


3/2/2026 12:16:35 PM MD106
C:\Users\mdonovan\Documents\22103.25_BLDG00_MECHANICAL-V23_mdonovan8\FXR.txd

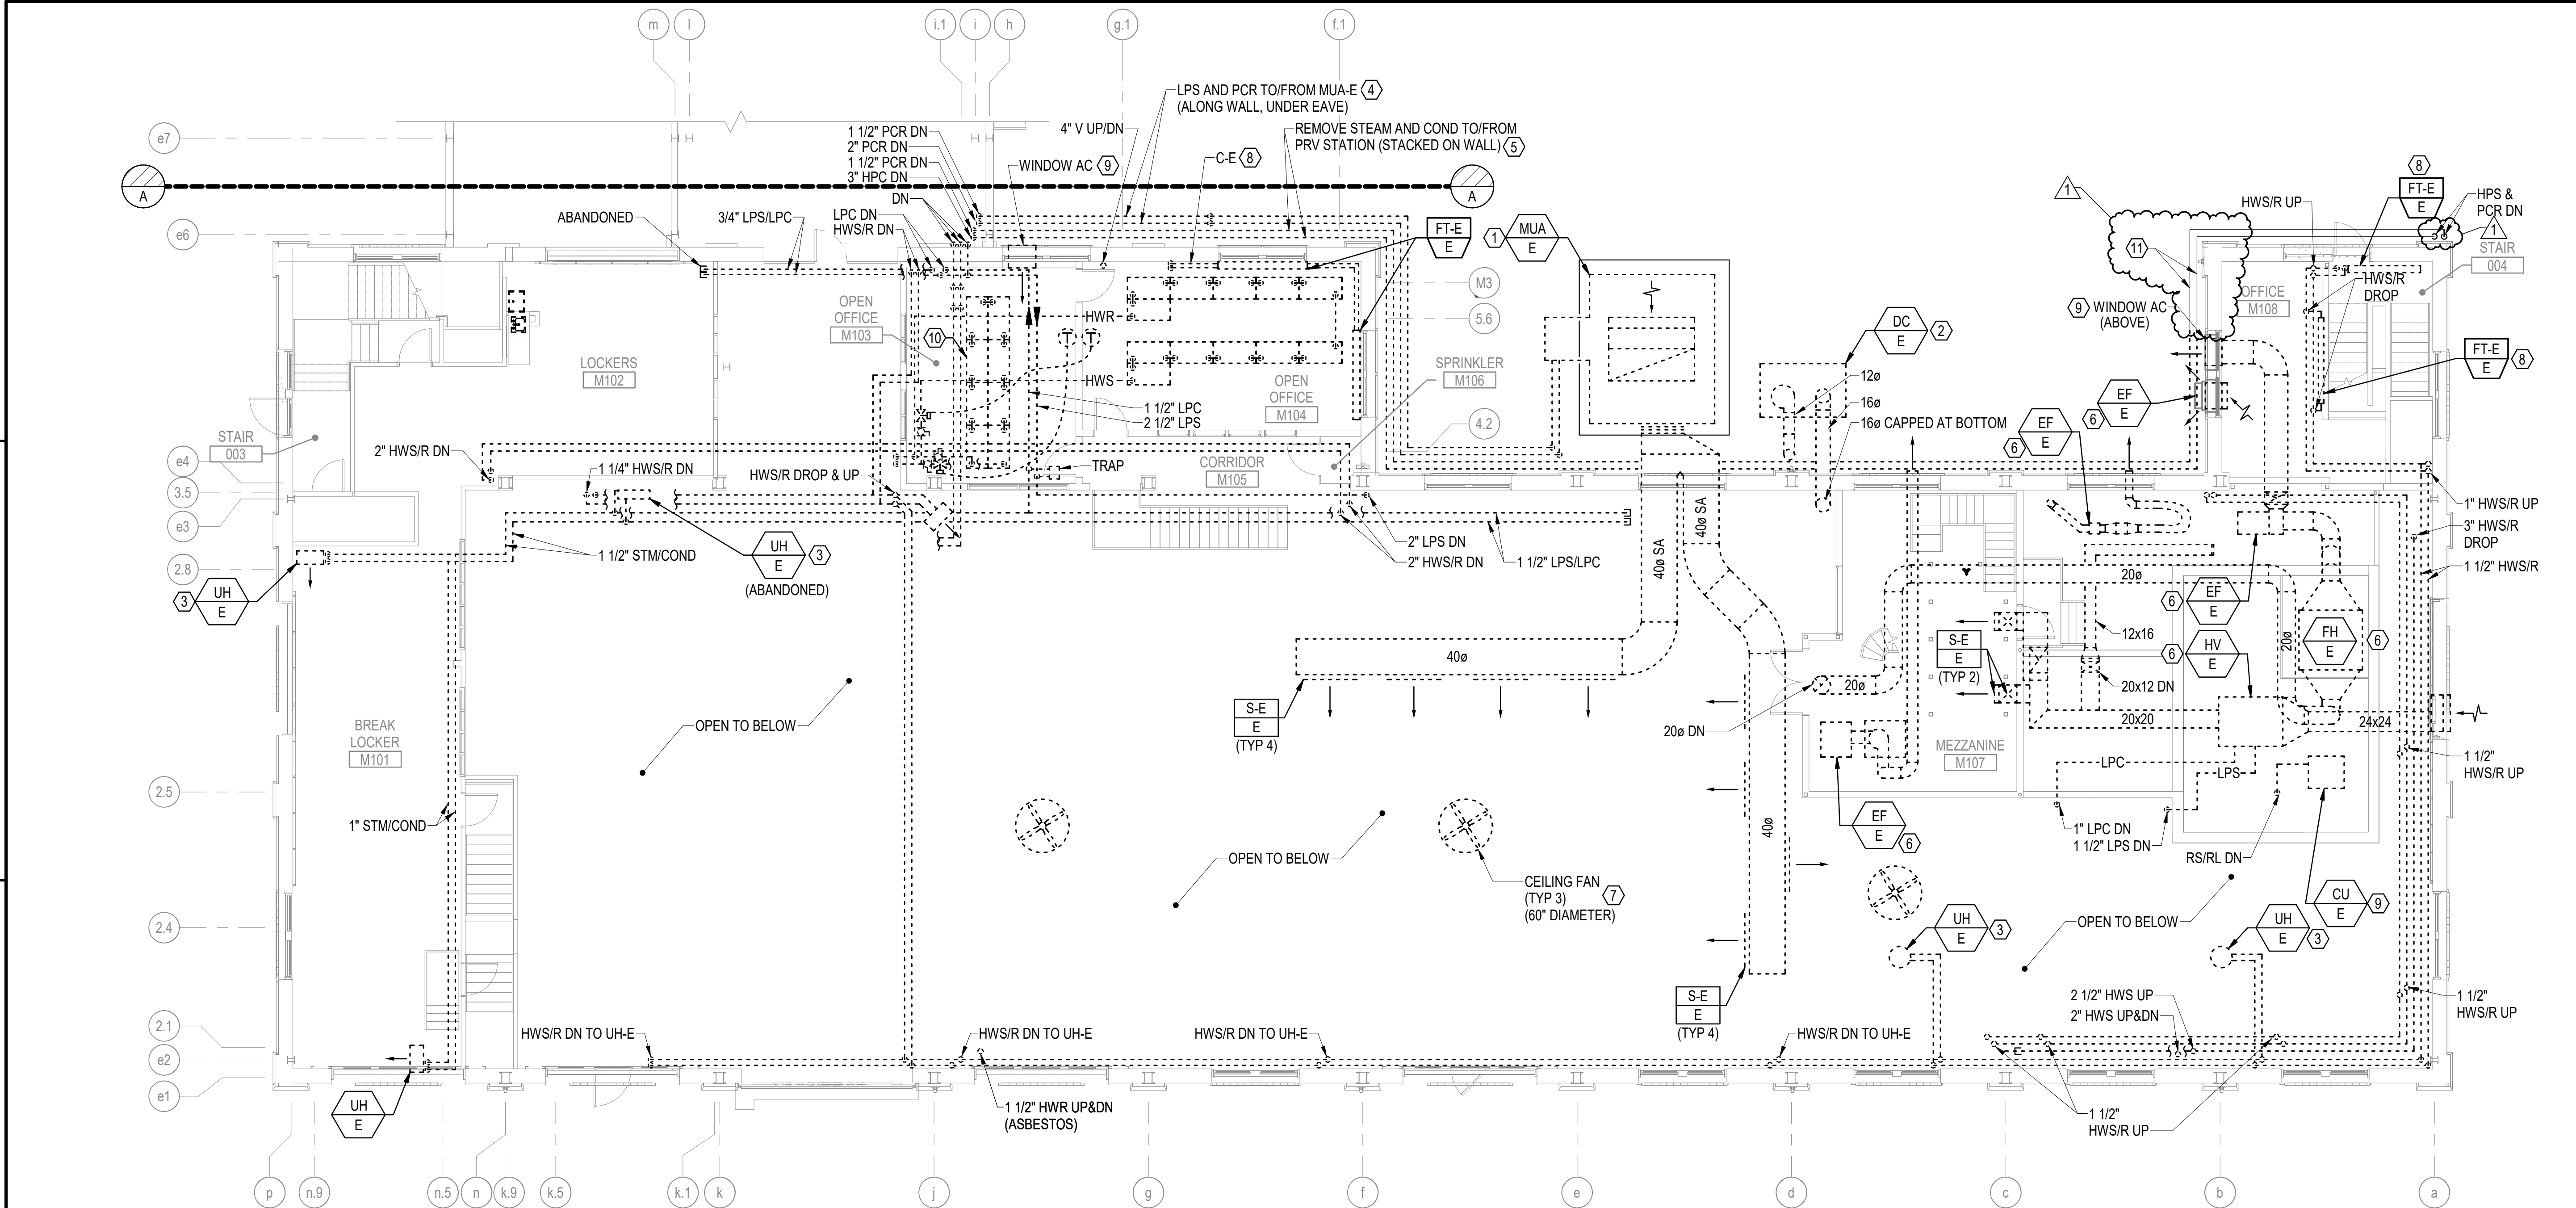

B1 FIRST FLOOR MEZZANINE MECHANICAL REMOVALS PLAN - WEST
SCALE: 1/8" = 1'-0"


GENERAL NOTES

- SEE M-001 FOR MECHANICAL LEGENDS, ABBREVIATIONS AND GENERAL NOTES.
- REMOVE ALL INDUSTRIAL PROCESS EQUIPMENT AND ASSOCIATED CONTROLS, WIRING AND PIPING THROUGHOUT THE SPACES SHOWN ON THIS SHEET, UNLESS OTHERWISE NOTED.
- COORDINATE WITH ARCHITECTURAL DRAWINGS FOR PATCHING OF OPEN FLOOR, WALL, AND CEILING PENETRATIONS ASSOCIATED WITH REMOVALS.
- MECHANICAL SUBCONTRACTOR SHALL IDENTIFY, MAKE SAFE CUT LOOSE AND CAP ALL ITEMS SPECIFIED TO BE DEMOLISHED. THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR DEMOLITION AND REMOVAL OFF SITE TO AN AUTHORIZED SALVAGE FACILITY.
- REFER TO CLIN 002 LIST OF INDUSTRIAL EQUIPMENT REMOVAL REQUIREMENTS.
- COORDINATE REMOVAL WITH HAZMAT DRAWINGS AND REQUIREMENTS.
- EXISTING MECHANICAL EQUIPMENT, DUCTWORK, AND PIPING THROUGHOUT THE BUILDING TO BE REMOVED, UNLESS OTHERWISE NOTED.
- CONDUCT TESTING OF EXISTING PUMPED STEAM CONDENSATE SYSTEM RETURN LINE BACK PRESSURE AND REPORT RESULTS TO CONTRACTING OFFICER PRIOR TO COMMENCING WITH REMOVALS IN BUILDING 60.


REMOVALS KEYNOTES (THIS SHEET ONLY)

- [CLIN 002] REMOVE MAKE UP AIR UNIT MUA-E AND ASSOCIATED PRESSURE POWERED CONDENSATE PUMP, CONTROLS, WIRING, DUCTWORK AND PIPING. THE EXISTING CONCRETE SERVICE PAD MUST REMAIN IN PLACE FOR REUSE.
- [CLIN 002] REMOVE DUST COLLECTION SYSTEM, INCLUDING EXHAUST FAN, BAGHOUSE, BAGHOUSE SUPPORT STAND, CONTROLS, WIRING, AND DUCTWORK.
- REMOVE UNIT HEATER AND ASSOCIATED BRANCH PIPING, CONTROLS AND WIRING.
- [CLIN 002] REMOVE LPS AND LPC PIPING FROM MAKE-UP AIR UNIT OUTSIDE OF THE BUILDING AT GROUND LEVEL TO THE WALL PENETRATIONS AT THE ANNEX WING OF THE BUILDING. REMOVE PIPING WALL SUPPORTS, AND COORDINATE PATCHING / REPAIR OF BRICK WORK. SEE SHEET MD201 FOR ELEVATION VIEW OF PIPING.
- REMOVE HPS AND PCR PIPING FROM ANNEX WING WALL PENETRATIONS TO CORNER OF EXTERIOR WALL OUTSIDE OF OPEN OFFICE AS SHOWN. REMOVE PIPING WALL SUPPORTS, AND COORDINATE PATCHING / REPAIR OF BRICK WORK.
- [CLIN 002] REMOVE INDUSTRIAL PROCESS EXHAUST AND MAKE UP AIR SYSTEMS, INCLUDING BUT NOT LIMITED TO AIR HANDLING UNITS, FANS, CONTROLS, MIRROR, DUCTWORK, HOODS, AND PIPING.
- REMOVE PADDLE TYPE CEILING FANS AND ASSOCIATED CONTROLS AND WIRING.
- REMOVE TERMINAL HEATING UNIT AND ASSOCIATED BRANCH PIPING, CONTROLS, AND WIRING.
- REMOVE AIR CONDITIONER UNIT: DISPOSAL OF UNITS CONTAINING REFRIGERANT SHALL BE DONE IN ACCORDANCE WITH CLEAN AIR ACT, LOCAL, STATE, AND FEDERAL REGULATIONS. ALL REFRIGERANT MUST BE REMOVED PRIOR TO EQUIPMENT REMOVAL. THE USED REFRIGERANT SHALL BE RECLAIMED BY EPA APPROVED, SPECIALIZED EQUIPMENT AND DISPOSED OF BY CONTRACTOR. THE CONTRACTOR MUST PROVIDE THE MIDLAND ODS FORMS TO DOCUMENT REFRIGERANT RECOVERY, DISPOSAL, AND CHARGE ACTIVITIES. SEE SPECIFICATION SECTION 02 41 00 "DEMOLITION AND DECONSTRUCTION".
- REMOVE HYDRONIC RADIANT CEILING PANELS AND ASSOCIATED HYDRONIC BRANCH PIPING, CONTROLS, AND WIRING.
- [CLIN 002] HPS AND PCR PIPING TO REMAIN IN PLACE. REFER TO SHEET M-401 FOR PLAN SHOWING HPS AND PCR CONNECTIONS TO THE EXISTING PIPING TO IDENTIFY HOW MUCH OF THE EXISTING PIPING ALONG THE NORTH WALL SHOULD REMAIN. PIPE SUPPORTS FOR THESE PIPES MUST REMAIN IN PLACE.

KEY PLAN

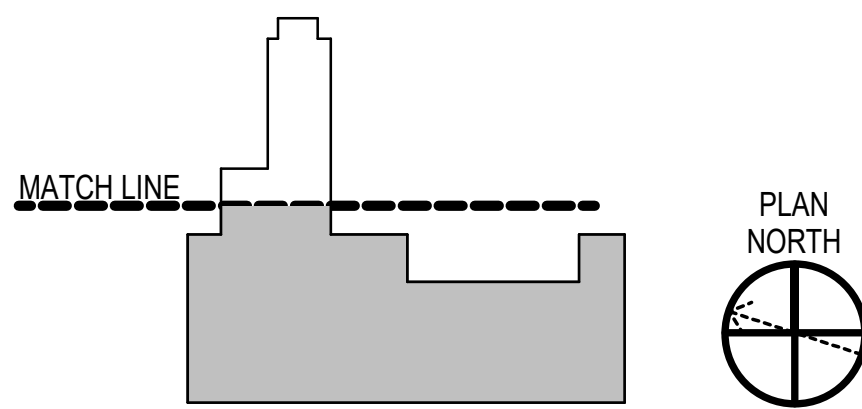

GRAPHIC SCALE

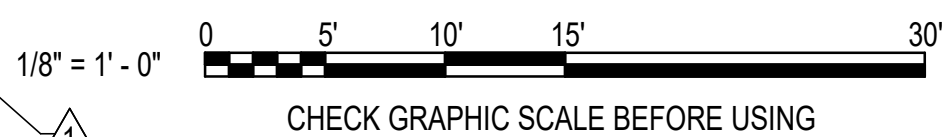

APPROVED		AMENDMENT 008		03/10/2026	RSB
FOR COMMANDER NAVFAC		FINAL SUBMISSION		10/07/2025	RSB
ACTIVITY		MARK		DATE	APR
SATISFACTORY TO DATE		DESIGNER		RNC	
DRAWN BY		CBM			
CHECKED BY		MSA			
DESIGN MANAGER		T. CARLETON			
PROJECT MANAGER		L. LYONS			
HEADLINE		S. RUCINSKI			
PREPARED BY		S. RUCINSKI			
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND		B60 REPAIRS			
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC		FIRST FLOOR MEZZANINE MECHANICAL REMOVALS PLAN - WEST			
PORTSMOUTH NAVAL SHIPYARD		KITTERY, ME			
PROJECT NO.		1740579			
NAVFAC DRAWING NO.		MD106			
SHEET		190 OF 282			
DRAWN BY		MD106			
DATE		14 SEP 2023			