

WebAIM Short Form TASK GROUP INSTRUCTION

29-JAN-2026 0907

20.14.15.2.9333 (September 2024)

ICN: 38K6112318 KeyOp: A01

TGI NO:	COMPONENT NAME: INTK MOIST PLCD	TYPE: AY	PHASE: A	REPEAT: 0	CHG/VER: 0/0
SHIP/HULL NO: DDG-115	SHIP/HULL NAME: USS RAFAEL PERALTA	PROJECT: K61	SYSTEM:	PLANT ID:	CASREP CAT:
CU PHASE TITLE: *F/O - INSTALL PLACARD TO BLOW IN DOOR FRAME TO FWD/AFT GTM AND GTG INTAKE					
PREPARING ACTIVITY:		STATUS: APP		WORKING STATUS:	
PREPARED BY: EGUCHI, MASASHI		CODE: 234	PHONE: 3152430978	DATE: 23-JAN-2026	
APPROVED BY: AKASE, KOUICHI		CODE: 234	PHONE: 3152432372	DATE: 23-JAN-2026	
CONCURRED BY:		CODE:	PHONE:	DATE:	
REASON FOR WORK/NEED FOR CHANGE: EM011215					
JCN: EM01-1215					
SPECIAL REQUIREMENTS: TGI Short Form					
CU PHASE DESCRIPTION: 1. SCOPE/PURPOSE: 1.1 Title: Placard to FWD and AFT Gas Turbine Module (GTM) and Ship Service Gas Turbine Generator (SSGTG) Intake Moisture Separator/Blow in Door (BID) Flame; install 1.2 Location of Work: 1.2.1 Intake Engine Room No. One (Starboard) (02-174-1-Q) 1.2.2 Intake Engine Room No. One (Port) (02-174-0-Q) 1.2.3 Intake Engine Room No.2 (02-284-0-Q) 1.2.4 Intake TRK (A) ENG Room No. 2 (1-289-2-Q) (01 Level) 1.2.5 Intake Engine Room No. 2 (01-276-0-Q)					
ZONE MANAGER: SAITO, KAZUNOBU		ZONE:	COMPARTMENT:	LEVEL:	FRAME: SIDE:
JOB SUMMARY ID: 123A2118	TOT MAN HR.:	TOT DUR:	TOT JML COST:	PLANNING ACCEPTANCE:	

WORK CERTIFICATION SIGNATURES:	DLs														
COMPLETION OF WORK REVIEW:				BADGE NO:		SHOP/CODE:		PHONE:		DATE:					
RECORDS REVIEW:				BADGE NO:		SHOP/CODE:		PHONE:		DATE:					



WebAIM Short Form TASK GROUP INSTRUCTION

29-JAN-2026 0907

20.14.15.2.9333 (September 2024)

(Continued)

ICN: 38K6112318

KeyOp: A01

TGI NO:	COMPONENT NAME: INTK MOIST PLCD	TYPE: AY	PHASE: A	REPEAT: 0	CHG/VER: 0/0
SHIP/HULL NO: DDG-115	SHIP/HULL NAME: USS RAFAEL PERALTA	PROJECT: K61	SYSTEM:	PLANT ID:	CASREP CAT:
CU PHASE TITLE: *F/O - INSTALL PLACARD TO BLOW IN DOOR FRAME TO FWD/AFT GTM AND GTG INTAKE					

CU PHASE DESCRIPTION (Cont.)

1.2.6 Intake Engine Room No. 2 (02-275-0-Q)

1.2.7 Intake Engine Room No. 2 (03-274-0-Q)

1.2.8 SS GTRB Intake/Exhaust Trunk (02-161-2-Q)

1.2.9 SS GTRB GEN Intake (03-174-0-Q)

1.2.10 SS GTRB GEN Intake (01-260-1-Q)

1.2.11 SS GTRB GEN Intake TRK (01-388-2-Q)

1.3 Identification:

1.3.1 Quantity (19 EA), Placard

Material: Cres 316L

Size: 6 Inch X 3 Inch

THK: 1/8 Inch

Spec: MIL-DTL-15024G, Type: B, Engrave

Letter: Size: 1/2 Inch

Letter Color: Red

Inscription: 1st Line: DANGER

2nd Line: NOT AN ACCESS

3rd Line: DO NOT ENTER

Remarks: See Enclosure-01 for details.

1.3.2 Quantity (4 EA), Moisture Separator/BID, 1A GTM Intake, Located in 1.2.1

Frame Material: CRES 316L

Remarks: See Enclosure-01 for details.

1.3.3 Quantity (4 EA), Moisture Separator/BID, 1B GTM Intake, Located in 1.2.2

Frame Material: CRES 316L

Remarks: See Enclosure-01 for details.

1.3.4 Quantity (4 EA), Moisture Separator/BID, 2A GTM Intake, Located in 1.2.3

Frame Material: CRES 316L

Remarks: See Enclosure-01 for details.

1.3.5 Quantity (4 EA), Moisture Separator/BID, 2B GTM Intake, Located in 1.2.6 and 1.2.7

Frame Material: CRES 316L

Remarks: See Enclosure-01 for details.

1.3.6 Quantity (One EA), Moisture Separator/BID, No. One SSGTG Intake, Located in 1.2.8

Frame Material: CRES 316L

Remarks: See Enclosure-01 for details.

1.3.7 Quantity (One EA), Moisture Separator/BID, No. 2 SSGTG Intake, Located in 1.2.10

Frame Material: CRES 316L

Remarks: See Enclosure-01 for details.

WebAIM Short Form TASK GROUP INSTRUCTION

29-JAN-2026 0907

20.14.15.2.9333 (September 2024)

(Continued)

ICN: 38K6112318

KeyOp: A01

TGI NO:	COMPONENT NAME: INTK MOIST PLCD	TYPE: AY	PHASE: A	REPEAT: 0	CHG/VER: 0/0
SHIP/HULL NO: DDG-115	SHIP/HULL NAME: USS RAFAEL PERALTA	PROJECT: K61	SYSTEM:	PLANT ID:	CASREP CAT:
CU PHASE TITLE: *F/O - INSTALL PLACARD TO BLOW IN DOOR FRAME TO FWD/AFT GTM AND GTG INTAKE					

CU PHASE DESCRIPTION (Cont.)

1.3.8 Quantity (One EA), Moisture Separator/BID, No. 3 SSGTG Intake, Located in 1.2.11
 Frame Material: CRES 316L
 Remarks: See Enclosure-01 for details.

1.4 Security Classification: None.

1.5 Initial Condition: None.

1.6 Contractor work start date: 7/27/2026

1.7 Contractor work complication date: 9/4/2026

2. PROCEDURE:

2.1 Accomplish the requirements of 2.3.

(V)(G) "GAS TURBINE MAINTENANCE PROCEDURE"

2.2 Fabricate and Install each new placard listed in 1.3.1 to intake BID moisture separator listed in 1.3.2 through 1.3.8 in accordance Enclosure-01.

2.2.1 Accomplish the requirements of 009-12 of 2.1, including Table One, Column(s)F, Lines One through 10.

2.3 Accomplish the requirements of 009-32 of 2.1 for each new and disturbed surfaces.

2.4 Notes:

2.4.1 Planner: Code 234 M. Eguchi, 243-0978
 Planner: Code 232 Y. Watanabe, 243-2375
 Engineer: Code 260 Y. Hasebe, 243-4347

2.4.2 Work Integration Manager (WIM): Code 333 T. Yaginuma, 080-5419-0598

2.4.3 JCN EM01-1215 is related to this TGI.

2.5 SRF-JRMC Furnished Material (GFM):

2.5.1 SRF-JRMC will provide GFM listed in Appendix "M".

2.6 SRF-JRMC will provide the following service work: (TGI No. 38K6112318S02)

2.6.1 [C740] Crane and crane rigging service.

2.6.2 [X99E] Utility service.

2.6.3 [X99M] Utility service, including low pressure air supply, water supply, and steam supply.

2.6.4 [C106.1] Safety inspection for SRF-JRMC employees.

WebAIM Short Form TASK GROUP INSTRUCTION

29-JAN-2026 0907

20.14.15.2.9333 (September 2024)

(Continued)

ICN: 38K6112318

KeyOp: A01

TGI NO:	COMPONENT NAME: INTK MOIST PLCD	TYPE: AY	PHASE: A	REPEAT: 0	CHG/VER: 0/0
SHIP/HULL NO: DDG-115	SHIP/HULL NAME: USS RAFAEL PERALTA	PROJECT: K61	SYSTEM:	PLANT ID:	CASREP CAT:
CU PHASE TITLE: *F/O - INSTALL PLACARD TO BLOW IN DOOR FRAME TO FWD/AFT GTM AND GTG INTAKE					

CU PHASE DESCRIPTION (Cont.)

2.6.5 [C106.2] Gas free inspection for SRF-JRMC employees.

2.6.6 [C133] QA Inspection for (G) symbol (s).

2.6.7 [C285] Inspection for (G) symbol(s).

WebAIM Short Form TASK GROUP INSTRUCTION

29-JAN-2026 0907

20.14.15.2.9333 (September 2024)

(Continued)

ICN: 38K6112318

KeyOp: A01

TGI NO:	COMPONENT NAME: INTK MOIST PLCD	TYPE: AY	PHASE: A	REPEAT: 0	CHG/VER: 0/0
SHIP/HULL NO: DDG-115	SHIP/HULL NAME: USS RAFAEL PERALTA	PROJECT: K61	SYSTEM:	PLANT ID:	CASREP CAT:
CU PHASE TITLE: *F/O - INSTALL PLACARD TO BLOW IN DOOR FRAME TO FWD/AFT GTM AND GTG INTAKE					

OTHER SPECIAL REQUIREMENTS:
CLASS M-2

Ref. No.	Document/Drawing Number	DOCUMENT/DRAWING TITLE	REV	CHG NO.	CPY REQ	PARAGRAPH	SECT	PG	CHPT
1	NSI NSI FY-26	NAVSEA Standard Items	-	1	N				
2	LI LI FY-26	Local Standard Items	-	ORG	N				
3	MP LM24-K6112318-EM011215	1A/1B/2A/2B GTM, NO.1/NO.2/NO.3 SSGTG INTAKE FOD PROTECTION FOR INSTALL PLACARD	-		Y			ALL	

TASK NAME / TASK DESCRIPTION	SHOP/ TSD	TS	SF WC	CREW #	MHRS	RWRK
						N

MATERIAL REFERENCES			
REF NO.	DOCUMENT/DRAWING NUMBER	DOCUMENT/DRAWING TITLE	REV

ICN: 38K6112318	KEY OP: A01
-----------------	-------------

MATERIAL LIST												
ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT
001			M	SHEET, METAL, SHEET, METAL 2 FT X 2 FT X 1/8 THK, MTERIAL: CRES 316L, ASTM A240 FINISH 2B ORDER FOR KTR ORIG: 234 M. EGUCHI, 243- 0978	9B 9515 LL9004718		NA	4	N		2/SH	

ATTACHMENT LIST

TITLE	FILE NAME	SAVED DATE
ENCLOSURE-01	38K6112318A01-Engrg Inst.pdf	23-JAN-2026 0000

NOTES :

1. Fabricate and install the warning placards on the blow-in door in accordance with this enclosure.
2. Fabrication, welding and inspection of class M-2 machinery components, category C shall be in accordance with NAVSEA S9074-AR-GIB-010A/278.

CUI

LOCATION GUIDANCE FOR INSTALLATION OF DDG-51 CL BID PLACARDS



CUI

CUI

CUI



**DANGER
NOT AN ACCESS
DO NOT ENTER**

TAC WELDS
(4 PLS, TYP)

CUI

MOISTURE SEPARATOR TYPE A



CUI

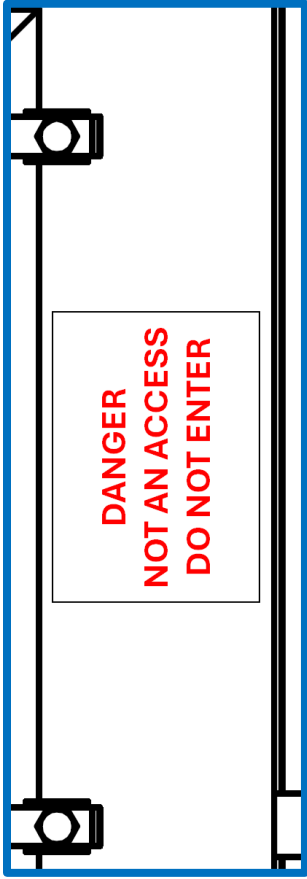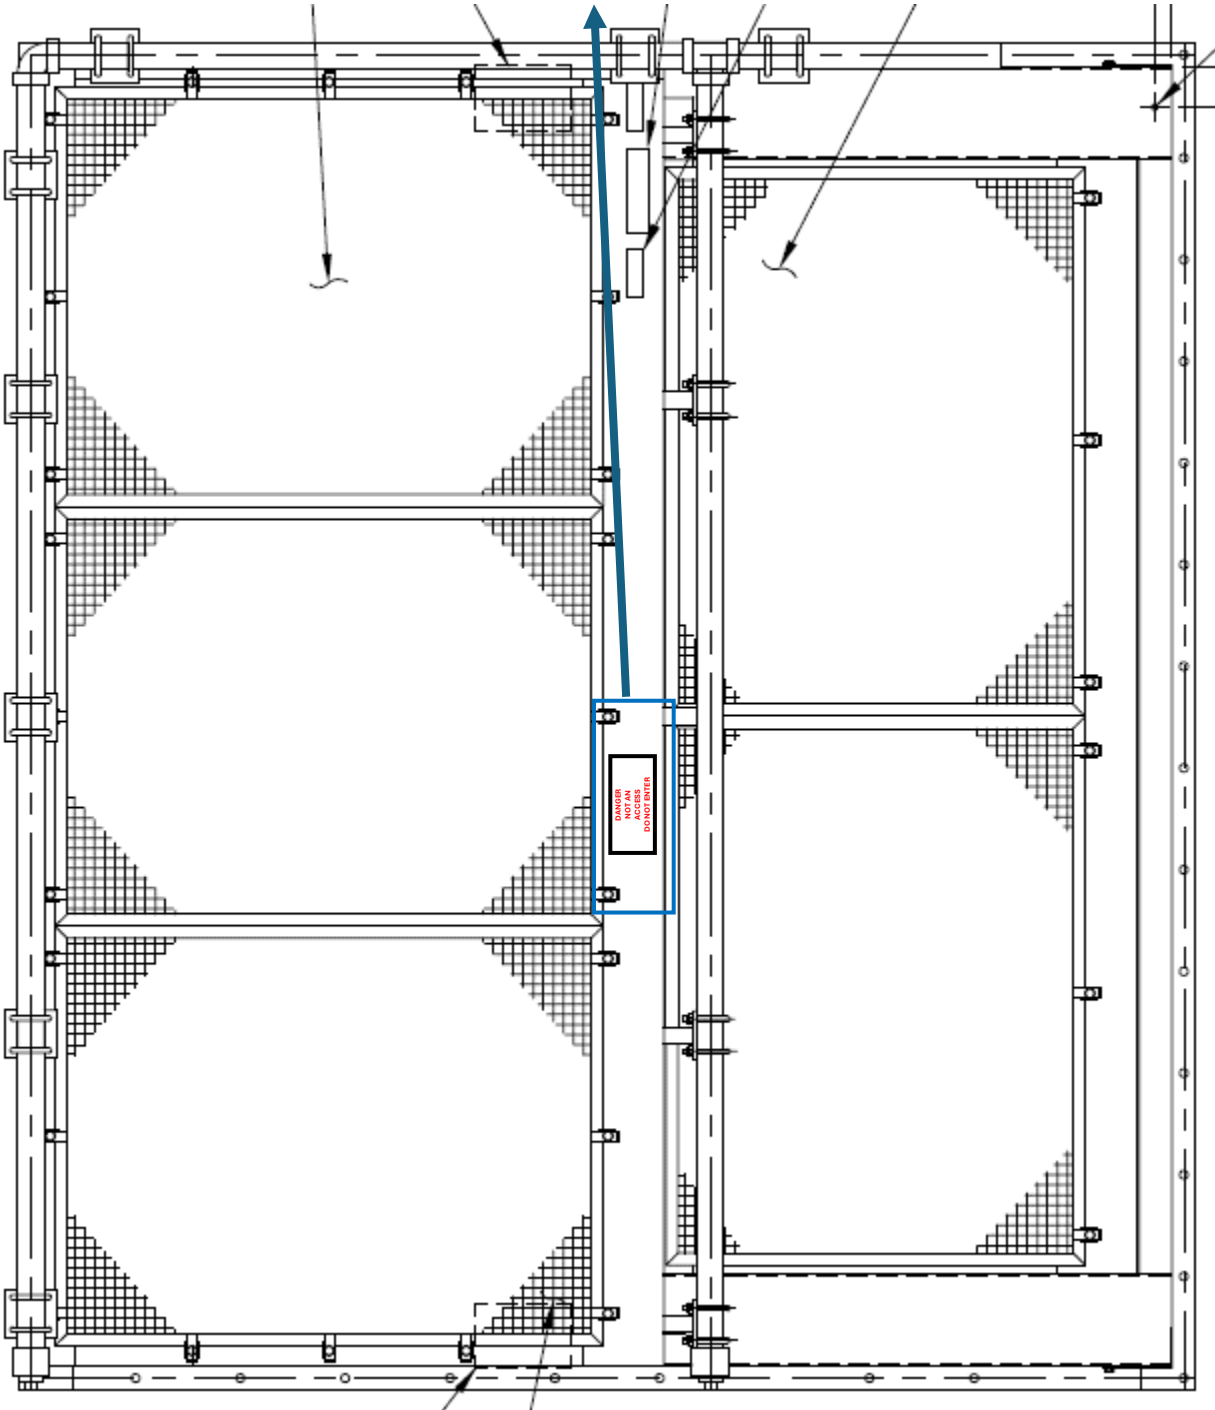

- Placard shall have the following:
 - Size: 6 x 3 inch x 1/8 THK
 - Material: Corrosion Resistance (CRES 316L)
 - Installation Method: Shall be tack welded similar to OEM placard

CUI


MOISTURE SEPARATOR TYPE B

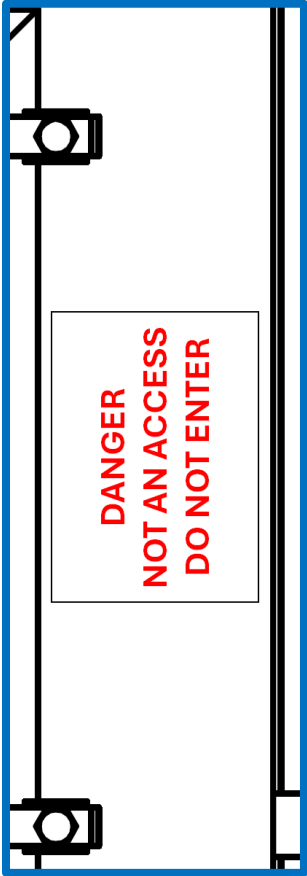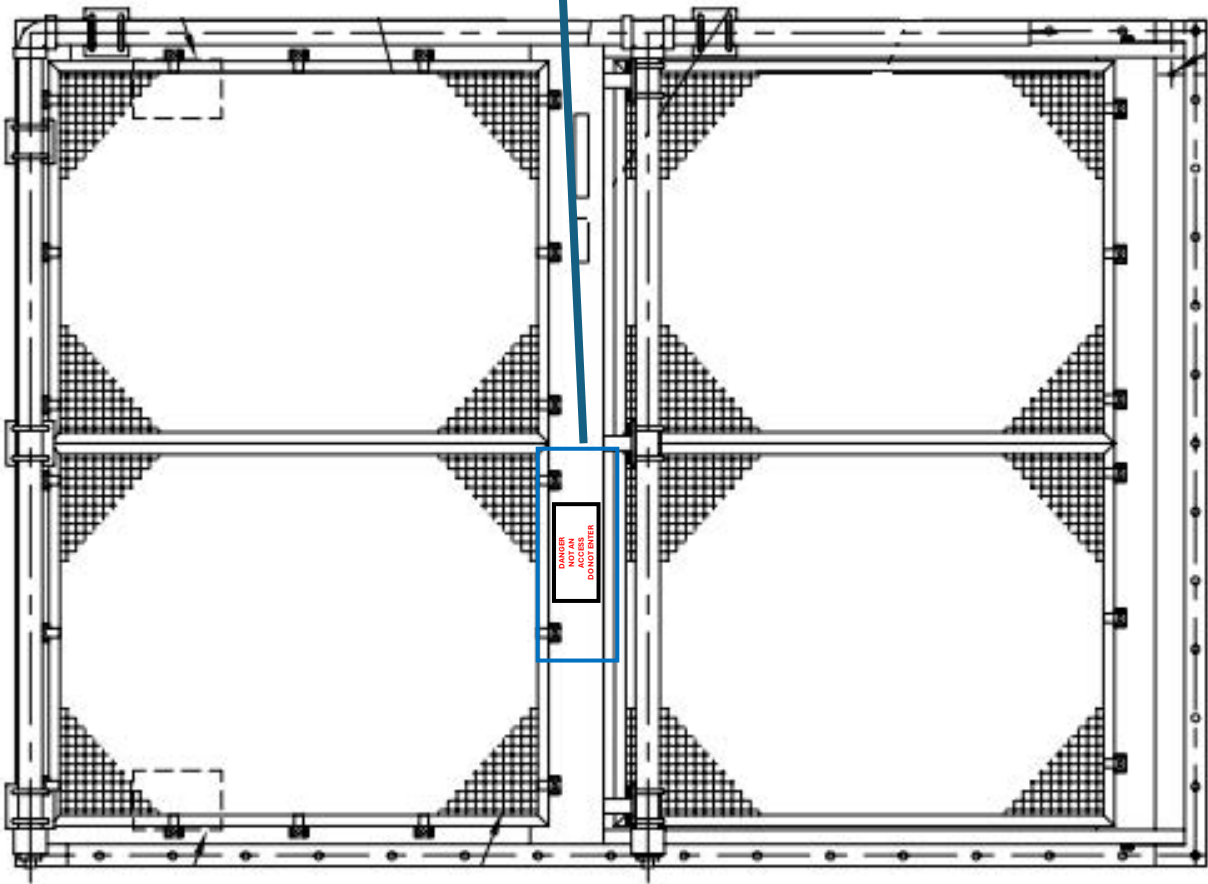

- Placard shall have the following:
 - Size: 6 x 3 inch x 1/8 THK
 - Material: Corrosion Resistance (CRES 316L)
 - Installation Method: Shall be tack welded similar to OEM placard



GTM 1A Intake

38K6112318A01

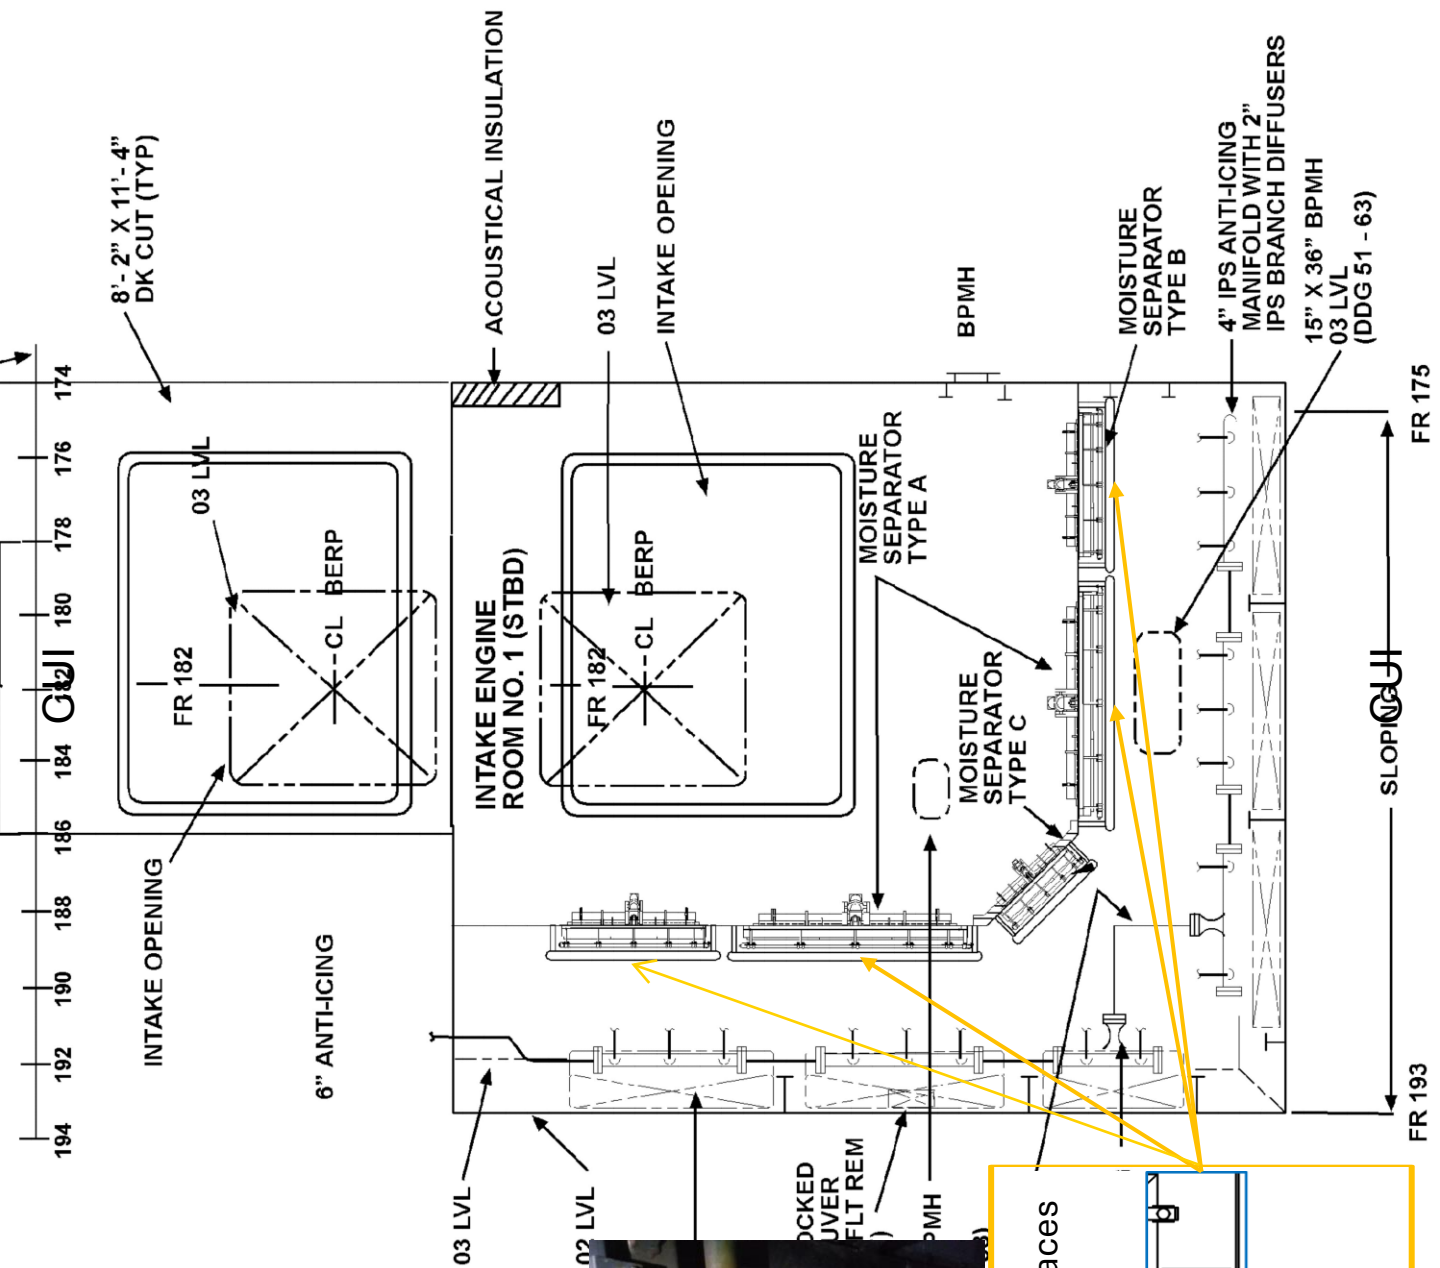

Four (4) places



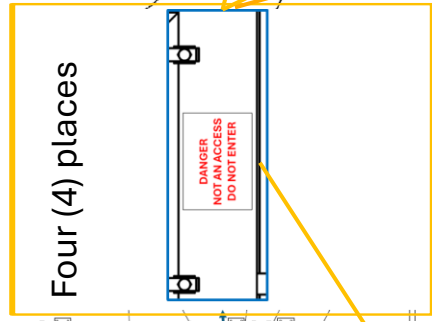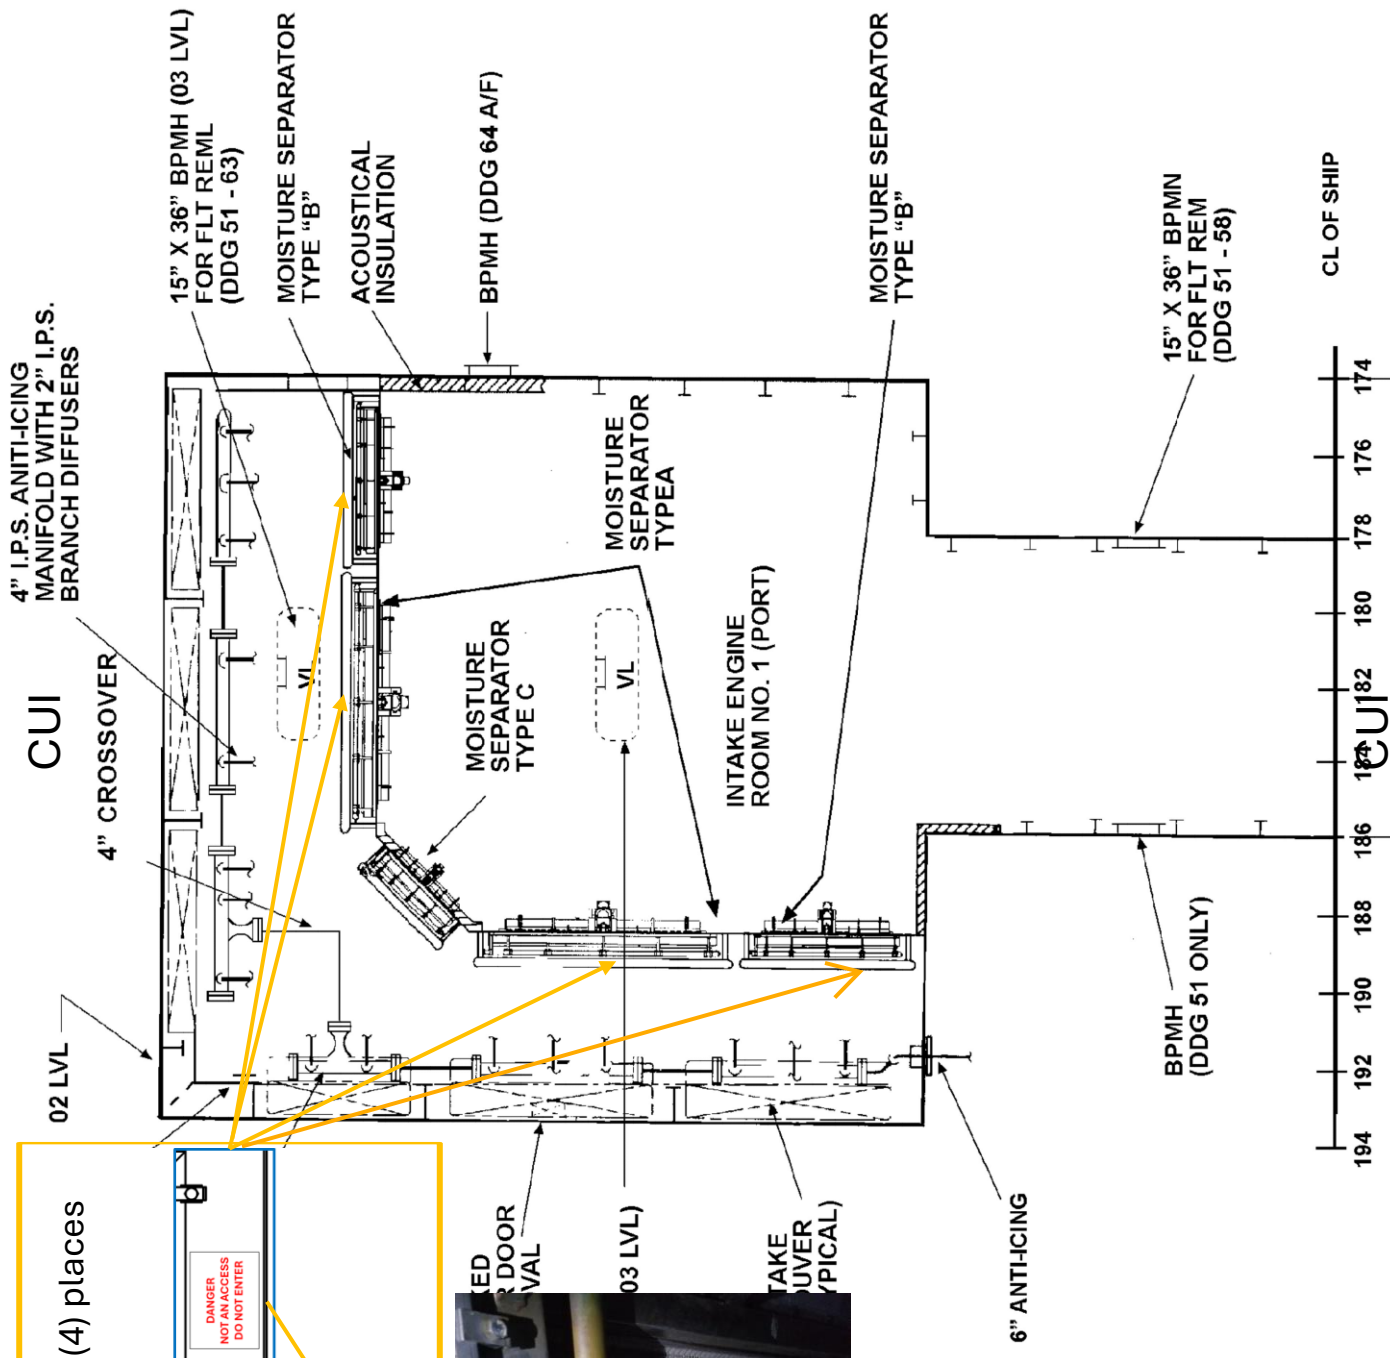


GTM 1B Intake

CUI

Three (3) places:
(2) GTM 2A
(1) GTM 2B



Three (3) places:
(2) GTM 2A
(1) GTM 2B

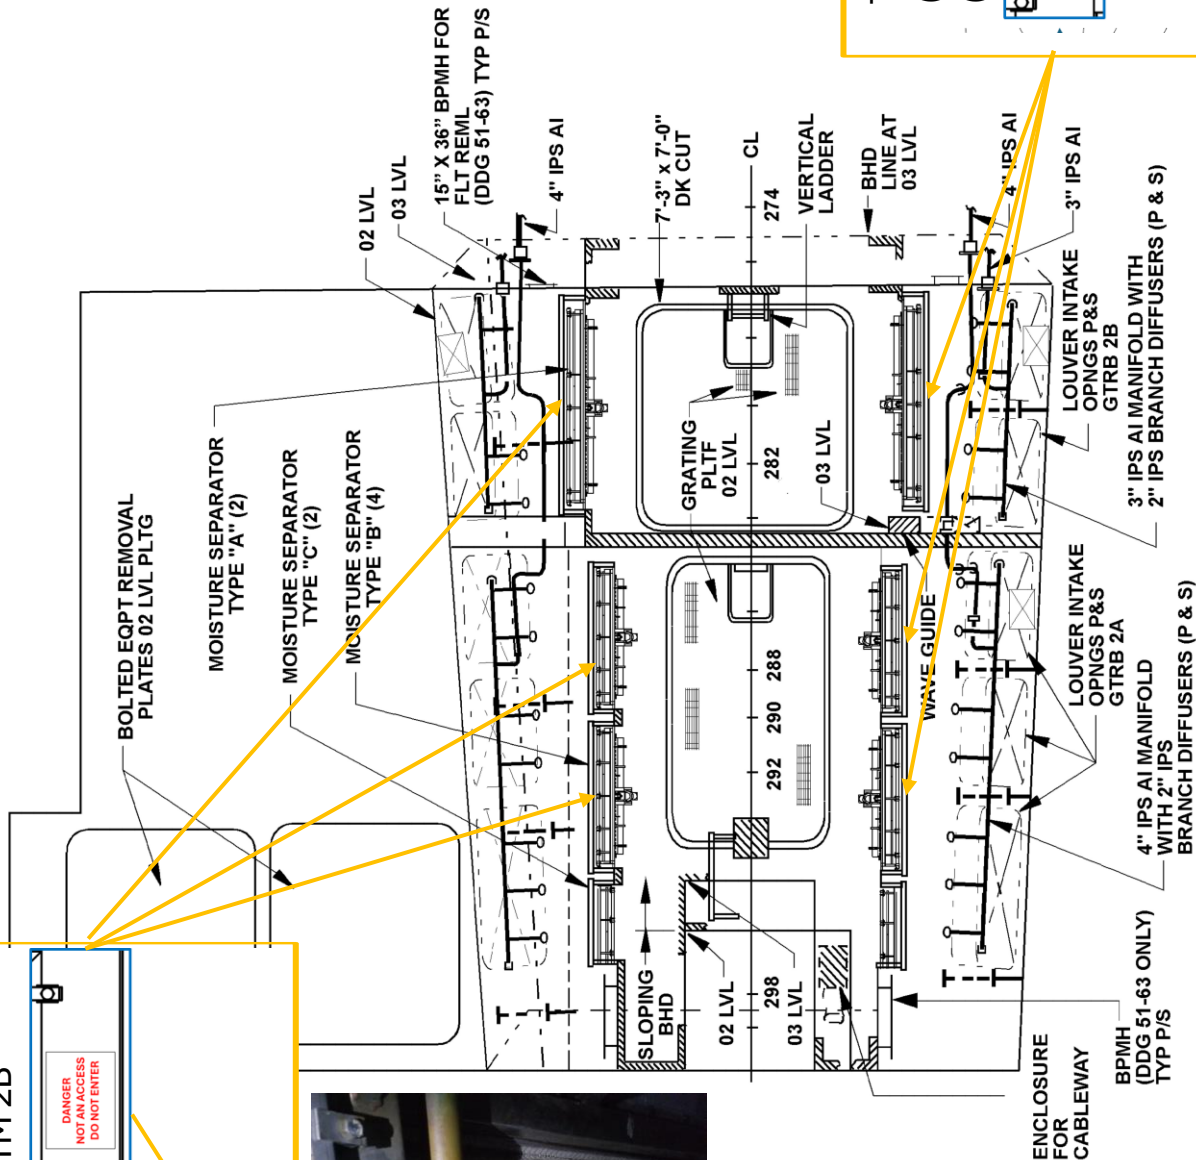


PLAN VIEW AT 02 LVL
FR 274-300

GTM 2A/2B Intake

CUI

S9234-GH-MMA-010

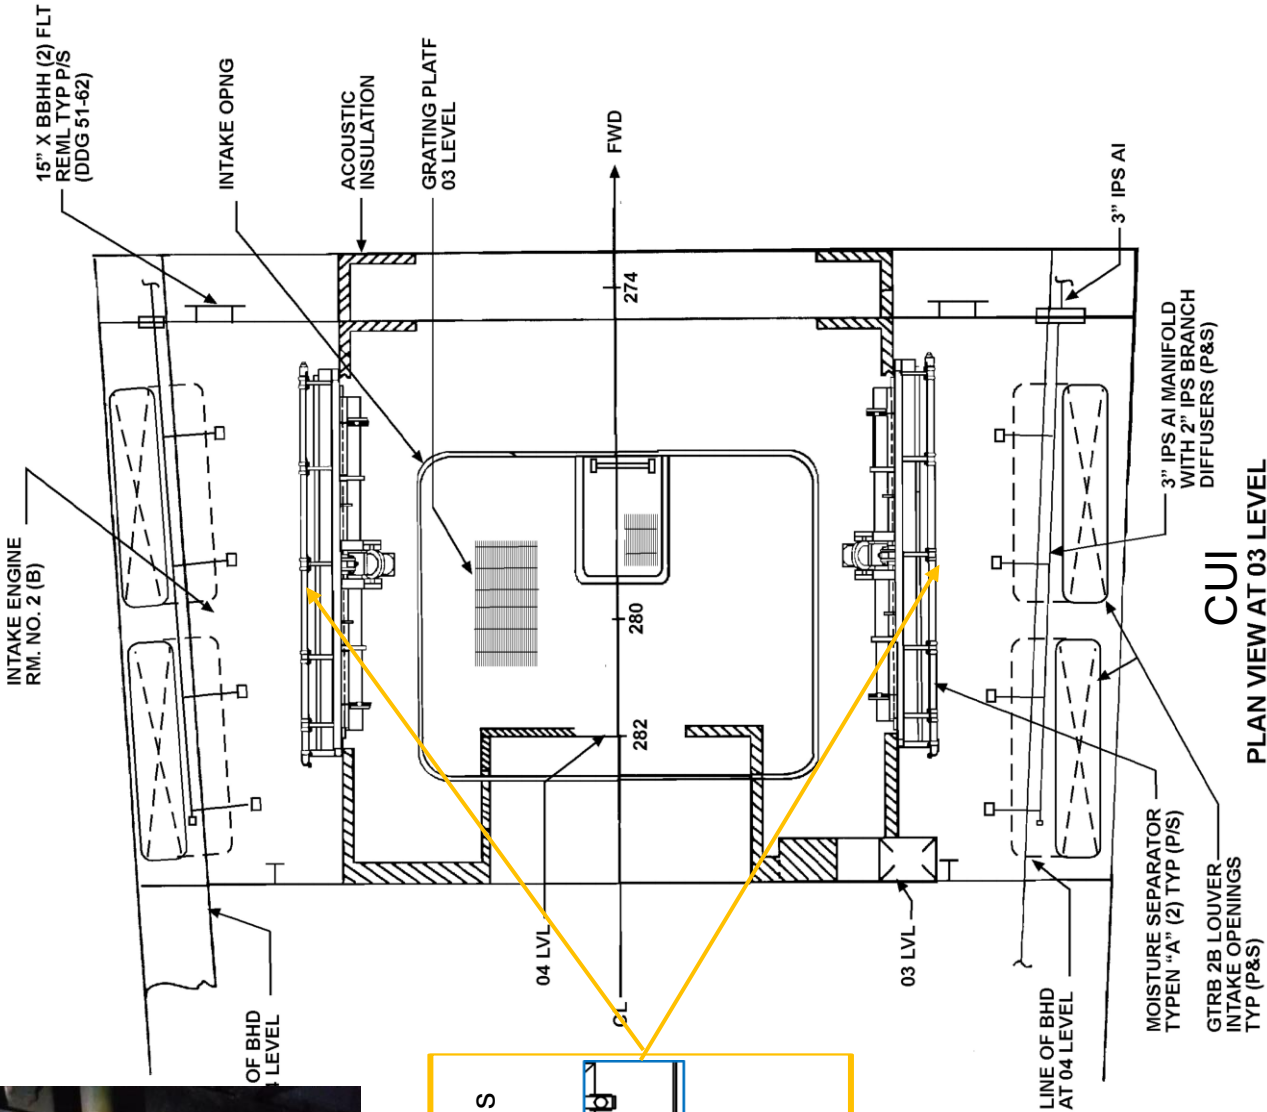

Two (2) places



GTM 2B Intake


38K6112318A01

ENGRNG INST ENCLOSURE-01

SHEET 9 OF 12

CUI


GTG 1 Intake

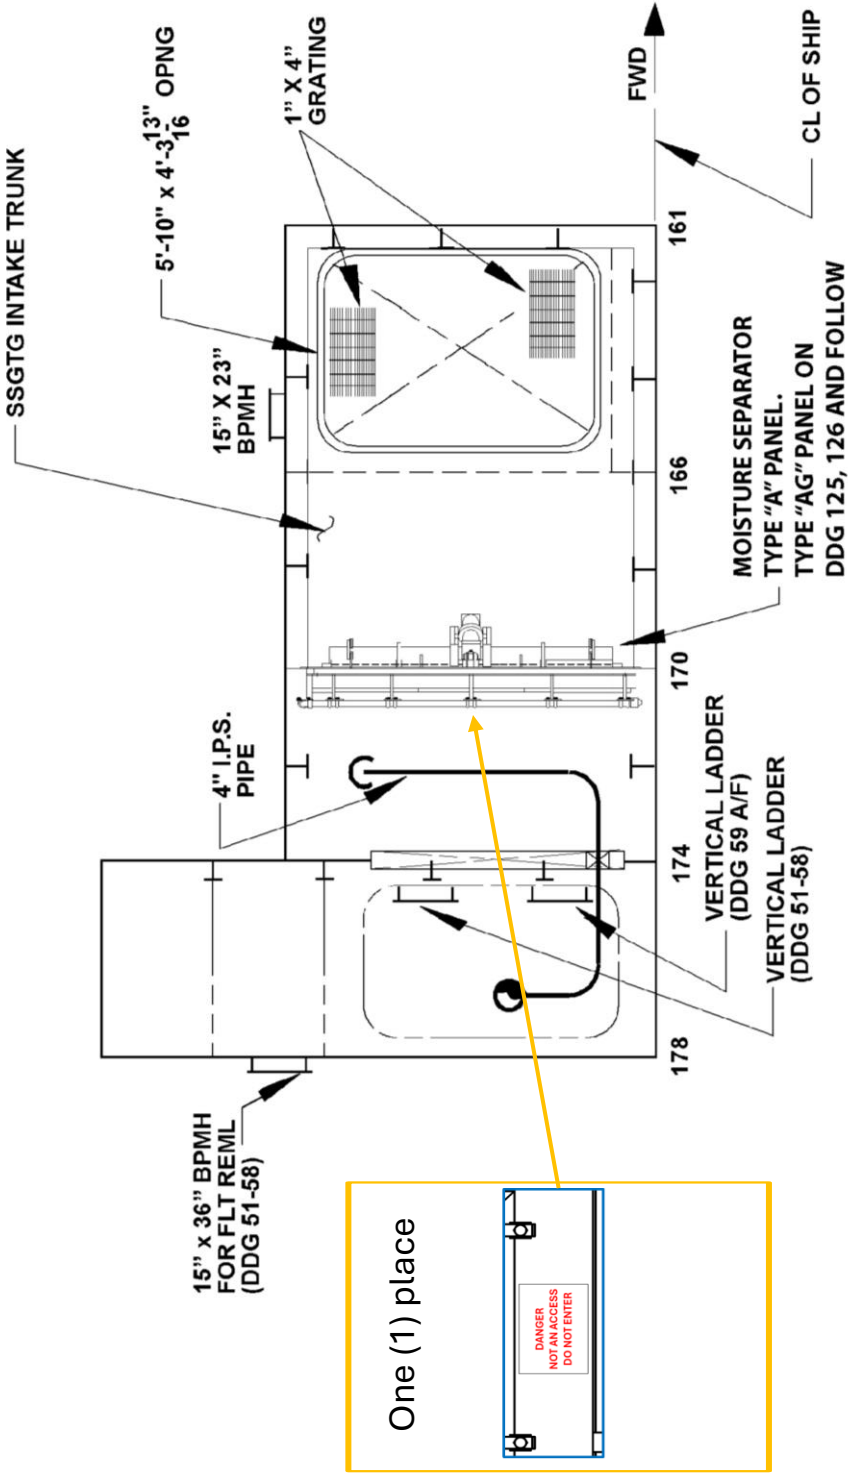


PLAN VIEW AT
02 LVL FR 161 - 178


CUI

GTG 2 Intake

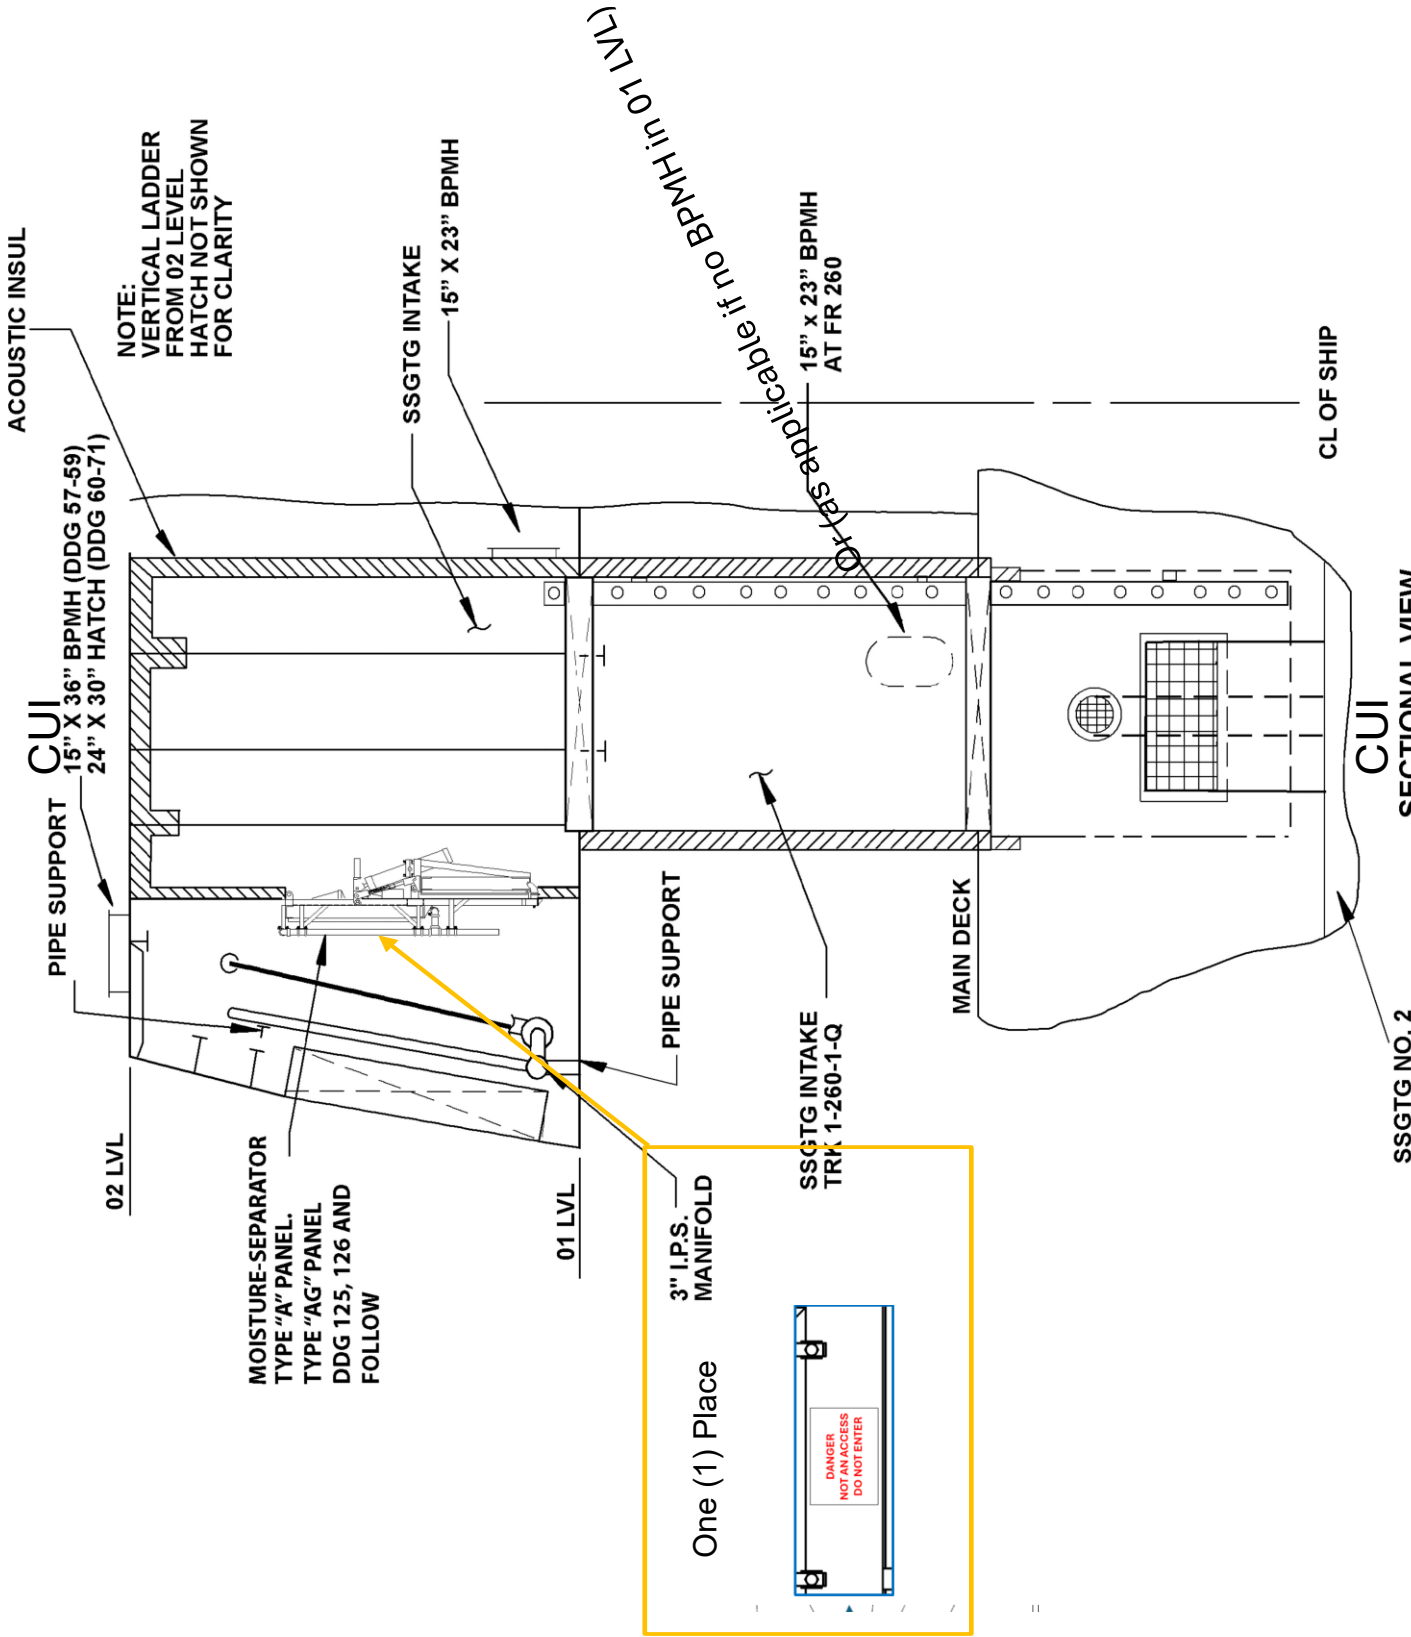

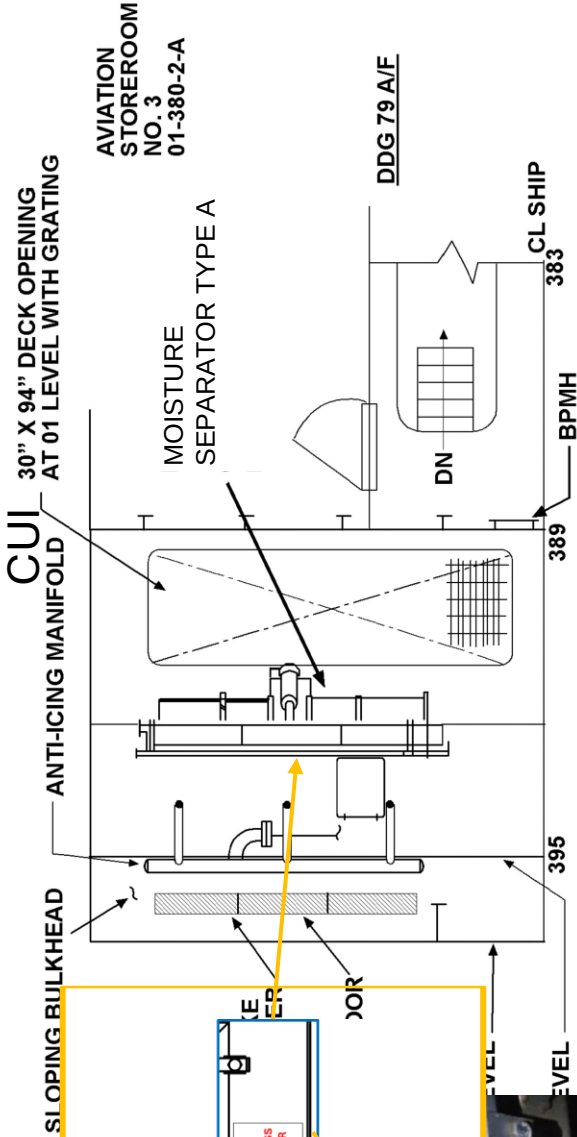

PLAN VIEW
01 LVL FR 383 - 398

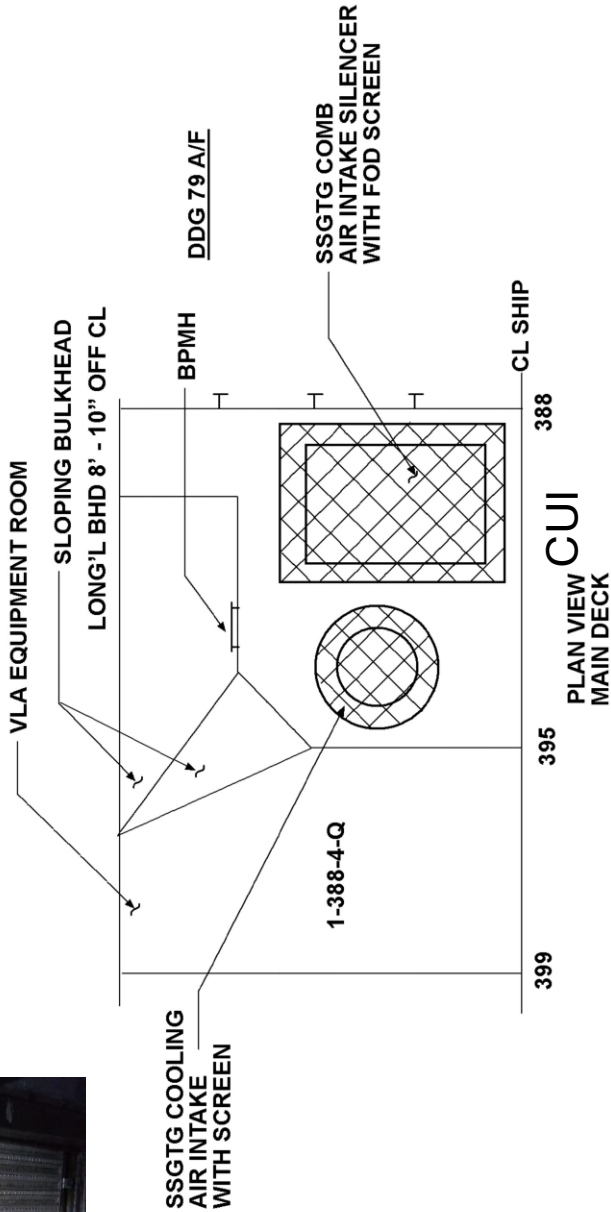

GTG 3 Intake
For DDG 79AF