

ABBREVIATIONS

"	INCH, INCHES	INT	INTERIOR
'	FOOT, FEET	IR	INSTALLATION
±	PLUS OR MINUS		RESTORATION
ACM	ASBESTOS CONTAINING MATERIAL	LBP	LEAD-BASED PAINT
ACT	ACOUSTICAL CEILING TILE	MAX	MAXIMUM
AFF	ABOVE FINISH FLOOR	MECH	MECHANICAL
AHJ	AUTHORITY HAVING JURISDICTION	MFR	MANUFACTURER
ALUM	ALUMINUM	MIN	MINIMUM
BF	BARRIER FREE	MIR	MIRROR
BLDG	BUILDING	MTL	METAL
CJ	CONTROL JOINT	N	NORTH
CL	CENTERLINE	NAT	NATURAL FINISH
CLG	CEILING	NIC	NOT IN CONTRACT
CLR	CLEAR	NMCI	NAVY/MARINE CORPS
CMU	CONCRETE MASONRY UNIT	NO.#	NUMBER
COL	COLUMN	OC	ON CENTER
CONC	CONCRETE	PCB'S	POLYCHLORINATED BIPHENYLS
CON	CONNECTION	PETG	POLYETHYLENE TEREPHTHALATE
CONT	CONTINUOUS		GLYCOL
CPT	CARPET	PMI	PLANNED MODIFICATION
CT	CERAMIC TILE		ITEM
CWT	CERAMIC WALL TILE	PNT	PAINT, PAINTED
DIA	DIAMETER	PLAM	PLASTIC LAMINATE
DN	DOWN	PLY	PLYWOOD
DWG	DRAWING	PQP	PRIVATE QUALIFIED PERSON
E	EAST		
EA	EACH	PT	PRESSURE TREATED
EF	EXHAUST FAN	PWD	PUBLIC WORKS DEPARTMENT
EJ	EXPANSION JOINT		
ELEC	ELECTRIC/ELECTRICAL	R	RADIUS
ELEV	ELEVATION	RCB	RUBBER COVE BASE
EMR	ELEVATOR MACHINE ROOM	RCP	REFLECTED CEILING PLAN
EQ	EQUAL		
EXIST	EXISTING	REINF	REINFORCED
EXT	EXTERIOR	RO	ROUGH OPENING
FCO	FLOOR CLEANOUT	S	SOUTH
FD	FLOOR DRAIN	SIM	SIMILAR
FND	FOUNDATION	SF	SQUARE FEET
FE	FIRE EXTINGUISHER	STL	STEEL
FEC	FIRE EXTINGUISHER CABINET	STRUCT	STRUCTURAL
FF	FINISH FLOOR	TYP	TYPICAL
FIN	FINISH	UL	UNDERWRITERS LABORATORIES
FL,FLR	FLOOR	UON	UNLESS OTHERWISE NOTED
FT	FOOT, FEET		
GA	GAUGE	VERT	VERTICAL
GALV	GALVANIZED	VIF	VERIFY IN FIELD
GYP BD	GYP SUM BOARD	W	WEST, WIDE
H,HT,HGT	HEIGHT	W/	WITH
HM	HOLLOW METAL	WB	WOOD BASE
HORIZ	HORIZONTAL	WD	WOOD
HP	HIGH POINT	WP	WALL PROTECTION
IN	INCHES, INCH		
INSUL	INSULATION, INSULATED		

GENERAL HAZARDOUS MATERIALS NOTES

- ITEMS IDENTIFIED ON THE HAZARDOUS MATERIALS DRAWINGS ARE EXISTING. SEE SHEETS HM001-HM604 FOR ADDITIONAL HAZARDOUS MATERIALS INFORMATION. COORDINATE HAZARDOUS MATERIALS WORK WITH BUILDING REMOVALS AND CONSTRUCTION SEQUENCE PLAN.
- OBTAIN PERMITS AND LICENSES REQUIRED FOR THE REMOVAL, TRANSPORT, AND DISPOSAL OF HAZARDOUS MATERIALS AND DEBRIS AT NO ADDITIONAL COST TO THE GOVERNMENT.
- CONTRACTOR MUST PERFORM NECESSARY MANAGEMENT OF IDENTIFIED HAZARDOUS MATERIALS, IN ACCORDANCE WITH EM 385-1-1, APPLICABLE PROJECT SPECIFICATIONS, AND FEDERAL, STATE, AND LOCAL REGULATIONS.
- CONTRACTOR MUST SUBMIT WORK PLANS AND HIRE PQP TO COORDINATE IMPLEMENTATION OF THE WORK PLAN, PERFORM INDEPENDENT INSPECTIONS, TESTING, AND VERIFICATION OF THE HAZARDOUS COMPONENTS WORK INCLUDING, BUT NOT LIMITED TO: ASBESTOS, LEAD-, CADMIUM, AND CHROMIUM-CONTAINING PAINT, AND PCBs.
- EXISTING PAINT IS ASSUMED TO CONTAIN LEAD, CADMIUM, AND CHROMIUM (VI) (HEAVY METALS). MANAGE HEAVY METALS PAINT IN AREAS INDICATED FOR REMOVAL SEPARATE FROM THE SUBSTRATE AND TREAT THE REMOVED PAINT AS HAZARDOUS MATERIAL IN ACCORDANCE WITH THE SPECIFICATIONS. HEAVY METALS MUST BE MANAGED, REMOVED, AND DISPOSED OF IN ACCORDANCE WITH FEDERAL, STATE, AND LOCAL REGULATIONS.
- EXISTING LIGHT FIXTURE BALLASTS ARE ASSUMED TO CONTAIN PCB'S AND EXISTING LAMPS ARE ASSUMED TO CONTAIN MERCURY. SEE ELECTRICAL DRAWINGS FOR EXTENT OF REMOVALS. REMOVE IN ACCORDANCE WITH SPECIFICATIONS.
- EXISTING INDUSTRIAL EQUIPMENT/PROCESSES HAVE PRODUCED HEAVY METALS RESIDUE. REFER TO HAZARDOUS MATERIAL SHEETS FOR FURTHER INFORMATION.
- THE FOLLOWING SPECIFICATIONS APPLY:

02 82 00.00 22

ASBESTOS REMEDIATION (PNSY PROJECTS)

02 83 00.00 22

MANAGEMENT OF LEAD, CADMIUM, AND CHROMIUM (VI) DURING RENOVATION, DEMOLITION, REMOVAL, AND ABATEMENT (PNSY PROJECTS)

02 84 16.00 22

HANDLING OF LIGHTING BALLASTS AND LAMPS CONTAINING PCB'S AND MERCURY (PNSY PROJECTS)

02 84 33.00 22

REMOVAL AND DISPOSAL OF POLYCHLORINATED BIPHENYLS (PCBS) (PNSY PROJECTS)

CONTRACT LINE ITEM NUMBERS (CLIN)

CLIN 001 BASE BID
CLIN 002 (IDENTIFIED AS LINE ITEM 1H IN PRICE SCHEDULE) INDUSTRIAL EQUIPMENT REMOVAL AND PROCESS HAZARDOUS MATERIALS MANAGEMENT/ABATEMENT
CLIN 003 (IDENTIFIED AS LINE ITEM 1I IN PRICE SCHEDULE) HAZARDOUS MATERIALS MANAGEMENT/ABATEMENT
CLIN 004 (IDENTIFIED AS LINE ITEM 1J IN PRICE SCHEDULE) EXISTING TRAILER UTILITIES

OPTION ITEMS

- FURNITURE, FIXTURES, AND EQUIPMENT (FF&E)
- INDUSTRIAL EQUIPMENT
- RADON FANS
- SECURITY DEVICES
- ADDITIONAL WINDOW RESTORATIONS
- NOT APPLICABLE
- ADDITIONAL ANNEX REPAIRS
- ADDITIONAL FINISHES
- ELECTRICAL SERVICE INFRASTRUCTURE
- RESINOUS FLOORING
- COMMUNICATION SERVICE ROUTING

GENERAL REMOVALS NOTES

- COORDINATE REMOVAL OF DEBRIS WITH THE CONTRACTING OFFICER TO MINIMIZE DISRUPTION OF BASE ACTIVITIES. COORDINATE WITH WASTE MANAGEMENT PLAN.
- ITEMS DEPICTED FOR REMOVAL OR DEMOLITION ARE SHOWN FOR INFORMATIONAL PURPOSES. THESE DRAWINGS DO NOT INDICATE EACH AND EVERY ITEM TO BE REMOVED OR DEMOLISHED. (EX: VALVE, HANGER, FASTENER, ETC.) VERIFY IN FIELD COMPLETE WORK ASSOCIATED WITH REMOVALS OR DEMOLITION.
- WHERE MATERIALS THAT ARE SUSPECTED TO CONTAIN HAZARDOUS MATERIALS ARE ENCOUNTERED, IMMEDIATELY STOP THAT WORK AND REPORT THE CONDITION TO THE CONTRACTING OFFICER. SEE HAZARDOUS MATERIALS NOTES AND HAZARDOUS MATERIALS REMOVALS PLANS.
- REMOVALS KEYNOTES INDICATED ON "AD" SHEETS ARE REPRESENTATIVE OF GENERAL ITEMS TO BE REMOVED AND ARE NOT INTENDED TO IDENTIFY EACH ITEM ON EVERY WALL, FLOOR, CEILING, OR ELEVATION. VERIFY IN FIELD COMPLETE WORK ASSOCIATED WITH REMOVALS.
- BUILDING 60 IS A HISTORIC FACILITY AND IS A CONTRIBUTING RESOURCE TO THE PORTSMOUTH NAVAL SHIPYARD HISTORIC DISTRICT. REMOVE ITEMS IN SUCH A MANNER THAT THE HISTORIC STRUCTURE (e.g. MORTAR JOINTS, GRANITE, BRICK, WOOD WINDOW AND DOOR TRIM, ETC.) TO REMAIN IS NOT DAMAGED DURING DEMOLITION AND CONSTRUCTION ACTIVITIES. ANY ITEMS DAMAGED BY THE CONTRACTOR MUST BE REPAIRED TO ITS ORIGINAL CONDITION AT NO ADDITIONAL COST TO THE GOVERNMENT. SUBMIT A WORK PLAN TO ADDRESS REPAIRS TO DAMAGED ITEMS. PWD MAINE CULTURAL RESOURCES MANAGER MUST REVIEW AND APPROVE THE CONTRACTOR'S QUALITY CONTROL PLAN PRIOR TO COMMENCING REPAIR WORK.
- HISTORIC ITEMS INDICATED ARE TO BE SALVAGED FOR REINSTALLATION OR ARE TO REMAIN IN PLACE (e.g. WOOD TRIM, METAL DOOR, PAINTED SIGNAGE, WINDOWS, AND STRUCTURAL ELEMENTS, ETC). PROTECT HISTORIC ITEMS DURING DEMOLITION AND CONSTRUCTION. ITEMS TO BE STORED FOR REINSTALLATION OR TURNED OVER TO GOVERNMENT MUST BE STORED ON SITE IN SAFE AND SECURE LOCATION.
- COORDINATE GENERAL BUILDING REMOVAL CONSTRUCTION SEQUENCE WITH HAZARDOUS MATERIALS REMOVALS.
- PATCH ANCHORAGE LOCATIONS AT REMOVED ITEMS. CUT FLUSH TO FLOOR/WALLS ANY EQUIPMENT ATTACHMENT/ANCHORAGE AS TO PROVIDE THE REQUIRED FLOOR/WALL FINISH.


GENERAL MASONRY CLEANING/REPAIR/REPOINTING NOTES

- BUILDING 60 AND ITS MASONRY ARE HISTORIC. COMPLY WITH SPECIFICATION SECTION 04 01 00.91 22 RESTORATION AND CLEANING OF MASONRY IN HISTORIC STRUCTURES (PWD ME).
 - PROTECT MASONRY AND STRUCTURE THROUGHOUT PROJECT. USE THE GENTLEST MEANS TO PERFORM THE WORK.
 - ENGAGE THE SERVICES OF A HISTORIC MASONRY CONSULTANT TO DETERMINE THE CONDITION OF THE EXISTING MASONRY AND MATERIALS AND TO RECOMMEND CLEANING AND RESTORATION PROCEDURES. REFER TO SPECIFICATION SECTION 04 01 00.91 22 RESTORATION AND CLEANING OF MASONRY IN HISTORIC STRUCTURES (PWD ME).
 - PREPARE A MOCK-UP FOR MASONRY REPAIR/RESTORATION WORK. REVIEW WITH CONTRACTING OFFICER AND PWD-ME CULTURAL RESOURCES MANAGER.
- BUILDING CODE:**
- UNIFIED FACILITIES CRITERIA (UFC) 1-200-01 (26 FEB. 2024)
- UNIFIED FACILITIES CRITERIA (UFC) 1-200-02 (01 JUNE 2022)
- UNIFIED FACILITIES CRITERIA (UFC) 3-101-01 (08 JAN. 2024)
- UNIFIED FACILITIES CRITERIA (UFC) 3-110-03 (01 MAY 2012)
- ACCESSIBILITY CODE:**
- UNIFORM ACCESSIBILITY STANDARDS (UFAS)
- ARCHITECTURAL BARRIERS ACT (ABA)
- AMERICANS WITH DISABILITIES ACT (ADA)
- ACCESSIBILITY GUIDELINES FOR BUILDINGS AND FACILITIES (ADAAG)
- MECHANICAL CODE:**
- INTERNATIONAL MECHANICAL CODE (IMC) 2021
- ELECTRICAL CODE:**
- NFPA 70, NATIONAL ELECTRIC CODE
- PLUMBING CODE:**
- INTERNATIONAL PLUMBING CODE (IPC) 2021
- FIRE PREVENTION & LIFE SAFETY CODE:**
- SEE SHEET G-100.

GENERAL CONSTRUCTION NOTES

- COMPLY WITH STATE, FEDERAL, NATIONAL, AND OTHER CODES AND ORDINANCES THAT APPLY TO THIS PROJECT.
- COMPLETE WORK IN ACCORDANCE WITH INDUSTRY STANDARDS AND PERFORM WORK IN A WORKMANLIKE AND PROFESSIONAL MANNER.
- WHERE CONFLICTS EXIST WITHIN THE DOCUMENTS OR BETWEEN THE DOCUMENTS AND APPLICABLE CODES, ORDINANCES, OR INDUSTRY STANDARDS, THE MORE STRINGENT, AS DETERMINED BY THE CONTRACTING OFFICER, MUST BE PROVIDED AT NO ADDITIONAL COST TO THE GOVERNMENT.
- MAINTAIN BUILDING EGRESS PATHS DURING THE ENTIRE CONTRACT PERIOD. PROVIDE TEMPORARY PATHS TO MAINTAIN BUILDING EGRESS. COMPLY WITH NFPA 241, STANDARD FOR SAFEGUARDING CONSTRUCTION, ALTERATIONS, AND DEMOLITION OPERATIONS.
- MAINTAIN THE CONSTRUCTION SITE IN A SECURE, NEAT, WATER TIGHT, CLEAN, AND SAFE CONDITION DURING THE ENTIRE CONTRACT PERIOD. EXTERIOR ENVELOPE WORK MUST BE PERFORMED IN A MANNER TO MAINTAIN WEATHER TIGHTNESS.
- PROVIDE ITEMS AND COMPONENTS SHOWN ON THE DRAWINGS UNLESS NOTED AS "EXISTING" (EXIST).
- WORK FROM GIVEN DIMENSIONS AND LARGE SCALE DETAILS. DO NOT SCALE DRAWINGS.
- DIMENSIONING SYSTEM: UNLESS OTHERWISE NOTED, PLAN DIMENSIONS ARE TO/FROM FINISHED FACE OF EXISTING WALLS, TO/FROM FACE OF FRAMING FOR STUD FRAMED WALLS, AND TO/FROM THE FACE OF MASONRY FOR MASONRY WALLS. DIMENSIONS INDICATED AS "CLEAR" (CLR) MUST BE MAINTAINED AND ARE MEASURED FROM THE FACE OF FINISH. CENTERLINE DIMENSIONS ARE INDICATED BY CENTERLINE SYMBOL (CL).
- LOCATE DOOR OPENINGS 6 INCHES FROM ADJACENT WALL (FACE OF FRAMING TO ROUGH OPENING), UNLESS OTHERWISE DIMENSIONED.
- VERIFY EXISTING CONDITIONS AND DIMENSIONS AND REPORT DISCREPANCIES TO THE CONTRACTING OFFICER. PROCEED WITH THE WORK AFTER THE DISCREPANCIES HAVE BEEN RESOLVED BY THE GOVERNMENT.
- DO NOT PENETRATE JOISTS, BEAMS, OR OTHER STRUCTURAL MEMBERS. OBTAIN WRITTEN APPROVAL FROM THE ENGINEER OF RECORD FOR UNAVOIDABLE PENETRATIONS OF STRUCTURAL MEMBERS.
- PROVIDE SOLID BLOCKING BEHIND SURFACE APPLIED FIXTURES, TRIM, GRAB BARS, SHELVES, WOOD WALL BASE, BASE AND WALL CABINETS, MARKER BOARDS, TELEVISIONS, AND OTHER ACCESSORIES AND EQUIPMENT INCLUDING GOVERNMENT SUPPLIED ITEMS WHEN MOUNTED TO STUD WALLS.
- DISPOSE OF AND/OR RECYCLE CONSTRUCTION DEBRIS FROM THE PROJECT SITE AS REQUIRED BY THE STATE OF MAINE AND AS REQUIRED BY THE CONTRACT. OBTAIN REQUIRED DISPOSAL PERMITS.
- PROTECT EXISTING SYSTEMS AND SURFACES TO REMAIN. REPAIR OR REPLACE DAMAGE RESULTING FROM PROJECT OPERATIONS, AS APPROVED BY THE CONTRACTING OFFICER, AT NO ADDITIONAL COST TO THE GOVERNMENT.
- OBTAIN APPROVAL FROM THE CONTRACTING OFFICER FOR THE SEQUENCE AND TIMING OF OPERATIONS PRIOR TO COMMENCING WORK AND PER OUTAGE REQUIREMENTS DETAILED IN THE SPECIFICATIONS.
- FIRESTOP CONDUIT/PIPE/DUCT PENETRATIONS THROUGH FIRE-RATED WALLS, CEILINGS, AND FLOORS. PROVIDE SMOKE BARRIER SEALANT AT FLOOR PENETRATIONS AND PENETRATIONS THROUGH SMOKE PARTITIONS.
- DO NOT INTERRUPT UTILITY SERVICES WITHOUT AN APPROVED OUTAGE REQUEST. DO NOT RESTORE UTILITIES WITHOUT AN APPROVED 'ONAGE' REQUEST. REFER TO SPECIFICATION SECTION 01 14 00.00 22 WORK RESTRICTIONS (PWD ME) AND SHEETS G-008 AND G-009.
- BUILDING 60 IS A HISTORIC FACILITY. PERFORM WORK IN COMPLIANCE WITH THE US DEPARTMENT OF THE INTERIOR "SECRETARY OF THE INTERIOR'S STANDARDS FOR THE TREATMENT OF HISTORIC PROPERTIES." HISTORIC ITEMS INDICATED OR SPECIFIED TO BE SALVAGED FOR REINSTALLATION OR TO REMAIN IN PLACE MUST BE PROTECTED DURING CONSTRUCTION.
- WHEN ATTACHING FASTENERS, BLOCKING, OR ACCESSORIES TO EXISTING HISTORIC BRICK OR STONE, PLACE FASTENERS IN MORTAR JOINTS. EXCEPTION: LIGHTNING PROTECTION.
- SYSTEMS AND THEIR ASSOCIATED CONDUIT MUST NOT PENETRATE HISTORIC FEATURES OF THE BUILDING (WINDOW AND DOOR SURROUNDS, STAIRWELLS, WOOD BASE, CRANE RAILS, ETC.). MAXIMIZE THE PLACEMENT OF CONDUIT IN SECONDARY SPACES WHERE PRACTICABLE.
- PRIOR TO INSTALLING FIRE PROTECTION PIPING, MECHANICAL DUCTWORK, PIPING, ELECTRICAL CONDUIT, AND OTHER ASSOCIATED SYSTEM ELEMENTS, SUBMIT COORDINATION DRAWINGS AND OBTAIN APPROVAL BY THE CONTRACTING OFFICER AND THE PWD ME CULTURAL RESOURCES MANAGER. REFER TO SPECIFICATION SECTION 01 30 10.00 22 COORDINATION PROCEDURES AND COORDINATION DRAWINGS (PWD ME).
- PROVIDE LIGHTNING PROTECTION SYSTEM TYPICAL. SEE ELECTRICAL SHEETS FOR INFORMATION.
- ACCESS TO THE INTERIOR OF BUILDING 60 MUST BE VIA EXISTING OPENINGS IN EXTERIOR FACADE. UNDER NO CIRCUMSTANCES WILL NEW TEMPORARY OPENINGS BE ENTERTAINED AND MUST NOT BE INCLUDED AS BASIS OF BID.
- CONTRACTOR MUST PROVIDE PAVEMENT AND ASSOCIATED SELECT SUB BASE FOR AREAS BEYOND THOSE IDENTIFIED ON THE CONTRACT DOCUMENTS THAT ARE IMPACTED AS A RESULT OF THE CONTRACTORS MEANS AND METHODS AS REQUIRED TO PERFORM THE CONTRACT SCOPE OF WORK.

GENERAL SYMBOLS LEGEND

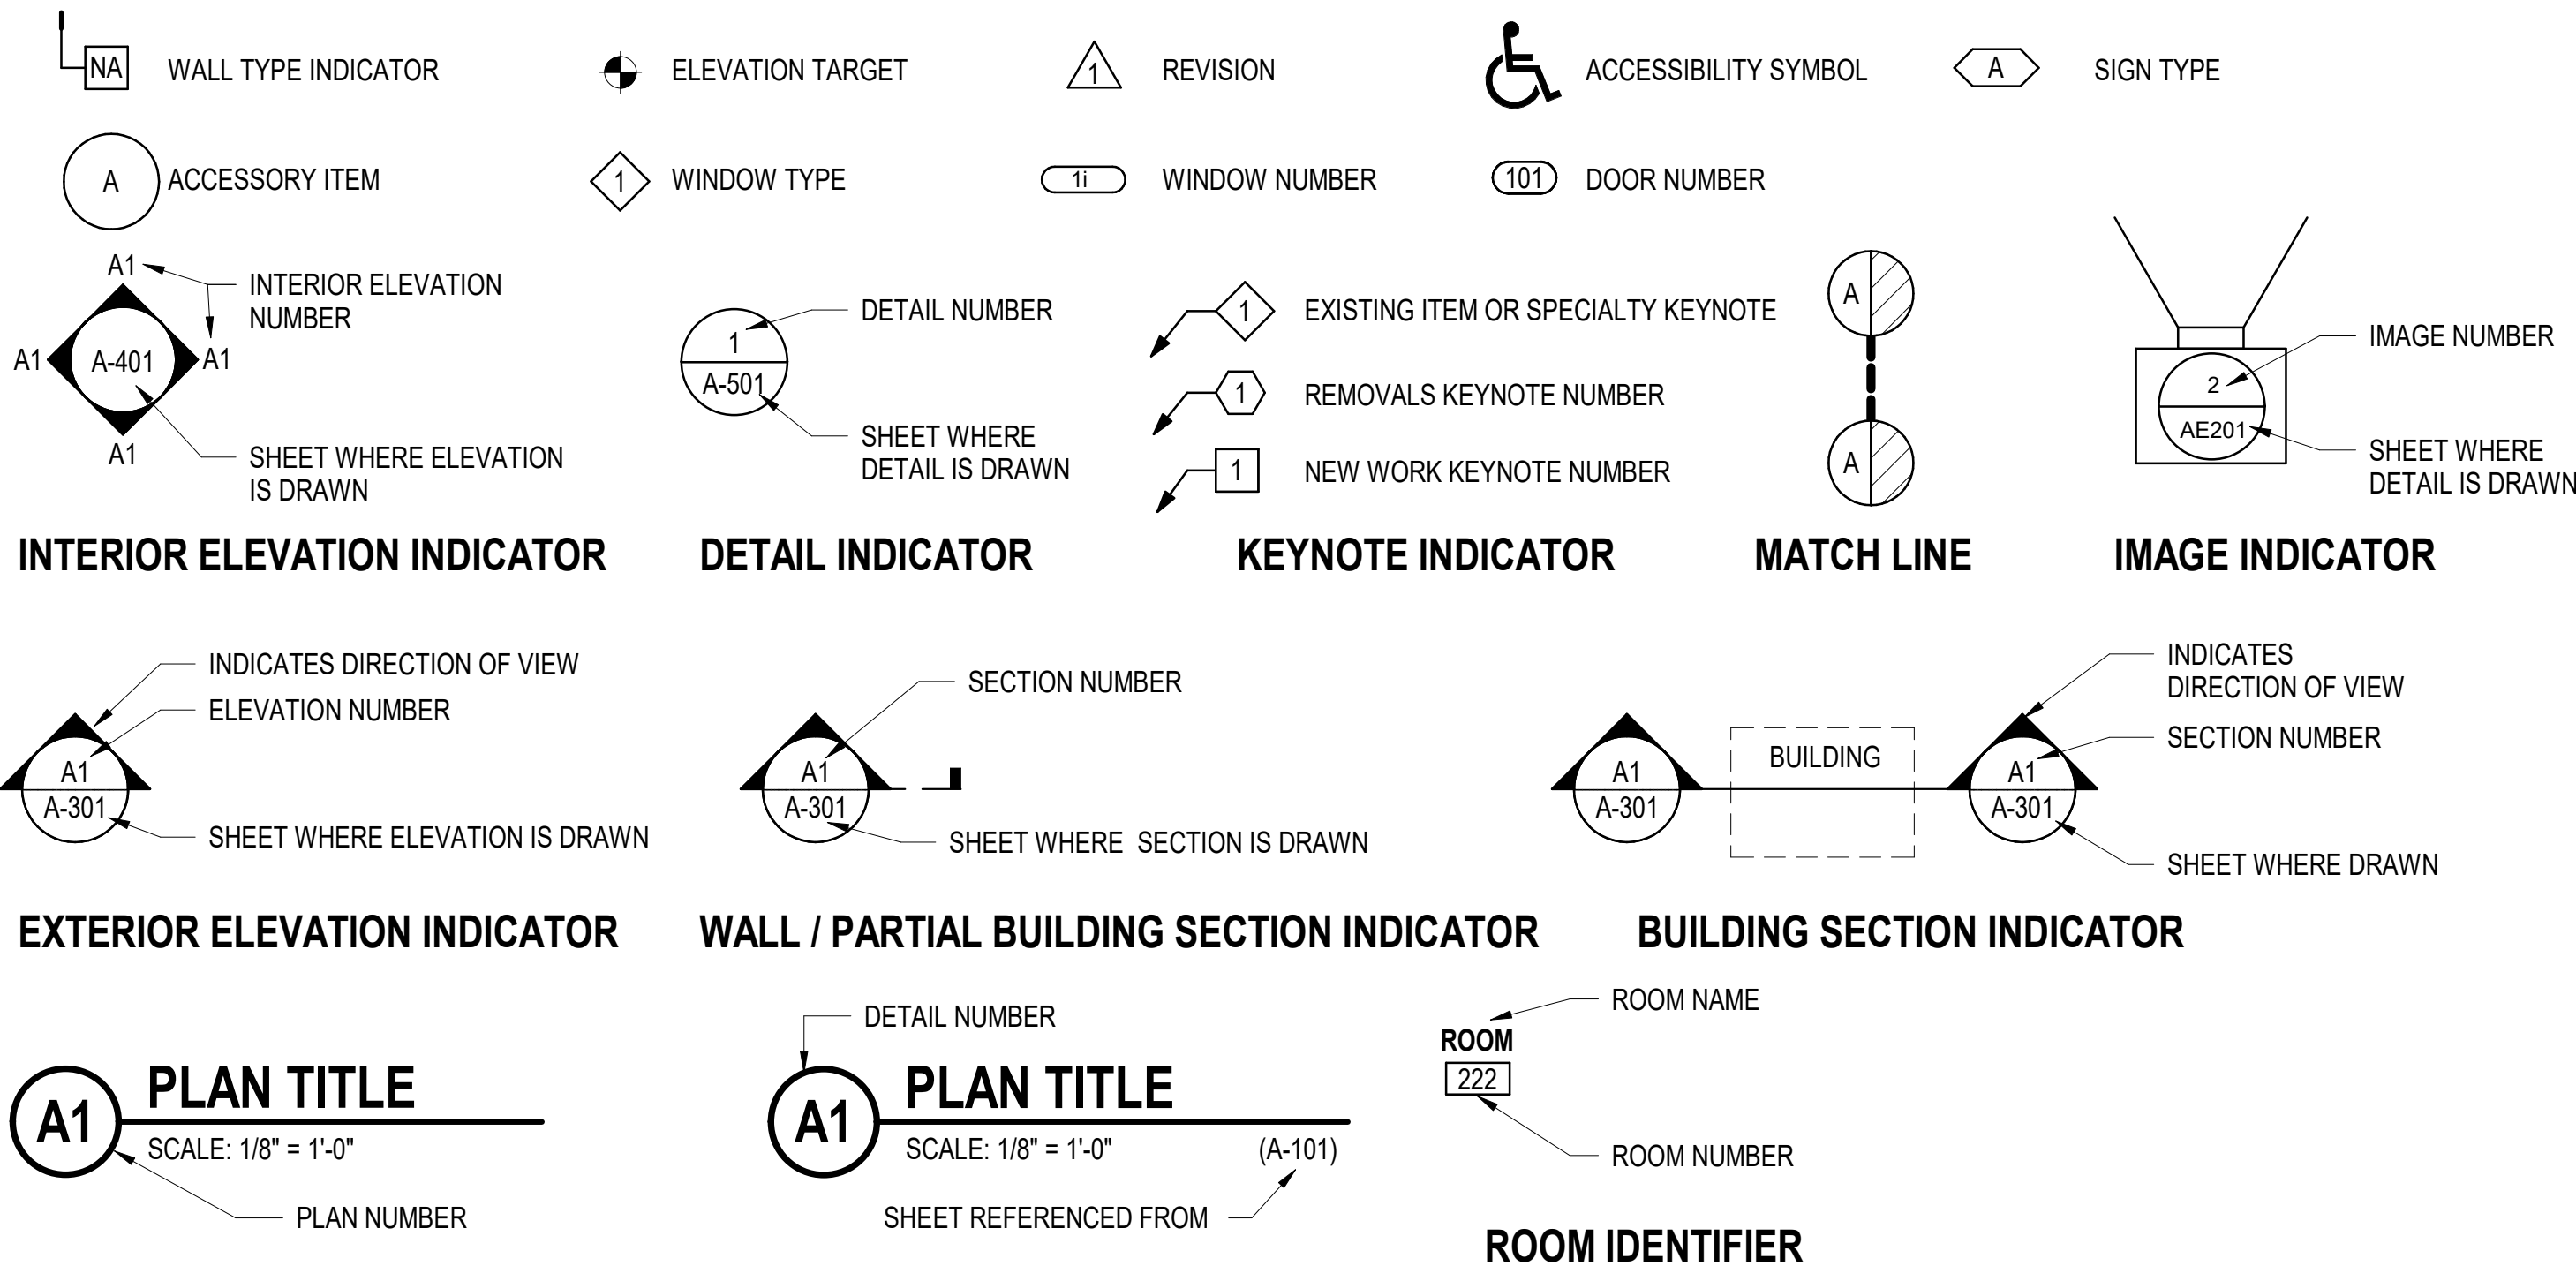

RSR

03/10/2026

10/07/2025

DATE

AMENDMENT 008

FINAL SUBMISSION

MARK

DESCRIPTION

SEAL

NAVFAC

OAK POINT ASSOCIATES

APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

SATISFACTORY TO DATE

DESIGNER JMR

DRAWN BY MJD

CHECKED BY RSH

DESIGN MANAGER T. CARLETON

PROJECT MANAGER L. LYONS

READ/NAME

FIRE PROTECTION S. RUCINSKI

DEPARTMENT OF THE NAVY

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC

PORTSMOUTH NAVAL SHIPYARD - KITTERY, ME

B60 REPAIRS

ABBREVIATIONS, LEGEND, AND GENERAL PROJECT NOTES - VOLUME 1

EPROJECT NO. 1740579

NAVFAC DRAWINGS NO.

SHEET 4 OF 282

G-004A

DRAWING REVISION: 14 SEP 2023