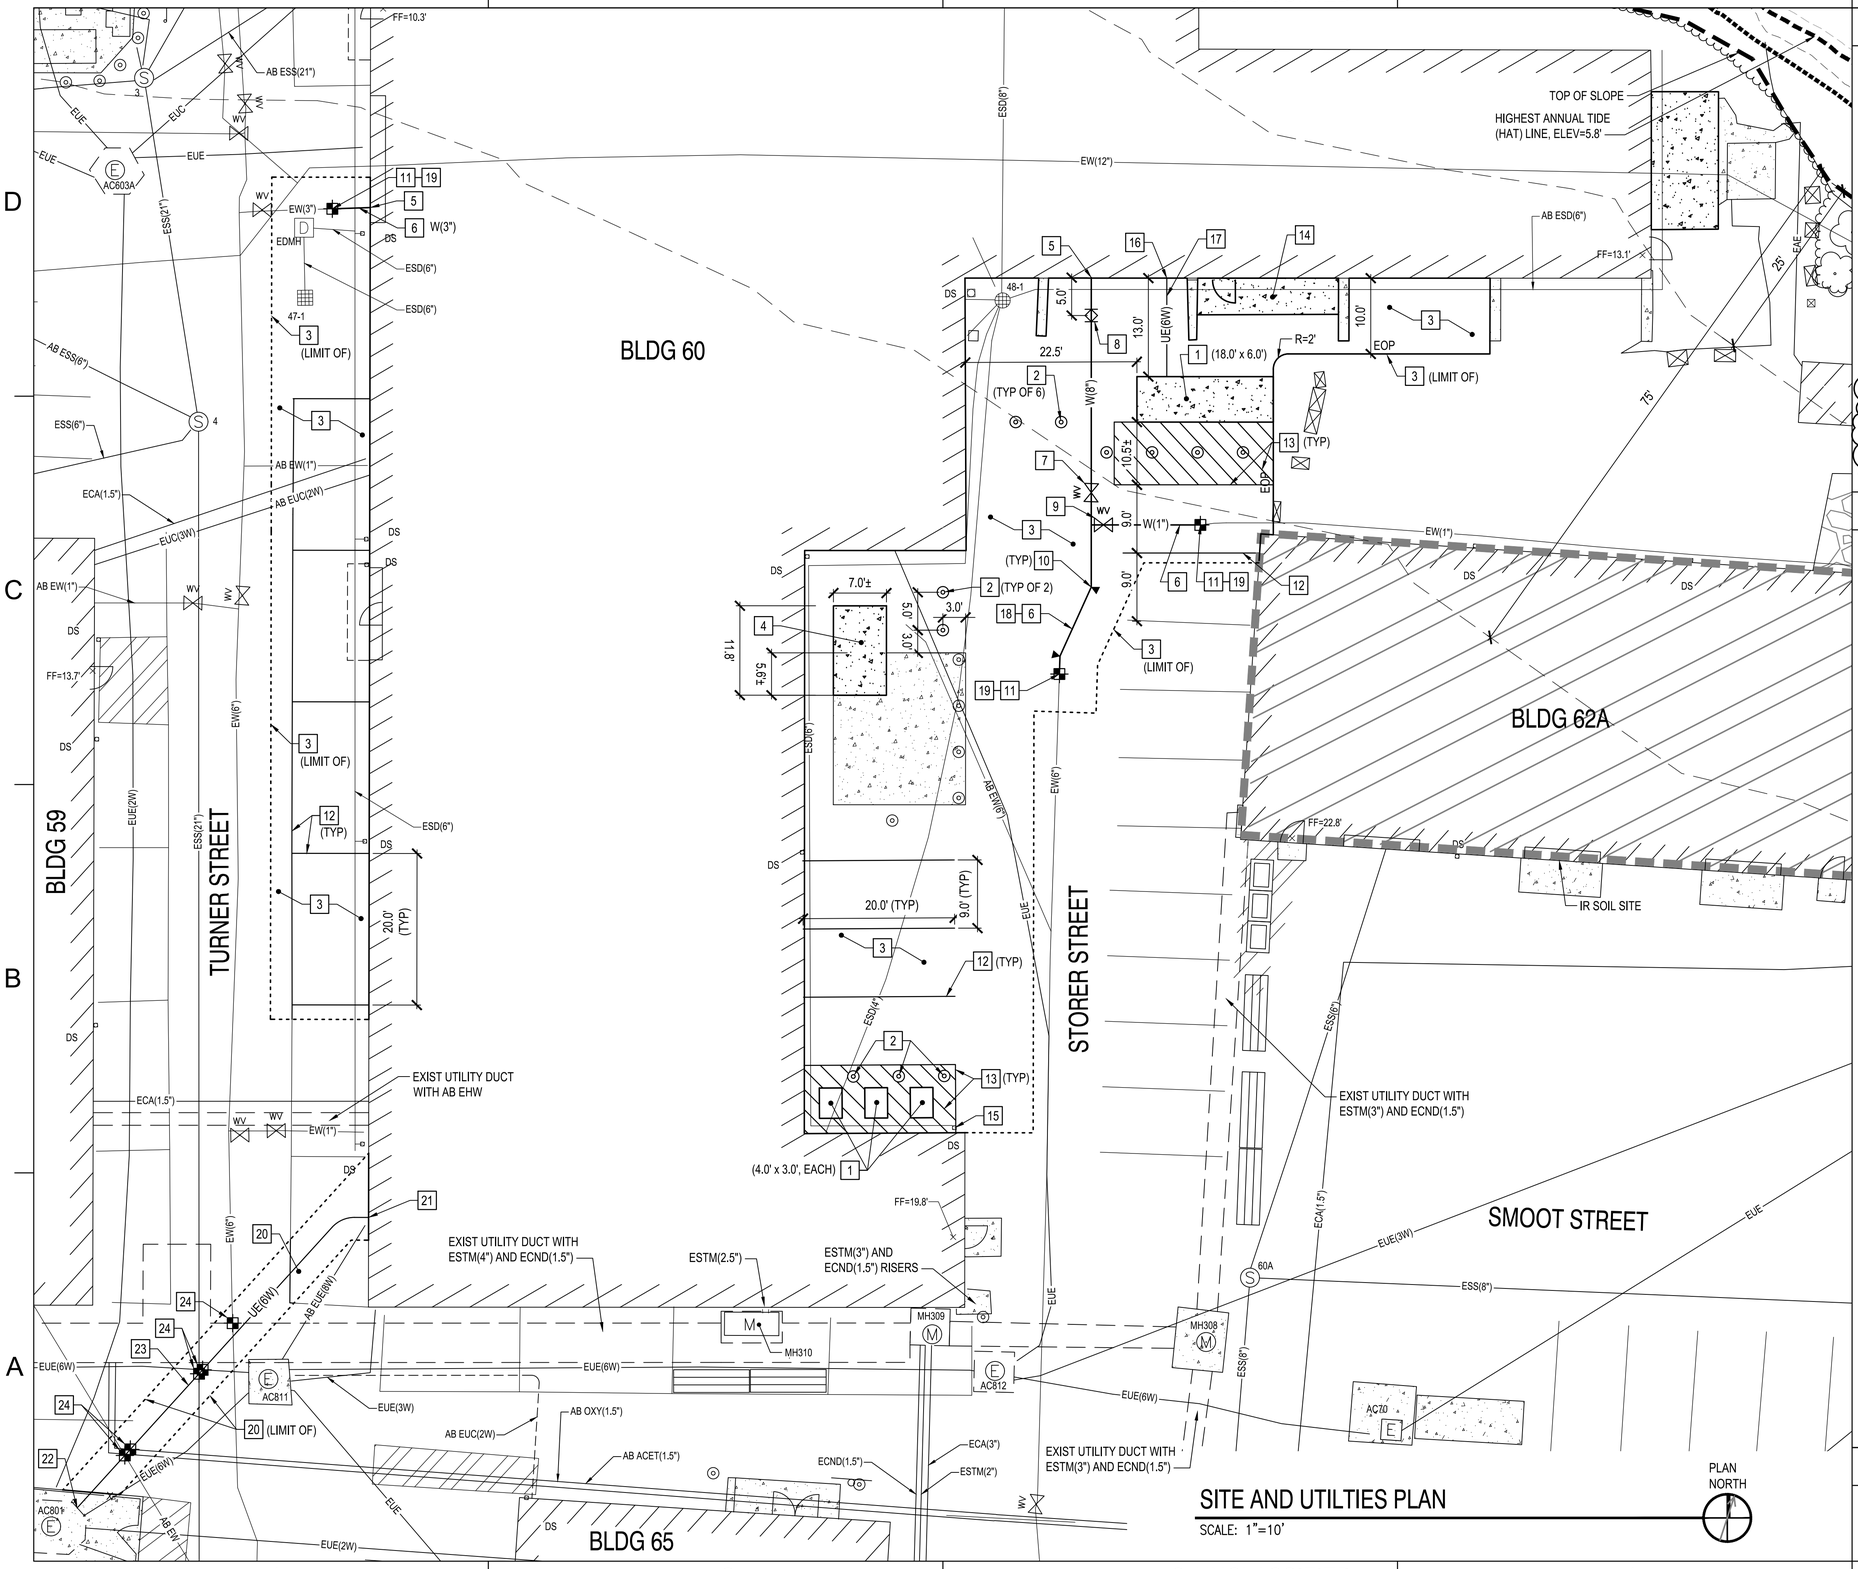

GENERAL SHEET NOTES

1. SEE ELECTRICAL AND TELECOMMUNICATIONS DRAWINGS FOR ELECTRICAL AND TELECOMMUNICATIONS SCOPE OF WORK.
2. SEE ELECTRICAL DRAWINGS FOR LIGHTNING PROTECTION SCOPE OF WORK.
3. SEE MECHANICAL AND PLUMBING DRAWINGS FOR MECHANICAL AND PLUMBING SCOPE OF WORK.
4. SEE SHEET G-005 FOR ARCHAEOLOGICAL CONSTRAINTS AND REQUIREMENTS.
5. SEE SHEET CX101 FOR MISCELLANEOUS SINK HOLE LOCATIONS AND DETAIL C1/C-502 FOR SCOPE OF REPAIRS.
6. QUALIFIED FIRE PROTECTION ENGINEER (QFPE) MUST INSPECT THE CONSTRUCTION OF THE FIRE PROTECTION SERVICE LINE UP TO THE POINT OF CONNECTION TO EXISTING.
7. SEE SHEET G-006 FOR SITE CONSTRAINTS AND REQUIREMENTS.
8. IF MEANS AND METHODS REQUIRE WORK BEYOND THE LIMITS TO COMPLETE THE CONTRACT SCOPE, INCLUDE PAVEMENT, CONCRETE AND TURF REMOVAL AND REPLACEMENT SET FORTH IN THE CONTRACT DOCUMENTS AT NO ADDITIONAL COST TO THE GOVERNMENT.
9. IN ADDITION TO THE QUANTITIES INDICATED, PROVIDE 30 CUBIC YARDS (6 UNITS OF 5 CUBIC YARDS) OF TOTAL PROJECT ROCK REMOVAL NOT OTHERWISE INDICATED ON THE DRAWINGS, SPECIFICATIONS, OR REPORTS. THE QUANTITIES INDICATED IN THE DRAWINGS AND SPECIFICATIONS ARE TO BE INCLUDED IN THE LUMP SUM BASE BID LINE ITEM. THE 30 CUBIC YARDS (6 UNITS OF 5 CUBIC YARDS) QUANTITY INDICATED ABOVE WILL BE TRACKED AS A UNIT PRICE.

KEYNOTES (THIS SHEET ONLY)

BASE BID:

1. CONCRETE EQUIPMENT PAD. DIMENSIONS SHOWN ARE FOR A BASIS OF DESIGN EQUIPMENT. COORDINATE WITH CONTRACTING OFFICER FOR FINAL SIZE AND LAYOUT OF CONCRETE PAD BEFORE INSTALLATION. PROVIDE PAD DIMENSIONS EXTENDING 6 INCHES BEYOND THE OUTER MOST LIMITS OF THE APPROVED EQUIPMENT CHOSEN. COORDINATE CONDUIT RISER LOCATIONS BASED ON APPROVED EQUIPMENT CHOSEN AND IN ACCORDANCE WITH THE MANUFACTURERS RECOMMENDATIONS. SEE DETAIL C3/C-502.
2. BOLLARD. SEE DETAILS C1/C-504 AND C3/C-504.
3. BITUMINOUS CONCRETE PAVEMENT. SEE DETAIL C1/C-502.
4. CONCRETE PAD EXPANSION. DRILL AND DOWEL 12" LONG #4 BARS EMBEDDED 6" INTO EXISTING CONCRETE PAD AND FILL ANNULAR VOID WITH EPOXY GROUT, 12" OC. SEE DETAIL C3/C-502 (SIM).
5. UTILITY FOUNDATION WALL PENETRATION. SEE DETAIL A1/C-504.
6. PIPE TRENCH. SEE DETAIL B4/C-503.
7. GATE VALVE. SEE DETAIL A1/C-503.
8. POST INDICATING VALVE. SEE DETAIL A4/C-503.
9. CORPORATION STOP CONNECTION. SEE DETAIL A3/C-503.
10. JOINT RESTRAINT. SEE DETAIL B2/C-503.
11. CONNECT TO EXISTING WATER LINE WITH SLEEVE TYPE MECHANICAL COUPLING.
12. PAINTED PAVEMENT MARKING - 4" WIDE WHITE LINE.
13. PAINTED PAVEMENT MARKING - 4" WIDE WHITE LINE BORDER AND INTERIOR LINES AT 45 DEGREES 3.0' OC.
14. CONCRETE STOOP (REFER TO ARCHITECTURAL AND STRUCTURAL DRAWINGS).
15. CONNECT TO EXISTING ROOF LEADER WITH DOWNSPOUT AT GRADE (SEE DETAIL C4/C-504).
16. CONNECT DUCTBANK TO EXISTING BUILDING. SEE DETAIL B3/C-502.
17. ELECTRIC DUCTBANK. SEE DETAIL A1/C-502 AND A3/C-502.
18. FIRE PROTECTION SERVICE PROFILE. SEE DETAIL A2/C-201.
19. EXCAVATE TEST HOLE, RECORD INFORMATION AND SUBMIT TO CO, SEE NOTES 24, 25, 26 AND 27 ON SHEET C-001.

OPTION 9:

20. BITUMINOUS CONCRETE PAVEMENT. SEE DETAIL C1/C-502.
21. CONNECT DUCTBANK TO EXISTING BUILDING. SEE DETAIL B3/C-502.
22. CONNECT DUCTBANK TO EXISTING MANHOLE AC801. SEE DETAIL B4/C-502.
23. ELECTRIC DUCTBANK. SEE DETAIL A1/C-502, A3/C-502 AND C2/C-201.
24. EXCAVATE TEST HOLE, RECORD INFORMATION AND SUBMIT TO CO, SEE NOTES 24, 25, 26 AND 27 ON SHEET C-001.

SITE AND UTILTIES PLAN

SCALE: 1"=10'

PLAN NORTH

GRAPHIC SCALE

1"=10' 10' 5' 0 10 20' 30'

CHECK GRAPHIC SCALE BEFORE USING

A	AMENDMENT 008	03/10/2026	RSH
	FINAL SUBMISSION	10/01/2025	RSH
SYS	DESCRIPTION	DATE	APR

NAVFAC

STATE OF MAINE
DANIEL ALBERT PHILIPPS
16279
LICENSED PROFESSIONAL ENGINEER
03-02-26

OAK POINT ASSOCIATES

APPROVED
FOR COMMANDER NAVFAC
ACTIVITY
SATISFACTORY TO DATE
DESIGNER DAP
DRAWN BY DAP
CHECKED BY DEW
DESIGN MANAGER T. CARLETON
PROJECT MANAGER L. LYONS
FEAD/PM&E
FIRE PROTECTION S. RUCINSKI

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
ROICC-ME
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC
PORTSMOUTH NAVAL SHIPYARD - KITTERY, ME
PORTSMOUTH NAVAL SHIPYARD
KITTERY, ME
B60 REPAIRS
SITE AND UTILITIES PLAN

EPROJECT NO.: 1740579
NAVFAC DRAWING NO.
SHEET 31 OF 282
CS101
DRAWFORM REVISION: 14 SEP 2023

10 Mar, 2026 – 9:43am
C:\File \22103.25-master.dwg