

GENERAL NOTES

1. TOP OF EXISTING SLAB-ON-GROUND ELEVATION = 10.30'±.
2. EXISTING STEEL FRAMING PAINT COATING IS LEAD-CONTAINING.
3. TOP OF EXISTING WOOD PLANK FLOOR BOARDS ELEVATION = 10.30'±.
4. EXISTING LEDGE ELEVATIONS ARE APPROXIMATE AND ARE BASED ON EXISTING REFERENCE DRAWING 60-02-2.

5. IN ADDITION TO THE QUANTITIES INDICATED, PROVIDE 30 CUBIC YARDS (6 UNITS OF 5 CUBIC YARDS) OF TOTAL PROJECT ROCK REMOVAL NOT OTHERWISE INDICATED ON THE DRAWINGS, SPECIFICATIONS, OR REPORTS. THE QUANTITIES INDICATED IN THE DRAWINGS AND SPECIFICATIONS ARE TO BE INCLUDED IN THE LUMP SUM BASE BID LINE ITEM. THE 30 CUBIC YARDS (6 UNITS OF 5 CUBIC YARDS) QUANTITY INDICATED ABOVE WILL BE TRACKED AS A UNIT PRICE.

D

C

B


A

D

C

B

A

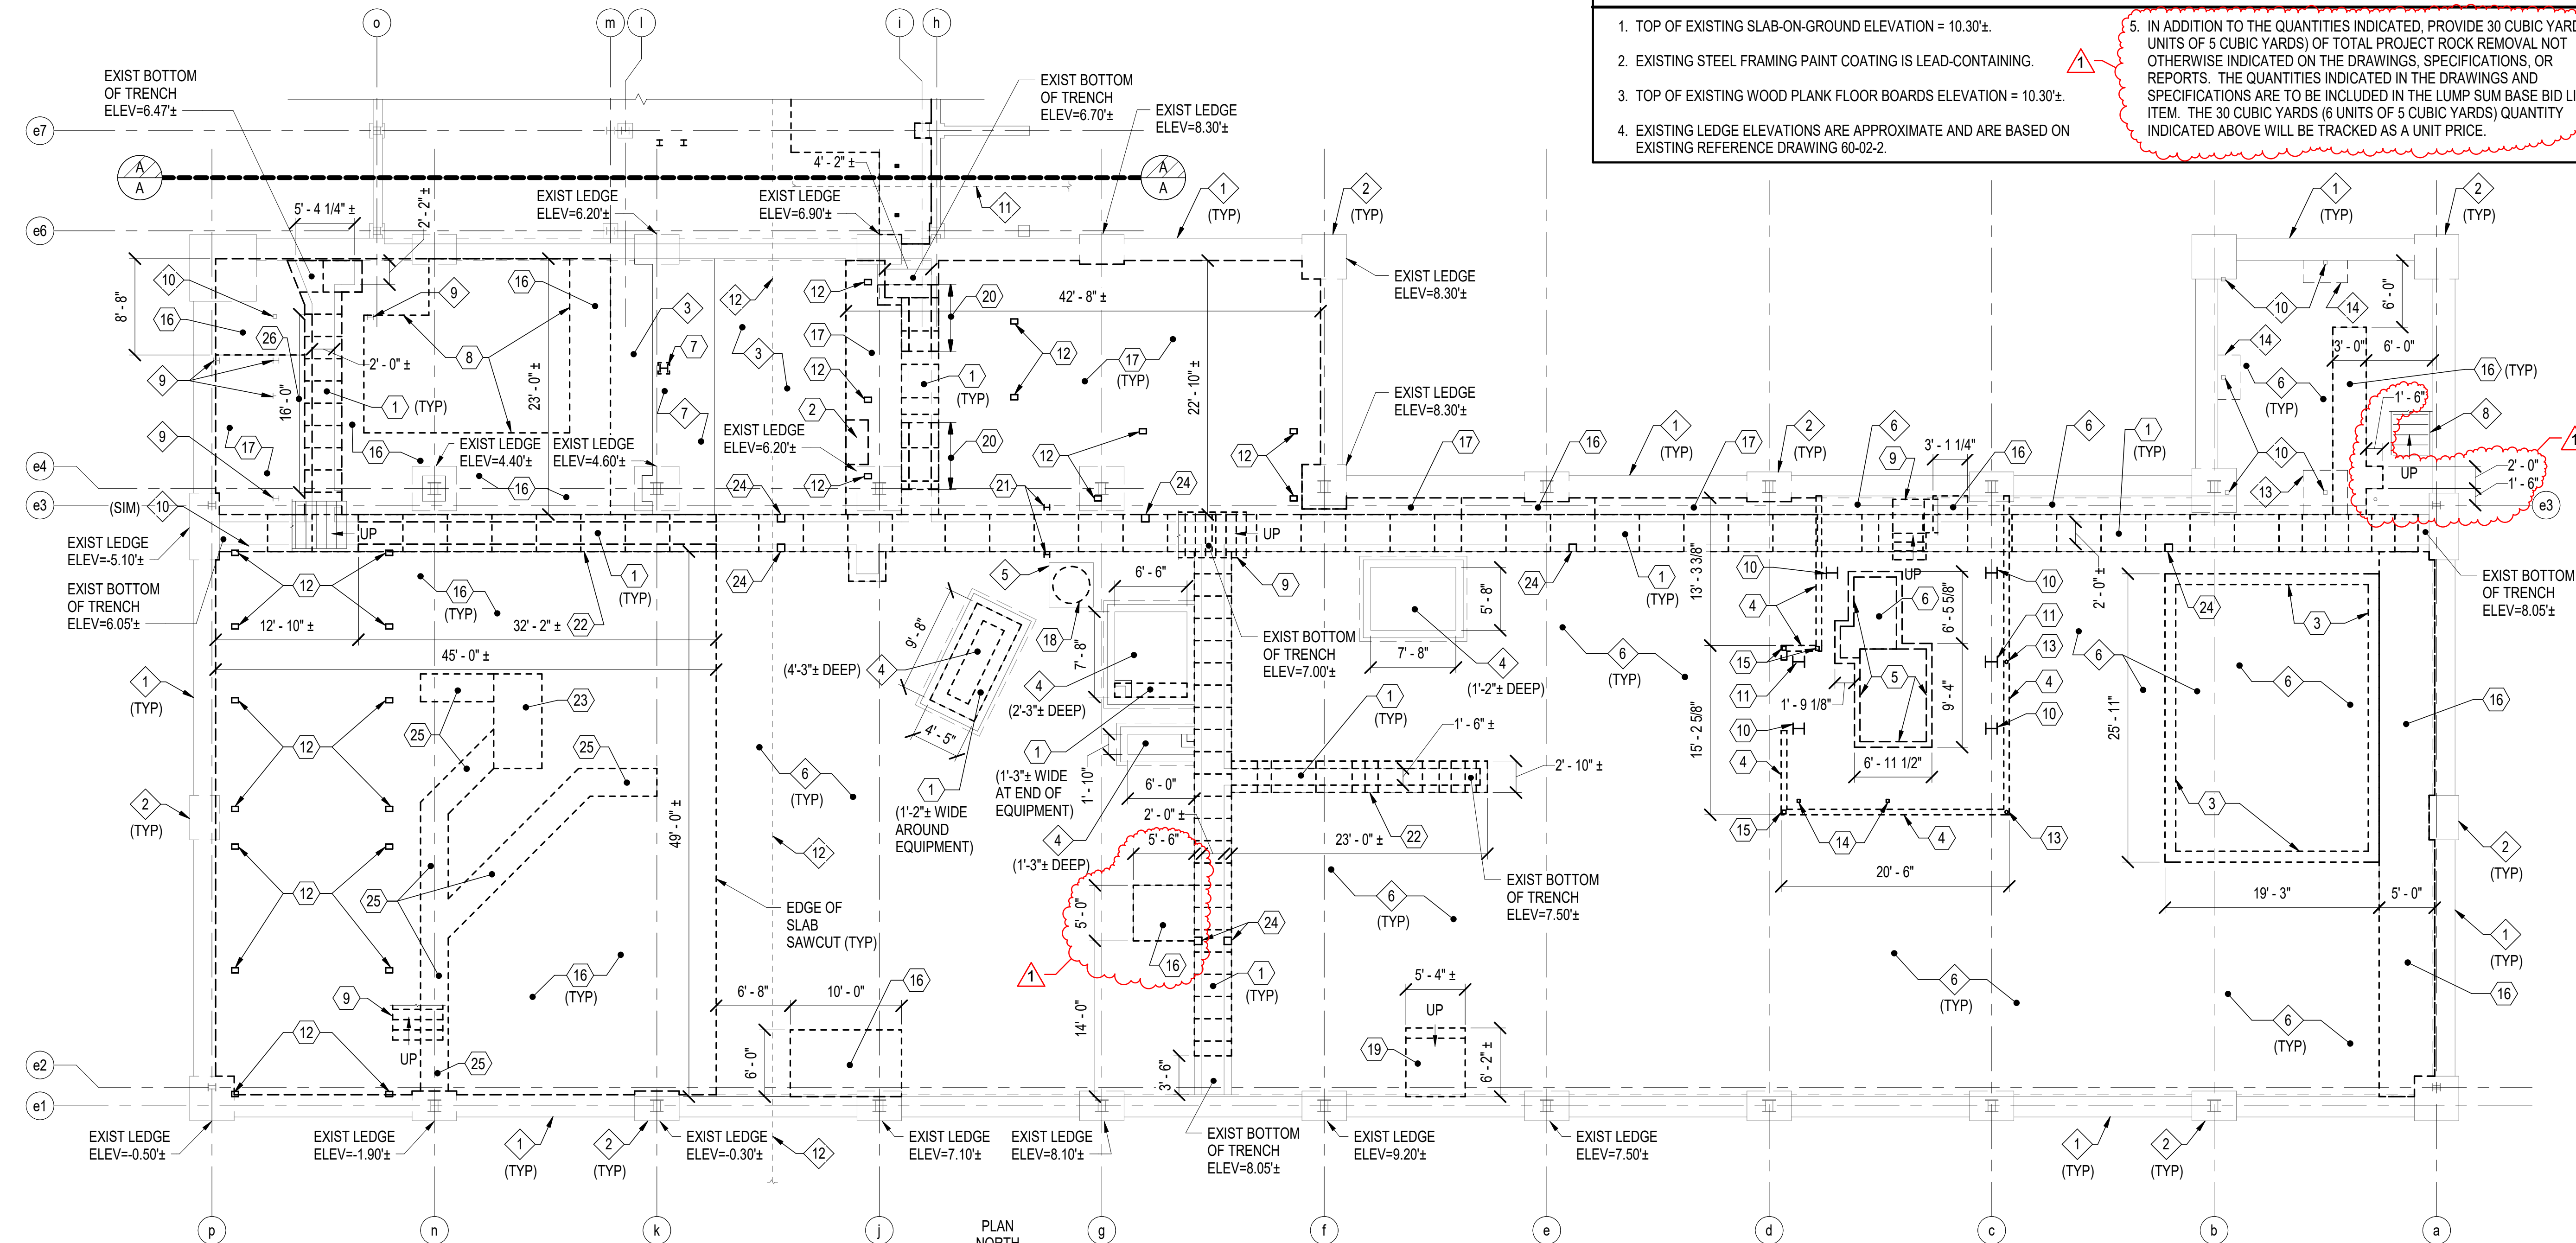

B1 FOUNDATION REMOVALS PART PLAN - WEST

SCALE: 1/8" = 1'-0"




EXISTING KEYNOTES (THIS SHEET ONLY)

1. EXISTING REINFORCED CONCRETE FOUNDATION WALL.
2. EXISTING REINFORCED CONCRETE PIER.
3. EXISTING 6" THICK REINFORCED CONCRETE SLAB-ON-GROUND WITH 1-1/2" CONCRETE TOPPING SLAB.
4. EXISTING CONCRETE PIT SUPPORTING EXISTING EQUIPMENT. DEPTH OF PIT INDICATED WITH KEYNOTE.
5. EXISTING REINFORCED CONCRETE JIB CRANE FOUNDATION.
6. EXISTING 7-1/2" THICK REINFORCED CONCRETE SLAB-ON-GROUND.
7. EXISTING 6" THICK REINFORCED CONCRETE SLAB-ON-GROUND AND 1-1/2" THICK WOOD PLANK FLOOR BOARDS.
8. EXISTING STEEL CHANNEL STAIR STRINGERS AND CONCRETE FILLED METAL PAN STAIR TREADS.
9. EXISTING W6x12 STEEL COLUMN SUPPORTING EXISTING STAIRS OR MEZZANINE.
10. EXISTING HSS STEEL COLUMN SUPPORTING EXISTING STAIRS OR MEZZANINE.
11. EXISTING STORM DRAIN LINE BELOW SLAB. SEE CIVIL DRAWINGS.
12. EXISTING WATER LINE BELOW SLAB. SEE CIVIL DRAWINGS.
13. EXISTING 4'-0"x4'-0"x1'-0" REINFORCED CONCRETE FOOTING.
14. EXISTING 2'-0"x4'-0"x1'-0" REINFORCED CONCRETE FOOTING.

REMOVALS KEYNOTES (THIS SHEET ONLY)

1. REMOVE EXISTING STEEL TRENCH COVERS AND CONTINUOUS STEEL ANGLE BOLTED TO TRENCH WALLS.
2. REMOVE TOP 1'-0" OF EXISTING CONCRETE CAPSTAN TO BOTTOM OF EXISTING SLAB.
3. REMOVE EXISTING 1'-0" REINFORCED CMU WALLS (9'-8" TALL) AND DOWELS INTO EXISTING SLAB. PATCH SLAB.
4. REMOVE EXISTING 6" x 6" CONTINUOUS CONCRETE CURB AND DOWELS INTO EXISTING SLAB AND GRIND DOWELS FLUSH WITH SLAB SURFACE. PATCH SLAB.
5. SAWCUT AND REMOVE TOP 8" OF REINFORCED CONCRETE CURB OF EQUIPMENT FOUNDATION.
6. CUT AND REMOVE EXPOSED PORTION OF 1-1/2" DIAMETER ANCHOR RODS (TYPICAL OF 16) FLUSH WITH TOP OF EQUIPMENT PAD.
7. REMOVE EXISTING JIB CRANE COLUMN (20 FEET TALL), STEEL BASE PLATE, AND FOUR ANCHOR RODS.
8. REMOVE EXISTING 6" HIGH CONCRETE SLAB ON TOP OF EXISTING 7-1/2" THICK CONCRETE SLAB-ON-GROUND.
9. REMOVE EXISTING STEEL CHANNEL STAIR STRINGERS AND METAL GRATING STAIR TREADS.
10. REMOVE EXISTING W12x65 STEEL COLUMN.
11. REMOVE EXISTING W12x96 STEEL COLUMN.
12. REMOVE EXISTING 6x8 WOOD POST.
13. REMOVE EXISTING 3" DIAMETER STEEL PIPE COLUMN.
14. REMOVE EXISTING HSS 3x3 STEEL COLUMN.
15. REMOVE EXISTING HSS 4x4 STEEL COLUMN.
16. SAWCUT AND REMOVE EXISTING 7-1/2" THICK REINFORCED CONCRETE SLAB-ON-GROUND.
17. SAWCUT AND REMOVE EXISTING 6" THICK REINFORCED CONCRETE SLAB-ON-GROUND AND 1-1/2" THICK WOOD PLANK FLOOR BOARDS.
18. REMOVE EXISTING FLOOR MOUNTED JIB CRANE AND CUT (6) 1-1/2" DIAMETER ANCHOR RODS FLUSH WITH TOP OF CONCRETE PAD.
19. REMOVE EXISTING 1'-0" THICK CONCRETE PAD AND STEP SUPPORTED ON EXISTING SLAB.
20. SAWCUT AND REMOVE PORTION OF EXISTING CONCRETE TRENCH.
21. REMOVE EXISTING W6x25 STEEL COLUMN, BASE PLATE, 1" NONSHRINK GROUT, AND CUT 1/2" DIAMETER ANCHOR BOLTS FLUSH WITH EXISTING SLAB.
22. REMOVE EXISTING CONCRETE TRENCH WALLS AND TRENCH SLAB.
23. REMOVE EXISTING 4'-4" x 8'-6" x 4'-2" DEEP CONCRETE FILLED EQUIPMENT FOUNDATION BELOW EXISTING SLAB-ON-GROUND.
24. PROVIDE 8" DIAMETER HOLE IN EXISTING TRENCH SIDE WALL FOR RADON SYSTEM. SEE DETAIL C3/SB501.
25. SAWCUT AND REMOVE EXISTING CONTINUOUS CONCRETE FILLED TRENCH (4'-4" x 4'-2") BELOW EXISTING SLAB-ON-GROUND.
26. SAWCUT AND REMOVE TOP 1'-6" OF EXISTING TRENCH WALL.

KEY PLAN

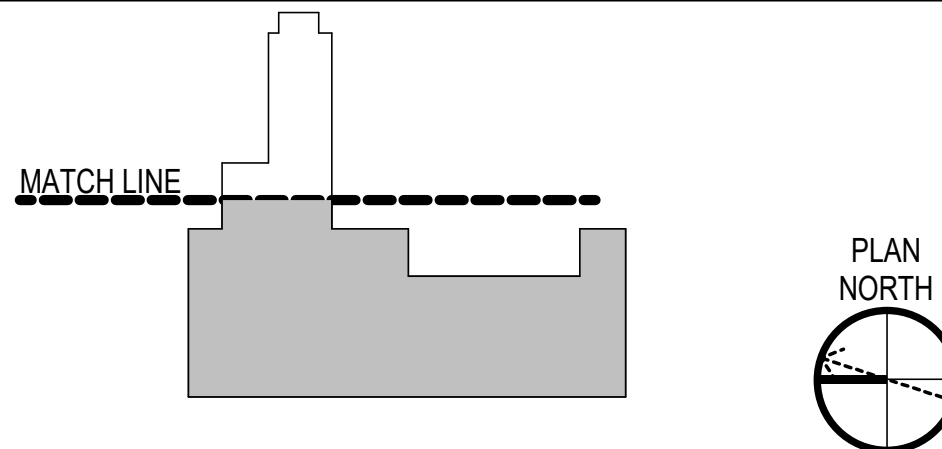

GRAPHIC SCALE(S)



APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

SATISFACTORY TO DATE

DESIGNER WFG

DRAWN BY MJC

CHECKED BY DNM

DESIGN MANAGER T. CARLETON

PROJECT MANAGER L. LYONS

HEADLINE

FIRE PROTECTION S. RUCINSKI

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC

PORTSMOUTH NAVAL SHIPYARD - KITTERY, ME

PORTSMOUTH NAVAL SHIPYARD

KITTERY, MAINE

B60 REPAIRS

FOUNDATION REMOVALS PART PLAN - WEST