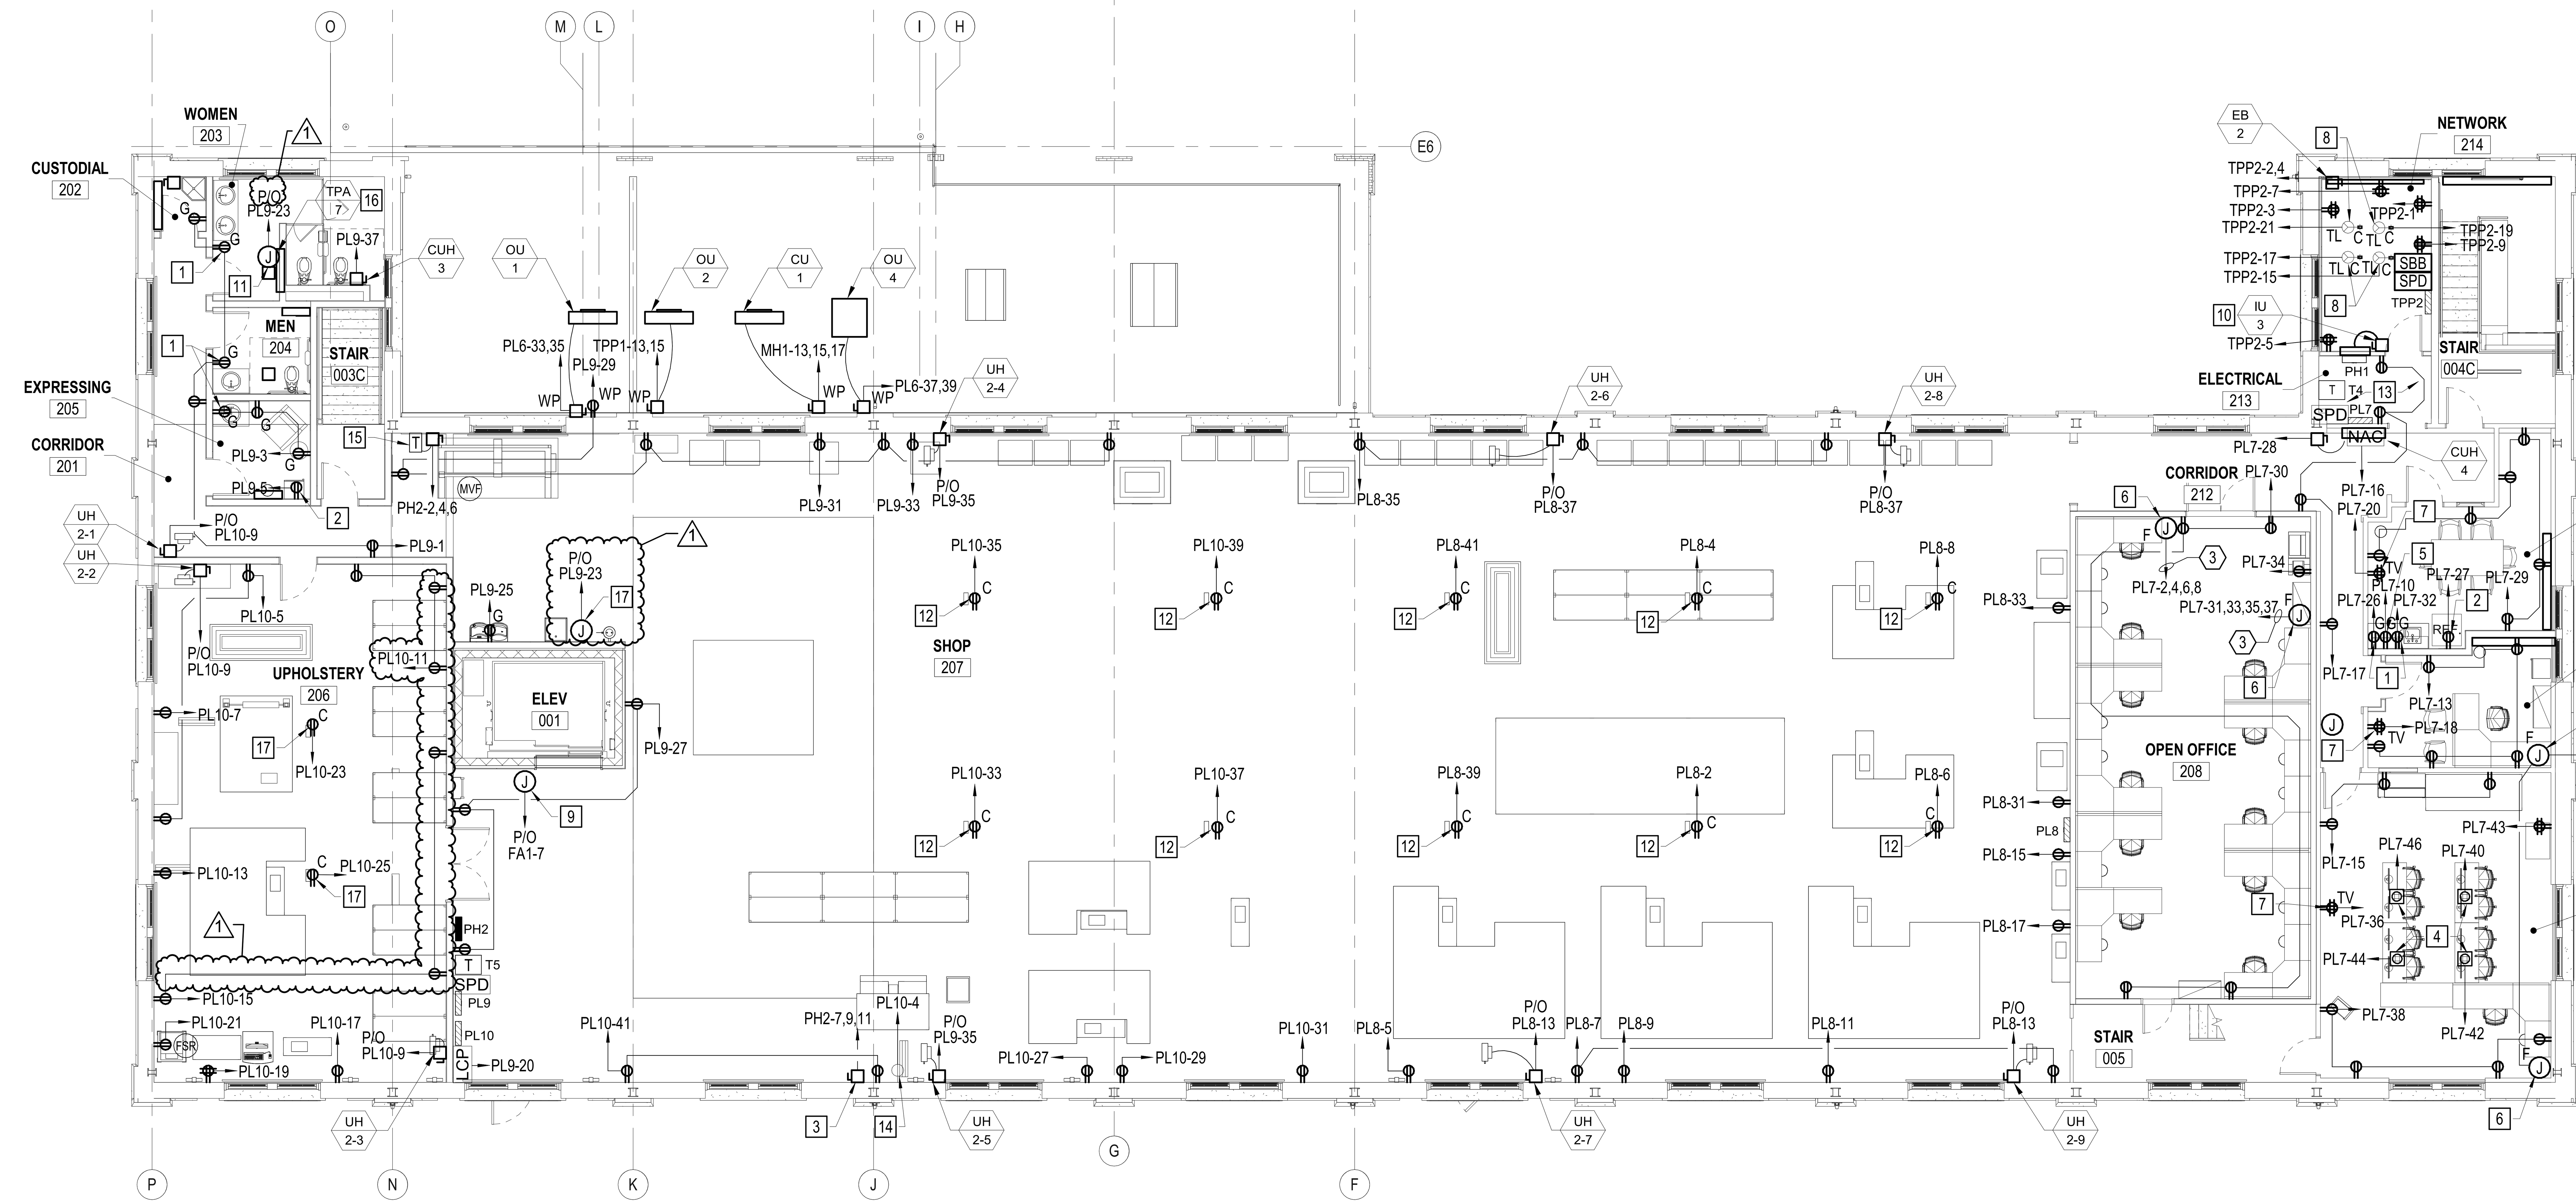


B1 SECOND FLOOR POWER PLAN

SCALE: 1/8" = 1'-0"


GENERAL NOTES

1. REFER TO SHEES EP503 AND EP504 FOR MECHANICAL, PLUMBING, AND MISCELLANEOUS EQUIPMENT WIRING SCHEDULE.
2. REFER TO SHEETS EP601 - EP604 FOR PANELBOARD SCHEDULES.
3. REFER TO SHEET EP501 FOR ONE-LINE DIAGRAM AND SCHEDULES.
4. REFER TO SHEET EP701 FOR SHOP EQUIPMENT SCHEDULE.

KEYNOTES

1. INSTALL 4" ABOVE COUNTERTOP BACKSPLASH.
2. PROVIDE RECEPTACLE FOR REFRIGERATOR. COORDINATE EXACT LOCATION WITH THE CONTRACTING OFFICER.
3. PROVIDE DISCONNECT AND POWER TO EXISTING BRIDGE CRANE. SPLICE AND EXTEND EXISTING WIRES SERVING THE BRIDGE CRANE TO THE DISCONNECT. FIELD VERIFY. EXISTING CRANE CONTROLS TO REMAIN.
4. PROVIDE COMBINATION POKE THROUGH DEVICE. REFER TO POKE THROUGH DETAIL A1/EP505.
5. COORDINATE EXACT RECEPTACLE LOCATION WITH THE PLUMBING TRADE AND WATER HEATER, EWH-3.
6. PROVIDE JUNCTION BOX AND 8-WIRE SYSTEMS FURNITURE CONNECTION. REFER TO DETAIL C3/EP504.
7. REFER TO DETAIL C1/ET502 FOR TV MONITOR AND AV INSTALLATION DETAIL.
8. INSTALL THE TWIST LOCK RECEPTACLE SERVING THE DATA CABINET WITHIN THE CABINET.
9. FOR ELEVATOR LOBBY 2 WAY COMMUNICATIONS SYSTEM. REFER TO DETAIL A3/ET501.
10. INDOOR UNIT IS POWERED FROM THE OUTDOOR UNIT. COORDINATE WITH THE MECHANICAL TRADE.
11. FOR TRAP PRIMER. COORDINATE WITH THE PLUMBING TRADE.
12. PROVIDE SURFACE MOUNTED BOX WITH ASSOCIATED CONDUIT CONCEALED WITHIN THE ATTIC SPACE ABOVE. PAINT THE JUNCTION BOX TO MATCH THE ADJACENT SURFACE.
13. PROVIDE STEEL SLOTTED STRUT SUPPORT FOR MOUNTING PANELBOARDS. COORDINATE WITH THE MECHANICAL TRADE TO AVOID PIPING THAT IS ROUTED VERTICALLY ALONG THE WALL.
14. PROVIDE SIMPLEX RECEPTACLE FOR POLY BAG SEALER.
15. INSTALL ROLL SLITTER TRANSFORMER. REFER TO SHEET EP701. COORDINATE EXACT LOCATION IN THE FIELD.
16. PROVIDE POWER TO THE TRAP PRIMER. COORDINATE EXACT LOCATION WITH THE PLUMBING TRADE.
17. PROVIDE POWER TO EMERGENCY EYEWASH ALARM SYSTEM. COORDINATE WITH THE PLUMBING TRADE. (1)

KEY PLAN

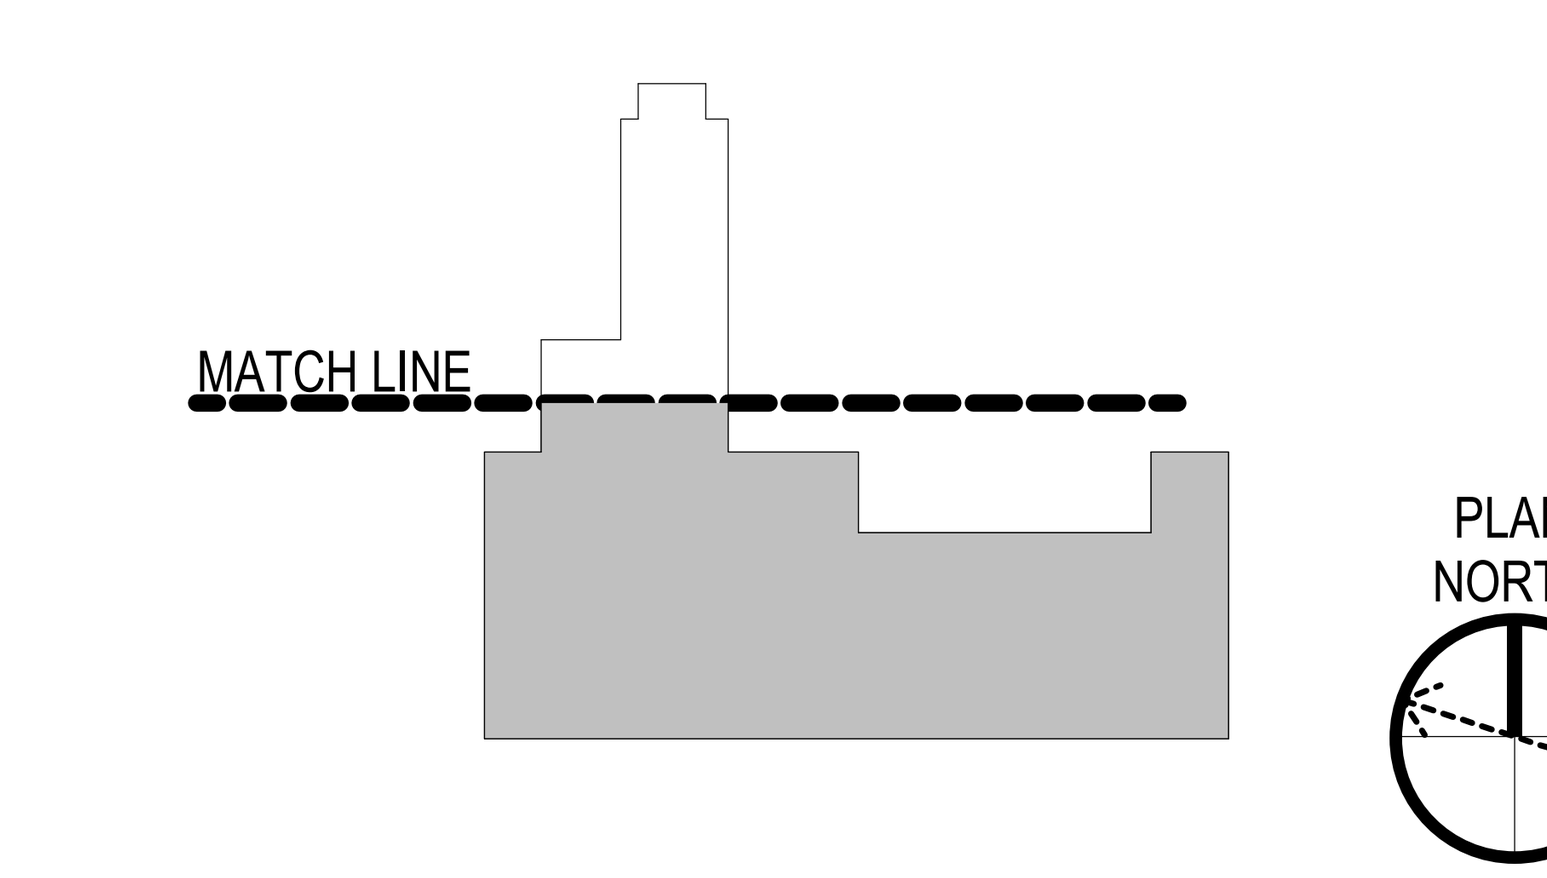

GRAPHIC SCALE(S)

1/8" = 1' - 0" — 0 5' 10' 15' 30'

MARK	DESCRIPTION	DATE	APPR
1	AMENDMENT 009	03/16/2026	RSH
	FINAL SUBMISSION	10/01/2025	RSH

NAVFAC

OAK POINT ASSOCIATES

SEAL

APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

SATISFACTORY TO DATE

DESIGNER	HRM
DRAWN BY	BPD
CHECKED BY	DCL
DESIGN MANAGER	T. CARLETON
PROJECT MANAGER	L. LYONS
FEAD/PM&E	
FIRE PROTECTION	S. RUCINSKI

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC
ROICC-ME PORTSMOUTH NAVAL SHIPYARD - KITTERY, ME

PORTSMOUTH NAVAL SHIPYARD
KITTERY, ME

B60 REPAIRS

SECOND FLOOR POWER PLAN

EPROJECT NO.: 1740579

NAVFAC DRAWING NO.

SHEET 252 OF 282

EP105

DRAWFORM REVISION: 14 SEP 2023

UNCLASSIFIED

3/16/2026 11:38:11 AM EP105
C:\Users\bdaigle\Documents\22103.25_BLDG60_ELEC-V23_bdaigleQUXG8.rvt