


FILE NAME: C:\pwwork\user\woodrj\p1102_L101.dwg LAYOUT NAME: L101 PLOTTED: Friday, June 20, 2025 - 4:47pm USER: woodrj


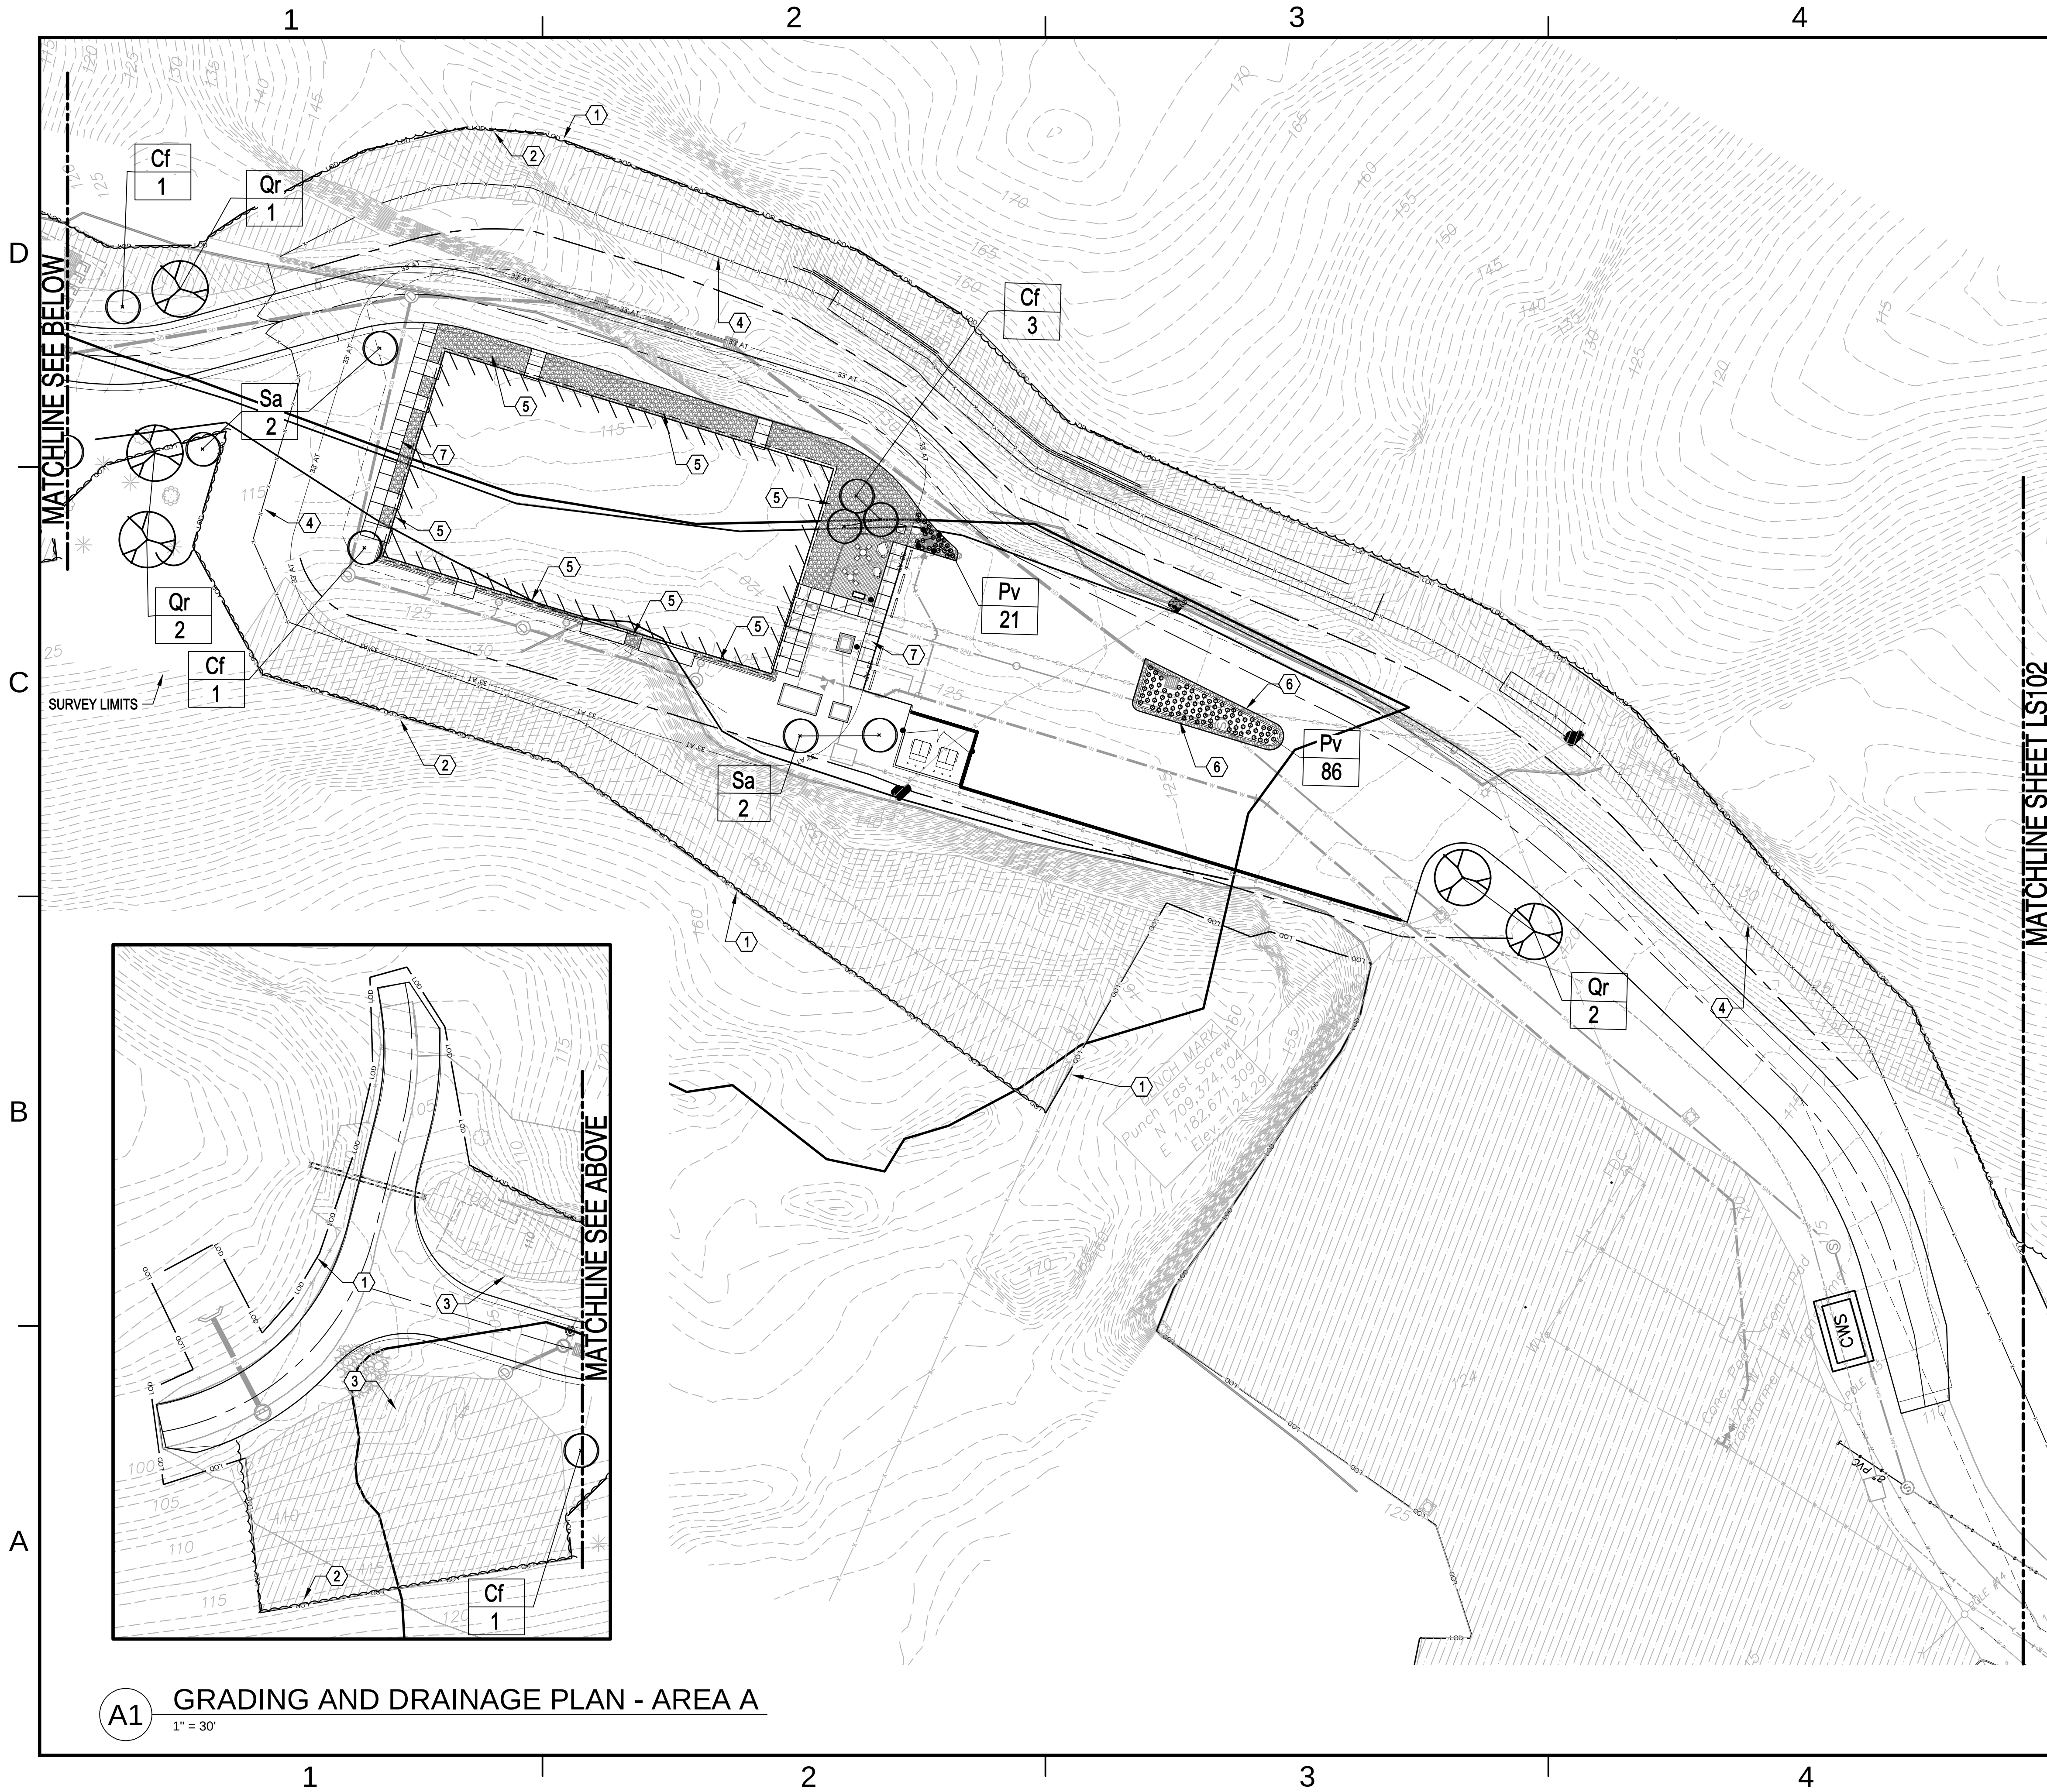


A1 GRADING AND DRAINAGE PLAN - AREA A
1" = 30'

- ### GENERAL SHEET NOTES
- TREES AND SHRUBS MUST BE NATIVE SPECIES.
 - PROVIDE SHRUB SPACING TO CONFORM WITH ATFP REQUIREMENTS REGARDING CONCEALMENT.
 - ALL SURFACES NOT PAVED OR DESIGNATED FOR LANDSCAPING MUST BE STABILIZED USING PERMANENT SEEDING PER LOCAL EROSION AND SEDIMENT CONTROL STANDARDS.


- ### KEYED NOTES
- LIMITS OF DISTURBANCE
 - TREE LINE
 - UNDERGROUND STORMWATER MANAGEMENT FACILITY - SEE CIVIL PLANS
 - SITE SECURITY FENCE - SEE CIVIL PLANS
 - MOW STRIP/RIVER ROCK MULCH - SEE C2, LS501
 - ISLAND CRUSHED GRANITE STRIP - SEE B2, LS501
 - CONCRETE SIDEWALK - SEE CIVIL

- ### LEGEND
- CANOPY TREE
 - ORNAMENTAL TREE
 - TABLE AND CHAIRS - (2 TOTAL) PROVIDE 1 ADA ACCESSIBLE - SEE A1, LS501
 - BOULDERS SOURCED FROM SITE (2 TOTAL)
APPROXIMATE BOULDER DIMENSIONS: 4' LONG 3' WIDE X 2' HIGH
SEE B1, LS501
 - GRANITE BLOCK BENCH ON CONCRETE PAD (1 TOTAL) - SEE B3, LS501
 - UNIT PAVER SEATING AREA - SEE SHEET LS501, DETAIL B4
 - MEADOW MIX SEEDING - SEE SHEET LS501, DETAIL C5
- FOR UNHATCHED AREAS NOT PAVED OR BUILT UPON, SEE SHEET LS501, DETAIL C5

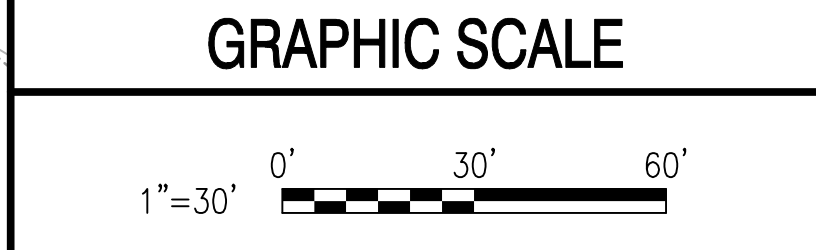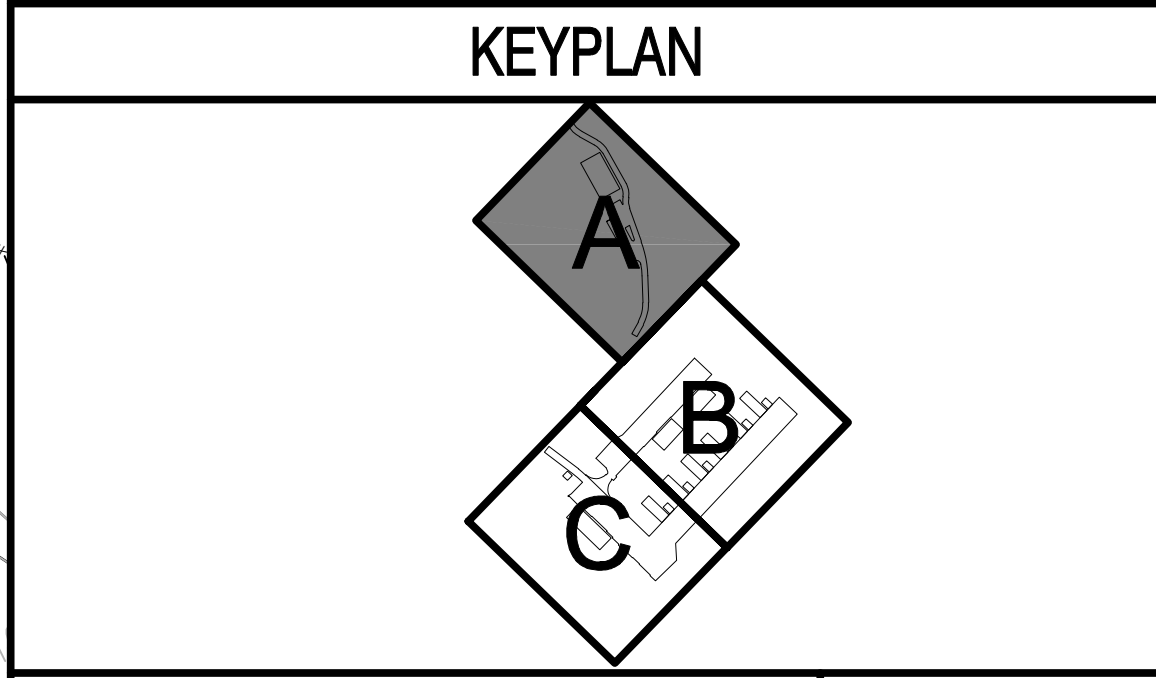

APPROVED		DATE	APPR
FOR COMMANDER NAVFAC		DESCRIPTION	SYN
ACTIVITY		APPROVED BY LCDR ELIZABETH OLOKODE NAVFAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT	
SATISFACTORY TO	DATE	05/27/2025	
DES	DD	DRW	DD
CHK	SA		
PMIDM	SMS/CWJ		
BRANCH MANAGER	DLP		
CHIEF ENGINEER	JWJ		
FIRE PROTECTION	HPN		
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC		NAVAL STATION - GROTON, CT	
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC		GROTON, CONNECTICUT	
NAVAL SUBMARINE BASE NEW LONDON		P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY	
SITE		LANDSCAPE - AREA A	
SCALE: AS NOTED		PROJECT NO.: 1687770	
CONSTR. CONTR. NO.		NAVFAC DRAWING NO. 12893908	
SHEET 102 OF 152		LS101	

FILE NAME: C:\pwworkar\den003\jgs_woods\00910671\P1102_LS103.dwg PLOTTED: Friday, June 20, 2025 - 4:47pm USER: wcd61

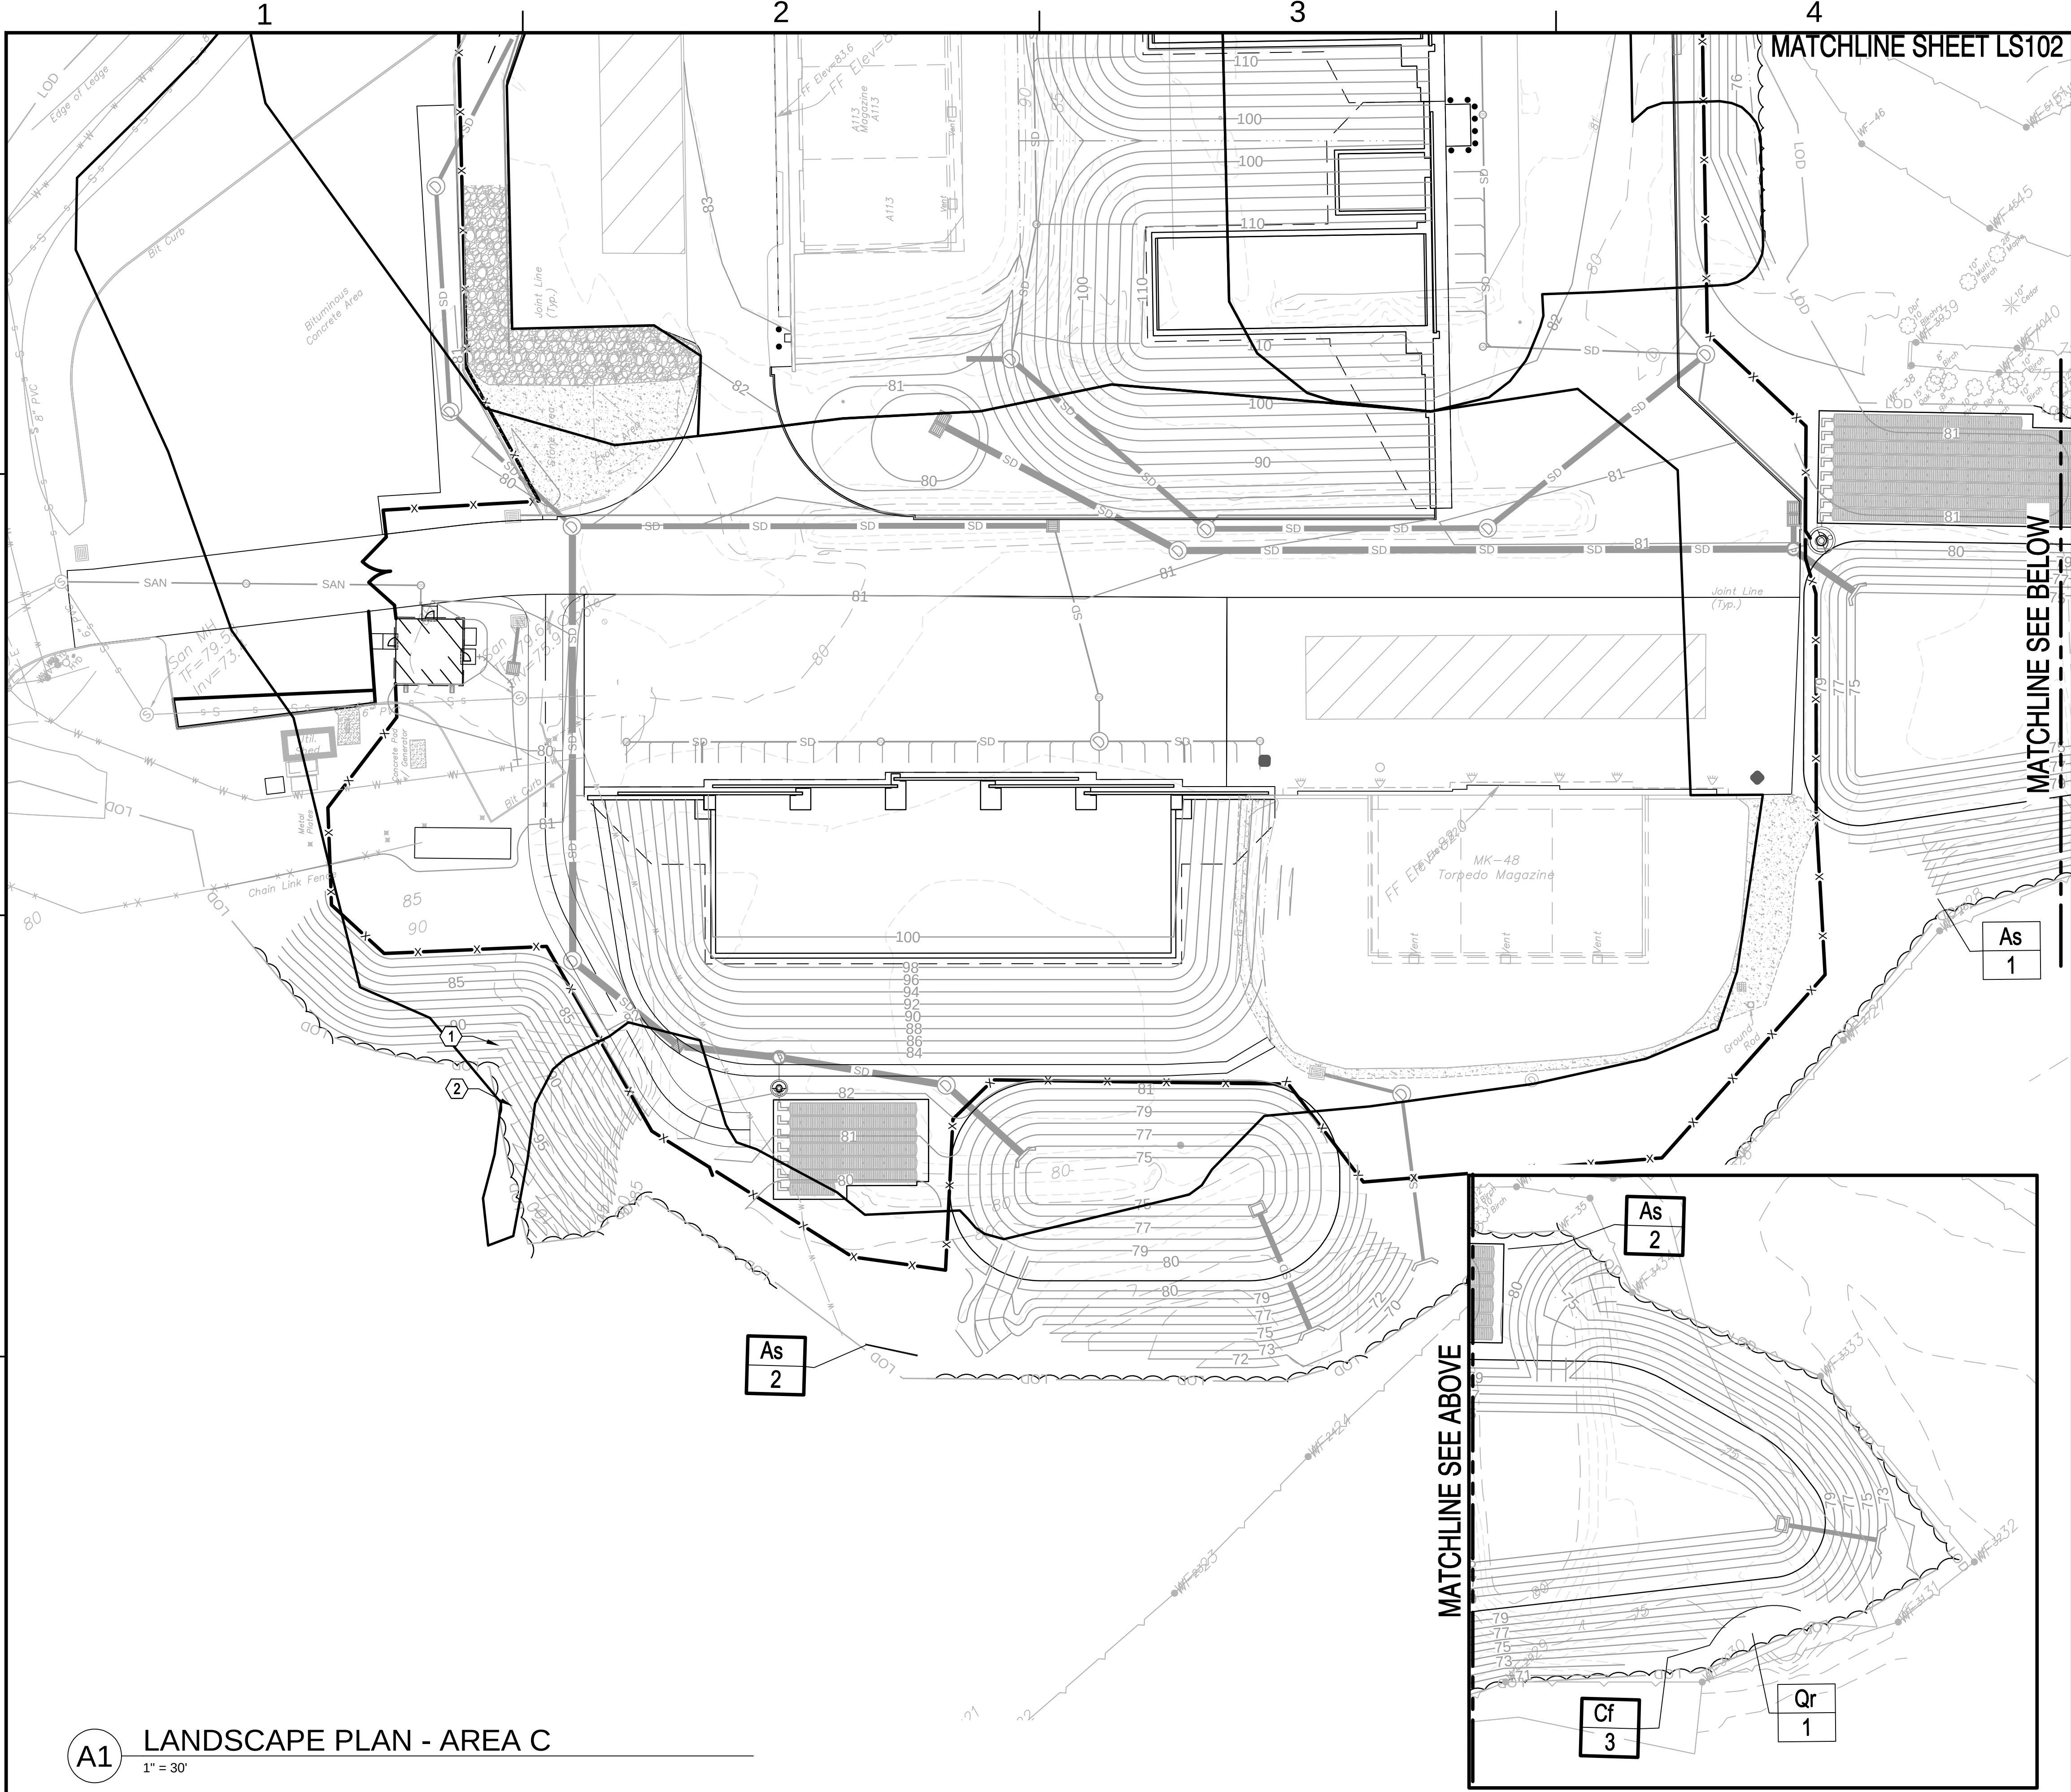

A1 LANDSCAPE PLAN - AREA C
1" = 30'

GENERAL SHEET NOTES

- TREES AND SHRUBS MUST BE NATIVE SPECIES.

KEYED NOTES

- LIMITS OF DISTURBANCE
- TREE LINE

LEGEND

SEE D4, LS501 FOR PLANT LIST

CANOPY TREE

ORNAMENTAL TREE

SEE C5, LS501 FOR GROUNDCOVER

BUFFALO GRASS - SEE C5, LS501


GRASS/CLOVER MIX - SEE C5, LS501

MEADOW MIX - SEE C5, LS501

BASIN MIX - SEE C5, LS501

FOR UNHATCHED AREAS NOT PAVED OR BUILT UPON, SEE C5, LS501


KEYPLAN

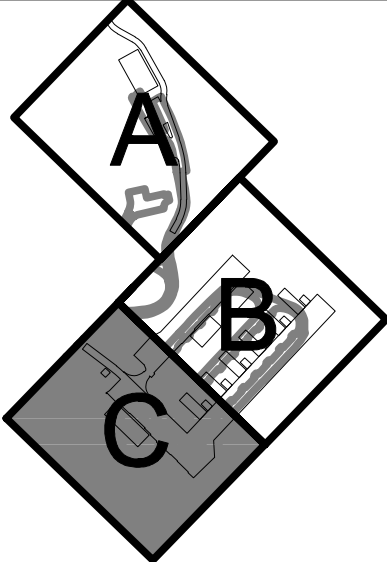

GRAPHIC SCALE



PLAN NORTH



APPR.	
DATE	
SYN. DESCRIPTION	
SEAL	
A/E INFO	
FOR COMMANDER NAVFAC	
ACTIVITY APPROVED BY LCDR ELIZABETH OLOKODE NAVFAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT	
SATISFACTORY TO	DATE 05/27/2025
DES DD	DRW DD
CHK SA	
PMIDM	SMS/CWJ
BRANCH MANAGER	DLP
CHIEF ENGINEER	JWJ
FIRE PROTECTION	HPN
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC	
NAVAL SUBMARINE BASE NEW LONDON	
P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY	
SITE	
LANDSCAPE - AREA C	
SCALE: AS NOTED	
PROJECT NO.: 1687770	
CONSTR. CONTR. NO.	
NAVFAC DRAWING NO. 12893910	
SHEET 104 OF 152	
LS103	

FILE NAME: C:\pwworkspace\den003\jgs_woods\100910671\102_LS500.dwg PLOTTED: Friday, June 20, 2025 - 4:45pm USER: woodsj

D

C

B


A

NOTES:


- SEE SHEETS CD101, CD102 & CD103 FOR TREE REMOVAL LOCATIONS
- 24 PROPOSED TREES SATISFIES BASE ENVIRONMENTAL MITIGATION REQUIREMENTS

TREES						
Key	Quantity	Botanical Name	Common Name	Size	Condition	Spacing
Qr	6	Quercus rubrum	Red Oak	3.0" cal. min, 14" tall min.	B & B	As Shown
As	5	Acer saccharum	Sugar Maple	3.0" cal. min, 14" tall min.	B & B	As Shown
Sa	4	Sassafras albidum	Sassafras	2.0" cal. min, 8" tall min.	B & B	As Shown
Cf	9	Cornus florida	Flowering Dogwood	2.0" cal. min., 8" tall min.	B & B	As Shown
Gr		GRASS				
Pv	104	Panicum virgatum	Switchgrass	#1	Container	18" O.C.


D4 PLANT LIST
NTS

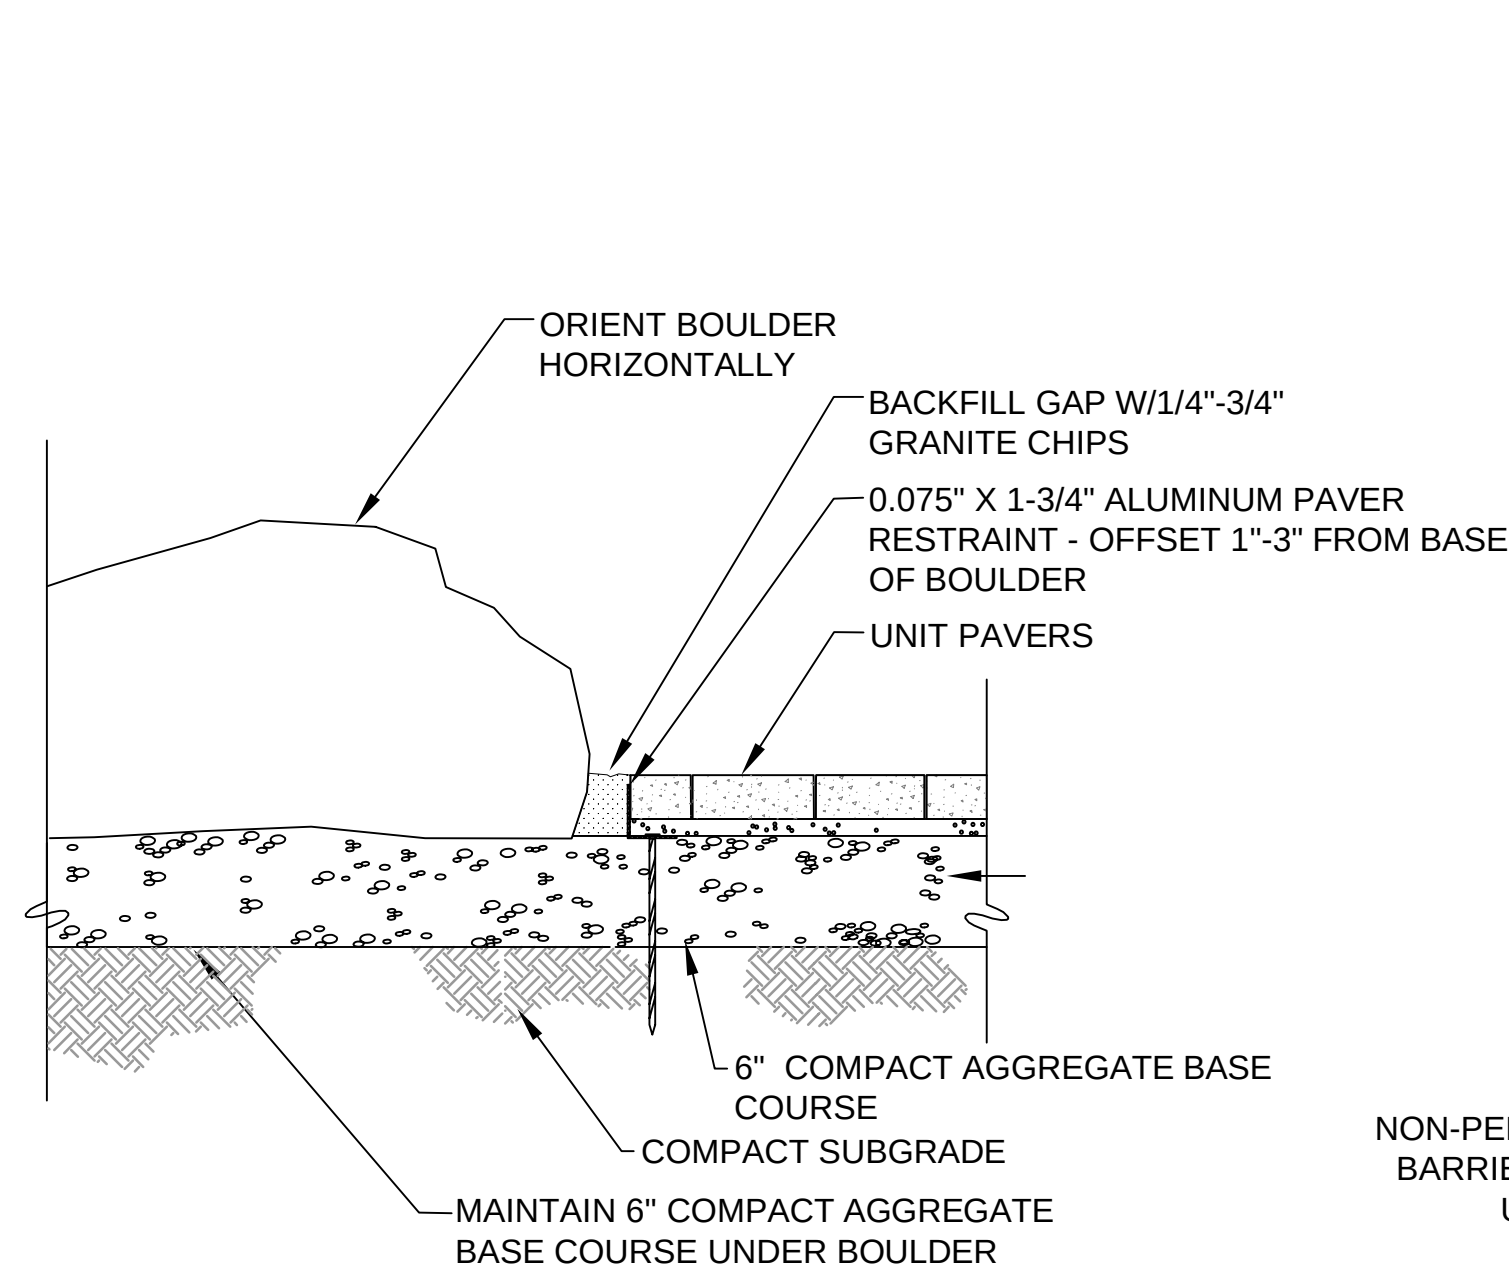


B1 BOULDER ON TERRACE DETAIL
NTS

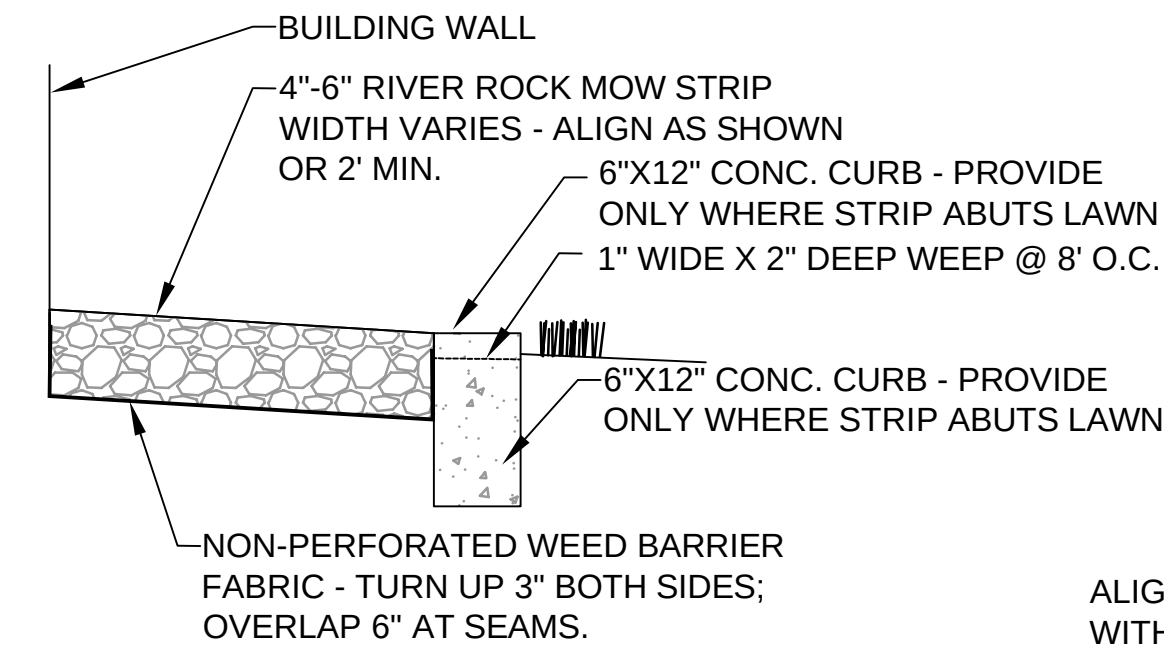


C2 MOW STRIP/RIVER ROCK MULCH DETAIL
NTS

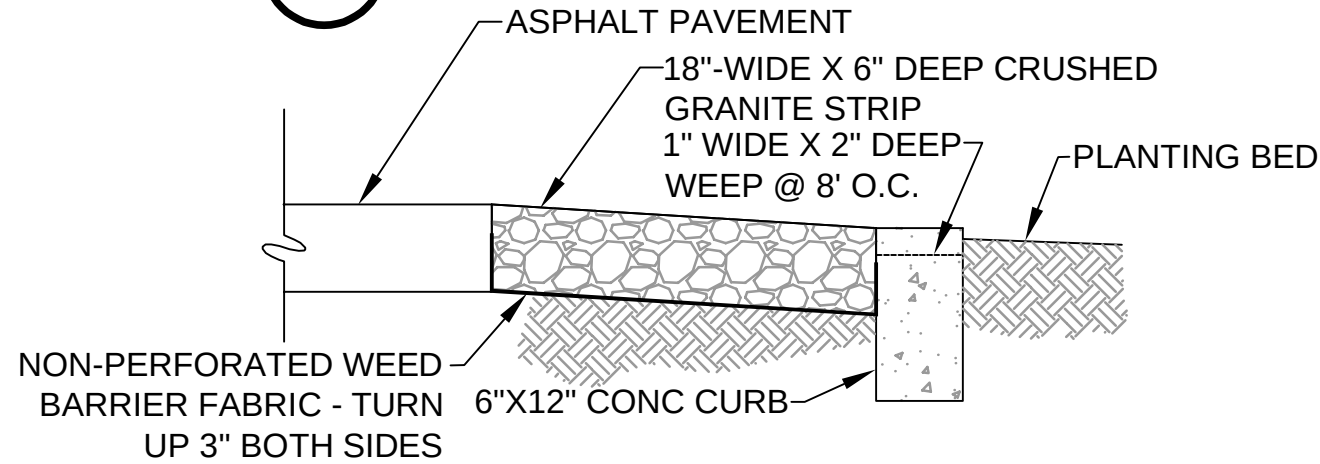

B2 ISLAND CRUSHED GRANITE STRIP
NTS
NOTE: CRUSHED GRANITE SIZE: 1/2" TO 3/4"
COLORS RANGING FROM TAN, GREY, BLUE & PINK

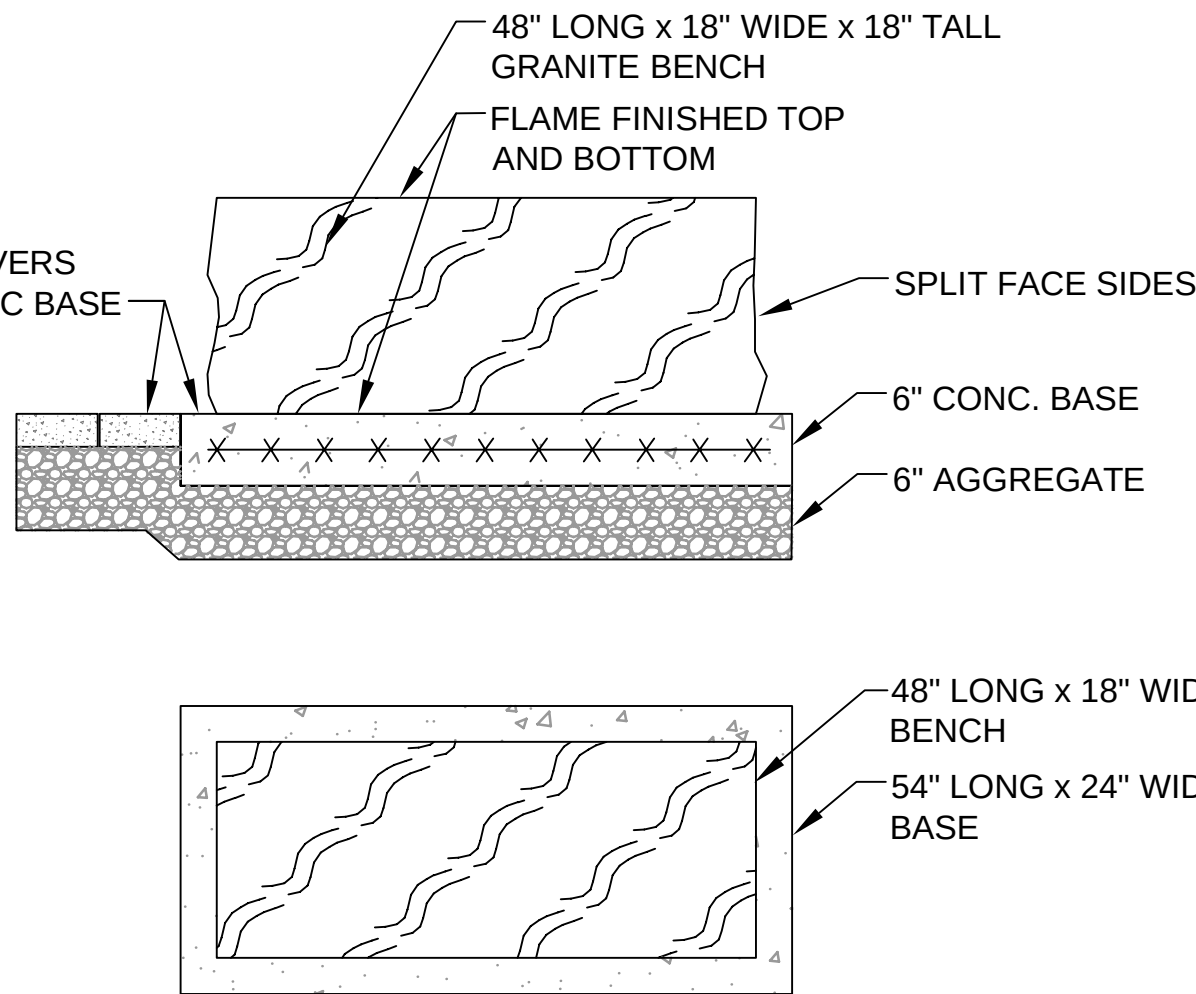


B3 GRANITE BENCH ON CONCRETE PAD DETAIL
NTS

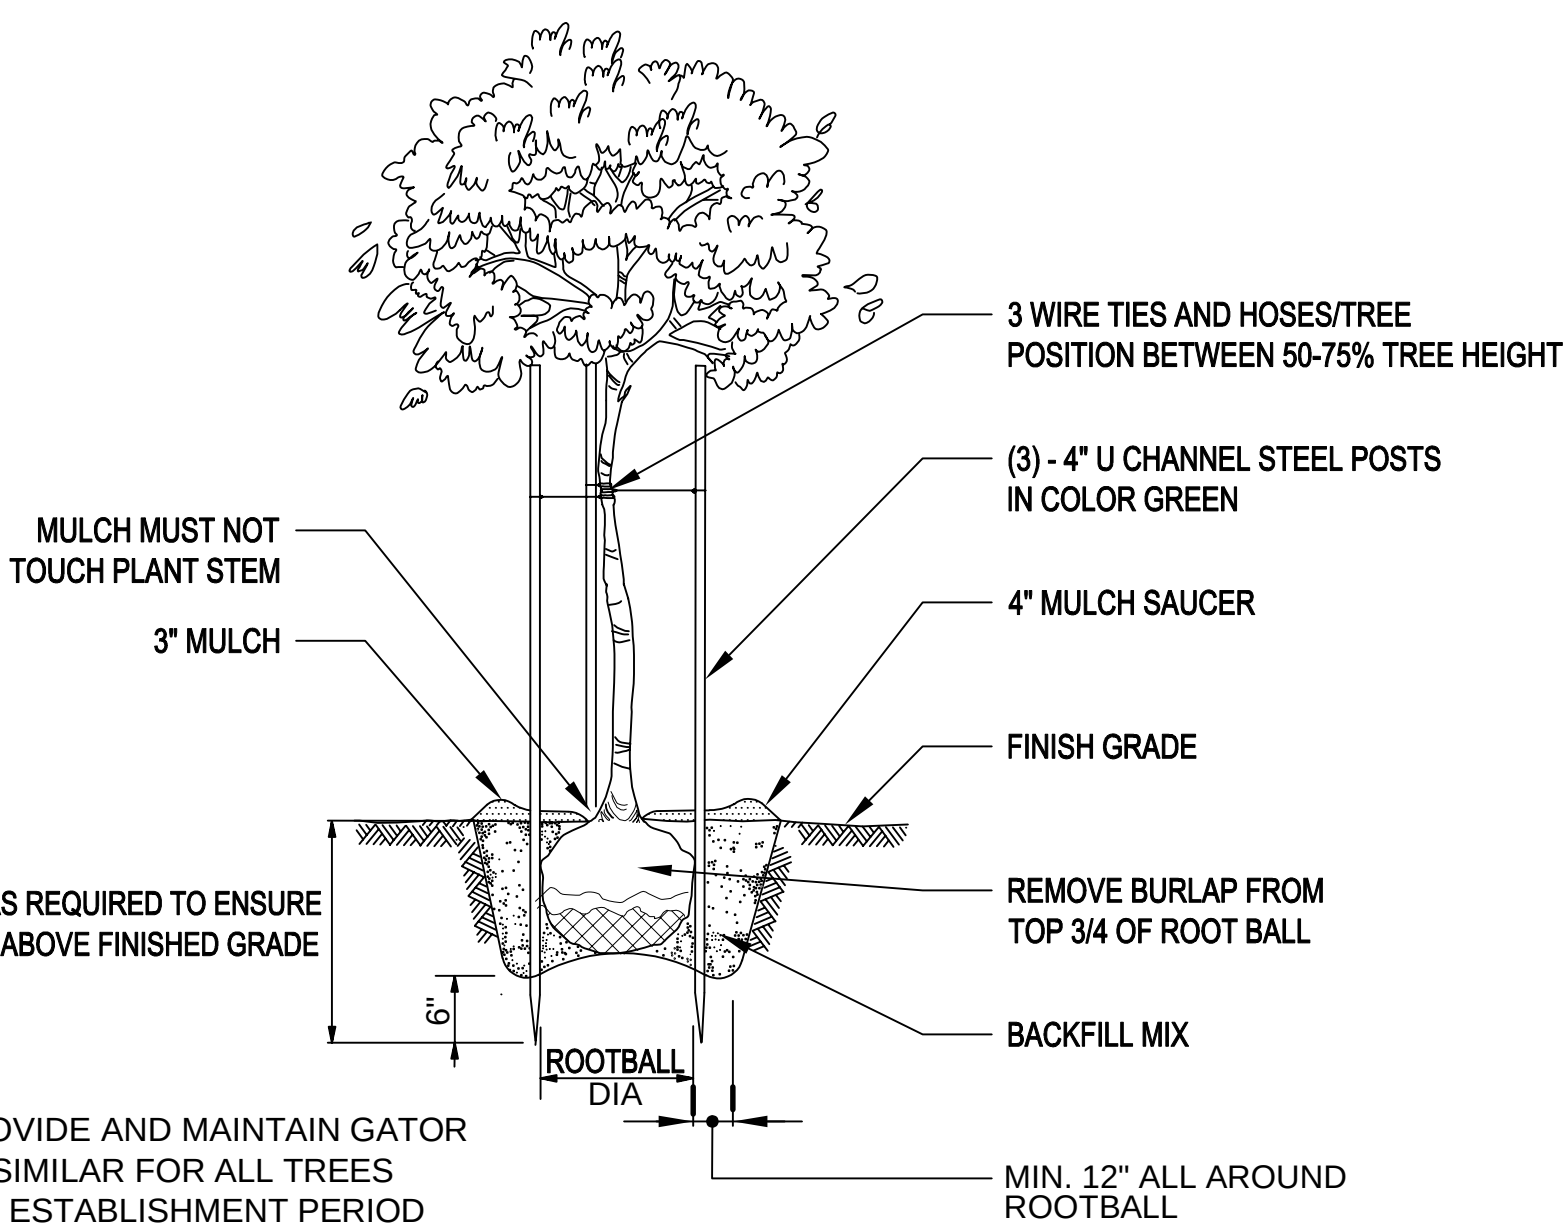


A3 DECIDUOUS TREE PLANTING
NTS

MAGAZINE VEGETATIVE SLOPE STABILIZATION




BUFFALO GRASS SEEDDED AREAS
SEW @ 150 LBS/ACRE OR 3.5 LBS/1,000 SF
AREA OF THIS SEED ±123,150 SF




FESCUE/DUTCH WHITE CLOVER MIX
SEEDDED AREAS
SEW @ 3.0 LBS FESCUE & 0.5 LBS
CLOVER/1,000 SF
AREA OF THIS SEED ±38,995 SF

MAGAZINE SLOPE STABILIZATION MUST INCLUDE INSTALLATION OF A TEMPORARY EROSION CONTROL BLANKET (ECB) PER CONNECTICUT GUIDELINES FOR SOIL EROSION AND SEDIMENT CONTROL. ALL AREAS SHOWN FOR SEEDING ABOVE MUST INCLUDE ECB.


NON-MAGAZINE VEGETATIVE STABILIZATION



BASIN MIX - FROM CONNECTICUT GUIDELINES FOR SOIL EROSION AND SEDIMENT CONTROL
FIGURE PS-3 - SEED MIXTURES FOR PERMANENT SEEDING (PS)
SEED MIX NUMBER 2 SEW @ 42 LBS/ACRE OR 0.95 LBS/S/1,000 SF
AREA OF THIS SEED ±12,850 SF



MEADOW MIX - FROM CONNECTICUT GUIDELINES FOR SOIL EROSION AND SEDIMENT CONTROL
FIGURE PS-3 - SEED MIXTURES FOR PERMANENT SEEDING (PS)
SEED MIX NUMBER 5 SEW @ 12 LBS/ACRE OR 0.3 LBS/S/1,000 SF
SEED MIX NUMBER 6 SEW @ 42 LBS/ACRE OR 1.05 LBS/1,000 SF
AREA OF THIS SEED ±202,100 SF




GENERAL STABILIZATION MIX - FROM CONNECTICUT GUIDELINES FOR SOIL EROSION AND SEDIMENT CONTROL
UNHATCHED AREAS NOT PAVED OR BUILT UPON
FIGURE PS-3: SEED MIXTURES FOR PERMANENT SEEDING (PS)
SEED MIX NUMBER 2: SEW @ 42 LBS/ACRE OR 1.00 LBS/1,000 SF
AREA OF THIS SEED MIX: ALLOWANCE OF ±75,000 SF

PLANTING DATES FOR ALL MIXES


SPRING PLANTING DATES: MARCH 15 THRU JUNE 15; FALL PLANTING DATES: AUGUST 15 THRU OCTOBER 1

C5 GROUND COVER
NTS

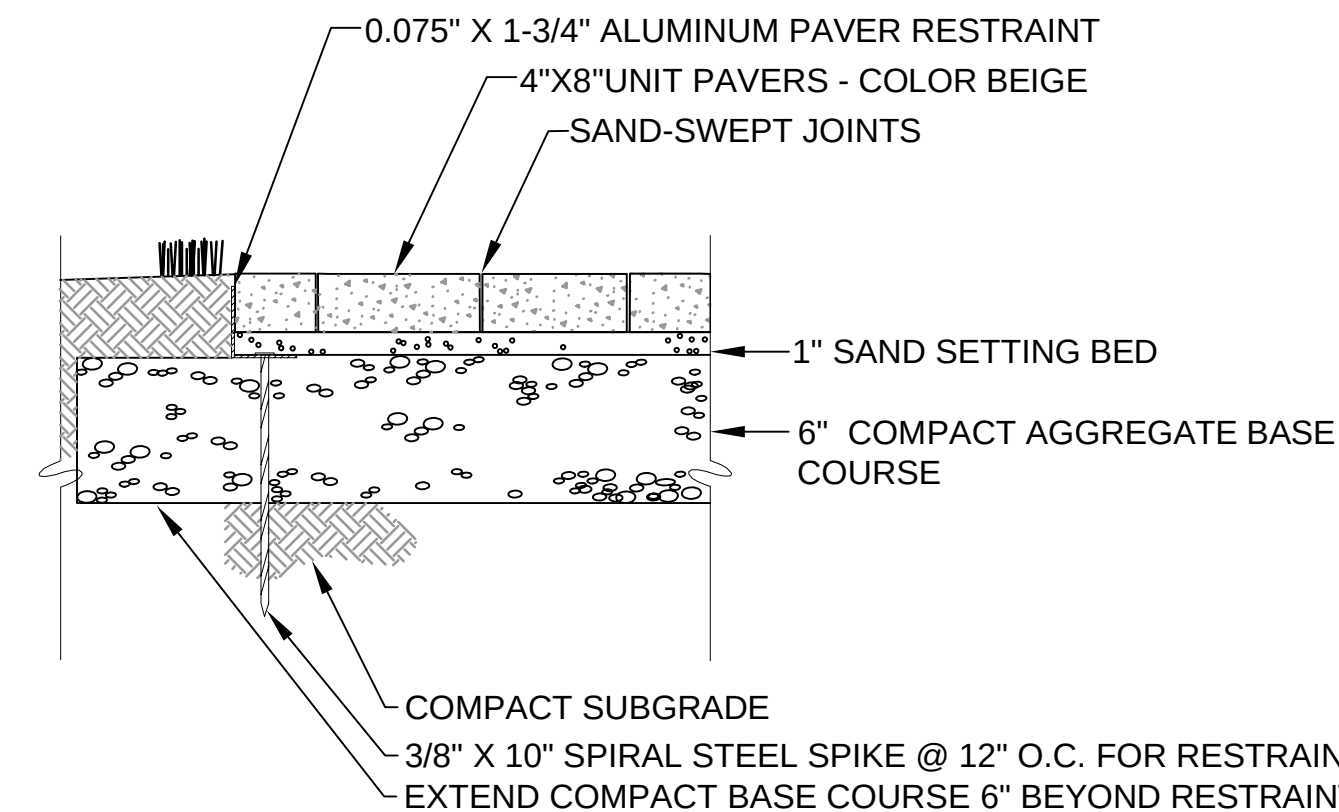


B4 CONCRETE UNIT PAVER INSTALLATION DETAIL
NTS

NOTE:
MILL FINISH - NATURAL ALUMINUM
COLOR

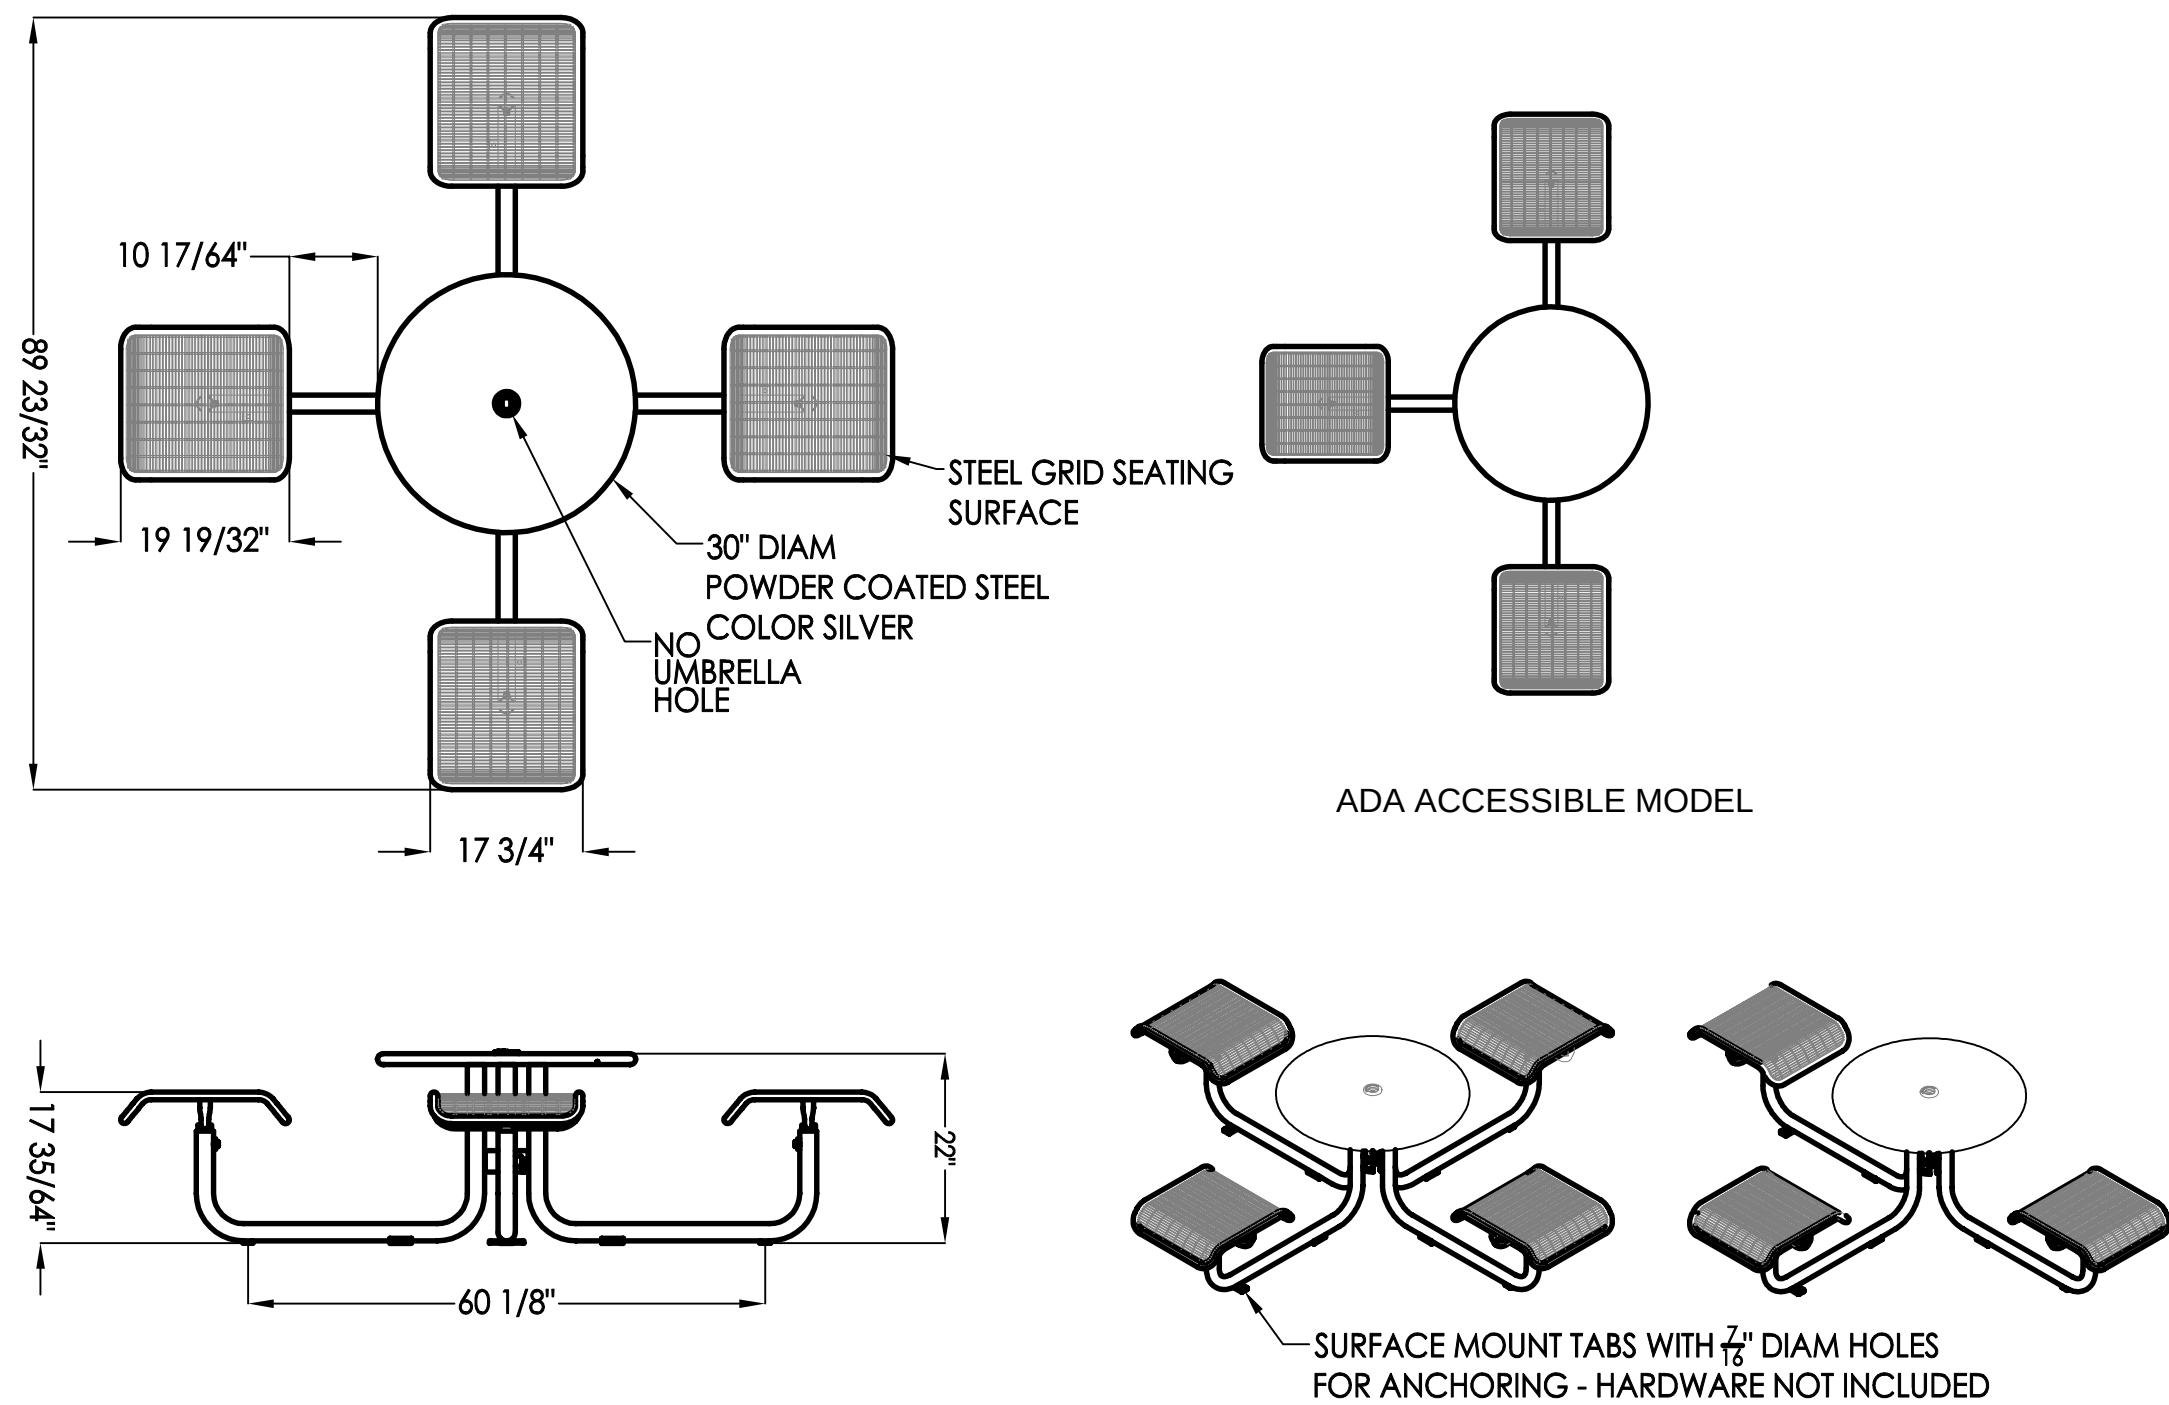

A1 TABLE AND CHAIRS
NTS


- NOTES:
- PROVIDE 2 TABLE AND CHAIR UNITS. ONE UNIT MUST BE ADA ACCESSIBLE
 - ANCHOR TO PAVERS PER MANUFACTURER'S RECOMMENDATION
 - UNITS MUST BE POWDER COATED STEEL IN COLOR SILVER

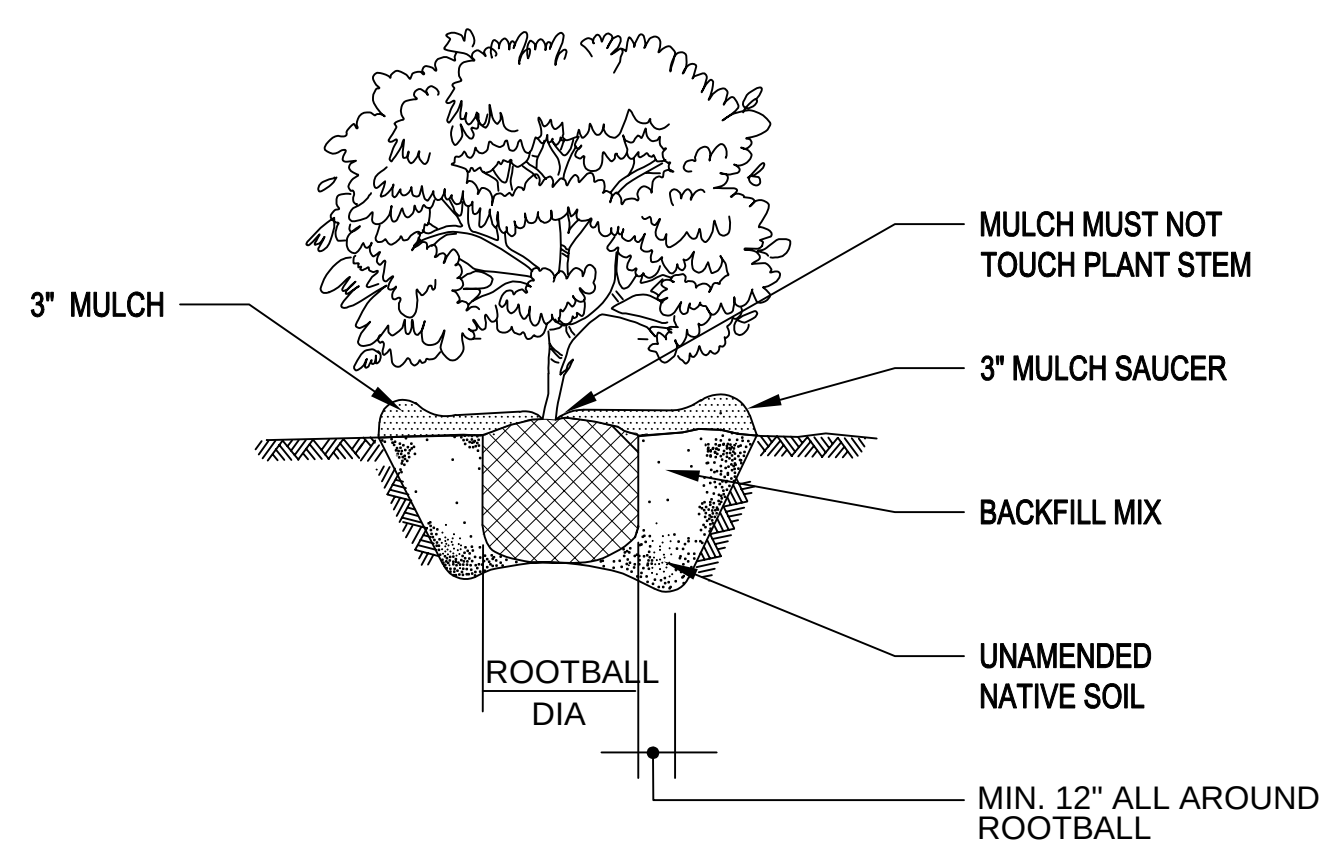

A4 SHRUB PLANTING
NTS

APPROVED	DATE	APPR
FOR COMMANDER NAVFAC		
ACTIVITY	APPROVED BY LCDR ELIZABETH OLOKODE NAVFAC NLOD HEAD DIRECTOR NEW LONDON, GROTON, CT	
SATISFACTORY TO	DATE 05/27/2025	
DES	DD	CHK SA
PMIDM	SMS/CWJ	
BRANCH MANAGER	DLB	
CHIEF ENGINEER	JWJ	
FIRE PROTECTION	HPN	
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC	NAVAL STATION - GROTON, CT	
NAVAL SUBMARINE BASE NEW LONDON	GROTON, CONNECTICUT	
P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY	SITE	
SCALE: AS NOTED	PROJECT NO: 12893911	
CONSTR. CONTR. NO.	1667770	
NAVAC DRAWING NO.	12893911	
SHEET	105 OF 152	
LS501		

ABBREVIATIONS		ABBREVIATIONS		ABBREVIATIONS		ABBREVIATIONS		ABBREVIATIONS	
ABBREV.	DESCRIPTION	ABBREV.	DESCRIPTION	ABBREV.	DESCRIPTION	ABBREV.	DESCRIPTION	ABBREV.	DESCRIPTION
Δ	DELTA	DESIG	DESIGNATION	HH	HANDHOLE	MLO	MAIN LUGS ONLY	SHLD	SHIELDED, SHIELD
		DIA	DIAMETER	HID	HIGH INTENSITY DISCHARGE	mm	MILLIMETER	SKVA	STARTING KILO-VOLT AMPERES
		DISC	DISCONNECT	HORIZ	HORIZONTAL	MO	MECHANICALLY OPERATED, MOTOR OPERATOR	SM	SOLID NEUTRAL
1/C	SINGLE CONDUCTOR CABLE	DIST, DISTRIB	DISTRIBUTION	HP	HORSEPOWER	MP	MOTOR PROTECTOR	SN	SHARED NEUTRAL
2S1W	TWO SPEED, ONE WINDING	DIV	DIVISION	HPF	HIGH POWER FACTOR	MS	MASTER SUBSTATION, MOTOR STARTER	SP	SPARE
2S2W	TWO SPEED, TWO WINDING	DPDT	DOUBLE POLE-DOUBLE THROW	HPS	HIGH PRESSURE SODIUM	MSP	MOTOR STARTER PANEL	SPD	SURGE PROTECTIVE DEVICE
3/C	THREE CONDUCTOR CABLE	DPST	DOUBLE POLE-SINGLE THROW	HRG	HIGH RESISTANCE GROUND	MT	MOUNT	SPDT	SINGLE POLE-DOUBLE THROW
3PDT	THREE POLE-DOUBLE THROW	DS, DSW	DISCONNECT SWITCH	HVAC	HEATING, VENTILATING AND AIR CONDITIONING	MTD	MOUNTED	SPST	SINGLE POLE-SINGLE THROW
3PST	THREE POLE-SINGLE THROW	DWG(S)	DRAWING(S)	HZ	HERTZ	MTG	MOUNTING	SQ	SQUARE
						MTTOE	MOUNTED TO TOP OF EQUIPMENT	SS	STAINLESS STEEL
A, AMP	AMMETER, AMPERE	(E), EX	EXISTING	IAW	IN ACCORDANCE WITH	MV	MEDIUM VOLTAGE	SSBJ	SUPPLY-SIDE BONDING JUMPER
AA	AMBIENT AIR	E	EMPTY	ICEA	INSULATED CABLE ENGINEERS ASSOCIATION			SSL	SOLID STATE LIGHT
ABBREV	ABBREVIATION	E.T.	ELECTRONIC TRIP	IDS	INTRUSION DETECTION SYSTEM	(N)	NEW	SSM	SOLID STATE METERING
ABV	ABOVE	EC	EMPTY CONDUIT	IEC	INTERNATIONAL ELECTROTECHNICAL COMMISSION	N, NEUT	NEUTRAL	SST	SOLID STATE TRIP
AC	ALTERNATING CURRENT	EF	EACH FACE	IEEE	INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS	N.C.	NORMALLY CLOSED	ST	SHUNT TRIP
ACT	ABOVE COUNTER TOP	EGC	EQUIPMENT GROUNDING CONDUCTOR	IESCR	INTEGRATED EQUIPMENT SHORT CIRCUIT RATING	N.O.	NORMALLY OPEN	STA	STATION
AF	AMP FRAME, CIRCUIT BREAKER FRAME AND TRIP DEVICE SENSOR SIZE (AMPS)	EL, ELEV	ELEVATION	IESNA, IES	ILLUMINATING ENGINEERING SOCIETY OF NORTH AMERICA	N.O.L.	NON-OVERLOAD	STD	STANDARD
AFF	ABOVE FINISHED FLOOR	ELEC	ELECTRICAL/ELECTRIC			N/A	NOT APPLICABLE	STP	SHIELDED TWISTED PAIR
AFG	ABOVE FINISHED GRADE	EM, EMER	EMERGENCY			NEC	NATIONAL ELECTRICAL CODE	SW	SWITCH
AHU	AIR HANDLING UNIT	EMH	EXISTING MANHOLE, ELECTRICAL MANHOLE			NEMA	NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION	SWBD	SWITCHBOARD
AIC	AMPERE INTERRUPTING CAPACITY	EMO	EMERGENCY MANUAL OFF	IG	ISOLATED GROUND	NFPA	NATIONAL FIRE PROTECTION ASSOCIATION	SWGR	SWITCHGEAR
AL	ALUMINUM	EMS	ENERGY MANAGEMENT SYSTEM	IMC	INTERMEDIATE METAL CONDUIT	NIC	NOT IN CONTRACT	SYM	SYMMETRICAL
AM	AMPERE METER	EMT	ELECTRICAL METALLIC TUBING	INC, INCAND	INCANDESCENT	NO.	NUMBER	SYNC	SYNCHRONIZER
ANN	ANNUNCIATOR	ENT	ELECTRICAL NON-METALLIC TUBING	INST	INSTRUCTIONS, INSTRUMENT/INSTRUMENTATION	NOS	NUMBERS		
ANSI	AMERICAN NATIONAL STANDARDS INSTITUTE	EO	ELECTRICALLY OPERATED	INTER	INTERMEDIATE	NPF	NORMAL POWER FACTOR	T&B	TOP AND BOTTOM
AS	AMMETER SWITCH	EOL	END-OF-LINE DEVICE			NPT	NATIONAL PIPE THREAD	T, TX	TRANSFORMER
ASYM	ASYMMETRICAL	EPP	EXISTING POWER POLE			NTE	NOT TO EXCEED	T.O.C.	TOP OF CONDUIT
AT	AMP TRIP, TRIP DEVICE RATING PLUG SIZE (AMPS)	EPR	ETHYLENE-PROPYLENE RUBBER	J, JB	JUNCTION BOX	NTS	NOT TO SCALE	TB	TERMINAL BLOCK
ATC	AIR TERMINAL CHAMBER	EQPT	EQUIPMENT			O.C.	ON CENTER	TBD	TO BE DETERMINED
ATS	AUTOMATIC TRANSFER SWITCH, TRIP DEVICE LONG TIME PICKUP SETTING (AMPS)	ES	ENERGY SAVING	*K	DEGREES KELVIN	OH	OVERHEAD	TDR	TIME DELAY RELAY
		ETC	ETCETERA	K	KEY INTERLOCK	O.L.	OVERLOAD	TEL	TELEPHONE
ATX	AUTO TRANSFORMER	ETL	ELECTRICAL TESTING LABORATORIES	KA	KILO-AMPERES	OFCI	OWNER FURNISHED, CONTRACTOR INSTALLED	TEL CAB	TELEPHONE CABINET
AVG	AVERAGE	EW	EACH WAY	KCM, KCMIL	1000 CIRCULAR MILS	OFE	OWNER FURNISHED EQUIPMENT, CONTRACTOR INSTALLED	TJB	TERMINAL JUNCTION BOX
AWG	AMERICAN WIRE GAUGE	EWC	ELECTRIC WATER COOLER	KG	KILO-GRAM			TP	TRANSFORMER PROTECTION
		EWB	ELECTRIC WATER HEATER	KM	KILO-METER			TSTAT	THERMOSTAT
		EXST	EXISTING, EXHAUST	KV	KILO-VOLTS	OFOI	OWNER FURNISHED, OWNER INSTALLED	TYP, (TYP)	TYPICAL
				KVA	KILO-VOLT AMPERES	OPT	OPTIONAL	UDS	UNITIZED DISTRIBUTION SUBSTATION
B.O.C.	BOTTOM OF CONDUIT			KVAC	KILO-VOLT AMPERES CONNECTED	P	POLE, POWER	UG, UGND	UNDERGROUND
B.O.D.	BOTTOM OF DUCT	(F)	FUTURE	KVAD	KILO-VOLT AMPERES DEMAND	PB	PRIVATE BRANCH EXCHANGE	UH	UNIT HEATER
B.O.P.	BOTTOM OF PIPE	F	FAHRENHEIT	KVAR	KILO-VOLT AMPERES REACTIVE	PBRD	PANELBOARD	UL	UNDERWRITERS' LABORATORIES
B.O.T.	BOTTOM OF TRAY	FA	FORCED AIR, FIRE ALARM	KW	KILOWATT	PCC	POINT OF COMMON COUPLING	UNO, UON	UNLESS NOTED OTHERWISE, UNLESS OTHERWISE NOTED
BAS	BUILDING AUTOMATION SYSTEM	FACP	FIRE ALARM CONTROL PANEL	KWD	KILOWATT DEMAND	PDP	POWER DISTRIBUTION PANEL	UPS	UNINTERRUPTIBLE POWER SUPPLY
BATT	BATTERY, BATTERIES	FBO	FURNISHED BY OTHERS, FURNISHED BY OWNER			PDU	POWER DISTRIBUTION UNIT	UTP	UNSHIELDED TWISTED PAIR
BC	BARE COPPER	FC	FLEXIBLE CONDUIT			P.E.J.,	PREFORMED EXPANSION JOINT	UV	ULTRAVIOLET
BIAx	BIAXIAL	FDR	FEEDER	L	LUMEN, LENGTH	PF	POWER FACTOR		
BIL	BASIC IMPULSE LEVEL	FFE	FINISHED FLOOR ELEVATION	LA	LIGHTNING ARRESTER	PH	PHASE		
BKR	BREAKER	FIXT	FIXTURE	LAN	LOCAL AREA NETWORK	PL	PLATE		
BLDG	BUILDING	FL	FOOT LAMBERTS	LB(S)	POUND(S)	PLC	PROGRAMMABLE LOGIC CONTROLLER	V	VOLT, VOLTS, VOLTMETER
		FLR	FLOOR	LED(S)	LIGHT EMITTING DIODE(S)	PMCS	POWER MONITORING AND CONTROL SYSTEM	VA	VOLT-AMPERE
*C	CELSIUS	FLUOR	FLUORESCENT	LPF	LOW POWER FACTOR	PNL	PANEL	VAC	VOLTS ALTERNATING CURRENT
C	CONDUIT, COIL	FREQ	FREQUENCY	LRG	LOW RESISTANCE GROUND	PT	POTENTIAL TRANSFORMER	VAR	VOLT AMPERE REACTIVE
CAT. NO, CAT	CATALOG	FRP	FIBERGLASS-REINFORCED POLYESTER	LSGM	LONG-TIME/SHORT-TIME TRIP	PVC	POLYVINYL CHLORIDE	VDC	VOLTS DIRECT CURRENT
CBM	CERTIFIED BALLAST MANUFACTURER	FT	FOOT	LSI	LONG-TIME/SHORT-TIME/INSTANTANEOUS TRIP	QTY	QUANTITY	VERT	VERTICAL
CCTV	CLOSED CIRCUIT TELEVISION CAMERA	FU	FUSE	LSIG	LONG-TIME/SHORT-TIME/INSTANTANEOUS/GRO UND FAULT TRIP			VESDA	VERY EARLY SMOKE DETECTION
CEG	COMMON EQUIPMENT GROUND	FUT	FUTURE	LSIGM	LONG-TIME/SHORT-TIME/INSTANTANEOUS/GRO UND FAULT TRIP AND METERING	%R	PERCENT RESISTANCE	VFD	VARIABLE FREQUENCY DRIVE
CFM	CUBIC FEET PER MINUTE	FVNR	FULL VOLTAGE NON-REVERSING			(R)	RELOCATE	VM	VOLT METER
CFM	CUBIC FEET PER MINUTE	FVR	FULL VOLTAGE REVERSING			R	RESISTANCE, RATE, RISE	VPE	VACUUM PRESSURE ENCAPSULATED
CKT	CIRCUIT	FWE	FURNISHED WITH EQUIPMENT, INDICATES ITEM IS FURNISHED WITH EQUIPMENT SUPPLIED UNDER OTHER DIVISIONS, BUT INSTALLED UNDER DIVISION 26.	LSIM	LONG-TIME/SHORT-TIME/INSTANTANEOUS TRIP AND METERING	R/I	RECTIFIER/INVERTER	VPI	VACUUM PRESSURE IMPREGNATED
CLF	CURRENT LIMITING FUSE			LT	LIQUID TIGHT	RCPT	RECEPTACLE	VS	VOLTMETER SWITCH
CLO	CLOSET			LTG	LIGHTING	RCR	ROOM CAVITY RATIO	VSD	VARIABLE SPEED DRIVE
cm	CENTIMETER			LTS	LIGHTS	RECP(S)	RECEPTACLE(S)	VT	VOLTAGE TRANSFORMER
CMS	COMBINATION MOTOR STARTER			LV	LOW VOLTAGE	REQD	REQUIRED		
CND	CONDUIT	g	GRAM	LVR	LOW VOLTAGE RELAY	REQMTS	REQUIREMENTS	W	WATT(S), WIRE, WIDTH
COMP	COMPARTMENT	G, GND	GROUND			RFI	RADIO FREQUENCY INTERFERENCE	W/	WITH
CONT	CONTINUOUS, CONTINUED	GA	GAUGE	m	METER	RGS	RIGID GALVANIZED STEEL	W/O	WITHOUT
CPT	CONTROL POWER TRANSFORMER	GALV	GALVANIZED	M/G	MOTOR/GENERATOR	RM	ROOM	WG	WATER GAGE
CPU	CENTRAL PROCESSING UNIT	GEC	GROUNDING ELECTRODE CONDUCTOR	MAX	MAXIMUM	RMS	ROOT MEAN SQUARE	WHD	WATTHOUR DEMAND METER
CRAC	COMPUTER ROOM AIR CONDITIONING UNIT	GEN	GENERATOR	MC	METAL-CLAD CABLE	RQD	REQUIRED	WP	WEATHERPROOF
CRI	COLOR RENDERING INDEX	GFCI	GROUND FAULT EQUIPMENT PROTECTIVE DEVICE	MCB	MAIN CIRCUIT BREAKER	RVAT	REDUCED VOLTAGE AUTOTRANSFORMER		
CS	CONTROL SWITCH	GFE	DENOTES GOVERNMENT FURNISHED EQUIPMENT, CONTRACTOR INSTALLED	MCC	MOTOR CONTROL CENTER	RVNR	REDUCED VOLTAGE NON-REVERSING	%X	PERCENT REACTANCE
CSA	CANADIAN STANDARDS ASSOCIATION	GFEPD	GROUND FAULT EQUIPMENT PROTECTIVE DEVICE	MCCB	MOLDED CASE CIRCUIT BREAKER	RVR	REDUCED VOLTAGE REVERSING	X	REACTANCE
CSCCN	CENTRAL SCIENTIFIC COMMUNICATIONS NETWORK			MECH	MECHANICAL			XFMR	TRANSFORMER
				MEZZ	MEZZANINE	S	SPEAKER	XLP	CROSS-LINK POLYETHYLENE INSULATION
CT	CURRENT TRANSFORMER, CABLE TRAY	GFP	GROUND FAULT PROTECTION	MFR	MANUFACTURER	S.C.	SHORT CIRCUIT		
CU	COPPER, COEFFICIENT OF UTILIZATION	GFR	GROUND FAULT RELAY	MH	MOUNTING HEIGHT, MAN HOLE	S/MH	SPACING TO MOUNTING HEIGHT RATIO	Y	WYE-CONNECTED
CY	CYCLE(S)	GP	GENERAL PURPOSE	MHL	METAL HALIDE LAMP	SCHED	SCHEDULE		
				MI	MINERAL INSULATED	SE	SERVICE ENTRANCE	%Z	PERCENT IMPEDANCE
		H	HEIGHT, HORN	MIN	MINIMUM	SEC	SECONDS	Z	IMPEDANCE
D	DEPTH, DEEP	HE	HIGH EXPOSURE	MIP	MEDICAL ISOLATION PANEL	SECT	SECTION		
DB	DUCT BANK					SES	SERVICE ENTRANCE SUBSATATION		
DC	DIRECT CURRENT								
DEPT	DEPARTMENT								

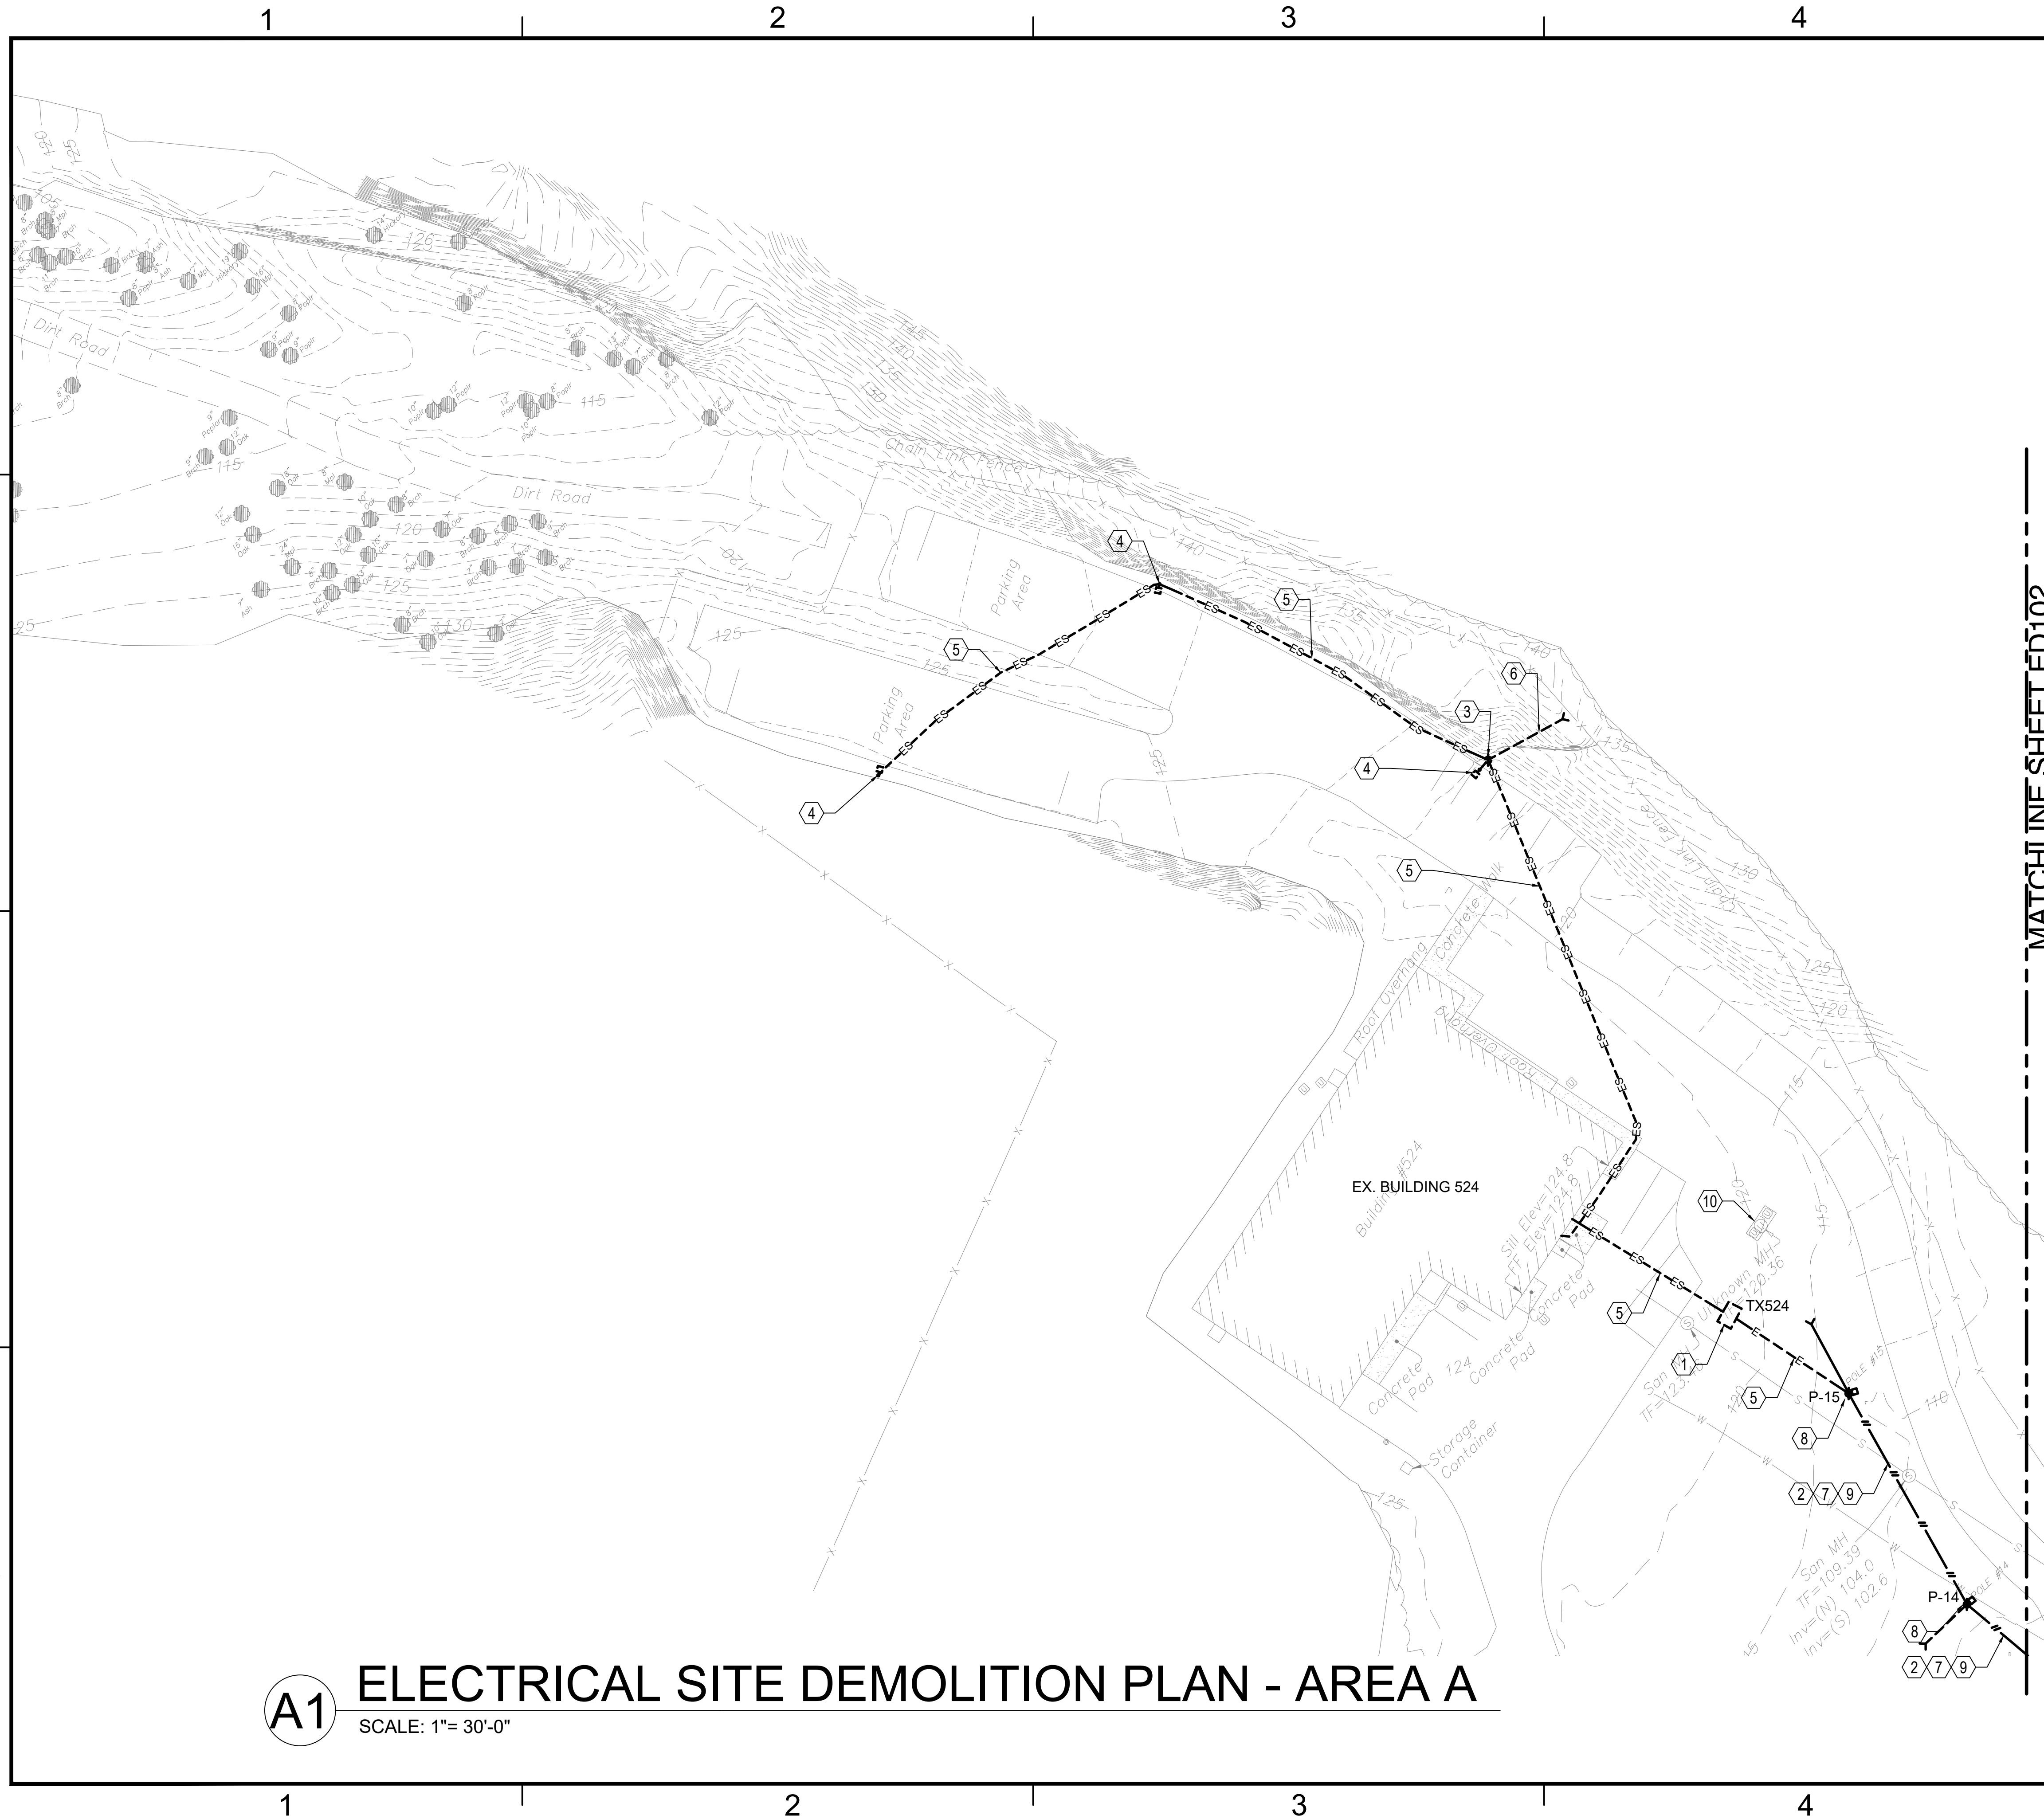


GENERAL SHEET NOTES

- A. REFER TO SHEET E-001 FOR ADDITIONAL ELECTRICAL NOTES.
- B. EXISTING ADVANCED METERING INFRASTRUCTURE (AMI) COMPONENTS AND DEVICES MUST BE RETURNED TO PUBLIC WORKS DEPARTMENT (PWD).
- C. LOW VOLTAGE CIRCUITS ARE TO REMAIN IN SERVICE UNLESS SPECIFICALLY INDICATED TO BE DEMOLISHED.
- D. PHASING: NEW WORK MUST BE READY FOR QUICK SWITCHOVER BEFORE DEMOLITION OF EXISTING POWER. COORDINATE DOWN TIME WITH NAVFAC.
- E. UTILITY POLES WHERE MV WIRE IS REMOVED SHOULD BE MODIFIED BY REMOVAL OF RELATED CROSSARMS AND REMOVING TOP OF UTILITY POLE TO 1FT ABOVE LIGHT FIXTURE IT IS SUPPORTING.

KEYED NOTES

1. REMOVE PAD-MOUNTED TRANSFORMER TX524 SERVING BUILDING B524.
2. REMOVE PRIMARY MEDIUM VOLTAGE OVERHEAD POWER LINE.
3. REMOVE ELECTRICAL UTILITY POLE.
4. REMOVE POLE-MOUNTED LIGHTING FIXTURE AND ASSOCIATED POLE.
5. REMOVE UNDERGROUND FEEDER AND ASSOCIATED CONDUIT/DUCTBANK BACK TO SOURCE.
6. REMOVE UTILITY POLE GUY WIRE.
7. 600V OH POWER LINE SERVING SITE LIGHTING TO REMAIN.
8. UTILITY POLE WITH SITE LIGHTING FIXTURE TO REMAIN. REMOVE CROSSARMS ASSOCIATED WITH MEDIUM VOLTAGE OVERHEAD WIRE REMOVAL.
9. REMOVE 600V OH WIRE RELATED TO STANDBY POWER BACK TO GENERATOR CONNECTION AT B393.
10. REMOVE ALL CONDUCTORS ASSOCIATED TO FUEL TANK BACK TO SOURCE.

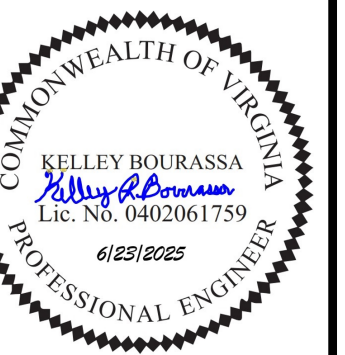

Jacobs

100 NORTH GLEBE ROAD
SUITE 500
ARLINGTON, VIRGINIA 22201
71.218.1000
FAX: 571.218.1600

A/E INFO

COMMANDER NAVFAC

APPROVED BY LCDR ELIZABETH
OLOKODE NAVFAC NLOD FEAD
RECTOR NEW LONDON, GROTON, CT

FACTORY TO	DATE	05/27/2025
------------	------	------------

JHP	DRW	JHP	CHK	KB
-----	-----	-----	-----	----

DM	SMS/CWJ
	WFF

VEH MANAGER	WRB
VE ENG/ARCH	DMU

PROTECTION	HPN
------------	-----

/A	T																																										
----	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

/A	T																																										
----	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

CU	TY
----	----

A

AN	W - N	NE	AC	A
----	-------	----	----	---

NAME	DATE
CLASS	PERIOD
TEACHER	SCORE

AF

MI
NAV
ON,
OL

ATC

JAN	GRO	EPA	N
-----	-----	-----	---

CPA

P	E	30
---	---	----


NC	7	15
----	---	----

EN	NA	IO
----	----	----

RDIII


NC	OF	SIT	TC
----	----	-----	----

FILE NAME: C:\pwwork\ed103\ed103.dwg PLOTTED: Thursday, June 12, 2025 - 9:52am USER: PHILLUH

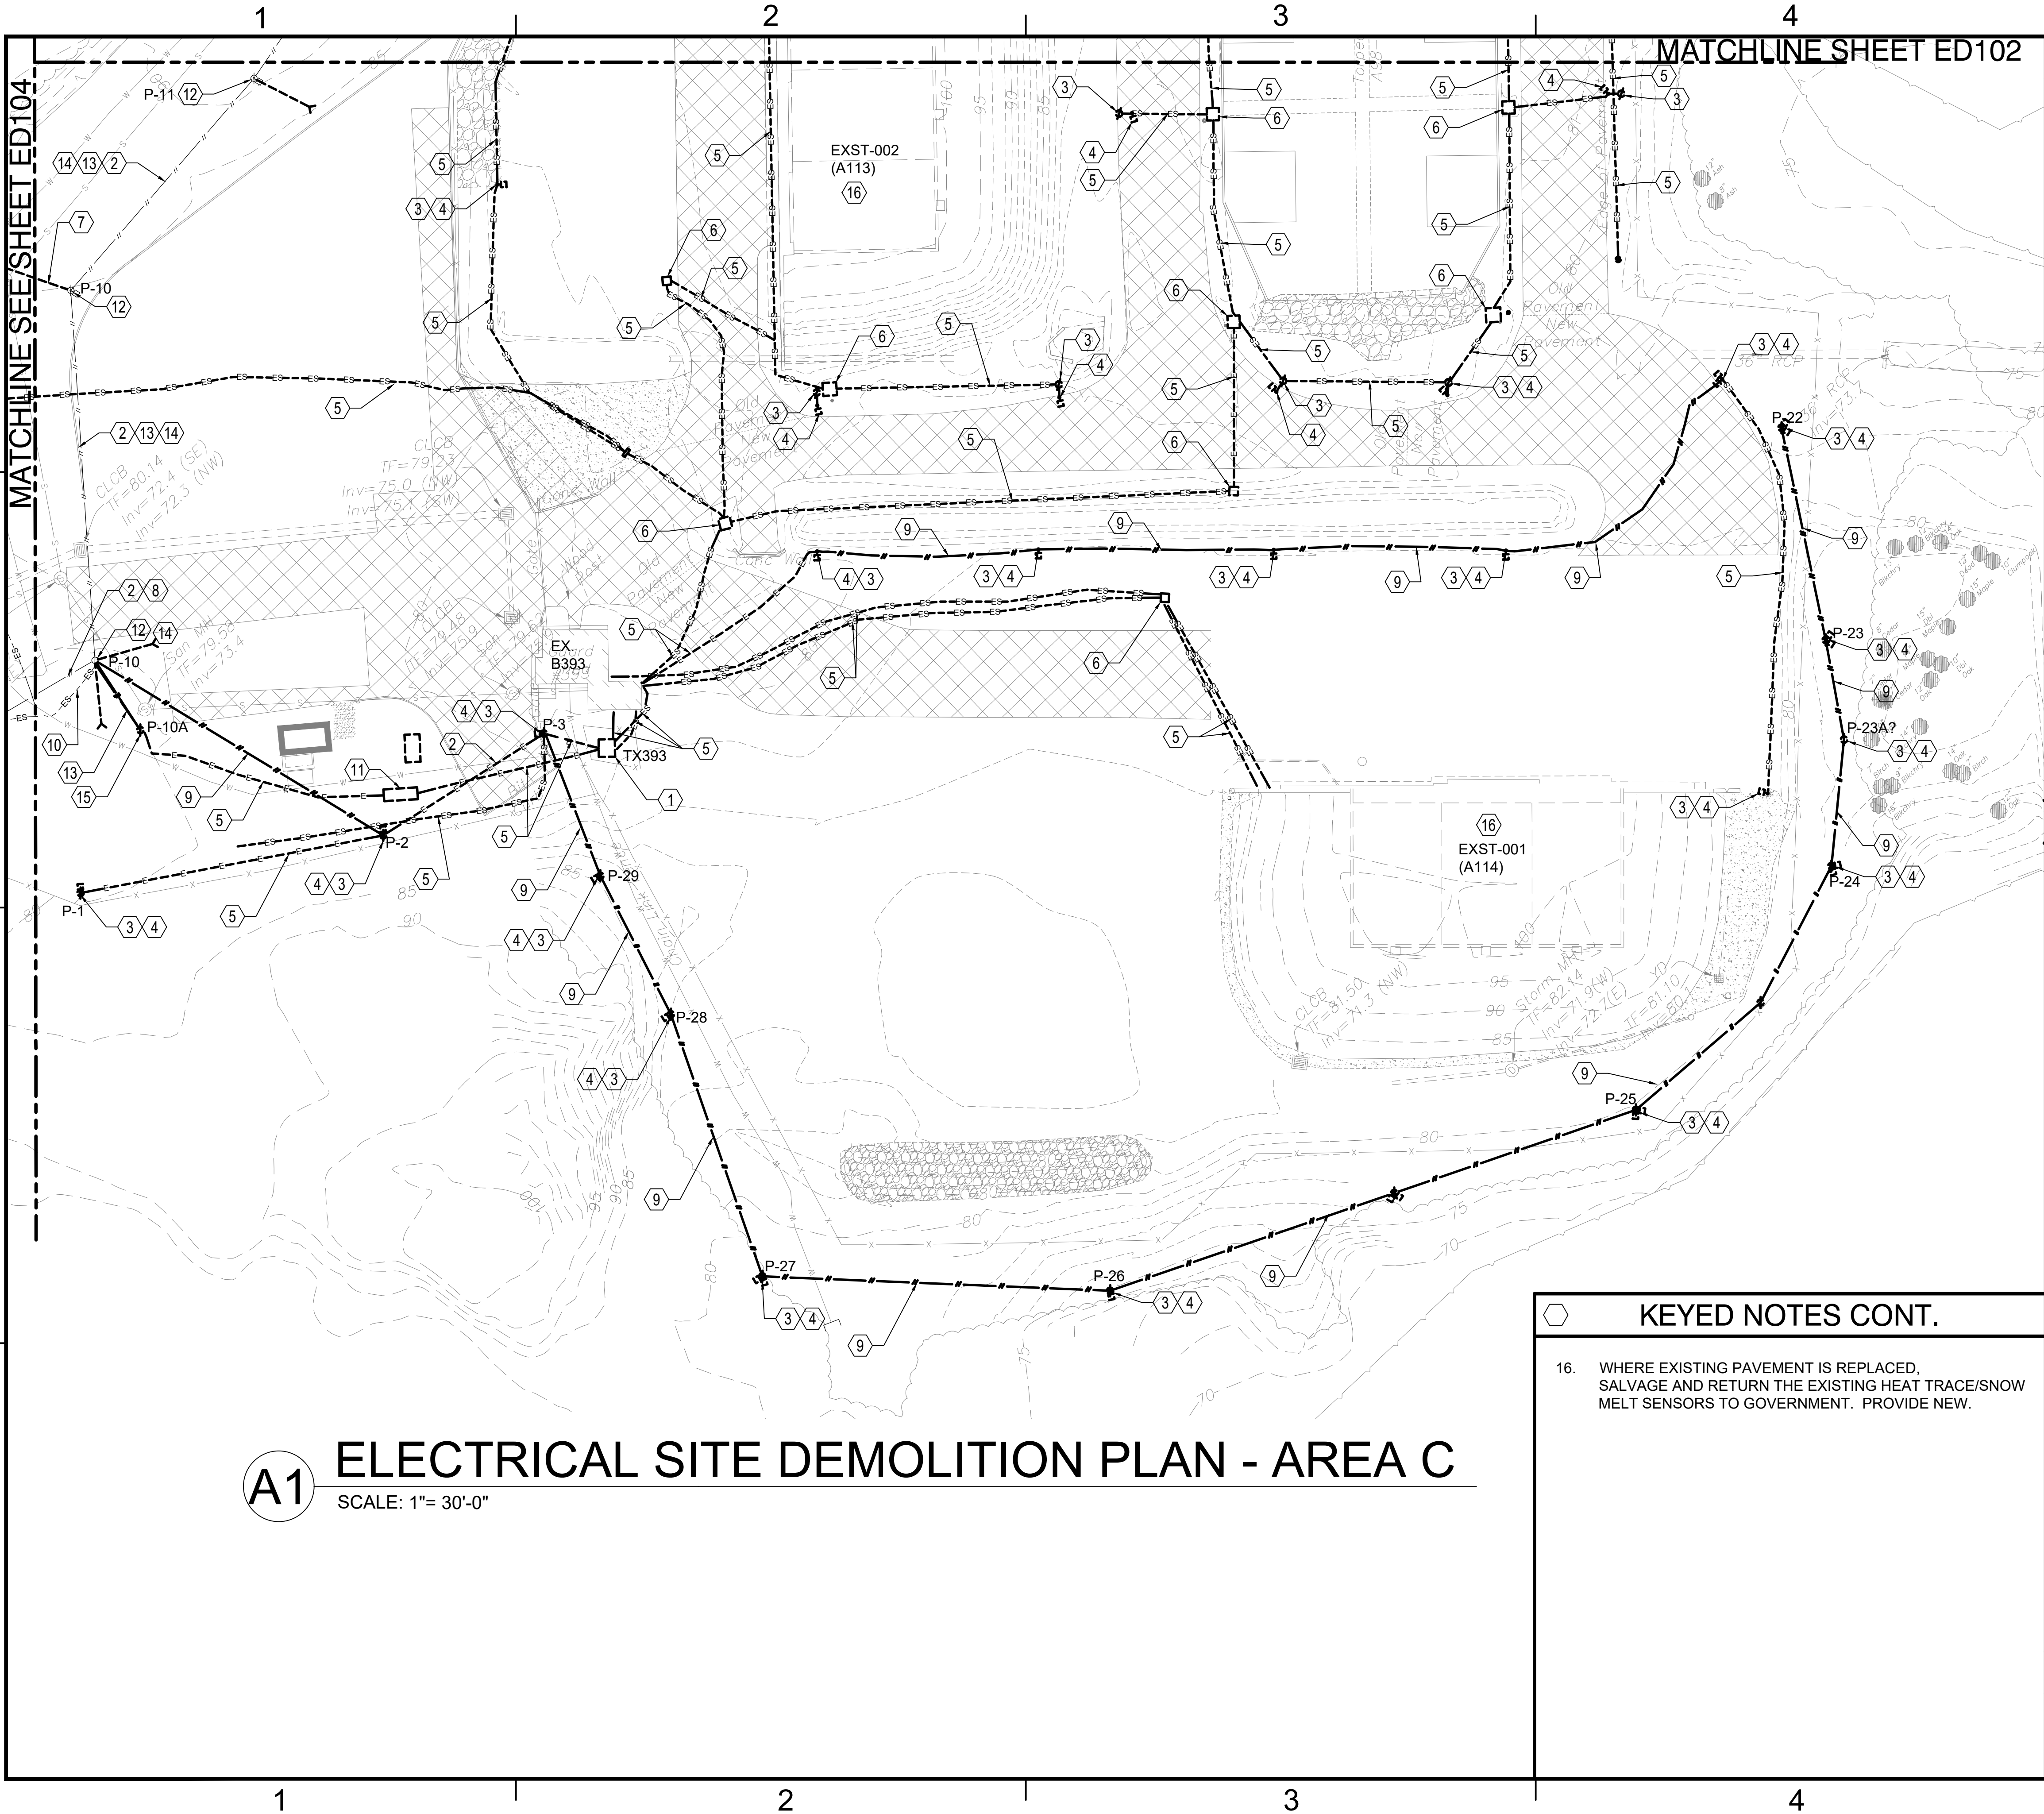

- ### GENERAL SHEET NOTES
- A. REFER TO SHEET E-001 FOR ADDITIONAL ELECTRICAL NOTES.
 - B. MAINTAIN CONTINUITY OF POWER TO EXISTING TO REMAIN SITE LIGHTING FIXTURES.
 - C. RE-BALANCE UTILITY POLES AFTER REMOVAL OF UTILITY LINES AS NEEDED.
 - D. EXISTING ADVANCED METERING INFRASTRUCTURE (AMI) COMPONENTS AND DEVICES MUST BE RETURNED TO PUBLIC WORKS DEPARTMENT (PWD).
 - E. WHEN MAGAZINE IS DEMOLISHED, REMOVE ASSOCIATED GROUNDING SYSTEM IN ITS ENTIRETY. THIS INCLUDES, BUT NOT LIMITED TO UNDERGROUND CONDUCTORS, GROUND RODS, TEST WELLS, ETC.
 - F. REMOVAL OF THE MAGAZINES IS PHASED. REMAINING MAGAZINES MUST REMAIN POWERED UNTIL READY TO BE DEMOLISHED.
 - G. LOW VOLTAGE CIRCUITS ARE TO REMAIN IN SERVICE UNLESS SPECIFICALLY INDICATED TO BE DEMOLISHED.
 - H. PHASING: NEW WORK MUST BE READY FOR QUICK SWITCHOVER BEFORE DEMOLITION OF EXISTING POWER. COORDINATE DOWN TIME WITH NAVFAC.
 - I. UTILITY POLES WHERE MV WIRE IS REMOVED SHOULD BE MODIFIED BY REMOVAL OF RELATED CROSSARMS AND REMOVING TOP OF UTILITY POLE TO 1FT ABOVE LIGHT FIXTURE IT IS SUPPORTING.
 - J. FOR EXISTING MAGAZINES TO REMAIN, MODIFY AND REPLACE GROUNDING SYSTEM NECESSARY TO MAINTAIN INTEGRITY OF GROUNDING SYSTEM.
 - K. WHERE PRESENT, REMOVE EXISTING GROUNDING CONDUCTOR ATTACHED TO EXISTING FENCE POSTS.

- ### KEYED NOTES
- 1. REMOVE PAD-MOUNTED TRANSFORMER TX393 SERVING BUILDING B393.
 - 2. REMOVE PRIMARY MEDIUM VOLTAGE OVERHEAD POWER LINE.
 - 3. REMOVE SITE LIGHTING POLE.
 - 4. REMOVE POLE-MOUNTED LIGHTING FIXTURE.
 - 5. REMOVE UNDERGROUND FEEDER AND ASSOCIATED CONDUIT/DUCTBANK BACK TO SOURCE.
 - 6. REMOVE ELECTRICAL MANHOLE/HANDHOLE.
 - 7. REMOVE UTILITY POLE GUY WIRE.
 - 8. ELECTRICAL UTILITY POLE TO REMAIN.
 - 9. REMOVE OVERHEAD SITE LIGHTING WIRING.
 - 10. UNDERGROUND FEEDER AND ASSOCIATED CONDUIT/DUCTBANK TO REMAIN.
 - 11. REMOVE GENERATOR AND ASSOCIATED FEEDERS SERVING BUILDING 393. SALVAGE AND RETURN GENERATOR TO GOVERNMENT.
 - 12. UTILITY POLE, GUY-WIRE, LIGHT FIXTURE AND 600V OH WIRING ASSOCIATED WITH STREET LIGHTING TO REMAIN.
 - 13. REMOVE 600V OH WIRE RELATED TO STANDBY POWER BACK TO GENERATOR CONNECTION AT B393.
 - 14. 600V OH POWER LINE SERVING SITE LIGHTING TO REMAIN.
 - 15. DEMOLISH UTILITY POLE.

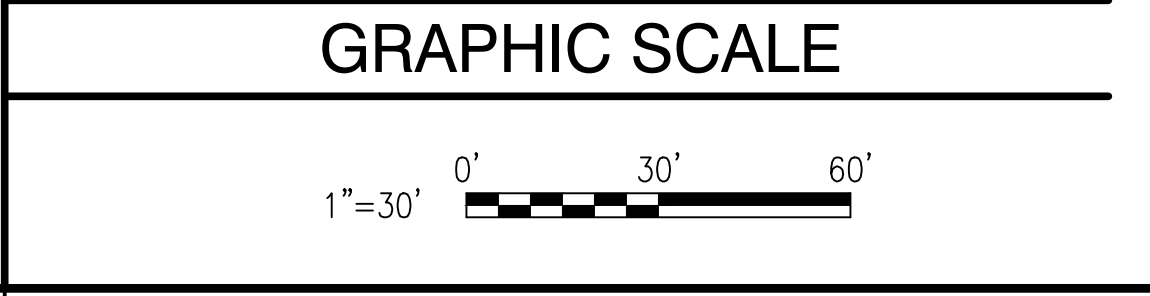

APPROVED	DATE	DESCRIPTION	SYN

Jacobs
1100 NORTH GLEBE ROAD
SUITE 500
ARLINGTON, VIRGINIA 22201
571.218.1000
FAX: 571.218.1600

APPROVED: _____
FOR COMMANDER NAVFAC

ACTIVITY: APPROVED BY LCDR ELIZABETH OLOKODE NAVFAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT

SATISFACTORY TO	DATE	05/27/2025			
DES	JHP	DRW	JHP	CHK	KB
PM/DM	SMS/CWJ				
BRANCH MANAGER	WRB				
CHIEF ENGINEER	JWJ				
FIRE PROTECTION	HPN				

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC
NAVAL STATION - GROTON, CT
NAVAL SUBMARINE BASE NEW LONDON
P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY
SITE
ELECTRICAL SITE DEMOLITION PLAN - AREA C

SCALE: AS NOTED
PROJECT NO.: 1667770
CONSTR. CONTR. NO.
NAVFAC DRAWING NO.: 12893917
SHEET 111 OF 152
ED103

FILE NAME: C:\pwworkspace\ed104\ed104_1205_1205.dwg PLOTTED: Thursday, June 12, 2025 9:56am USER: PHILLUH

D

C

B

A

1

2

3

4

5

GENERAL SHEET NOTES

- REFER TO SHEET E-001 FOR ADDITIONAL ELECTRICAL NOTES.
- MAINTAIN CONTINUITY OF POWER TO EXISTING TO REMAIN SITE LIGHTING FIXTURES.
- EXISTING ADVANCED METERING INFRASTRUCTURE (AMI) COMPONENTS AND DEVICES MUST BE RETURNED TO PUBLIC WORKS DEPARTMENT (PWD).
- LOW VOLTAGE CIRCUITS ARE TO REMAIN IN SERVICE UNLESS SPECIFICALLY INDICATED TO BE DEMOLISHED.
- PHASING: NEW WORK MUST BE READY FOR QUICK SWITCHOVER BEFORE DEMOLITION OF EXISTING POWER. COORDINATE DOWN TIME WITH NAVFAC.
- UTILITY POLES WHERE MV WIRE IS REMOVED SHOULD BE MODIFIED BY REMOVAL OF RELATED CROSSARMS AND REMOVING TOP OF UTILITY POLE TO 1FT ABOVE LIGHT FIXTURE IT IS SUPPORTING.
- WHERE PRESENT, REMOVE EXISTING GROUNDING CONDUCTOR ATTACHED TO EXISTING FENCE POSTS.



Jacobs
1100 NORTH GLEBE ROAD
SUITE 500
ARLINGTON, VIRGINIA 22201
571.218.1000
FAX: 571.218.1600

APPROVED: A/E INFO

FOR COMMANDER NAVFAC

ACTIVITY: APPROVED BY LCDR ELIZABETH OLOKODE NAVFAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT

SATISFACTORY TO: DATE: 05/27/2025

DES: JHP | DRW: JHP | CHK: KB

PM/DM: SMS/CWJ

BRANCH MANAGER: WRB

CHIEF ENGINEER: JWJ

FIRE PROTECTION: HPN

DEPARTMENT OF THE NAVY

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC

NAVAL STATION - NORFOLK VA

NAVAL SUBMARINE BASE NEW LONDON

GROTON, CONNECTICUT

P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY

SITE

ELECTRICAL SITE DEMOLITION PLAN - AREA D

SCALE: AS NOTED

PROJECT NO.: 1667770

CONSTR. CONTR. NO.


NAVFAC DRAWING NO. 12893918

SHEET 112 OF 152

ED104

KEYED NOTES

- REMOVE PRIMARY MEDIUM VOLTAGE OVERHEAD POWER LINE.
- REMOVE ELECTRICAL UTILITY POLE. REMOVE CROSSARMS ASSOCIATED WITH MEDIUM VOLTAGE OVERHEAD WIRE.
- REMOVE UNDERGROUND FEEDER AND ASSOCIATED CONDUIT/DUCTBANK.
- REMOVE CONNECTIONS TO POLE-MOUNTED TRANSFORMER TX778 SERVING EXISTING STREET POLE LIGHTING. TRANSFORMER TO REMAIN FOR RE-USE.
- REMOVE UTILITY POLE AND RELATED GUY-WIRE.
- POLE-MOUNTED TRANSFORMER TX779 SERVING EXISTING B351 BUNKERS (A91-90-89-88) TO REMAIN.
- ELECTRICAL UTILITY POLE TO REMAIN. REMOVE CROSSARMS ASSOCIATED WITH MEDIUM VOLTAGE OVERHEAD WIRE.
- OVERHEAD MV POWER LINES TO REMAIN.
- UNDERGROUND FEEDER AND ASSOCIATED CONDUIT/DUCTBANK TO REMAIN.
- POLE-MOUNTED SITE LIGHTING FIXTURE TO REMAIN.
- 600V OH WIRE ASSOCIATED WITH STREET LIGHTING TO REMAIN.
- RETAIN UG CONDUITS BETWEEN EX. HH AND SW325. REMOVE RELATED CONDUCTORS.
- 600V OH WIRE TO REMAIN.

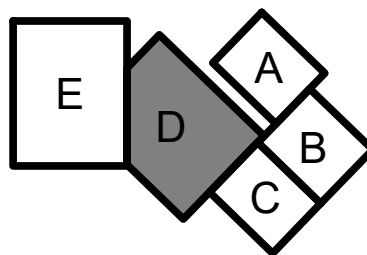

GRAPHIC SCALE

1"=50' 0' 50' 100'

ELECTRICAL SITE DEMOLITION PLAN - AREA D

SCALE: 1"= 50'-0"

A1

MATCHLINE SHEET ED105

MATCHLINE SEE SHEET ED103

EX. BUILDING 325

EX. HH

P-19 TX-799

P-18

P-45

P-46

P-46A

P-48

P-6

P-7

P-8

P-9

P-44

P-44A

P-43

P-4

P-5

P-6

P-7

P-8

P-9

7

6

7

9

13

11

1

11

1

7

9

11

1

7

11

1

7

11

1

7

11

1

7

11

1

7

11

1

7

11

1

7

11

1

7

11

1

7

11

1

7

11

1

7

1


2

3

4

5

FILE NAME: C:\pwworkar\der003\pwworkar\1433269\ED105_EDE128.dwg PLOTTED: Thursday, June 12, 2025 9:58am USER: PHILLUH

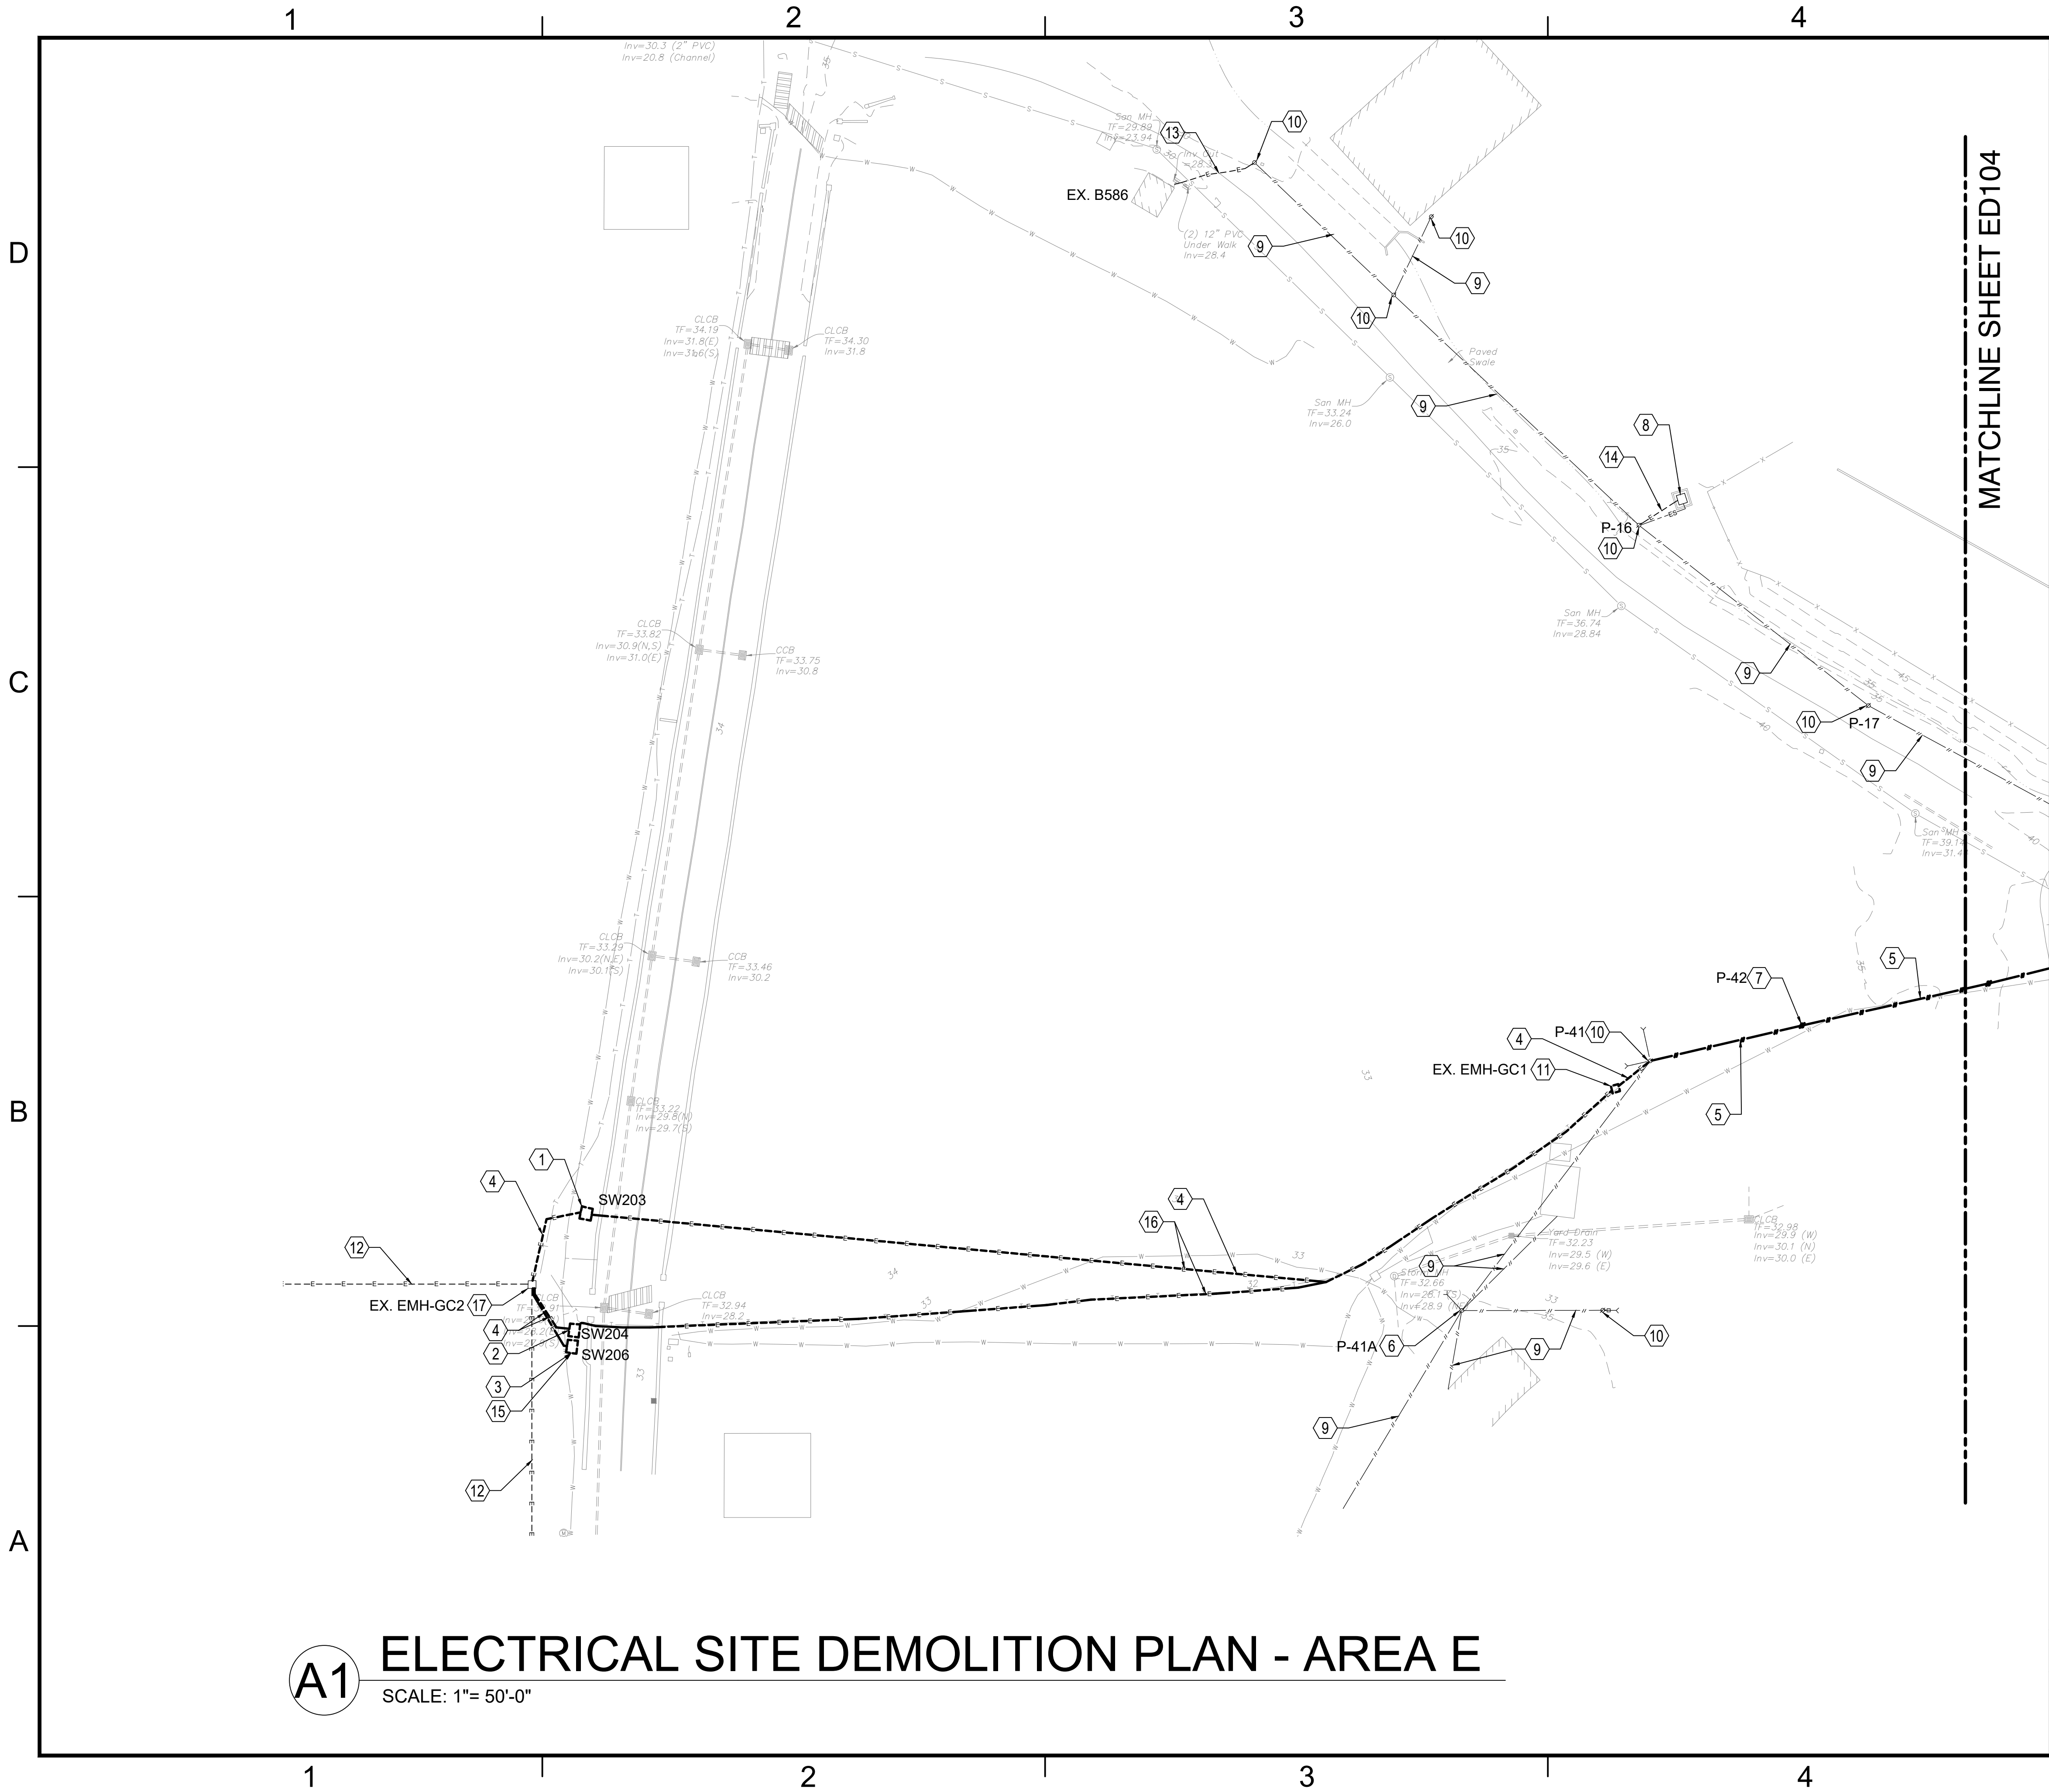


A1 ELECTRICAL SITE DEMOLITION PLAN - AREA E
SCALE: 1"= 50'-0"

GENERAL SHEET NOTES

- A. REFER TO SHEET E-001 FOR ADDITIONAL ELECTRICAL NOTES.
- B. EXISTING ADVANCED METERING INFRASTRUCTURE (AMI) COMPONENTS AND DEVICES MUST BE RETURNED TO PUBLIC WORKS DEPARTMENT (PWD).
- C. LOW VOLTAGE CIRCUITS ARE TO REMAIN IN SERVICE UNLESS SPECIFICALLY INDICATED TO BE DEMOLISHED.
- D. PHASING: NEW WORK MUST BE READY FOR QUICK SWITCHOVER BEFORE DEMOLITION OF EXISTING POWER. COORDINATE DOWN TIME WITH NAVFAC.
- E. UTILITY POLES WHERE MV WIRE IS REMOVED SHOULD BE MODIFIED BY REMOVAL OF RELATED CROSSARMS AND REMOVING TOP OF UTILITY POLE TO 1FT ABOVE LIGHT FIXTURE IT IS SUPPORTING.

KEYED NOTES

- 1. REMOVE 3-POSITION MV PAD-MOUNTED SWITCH SW203 AND RELATED CONCRETE PAD.
- 2. REMOVE PREVIOUSLY ABANDONED PAD-MOUNTED AIR SWITCH SW204 ENCLOSURE.
- 3. REMOVE PAD-MOUNTED AIR SWITCH SW206 AND RELATED CONCRETE PAD.
- 4. REMOVE UNDERGROUND FEEDER AND ASSOCIATED CONDUIT/DUCTBANK.
- 5. REMOVE PRIMARY MEDIUM VOLTAGE OVERHEAD POWER LINE.
- 6. UTILITY POLE WITH POLE-MOUNTED TRANSFORMER TX281 SERVING EXISTING B281 AND B468 TO REMAIN.
- 7. REMOVE ELECTRICAL UTILITY POLE.
- 8. PAD-MOUNTED TRANSFORMER TX586 SERVING B586 TO REMAIN.
- 9. OVERHEAD POWER LINE TO REMAIN.
- 10. ELECTRICAL UTILITY POLE TO REMAIN.
- 11. ELECTRICAL MANHOLE TO BE DEMOLISHED.
- 12. UNDERGROUND FEEDERS M2M AND M12N TO REMAIN.
- 13. UNDERGROUND FEEDER AND ASSOCIATED CONDUIT/DUCTBANK TO REMAIN.
- 14. TX586 PRIMARY AND SECONDARY UNDERGROUND FEEDER BETWEEN POLE 16 AND TX586 TO REMAIN.
- 15. DISCONNECT CIRCUITS FROM SW206 AND DEMOLISH EXISTING SWITCH. PROVIDE TEMPORARY SPLICE WITHIN EXISTING MANHOLE EMH-GC2 TO TEMPORARILY MAKE MV LOOP ELECTRICALLY CONTINUOUS PRIOR TO INSTALLATION OF NEW MW SWITCHES AND RELATED UG CONDUCTORS.
- 16. ROUTING IS BASED ON RECORD DRAWINGS. FIELD VERIFY ELECTRICAL UG ROUTE TO SW203.
- 17. ELECTRICAL MANHOLE TO REMAIN.

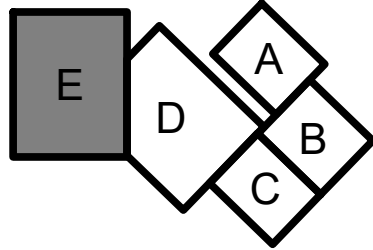

GRAPHIC SCALE



APPR	DATE	SYN	DESCRIPTION


Jacobs
1100 NORTH GLEBE ROAD
SUITE 500
ARLINGTON, VIRGINIA 22201
571.218.1000
FAX: 571.218.1600

APPROVED
FOR COMMANDER NAVFAC
ACTIVITY: APPROVED BY LCDR ELIZABETH OLOKODE NAVFAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT
SATISFACTORY TO DATE 05/27/2025
DES JHP DRW JHP CHK KB
PMIDM SMS/CWJ
BRANCH MANAGER WRB
CHIEF ENGINEER JWW
FIRE PROTECTION HPN

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC
NAVAL SUBMARINE BASE NEW LONDON
P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY SITE
NAVAL STATION - GROTON, CT
ELECTRICAL SITE DEMOLITION PLAN - AREA E

SCALE: AS NOTED
EPROJECT NO.: 1667770
CONSTR. CONTR. NO.
NAVFAC DRAWING NO. 12893919
SHEET 113 OF 152
ED105

FILE NAME: C:\p\m\workdir\ben003\jcs_phillip\143269\ED601_10Z\10Z\10Z.dwg LAYOUT NAME: ED601 PLOTTED: Thursday, June 12, 2025 - 10:03am USER: PHILLIP

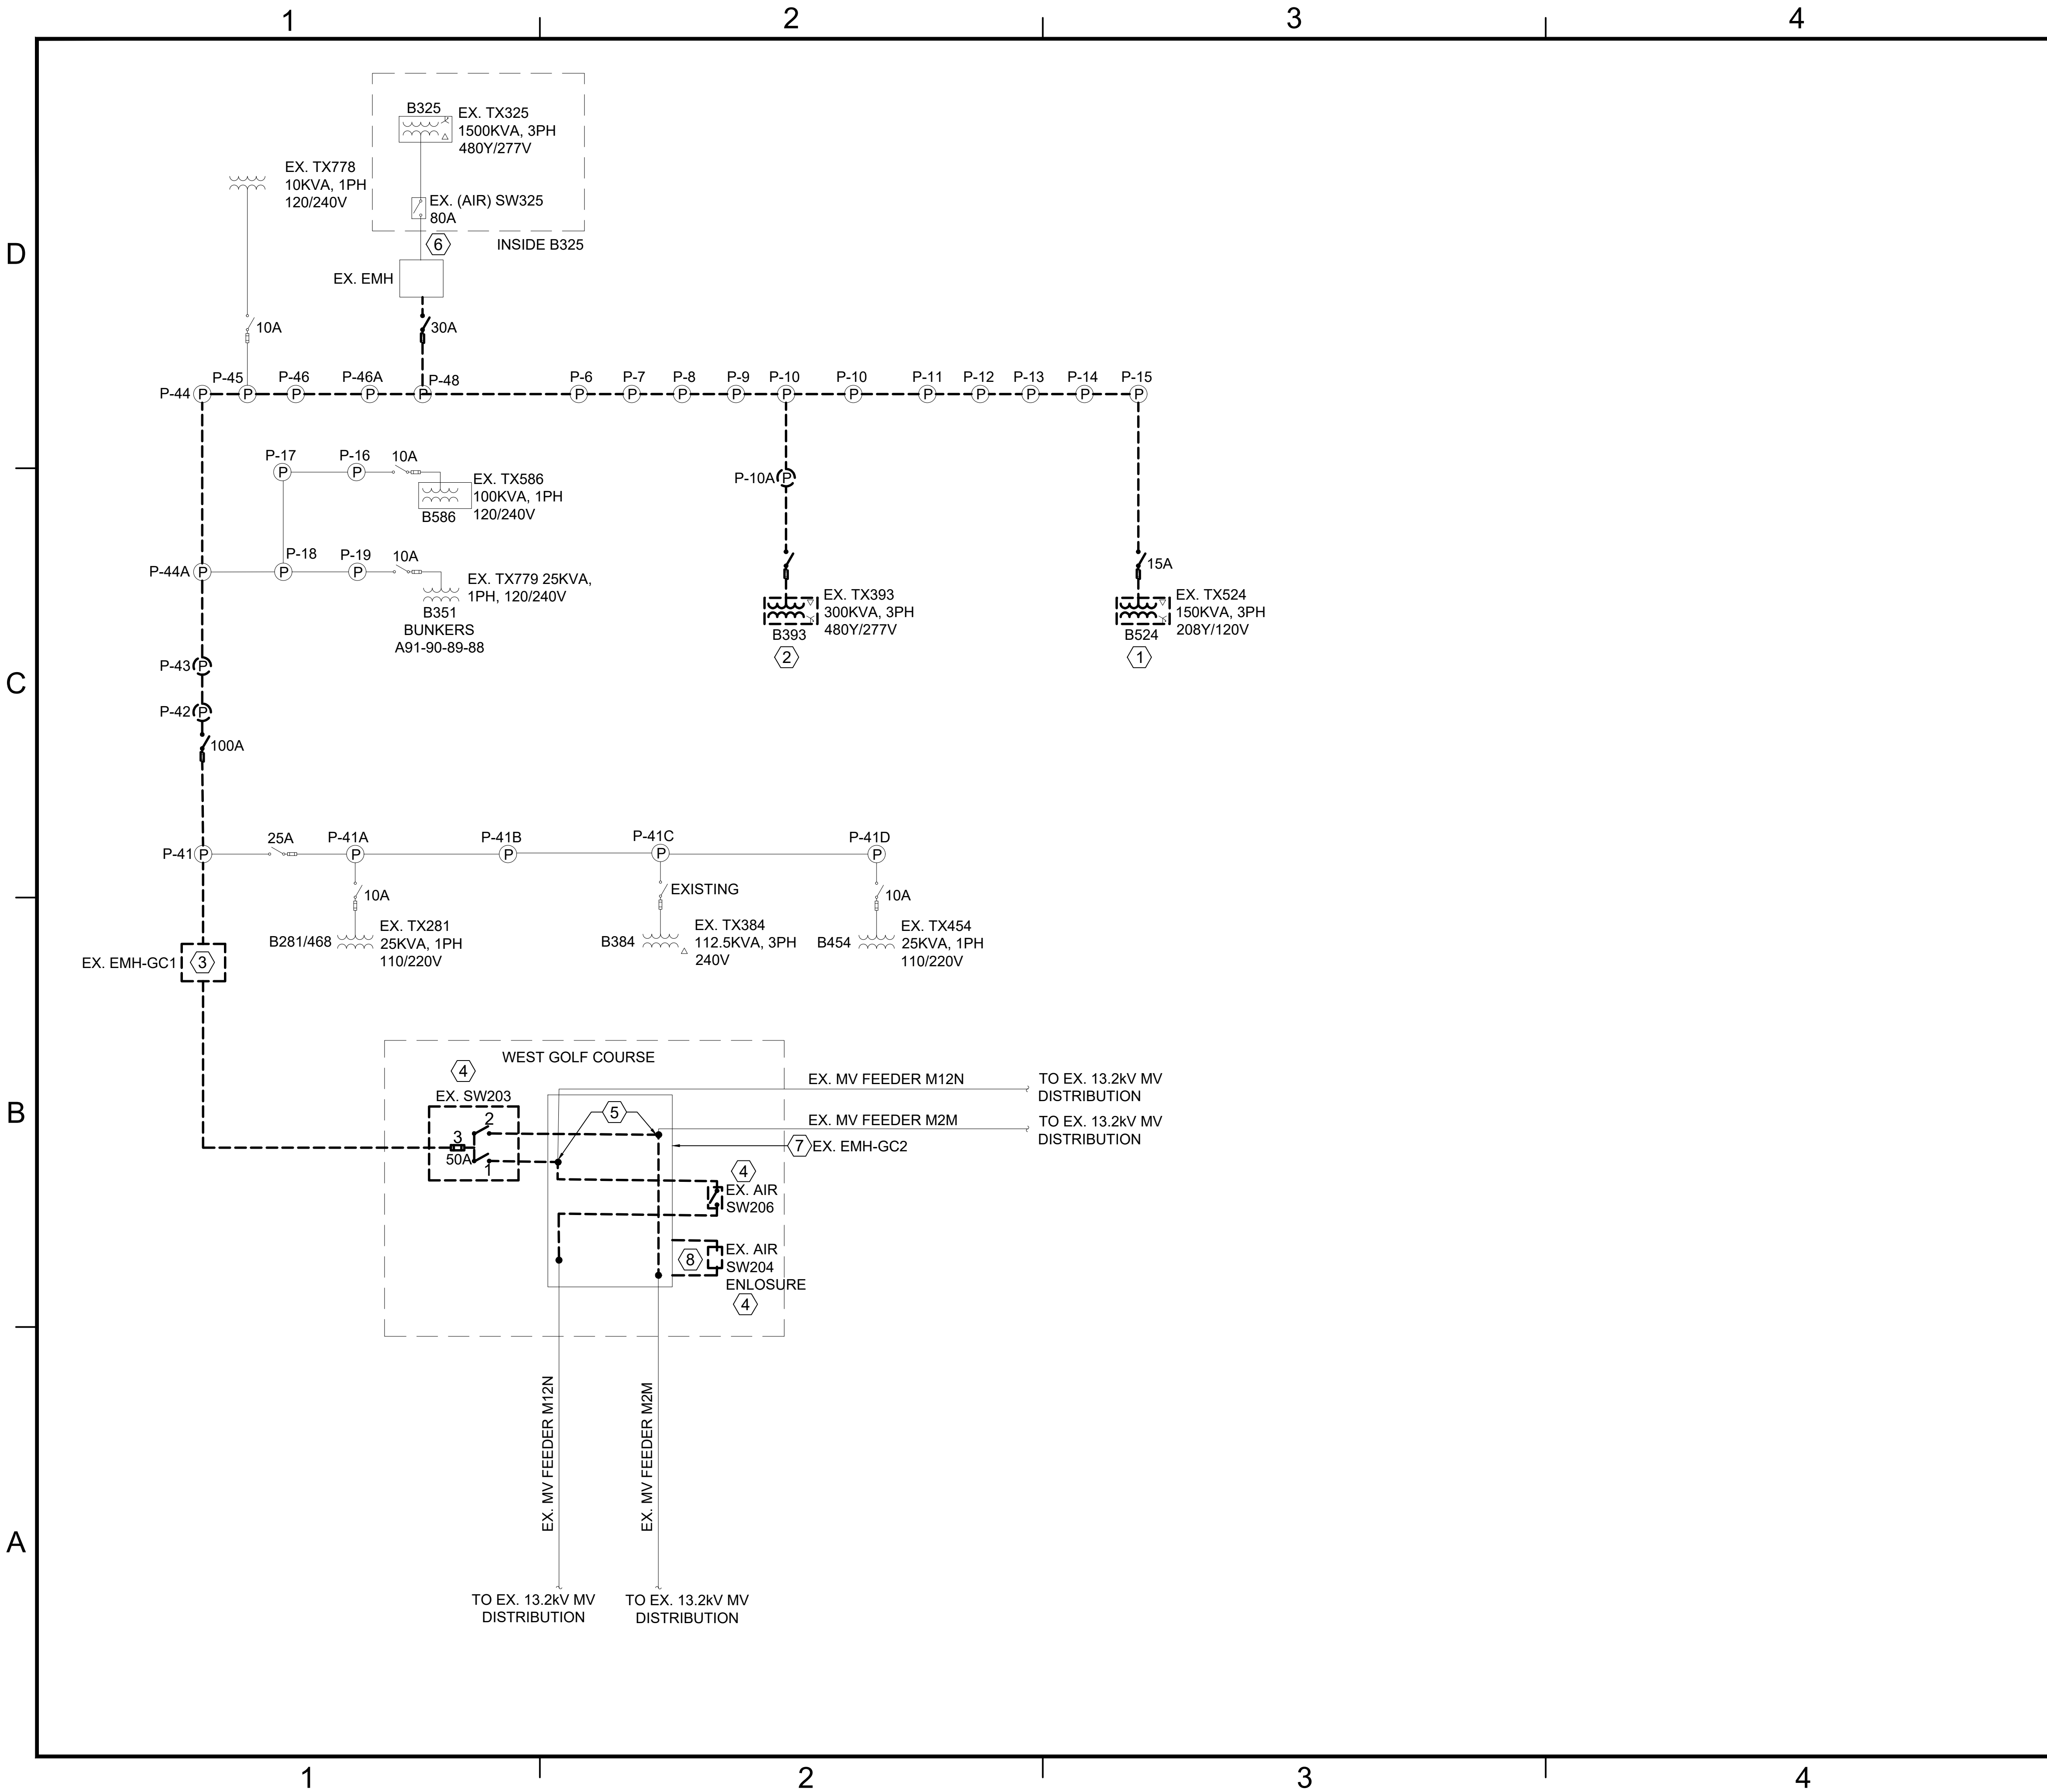

GENERAL SHEET NOTES


A. REFER TO SHEET E-001 FOR ADDITIONAL NOTES.

KEYED NOTES

1. REMOVE EXISTING TRANSFORMER SERVING B524 AND ASSOCIATED UNDERGROUND PRIMARY AND SECONDARY CONDUCTORS AND RACEWAY BACK TO SOURCE.
2. REMOVE EXISTING TRANSFORMER SERVING B393 AND ASSOCIATED UNDERGROUND PRIMARY AND SECONDARY CONDUCTORS AND RACEWAY BACK TO SOURCE.
3. ELECTRICAL MANHOLE TO BE DEMOLISHED.
4. REMOVE EXISTING PAD-MOUNTED SWITCH.
5. REMOVE EXISTING FEEDER BACK TO SPLICE POINT.
6. REMOVE EXISTING MV FEEDERS BACK TO SOURCE. EXISTING CONDUITS AND DUCTBANK TO REMAIN FOR REUSE.
7. ELECTRICAL MANHOLE TO REMAIN.
8. PREVIOUSLY ABANDONED EXISTING SWITCH ENCLOSURE, RELATED CONDUITS AND MV CABLES TO BE DEMOLISHED.

APPR	DATE	SYN	DESCRIPTION
1100 NORTH GLEBE ROAD SUITE 500 ARLINGTON, VIRGINIA 22201 571.218.1000 FAX: 571.218.1600			
APPROVED			
FOR COMMANDER NAFAC			
ACTIVITY: APPROVED BY LCDR ELIZABETH OLOKODE NAFAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT			
SATISFACTORY TO DATE: 05/27/2025			
DES	JHP	DRW	JHP
CHK	KB	CHK	KB
BRANCH MANAGER: SMS/CWJ			
PM/DM: SMS/CWJ			
CHIEF ENGINEER: WRB			
FIRE PROTECTION: JWW			
HPN			
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC			
NAVAL STATION - GROTON, CONNECTICUT			
NAVAL SUBMARINE BASE NEW LONDON			
P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY			
SITE			
MV SINGLE LINE DIAGRAM - DEMOLITION			
SCALE: NONE			
PROJECT NO.: 1667770			
CONSTR CONTR NO.			
NAVFAC DRAWING NO. 12893920			
SHEET 114 OF 152			
ED601			

FILE NAME: C:\pwworkspace\1433203\1433203.dwg USER: PHILLUH PLOTTED: Thursday, June 12, 2025 - 11:19am

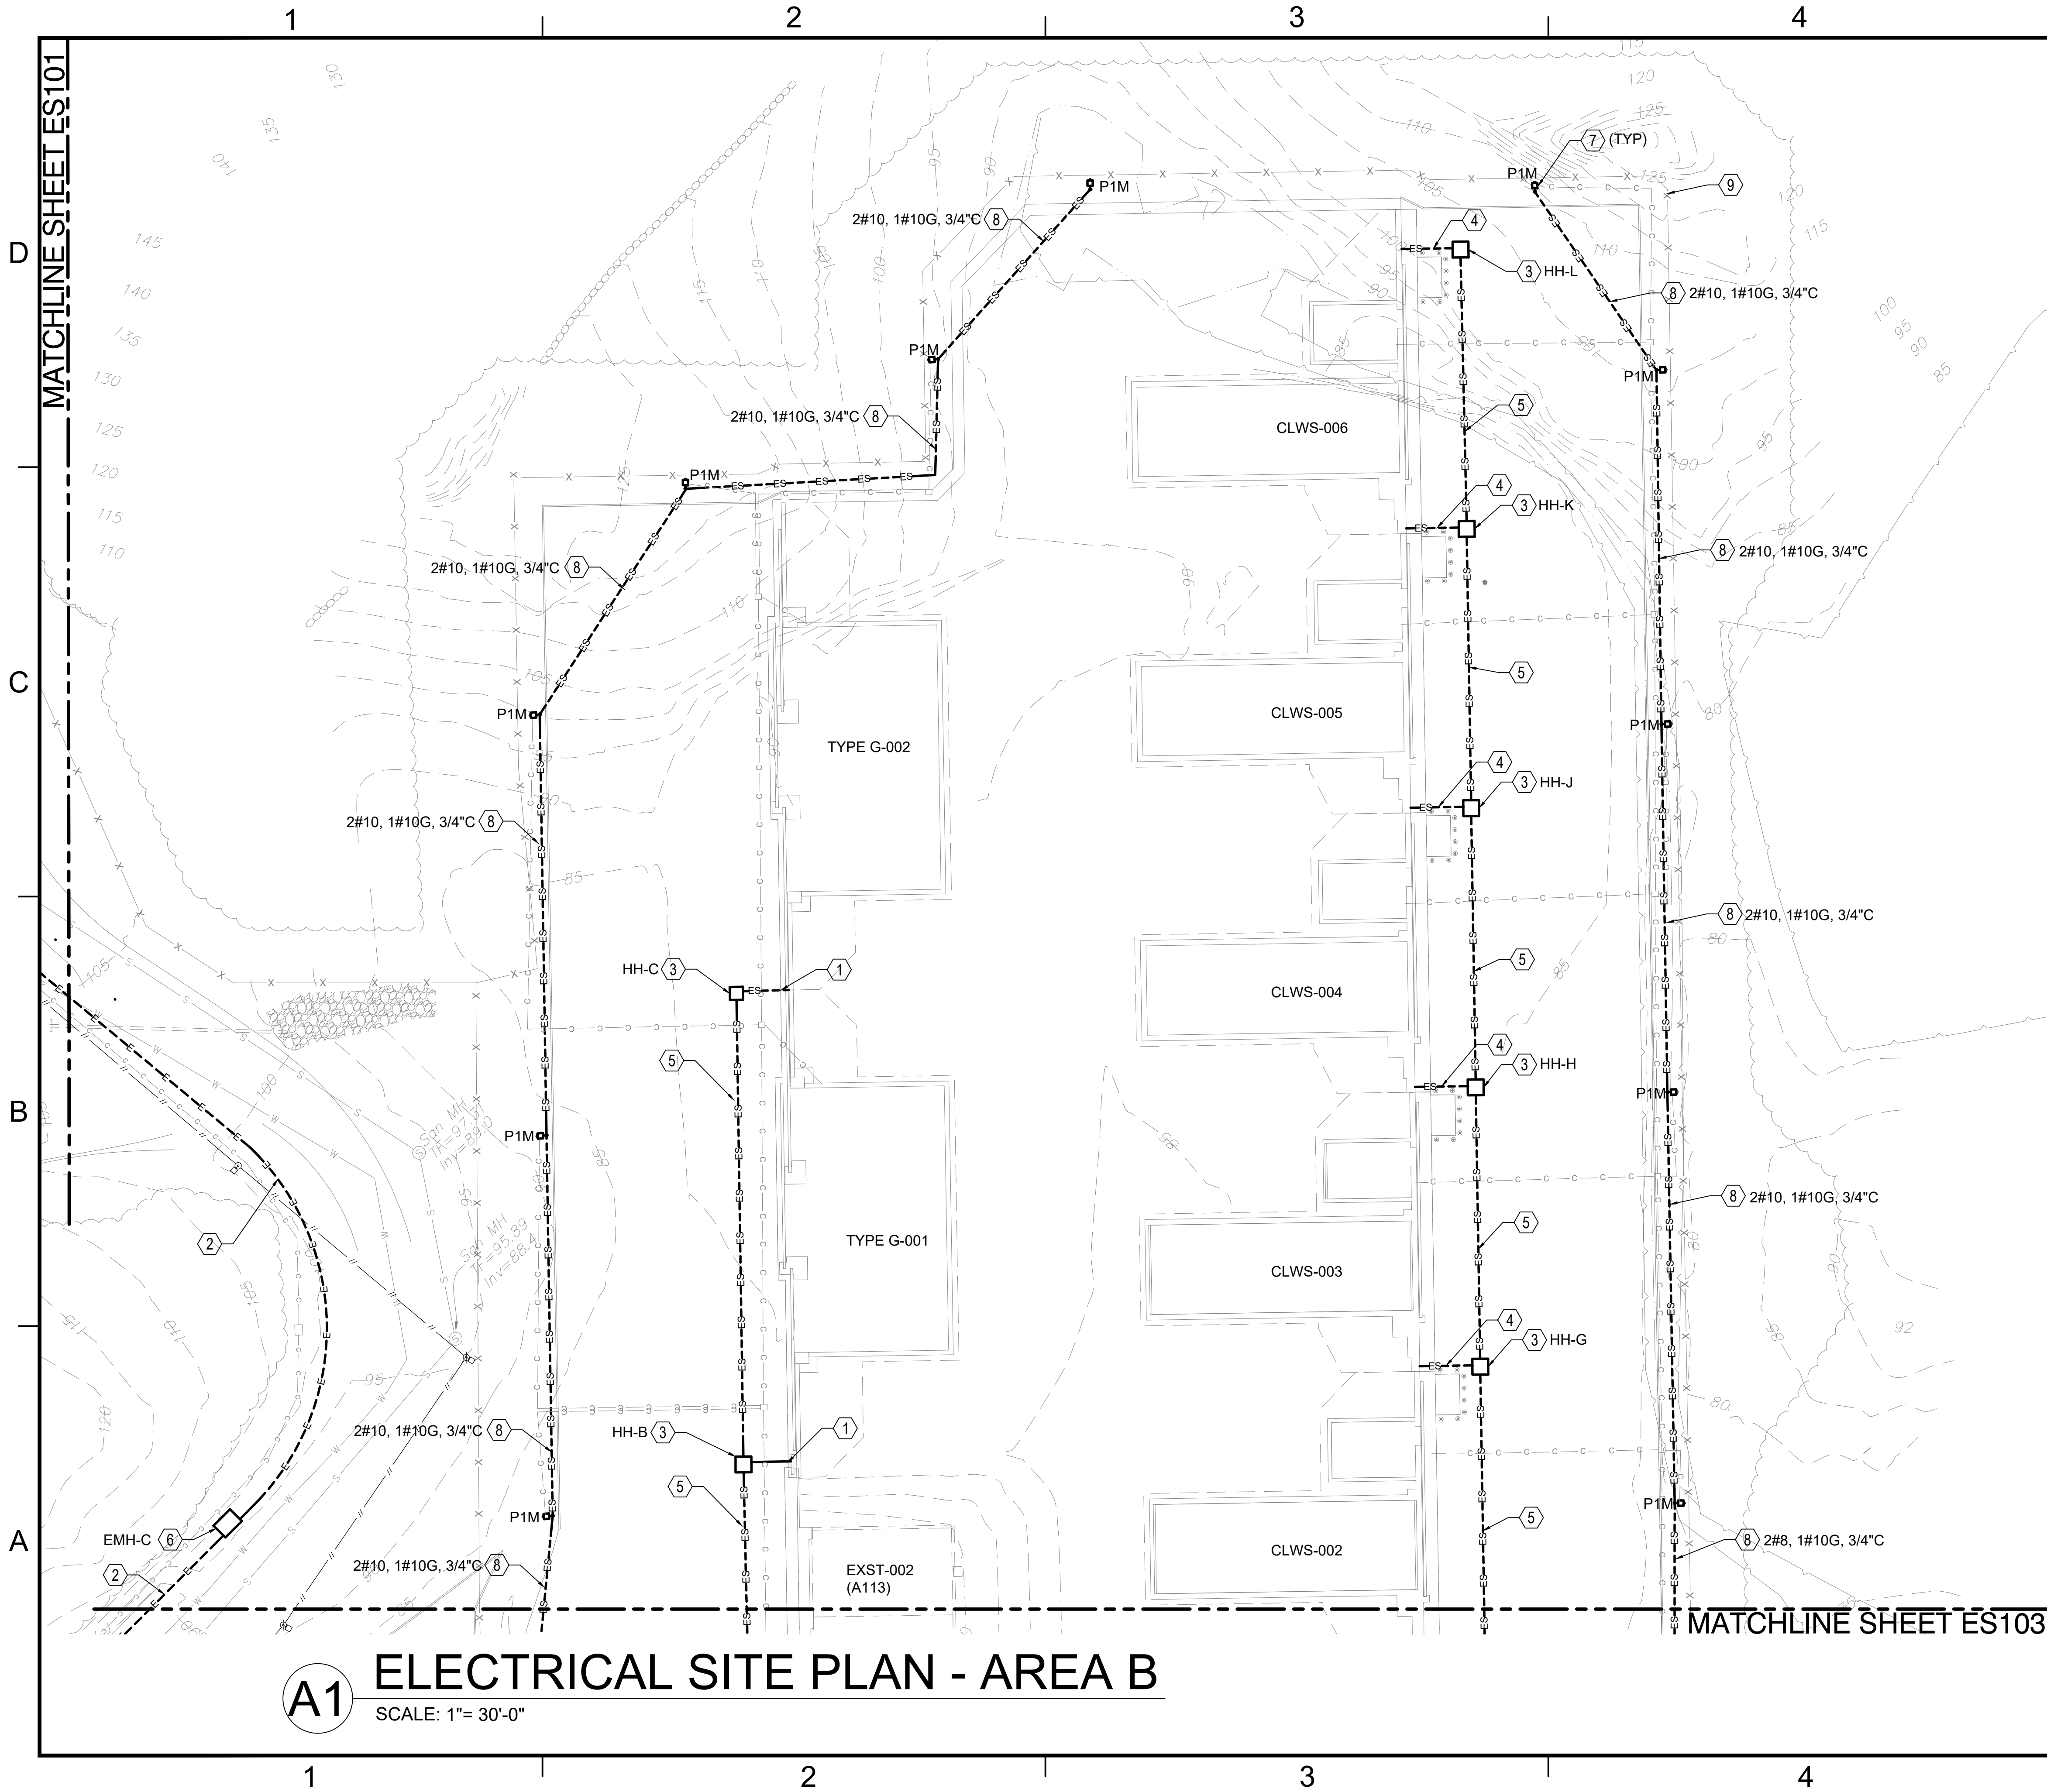

A1

ELECTRICAL SITE PLAN - AREA B


SCALE: 1"= 30'-0"

GENERAL SHEET NOTES

- A. REFER TO SHEET E-001 FOR ADDITIONAL ELECTRICAL NOTES.
- B. REFER TO SHEET E-701 FOR ADDITIONAL INFORMATION ON POLE-MOUNTED LIGHTING FIXTURES.
- C. PERIMETER SECURITY FENCE POLE LIGHTING FIXTURES MUST BE INSTALLED AT A MINIMUM OF 5'-0" FROM FENCE.
- D. REFER TO SHEET E-602 FOR ADDITIONAL DUCTBANK INFORMATION REQUIREMENTS FOR MAGAZINE AREA.
- E. REFER TO SHEET E-504 FOR MV DISTRIBUTION BUTTERFLY DIAGRAMS AT MANHOLES.

KEYED NOTES

1. PROVIDE UNDERGROUND 480V FEEDER TO TYPE G BUILDING DISCONNECT SWITCH LOCATED ON BUILDING EXTERIOR. REFER TO SITE-ADAPTED TYPE G MAGAZINE ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION.
2. PROVIDE MV CABLE IN 5" PVC CONDUIT. CONDUITS MUST BE CONCRETE-ENCASED. REFER TO MV ONE LINE DIAGRAM FOR CABLE SIZES AND DUCT BANK DETAILS.
3. PROVIDE ELECTRICAL HANDHOLE. REFER TO HANDHOLE DETAILS ON SHEET E-501.
4. PROVIDE UNDERGROUND 480V FEEDER TO CLWS MAGAZINE BUILDING DISCONNECT SWITCH LOCATED ON BUILDING EXTERIOR. REFER TO SITE-ADAPTED CLWS BOX MAGAZINE ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION.
5. PROVIDE UNDERGROUND 480V FEEDERS TO MAGAZINES IN CONCRETE ENCASED DUCTBANK.
6. PROVIDE ELECTRICAL MANHOLE. REFER TO MANHOLE DETAILS ON SHEET E-501.
7. PROVIDE POLE-MOUNTED LIGHTING FIXTURE. PROVIDE PULLBOX AS NEEDED.
8. PROVIDE UNDERGROUND 277V FEEDER FOR MAGAZINE SITE LIGHTING CIRCUITS. MAGAZINE SITE LIGHTING CIRCUITS ARE FED FROM PANEL HP-SB IN SENTRY BUILDING.
9. PROVIDE GROUNDING FOR ENTIRETY OF PERIMETER FENCING. REFER TO DETAIL ON SHEET E-501 FOR MORE INFORMATION.

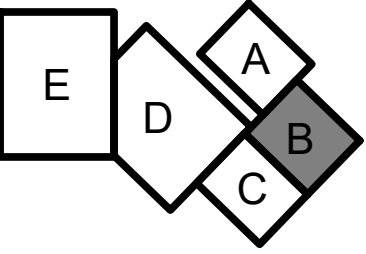


GRAPHIC SCALE

1"= 30' 0' 30' 60'

APPROVED	DATE	APPR
SYN	DESCRIPTION	
1100 NORTH GLEBE ROAD SUITE 500 ARLINGTON, VIRGINIA 22201 571.218.1000 FAX: 571.218.1600		
APPROVED		
FOR COMMANDER NAVFAC		
ACTIVITY APPROVED BY LCDR ELIZABETH OLOKODE NAVFAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT		
SATISFACTORY TO	DATE	05/27/2025
DES JHP	DRW JHP	CHK KB
PM/DM	SMS/CWU	
BRANCH MANAGER	WRB	
CHIEF ENGINEER	JWU	
FIRE PROTECTION	HPN	
DEPARTMENT OF THE NAVY NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC NAVAL STATION - NORFOLK, VA NAVAL SUBMARINE BASE NEW LONDON GROTON, CONNECTICUT P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY SITE ELECTRICAL SITE PLAN - AREA B		
SCALE: AS NOTED		
EPROJECT NO.: 1667770		
CONSTR. CONTR. NO.		
NAVFAC DRAWING NO. 12893922		
SHEET 116 OF 152		
ES102		

FILE NAME: C:\pwworkspace\12893923\12893923.dwg PLOT DATE: Thursday, June 12, 2025 - 11:22am USER: PHILLUH

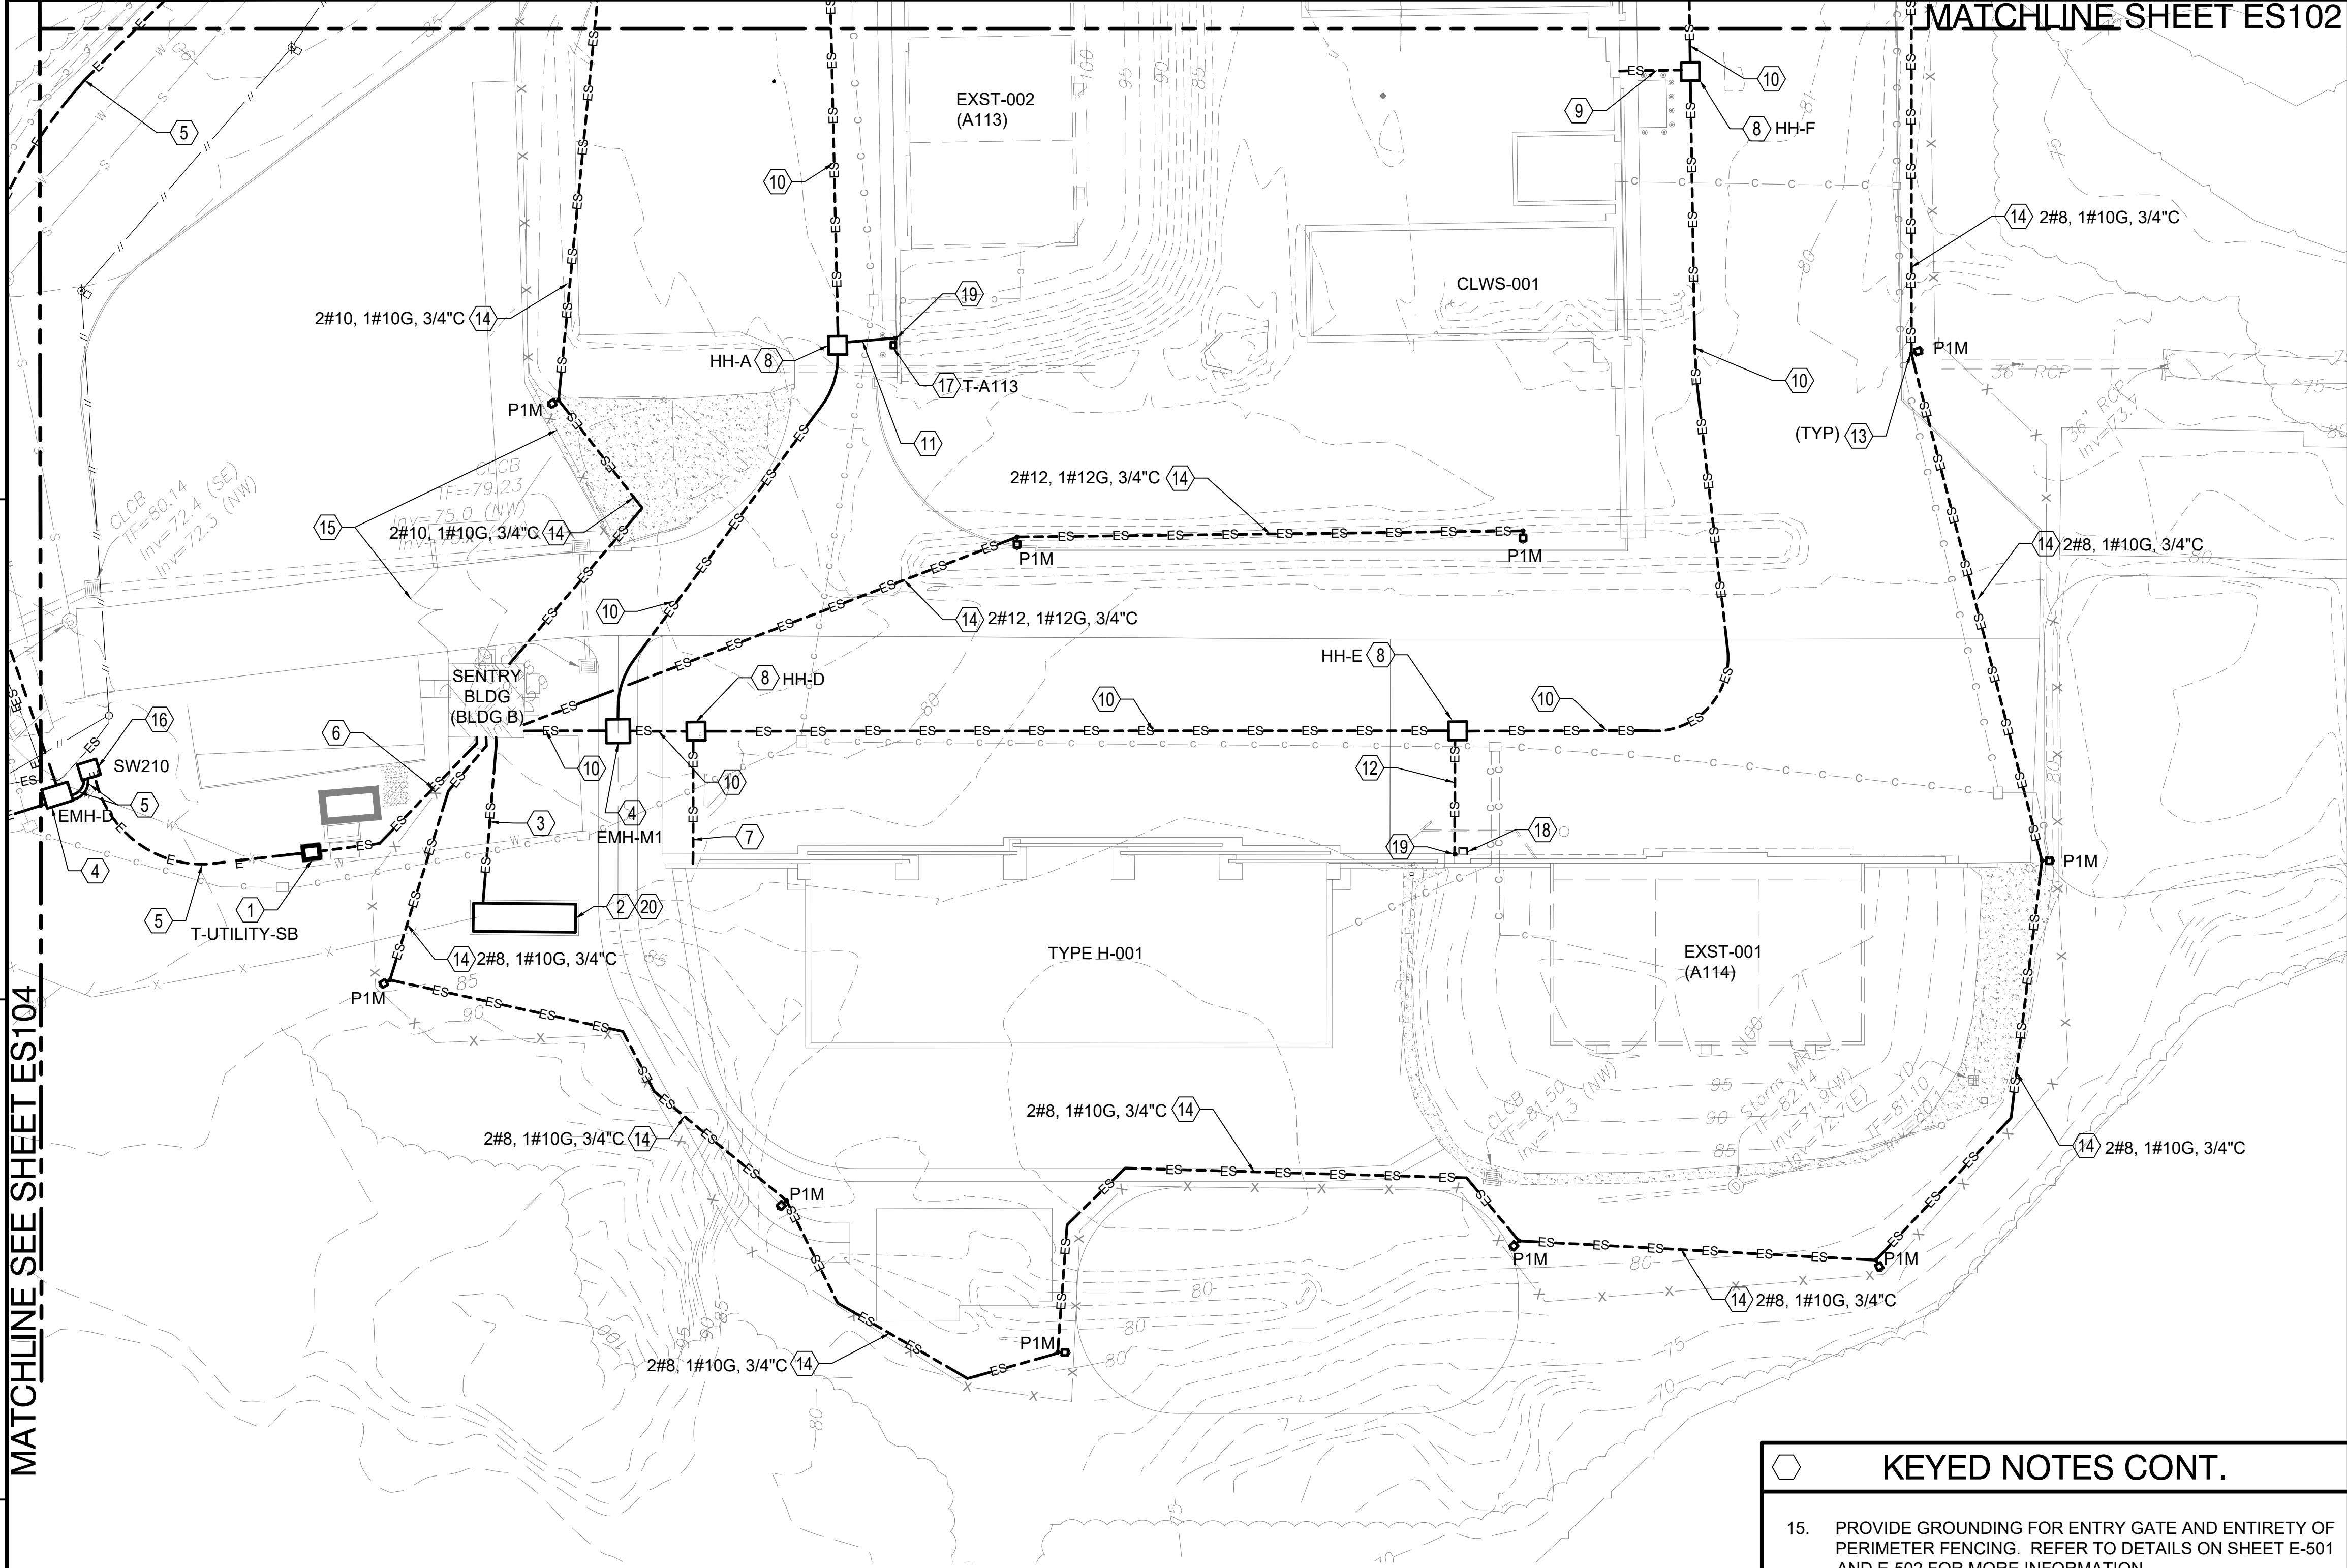


A1 ELECTRICAL SITE PLAN - AREA C

SCALE: 1"= 30'-0"

- ## KEYED NOTES CONT.
15. PROVIDE GROUNDING FOR ENTRY GATE AND ENTIRETY OF PERIMETER FENCING. REFER TO DETAILS ON SHEET E-501 AND E-502 FOR MORE INFORMATION.
 16. PROVIDE 15KV SF6 PAD-MOUNTED SWITCH.
 17. PROVIDE TRANSFORMER. REFER TO SENTRY BUILDING ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION.
 18. EXISTING WALL-MOUNTED TRANSFORMER SERVING EXISTING MAGAZINE.
 19. PROVIDE DISCONNECT SWITCH. REFER TO SENTRY BUILDING ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION.
 20. PROVIDE INTEGRAL LIGHTNING PROTECTION SYSTEM AND SECONDARY GROUND RING FOR GENERATOR ENCLOSURE PER NFPA 780 AND CONNECT TO SENTRY BUILDING GROUNDING SYSTEM WITH #2/0AWG COPPER CONDUCTOR. PROVIDE GROUND RODS AT A MINIMUM OF EACH CORNER. PROVIDE MINIMUM ONE TEST WELL.

- ## GENERAL SHEET NOTES
- REFER TO SHEET E-001 FOR ADDITIONAL ELECTRICAL NOTES.
 - REFER TO SHEET E-701 FOR ADDITIONAL INFORMATION ON POLE-MOUNTED LIGHTING FIXTURES.
 - PERIMETER SECURITY FENCE POLE LIGHTING FIXTURES MUST BE INSTALLED AT A MINIMUM OF 5'-0" FROM FENCE.
 - REFER TO SHEET E-602 FOR ADDITIONAL DUCTBANK INFORMATION REQUIREMENTS FOR MAGAZINE AREA.
 - REFER TO SHEET E-504 FOR MV DISTRIBUTION BUTTERFLY DIAGRAMS AT MANHOLES.

- ## KEYED NOTES
1. PRIMARY SERVICE PAD-MOUNTED TRANSFORMER SERVING SENTRY BUILDING. REFER TO SENTRY BUILDING ELECTRICAL DRAWINGS FOR MORE INFORMATION.
 2. PROVIDE GENERATOR SERVING SENTRY BUILDING. PROVIDE SPARK ARRESTORS/FLAME SUPPRESSION ON THE EXHAUST. REFER TO SENTRY BUILDING ELECTRICAL DRAWINGS FOR MORE INFORMATION.
 3. PROVIDE UNDERGROUND DUCTBANK TO SENTRY BUILDING FOR 480V FEED TO AUTOMATIC TRANSFER SWITCH, AND 208V FEED TO GENERATOR ENCLOSURE PANELBOARD. REFER TO SENTRY BUILDING ELECTRICAL DRAWINGS FOR MORE INFORMATION.
 4. PROVIDE ELECTRICAL MANHOLE. REFER TO MANHOLE DETAILS ON SHEET E-501.
 5. PROVIDE MV CABLE IN 5" PVC CONDUIT. CONDUITS MUST BE CONCRETE-ENCASED. REFER TO ONE LINE DIAGRAM FOR CABLE SIZES.
 6. PROVIDE UNDERGROUND 480V FEEDER TO SENTRY BUILDING MAIN NORMAL POWER DISTRIBUTION PANEL. REFER TO SENTRY BUILDING ELECTRICAL DRAWINGS FOR MORE INFORMATION.
 7. PROVIDE UNDERGROUND 480V FEEDER TO TYPE H MAGAZINE BUILDING DISCONNECT SWITCH LOCATED ON BUILDING EXTERIOR. REFER TO SITE-ADAPTED TYPE H MAGAZINE ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION.
 8. PROVIDE ELECTRICAL HANDHOLE. REFER TO HANDHOLE DETAILS ON SHEET E-501.
 9. PROVIDE UNDERGROUND 480V FEEDER TO CLWS MAGAZINE BUILDING DISCONNECT SWITCH LOCATED ON BUILDING EXTERIOR. REFER TO SITE-ADAPTED CLWS BOX MAGAZINE ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION.
 10. PROVIDE UNDERGROUND 480V FEEDERS TO MAGAZINES IN CONCRETE ENCASED DUCTBANK.
 11. PROVIDE UNDERGROUND 480V FEEDER TO TRANSFORMER PRIMARY SIDE DISCONNECT SWITCH SERVING EXISTING A113 MAGAZINE. REFER TO SENTRY BUILDING ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION.
 12. PROVIDE UNDERGROUND 480V FEEDER TO DISCONNECT SWITCH SERVING EXISTING A114 MAGAZINE. REFER TO SENTRY BUILDING ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION.
 13. PROVIDE POLE-MOUNTED LIGHTING FIXTURE. PROVIDE PULLBOX AS NEEDED.
 14. PROVIDE UNDERGROUND 277V FEEDER FOR MAGAZINE SITE LIGHTING CIRCUITS. SITE LIGHTING CIRCUITS ARE FED FROM PANEL HP-SB IN SENTRY BUILDING.

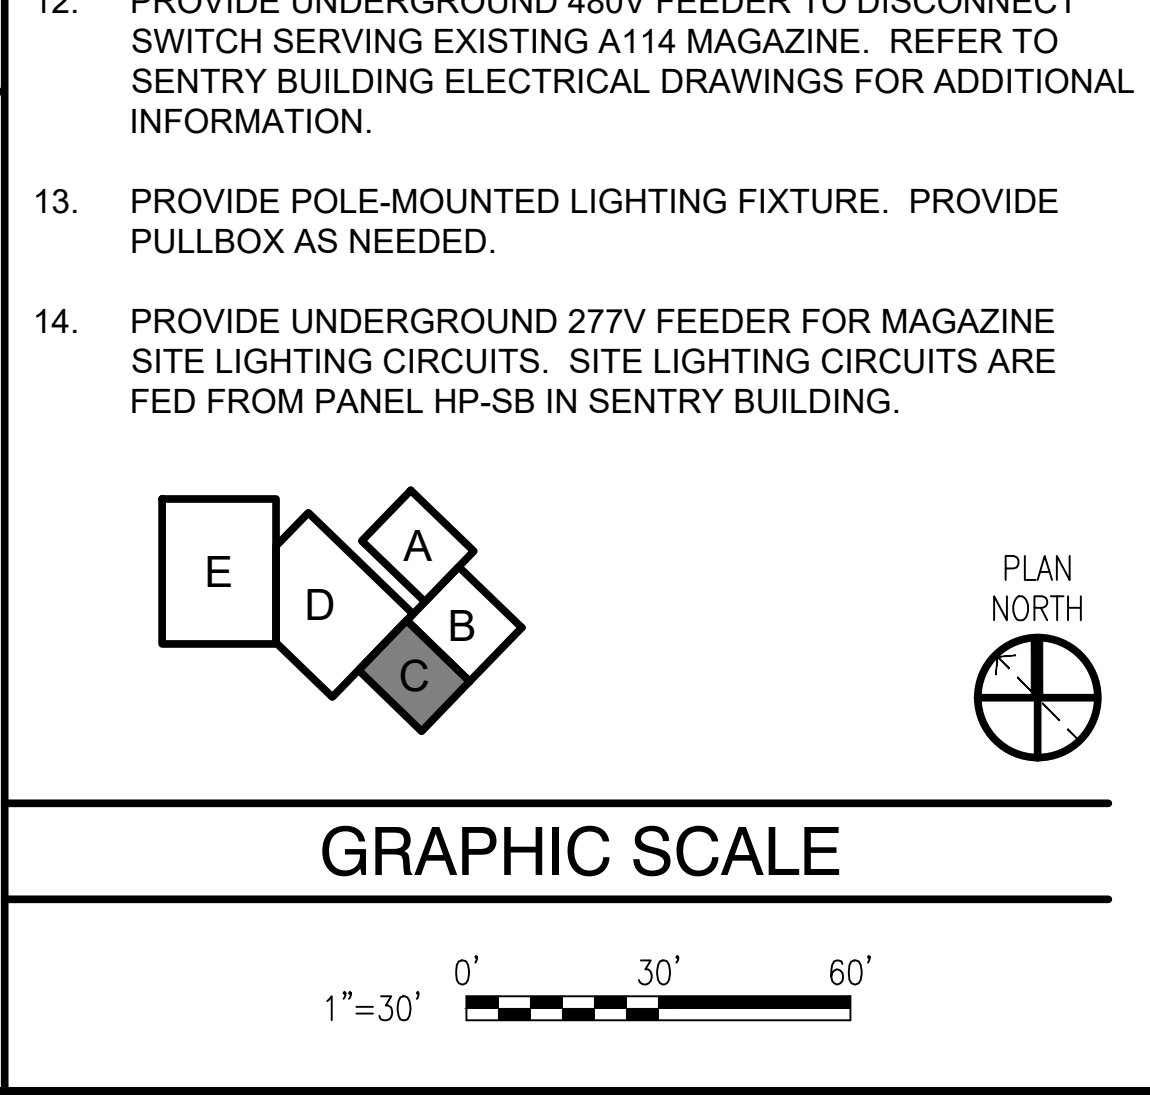

APPROVED	DATE	APP'D
SYN	DESCRIPTION	

Jacobs
1100 NORTH GLEBE ROAD
SUITE 500
ARLINGTON, VIRGINIA 22201
571.218.1000
FAX: 571.218.1600

APPROVED

FOR COMMANDER NAVFAC

ACTIVITY APPROVED BY LCDR ELIZABETH OLOKODE NAVFAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT

SATISFACTORY TO DATE 05/27/2025

DES	JHP	DRW	JHP	CHK	KB
-----	-----	-----	-----	-----	----

PM/DM	SMS/CWJ
BRANCH MANAGER	WRB
CHIEF ENGINEER	JWJ
FIRE PROTECTION	HPN

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC
NAVAL STATION - NORFOLK, VA
GROTON, CONNECTICUT
NAVAL SUBMARINE BASE NEW LONDON
P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY
SITE
ELECTRICAL SITE PLAN - AREA C

SCALE: AS NOTED
PROJECT NO.: 1667770
CONSTR. CONTR. NO.
NAVFAC DRAWING NO.: 12893923
SHEET 117 OF 152
ES103

FILE NAME: C:\pwworket\der003\pwworket\phillip\14132039\14132039.dwg LAYOUT NAME: E-501_PLOT01 Thursday, June 12, 2025 - 9:24am USER: PHILLIP

D

C


B

A

A1

EQUIPMENT PAD GROUNDING DETAIL

SCALE: NTS

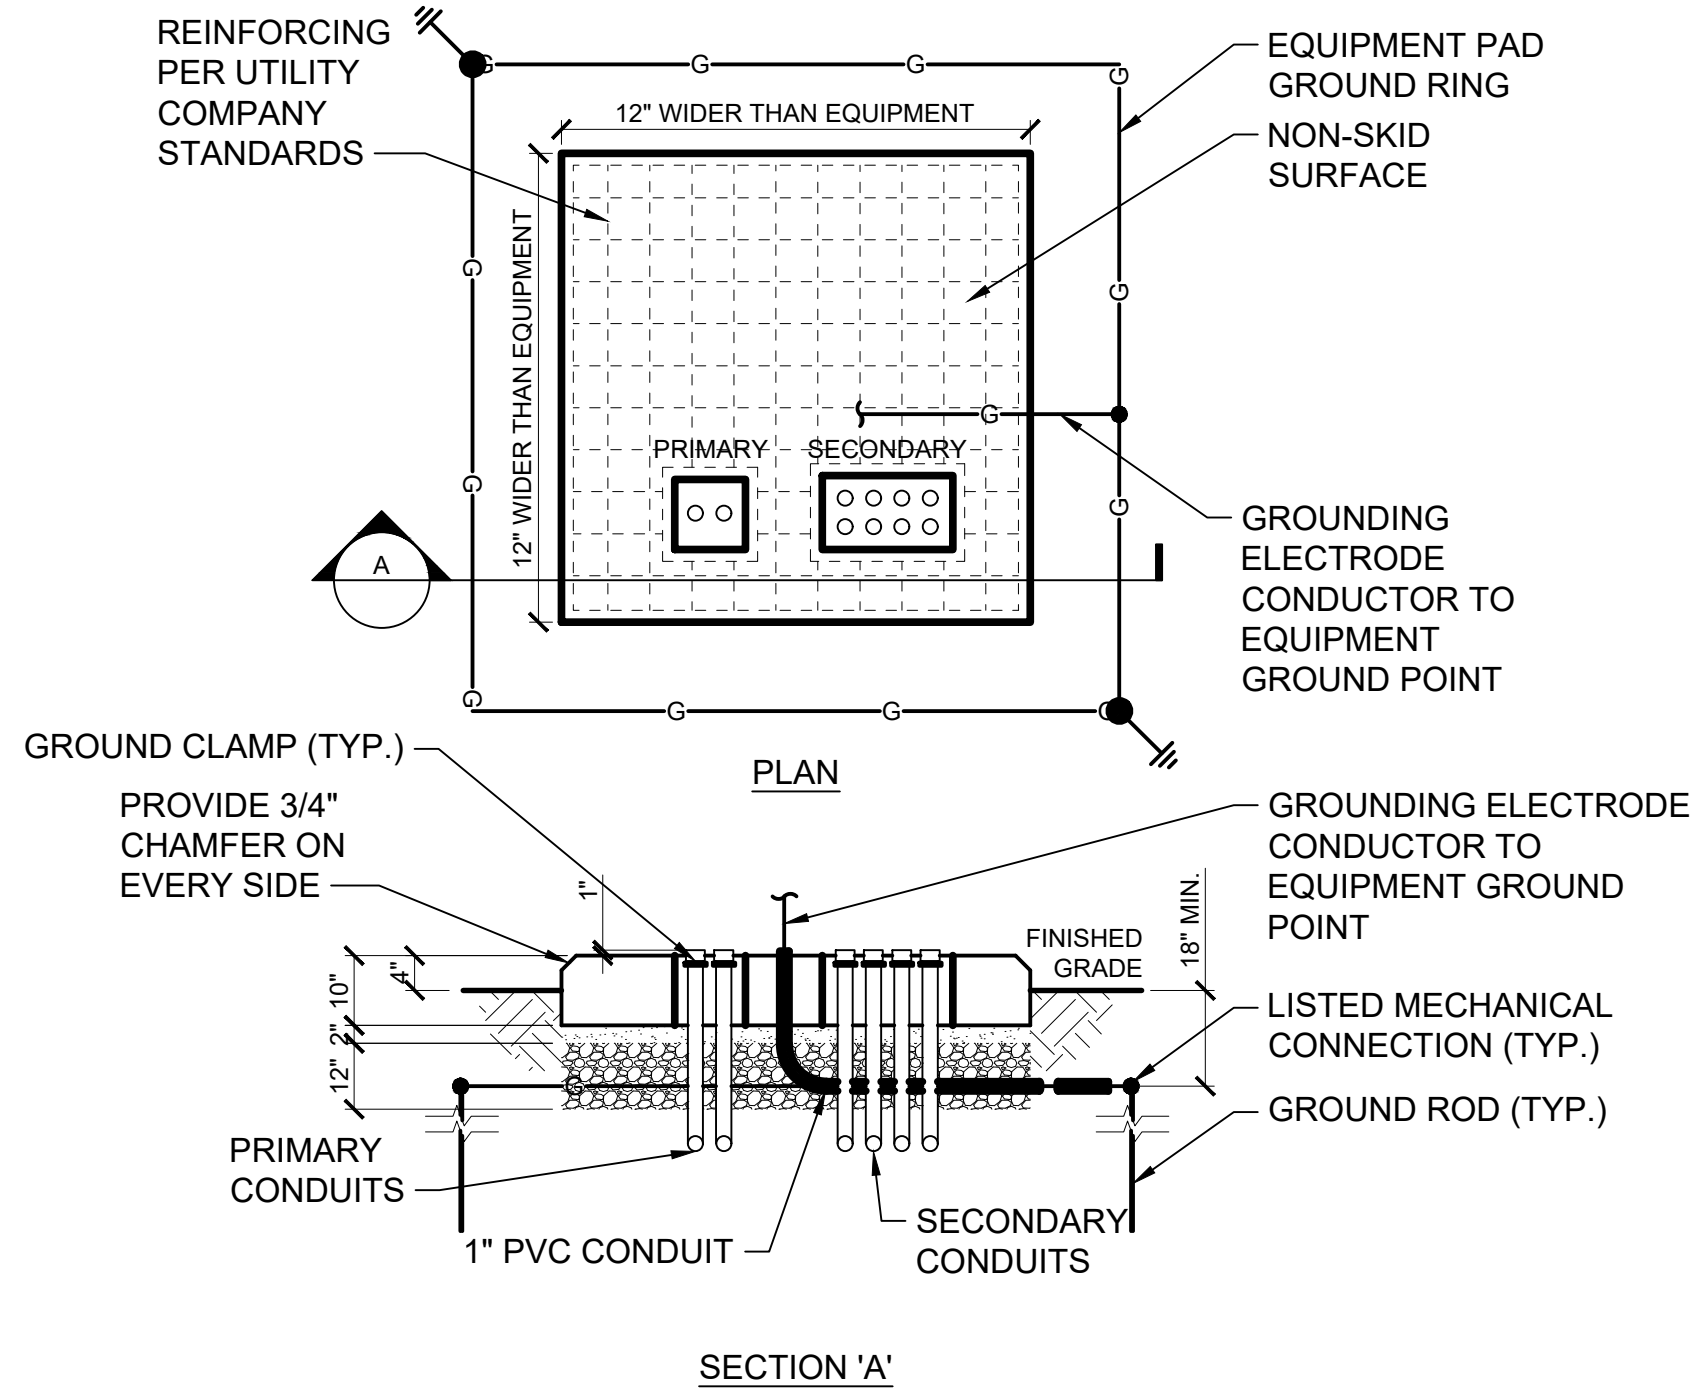

- DETAIL NOTE:
1. COORDINATE CONDUIT SIZES AND QUANTITIES WITH SINGLE LINE DIAGRAM.

B1 ELECTRIC MANHOLE DETAIL

SCALE: NTS




STANDARD ELECTRICAL MANHOLE (TRAFFIC) TYPES 3 & 4

SKETCH DATE JUNE 2002 STYLE UG-2

A2

TYPICAL CONCRETE ENCASED DUCT BANK DETAIL

SCALE: NTS

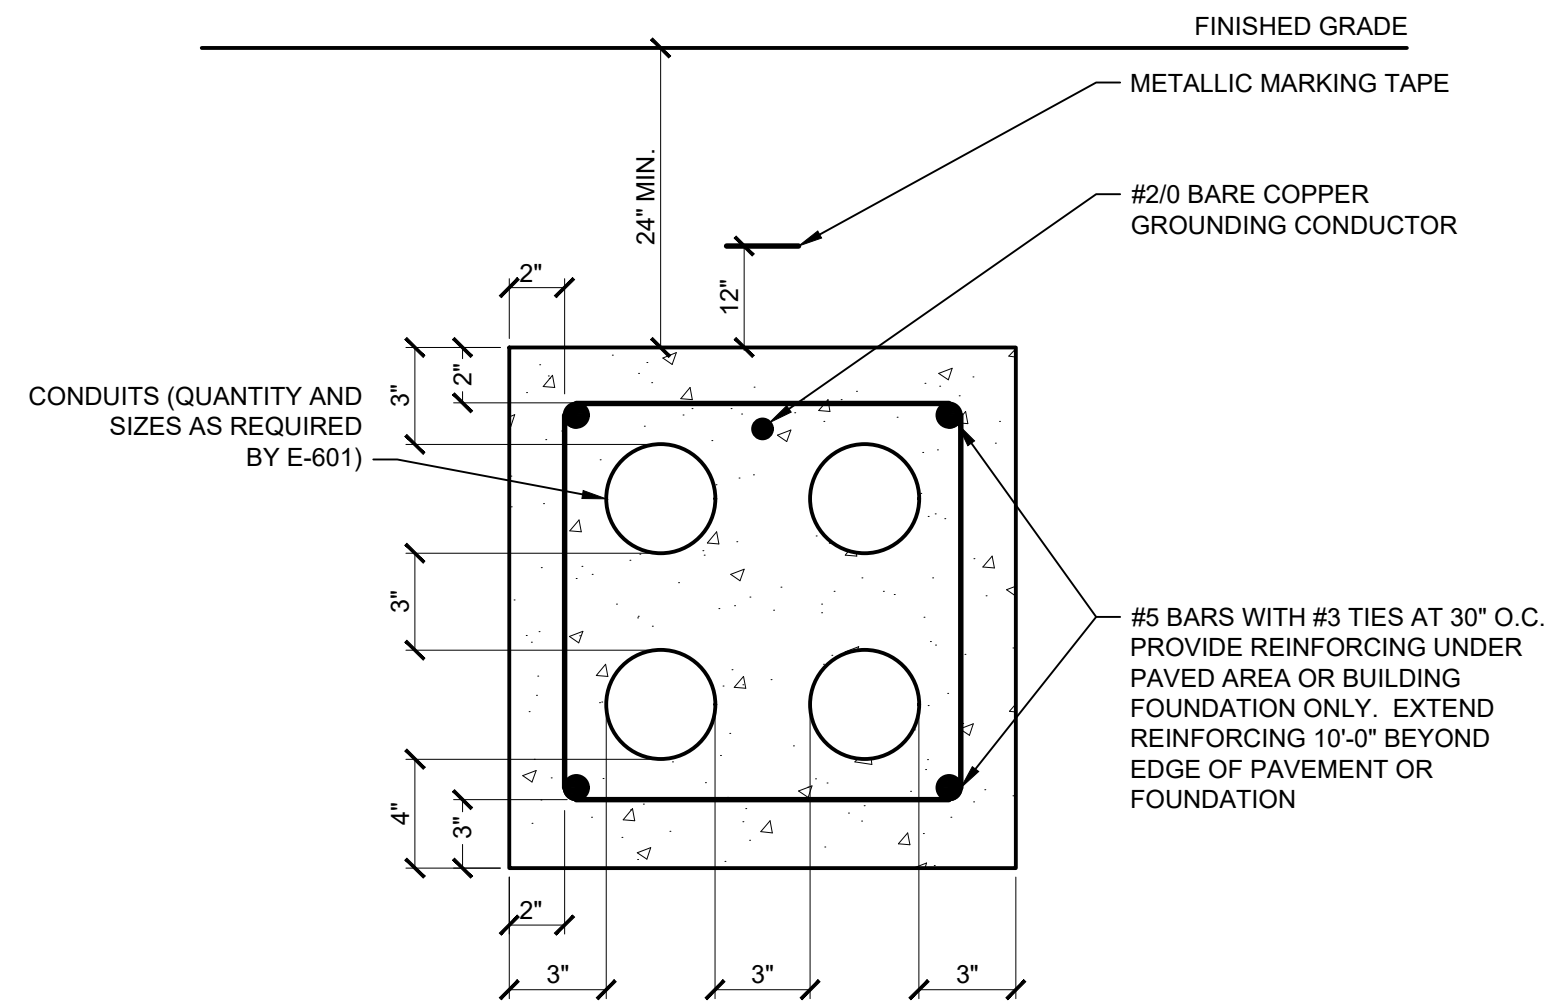

B2 SITE HANDHOLE DETAIL

SCALE: NTS

- GENERAL NOTES:
1. ENSURE WHERE DUCTBANK CONDUITS ENTER HANDHOLES MEETS THE REQUIREMENTS OF NEC 314.28.
 2. HANDHOLE AND COVER LOCATED IN FENCED IN MAGAZINE AREA ARE DESIGNED IN ACCORDANCE WITH AASHTO M306.

STANDARD ELECTRICAL HANDHOLE (TRAFFIC/AIRFIELD) TYPES 3 & 4


SKETCH DATE JUNE 2003 STYLE UG-5

3

A4

FENCE GROUNDING DETAIL


SCALE: NTS

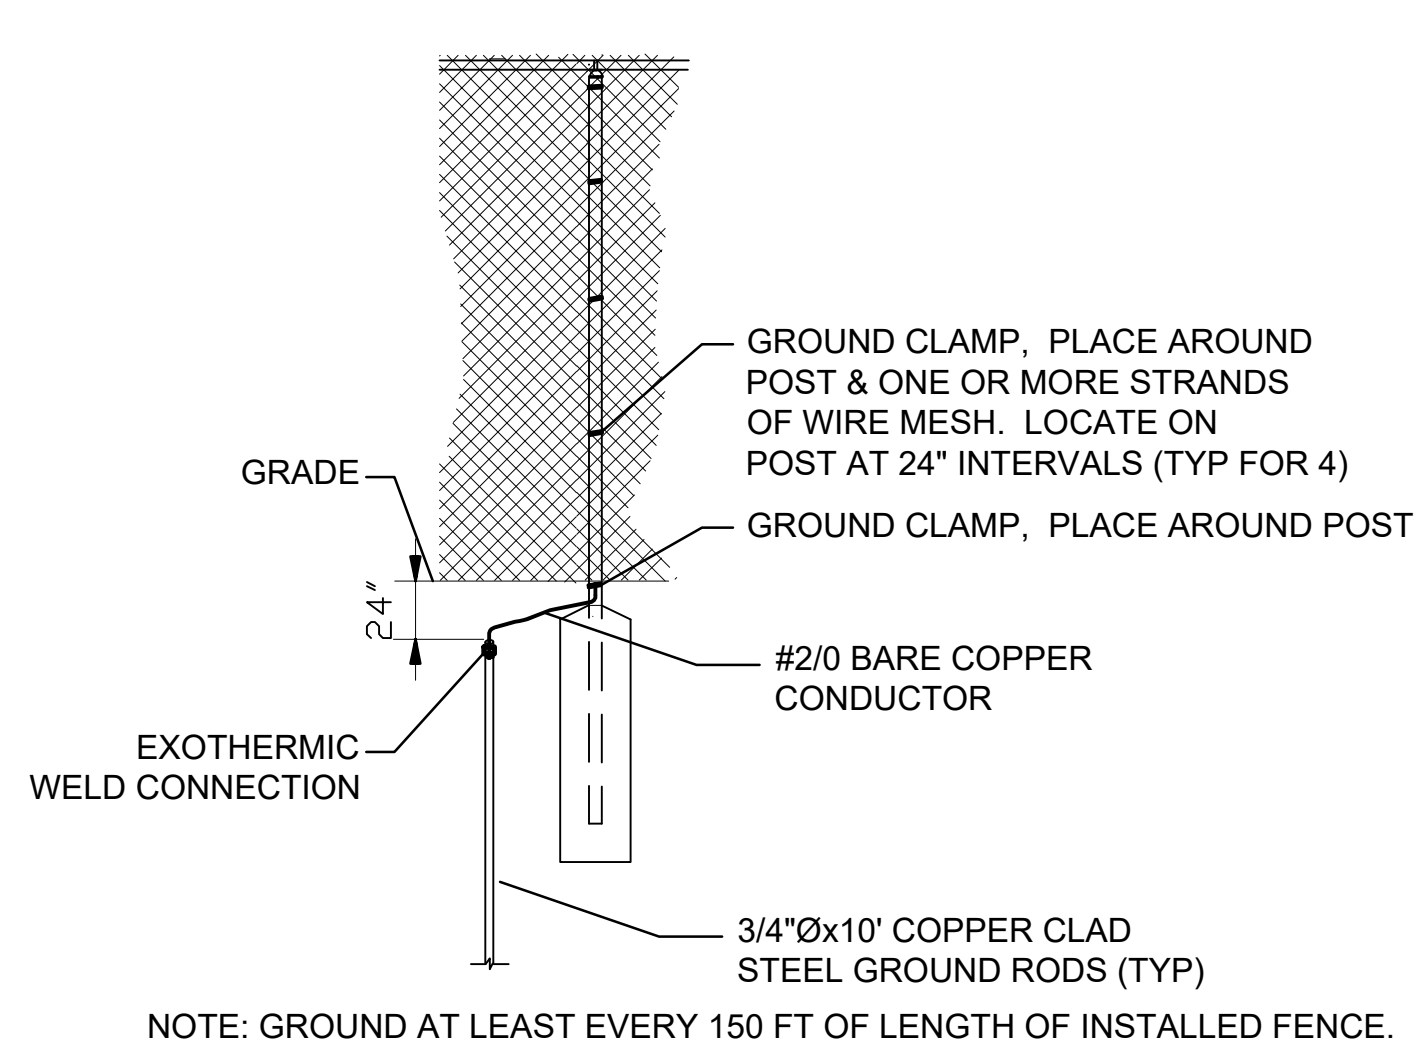

B4

SITE HANDHOLE/MANHOLE CABLE ENTRANCE DETAIL

SCALE: NTS

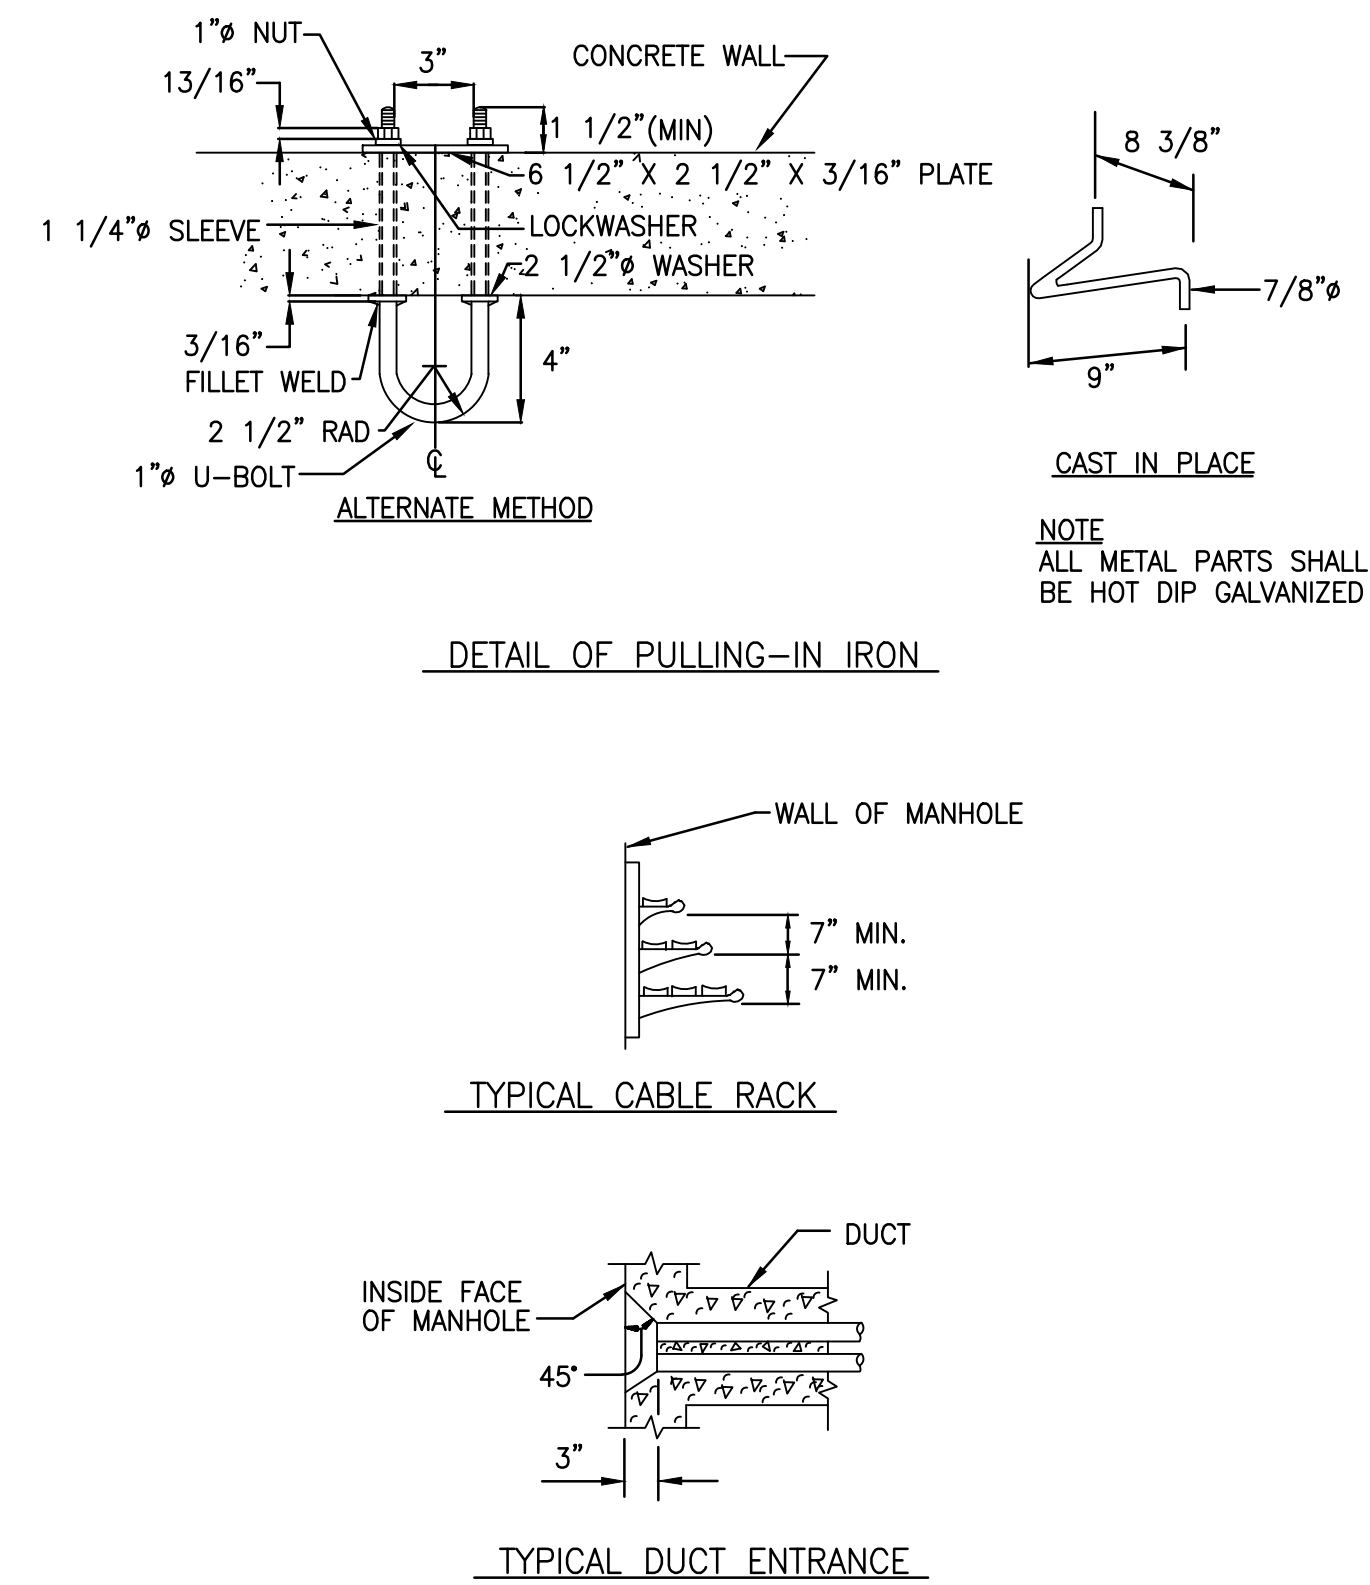

DETAILS (PULLING-IN IRONS, CABLE RACK AND DUCT ENTRANCE)

SKETCH DATE JUNE 2002 STYLE UG-7

5



A

B

C

D

DATE	APPR
SYN	DESCRIPTION

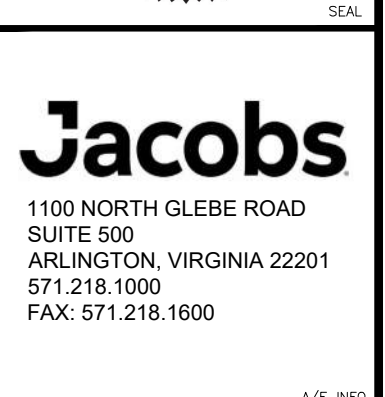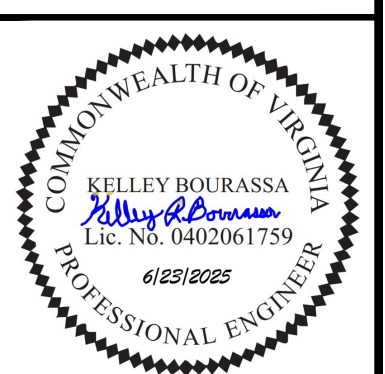

A/E INFO

APPROVED FOR COMMANDER NAVFAC

APPROVED BY LCDR ELIZABETH OLOKODE NAVFAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT

SATISFACTORY TO DATE 05/27/2025

DES JHP | DRW JHP | CHK KB

PMDM SMS/CWJ

BRANCH MANAGER WRB

CHIEF ENGINEER JWW

FIRE PROTECTION HPN

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC
NAVAL SUBMARINE BASE NEW LONDON
GROTON, CONNECTICUT
P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY
SITE
ELECTRICAL DETAILS

SCALE: NONE

PROJECT NO: 1667770

CONSTR. CONTR. NO.

NAVFAC DRAWING NO. 12893926

SHEET 120 OF 152

E-501






FILE NAME: C:\pym_work\kdr003\pym_phillip\14143203\14143203.dwg PLOTTED: Thursday, June 12, 2025 - 9:28am USER: PHILLIP

A


B

C

D

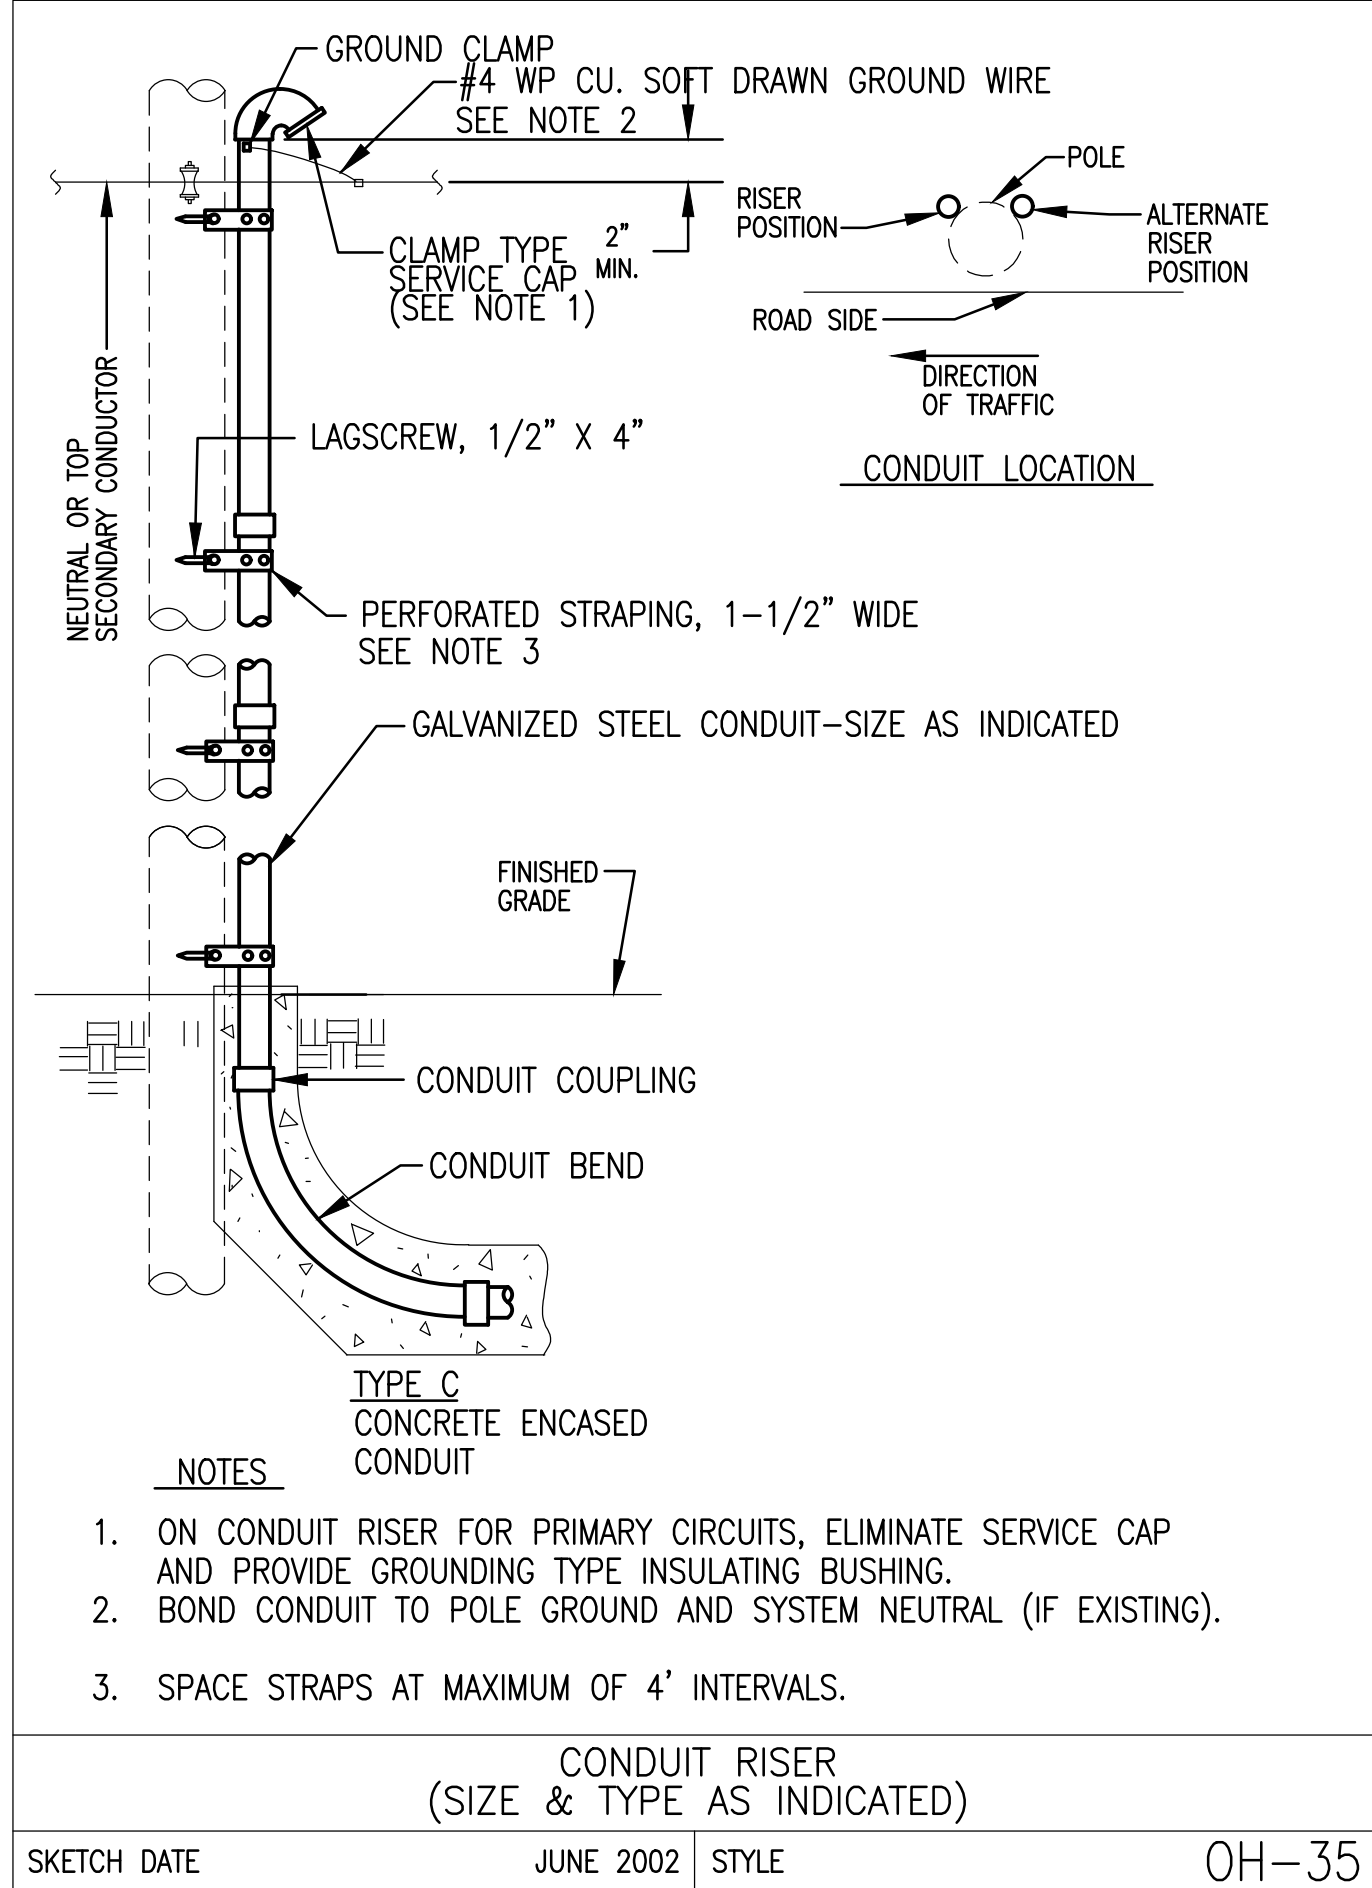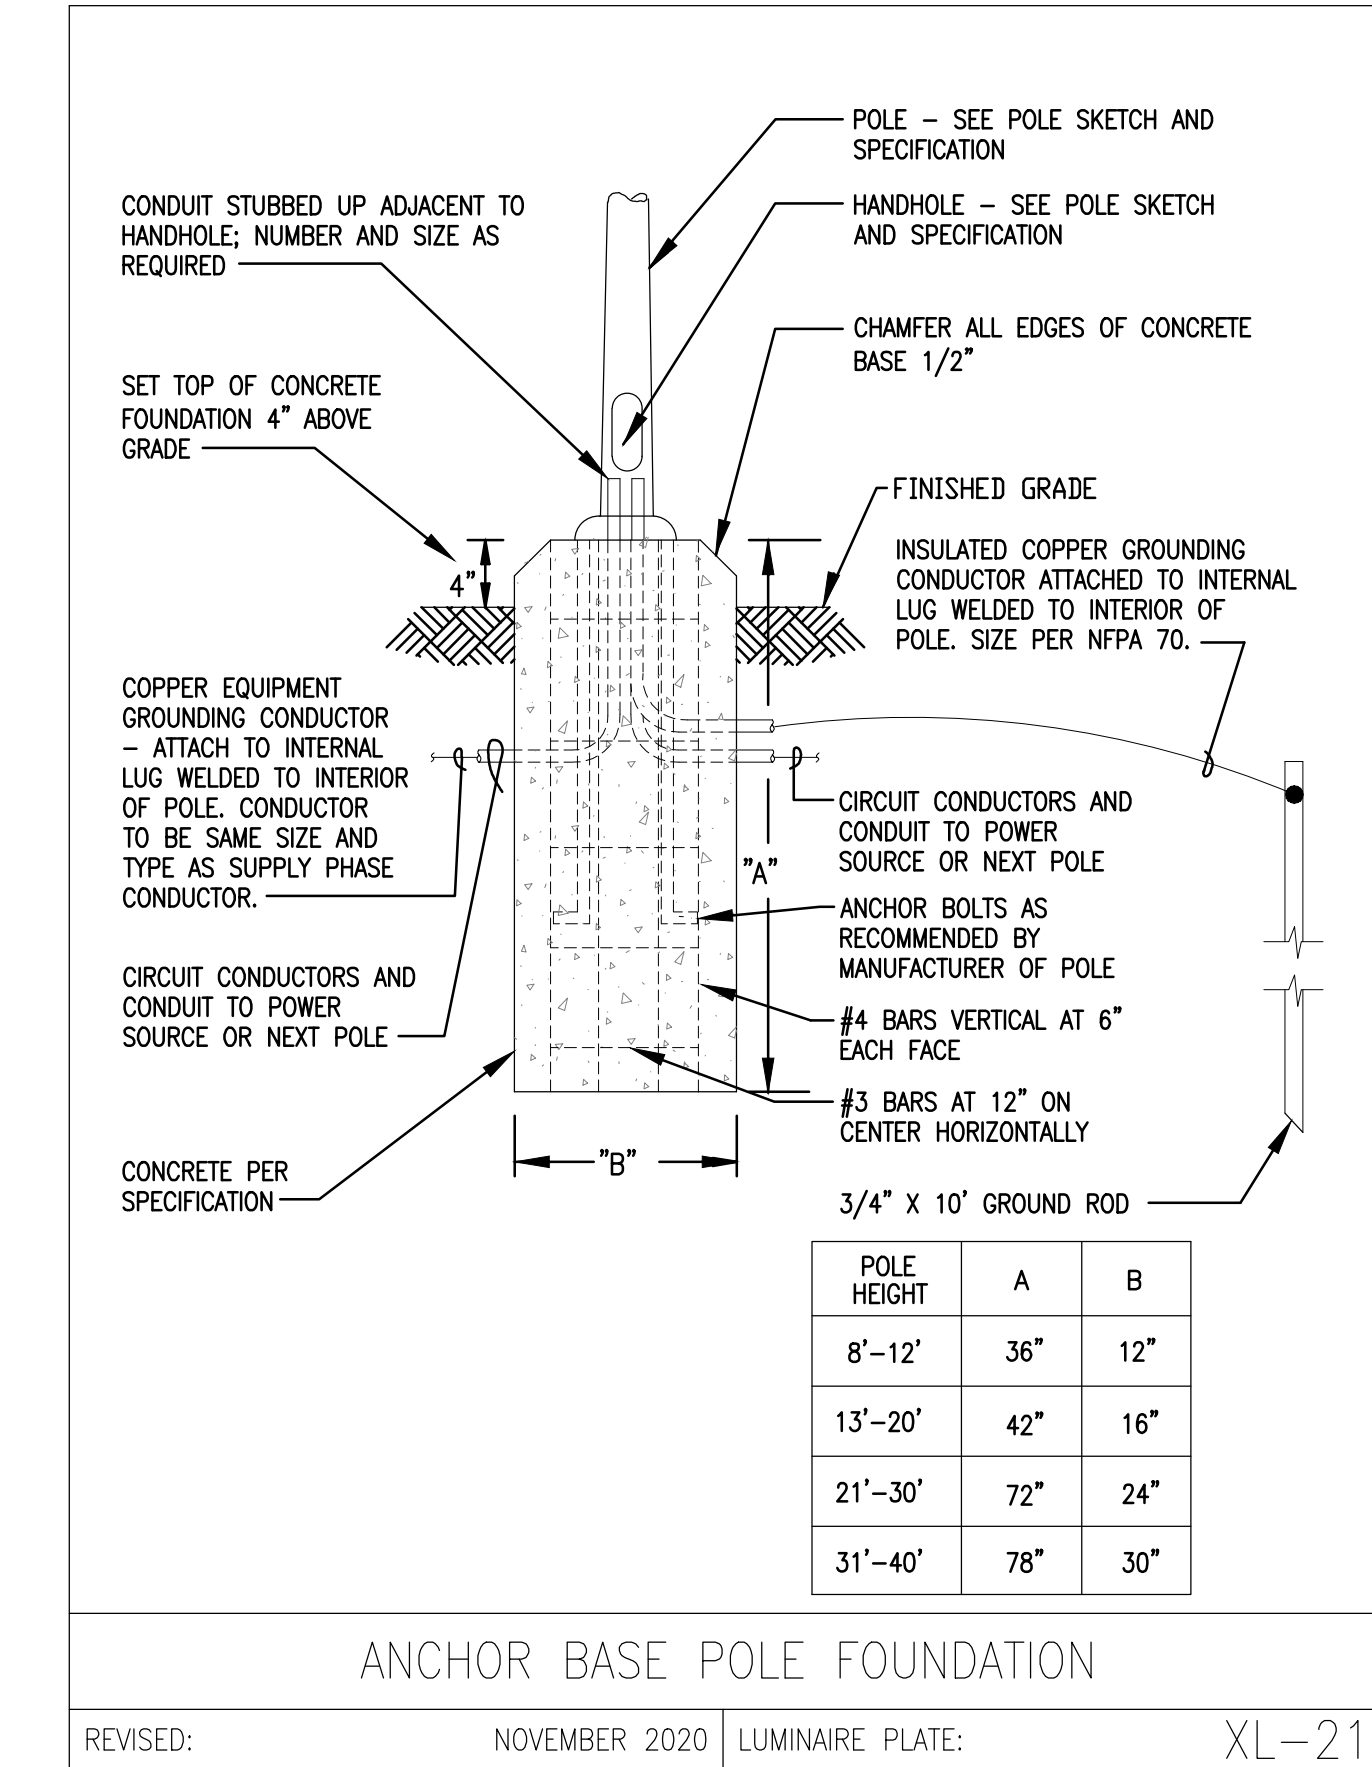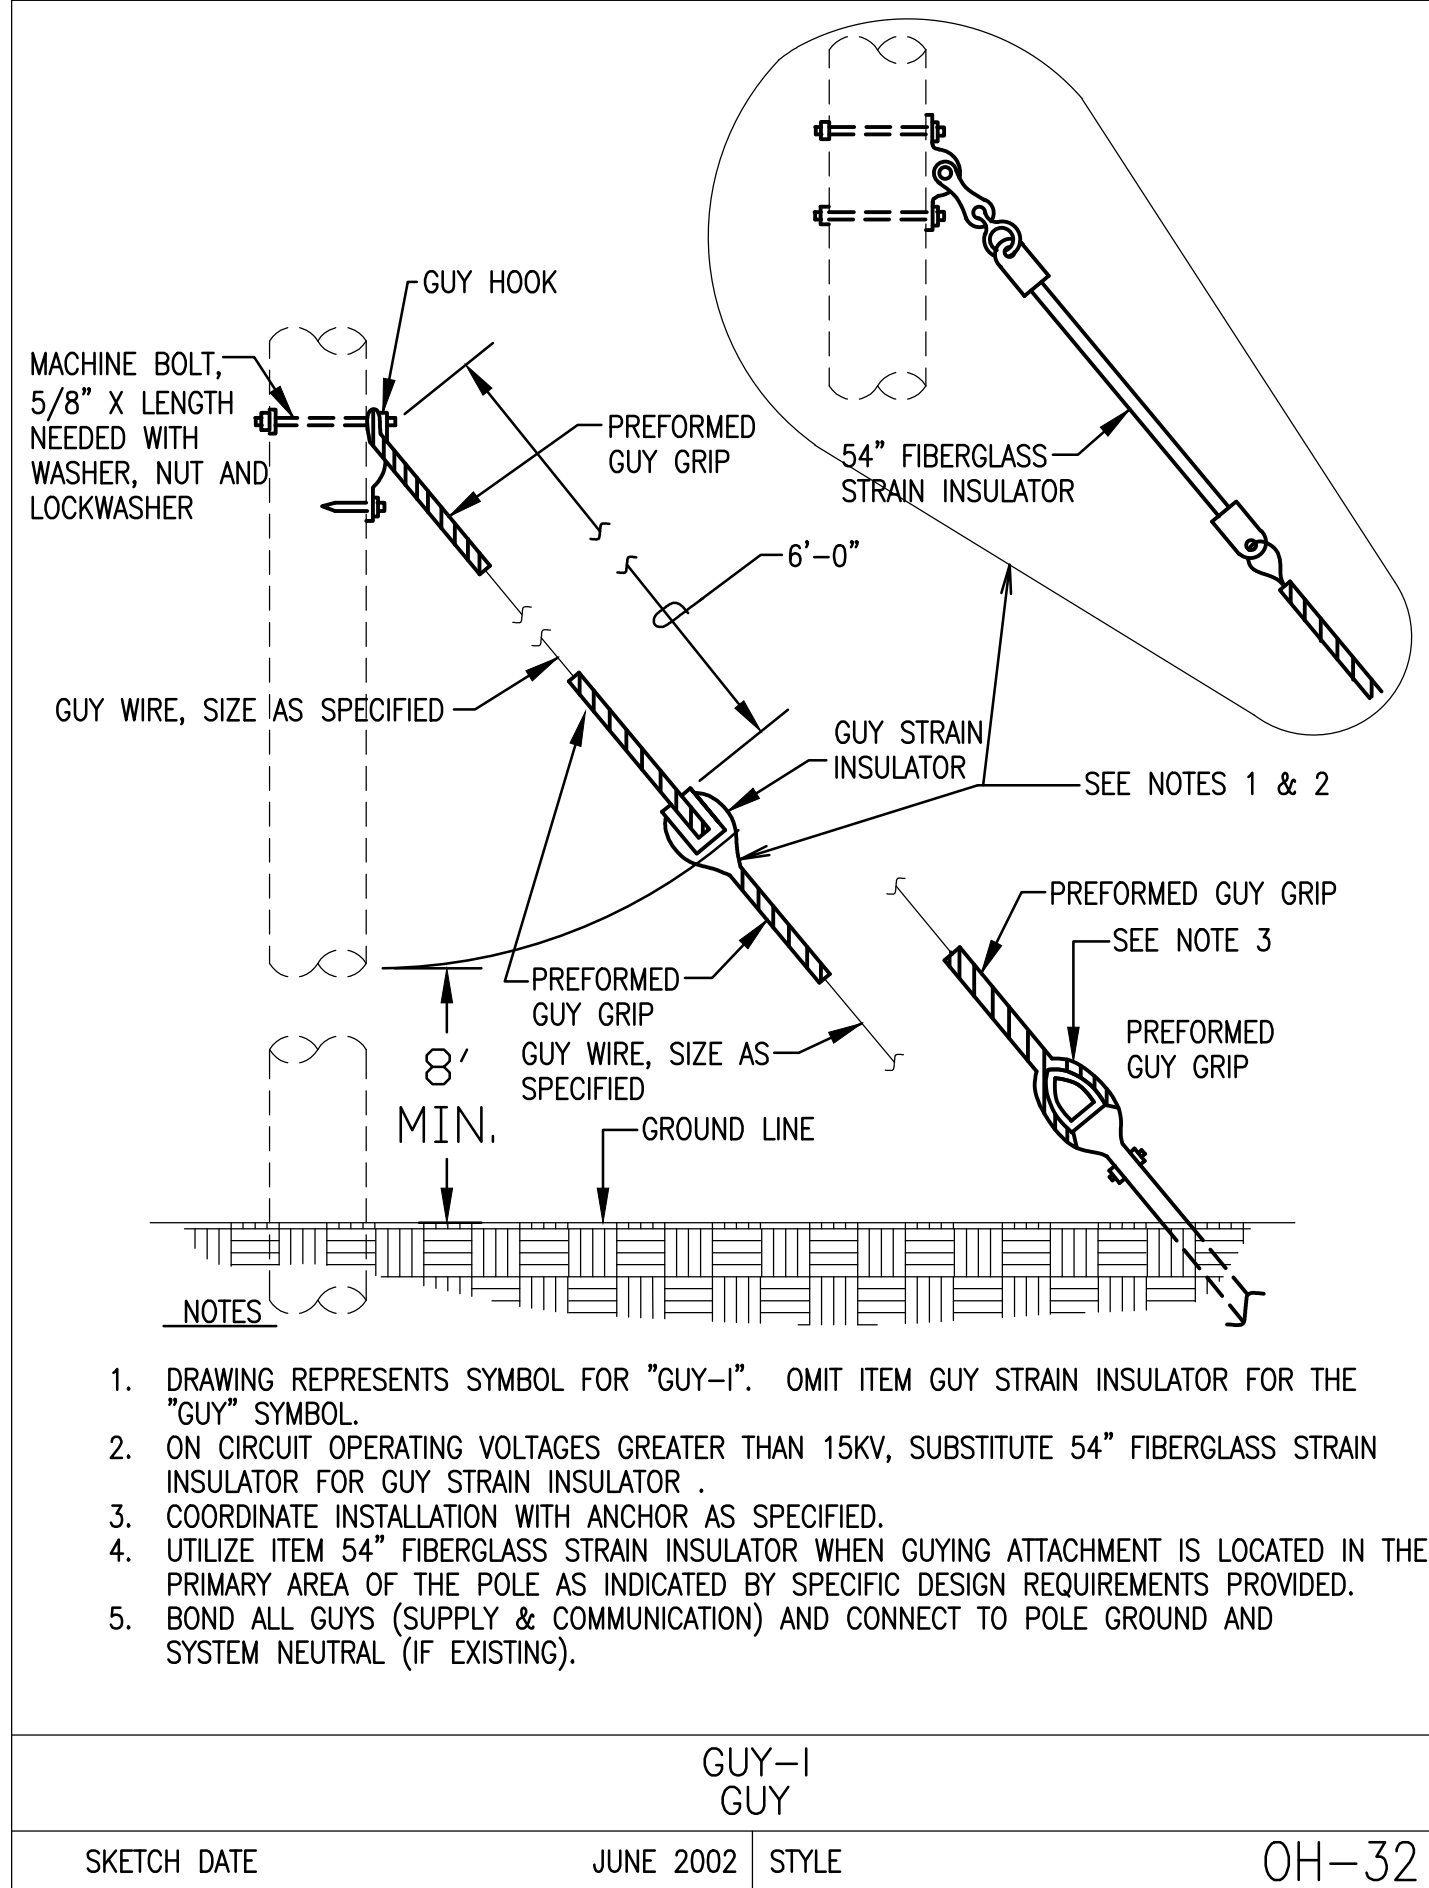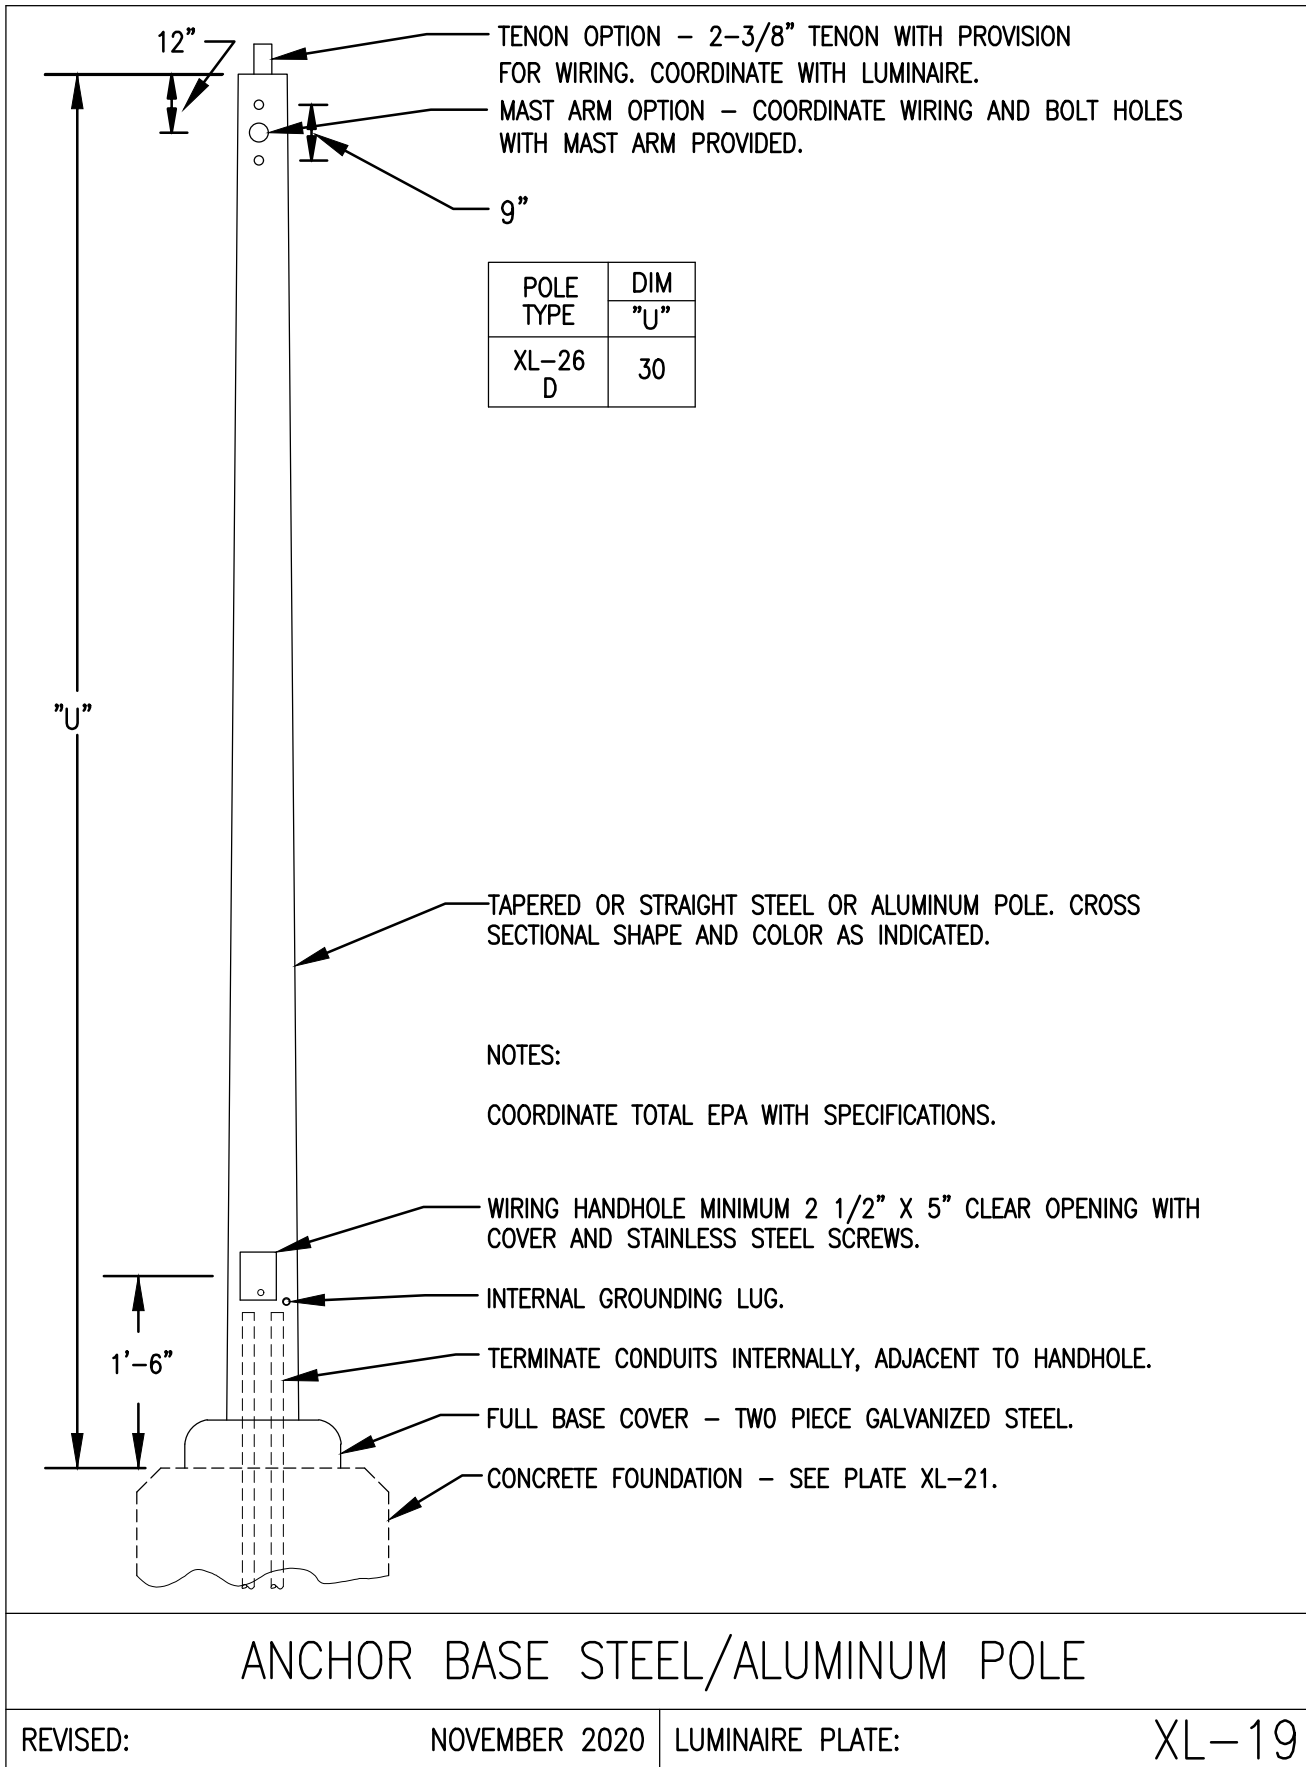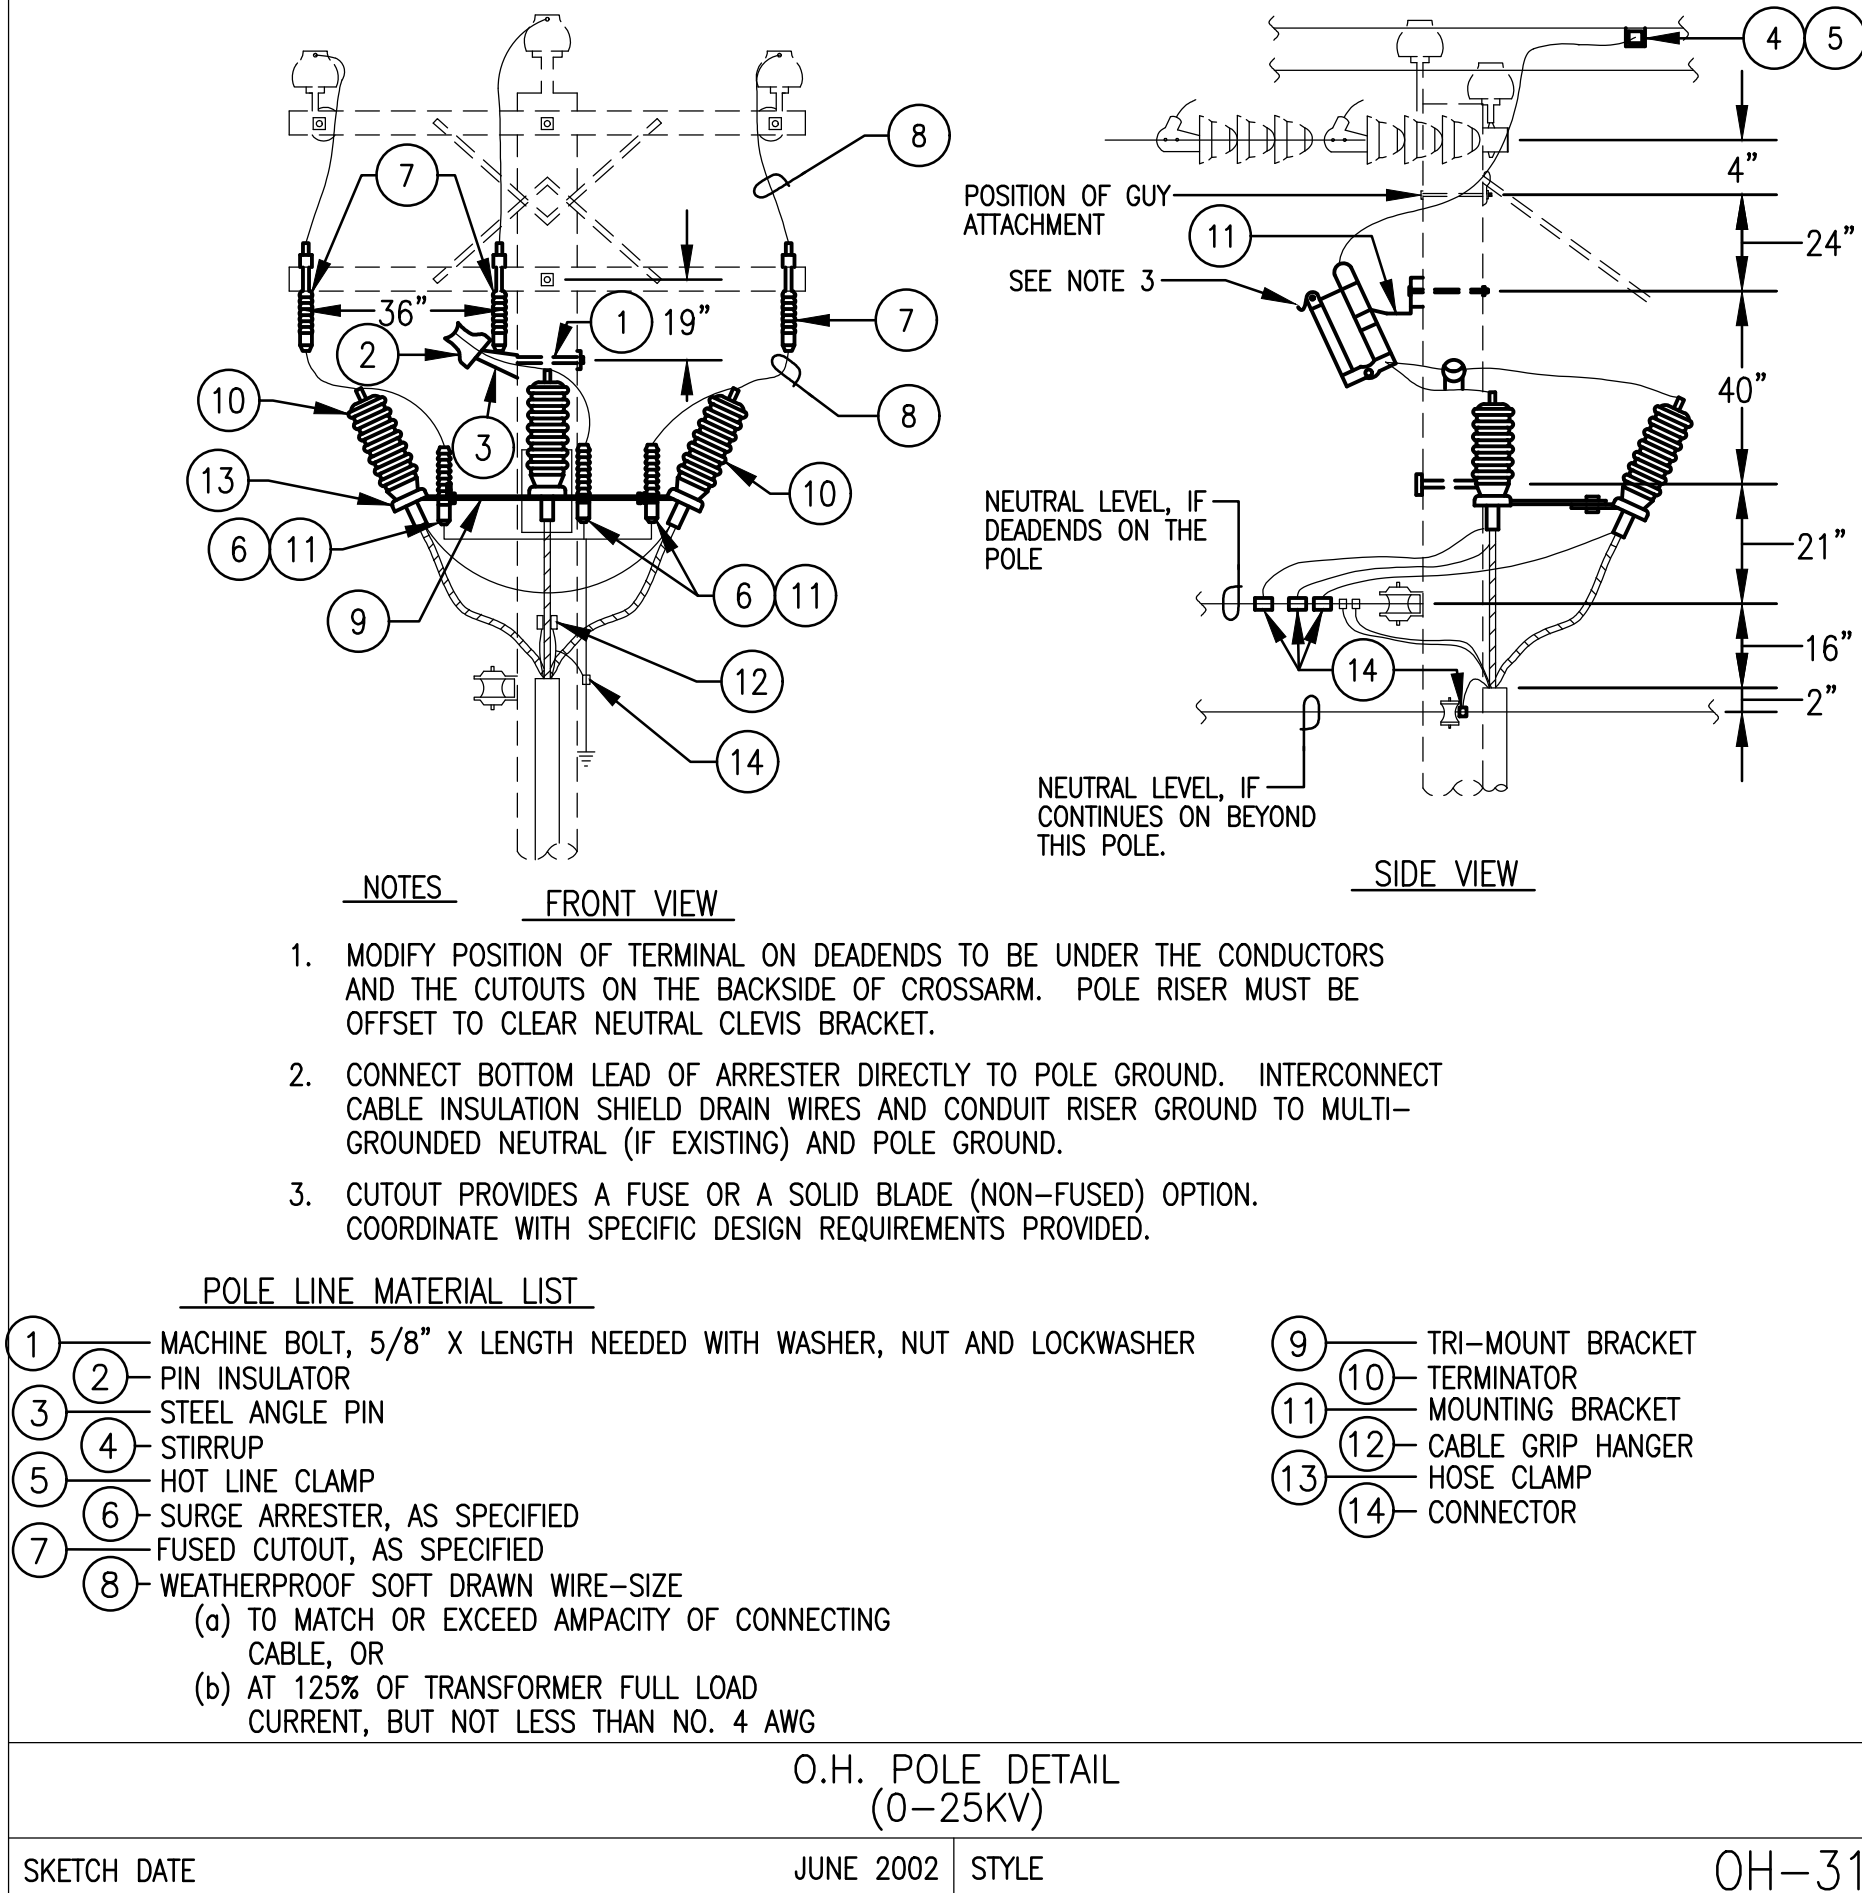

APPROVED	DATE	APPR
FOR COMMANDER NAVFAC		
ACTIVITY: APPROVED BY LCDR ELIZABETH OLOKODE NAVFAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT		
SATISFACTORY TO	DATE	05/27/2025
DES	JHP	DRW JHP
CHK	KB	
PM/DM	SMS/CWJ	
BRANCH MANAGER	WRB	
CHIEF ENGINEER	JWJ	
FIRE PROTECTION	HPN	
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC NAVAL STATION - NORFOLK, VA NAVAL SUBMARINE BASE NEW LONDON GROTON, CONNECTICUT P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY SITE ELECTRICAL DETAILS		
SCALE: NONE		
EPROJCT NO.: 1667770		
CONSTR. CONTR. NO.		
NAVFAC DRAWING NO. 12893928		
SHEET 122 OF 152		
E-503		

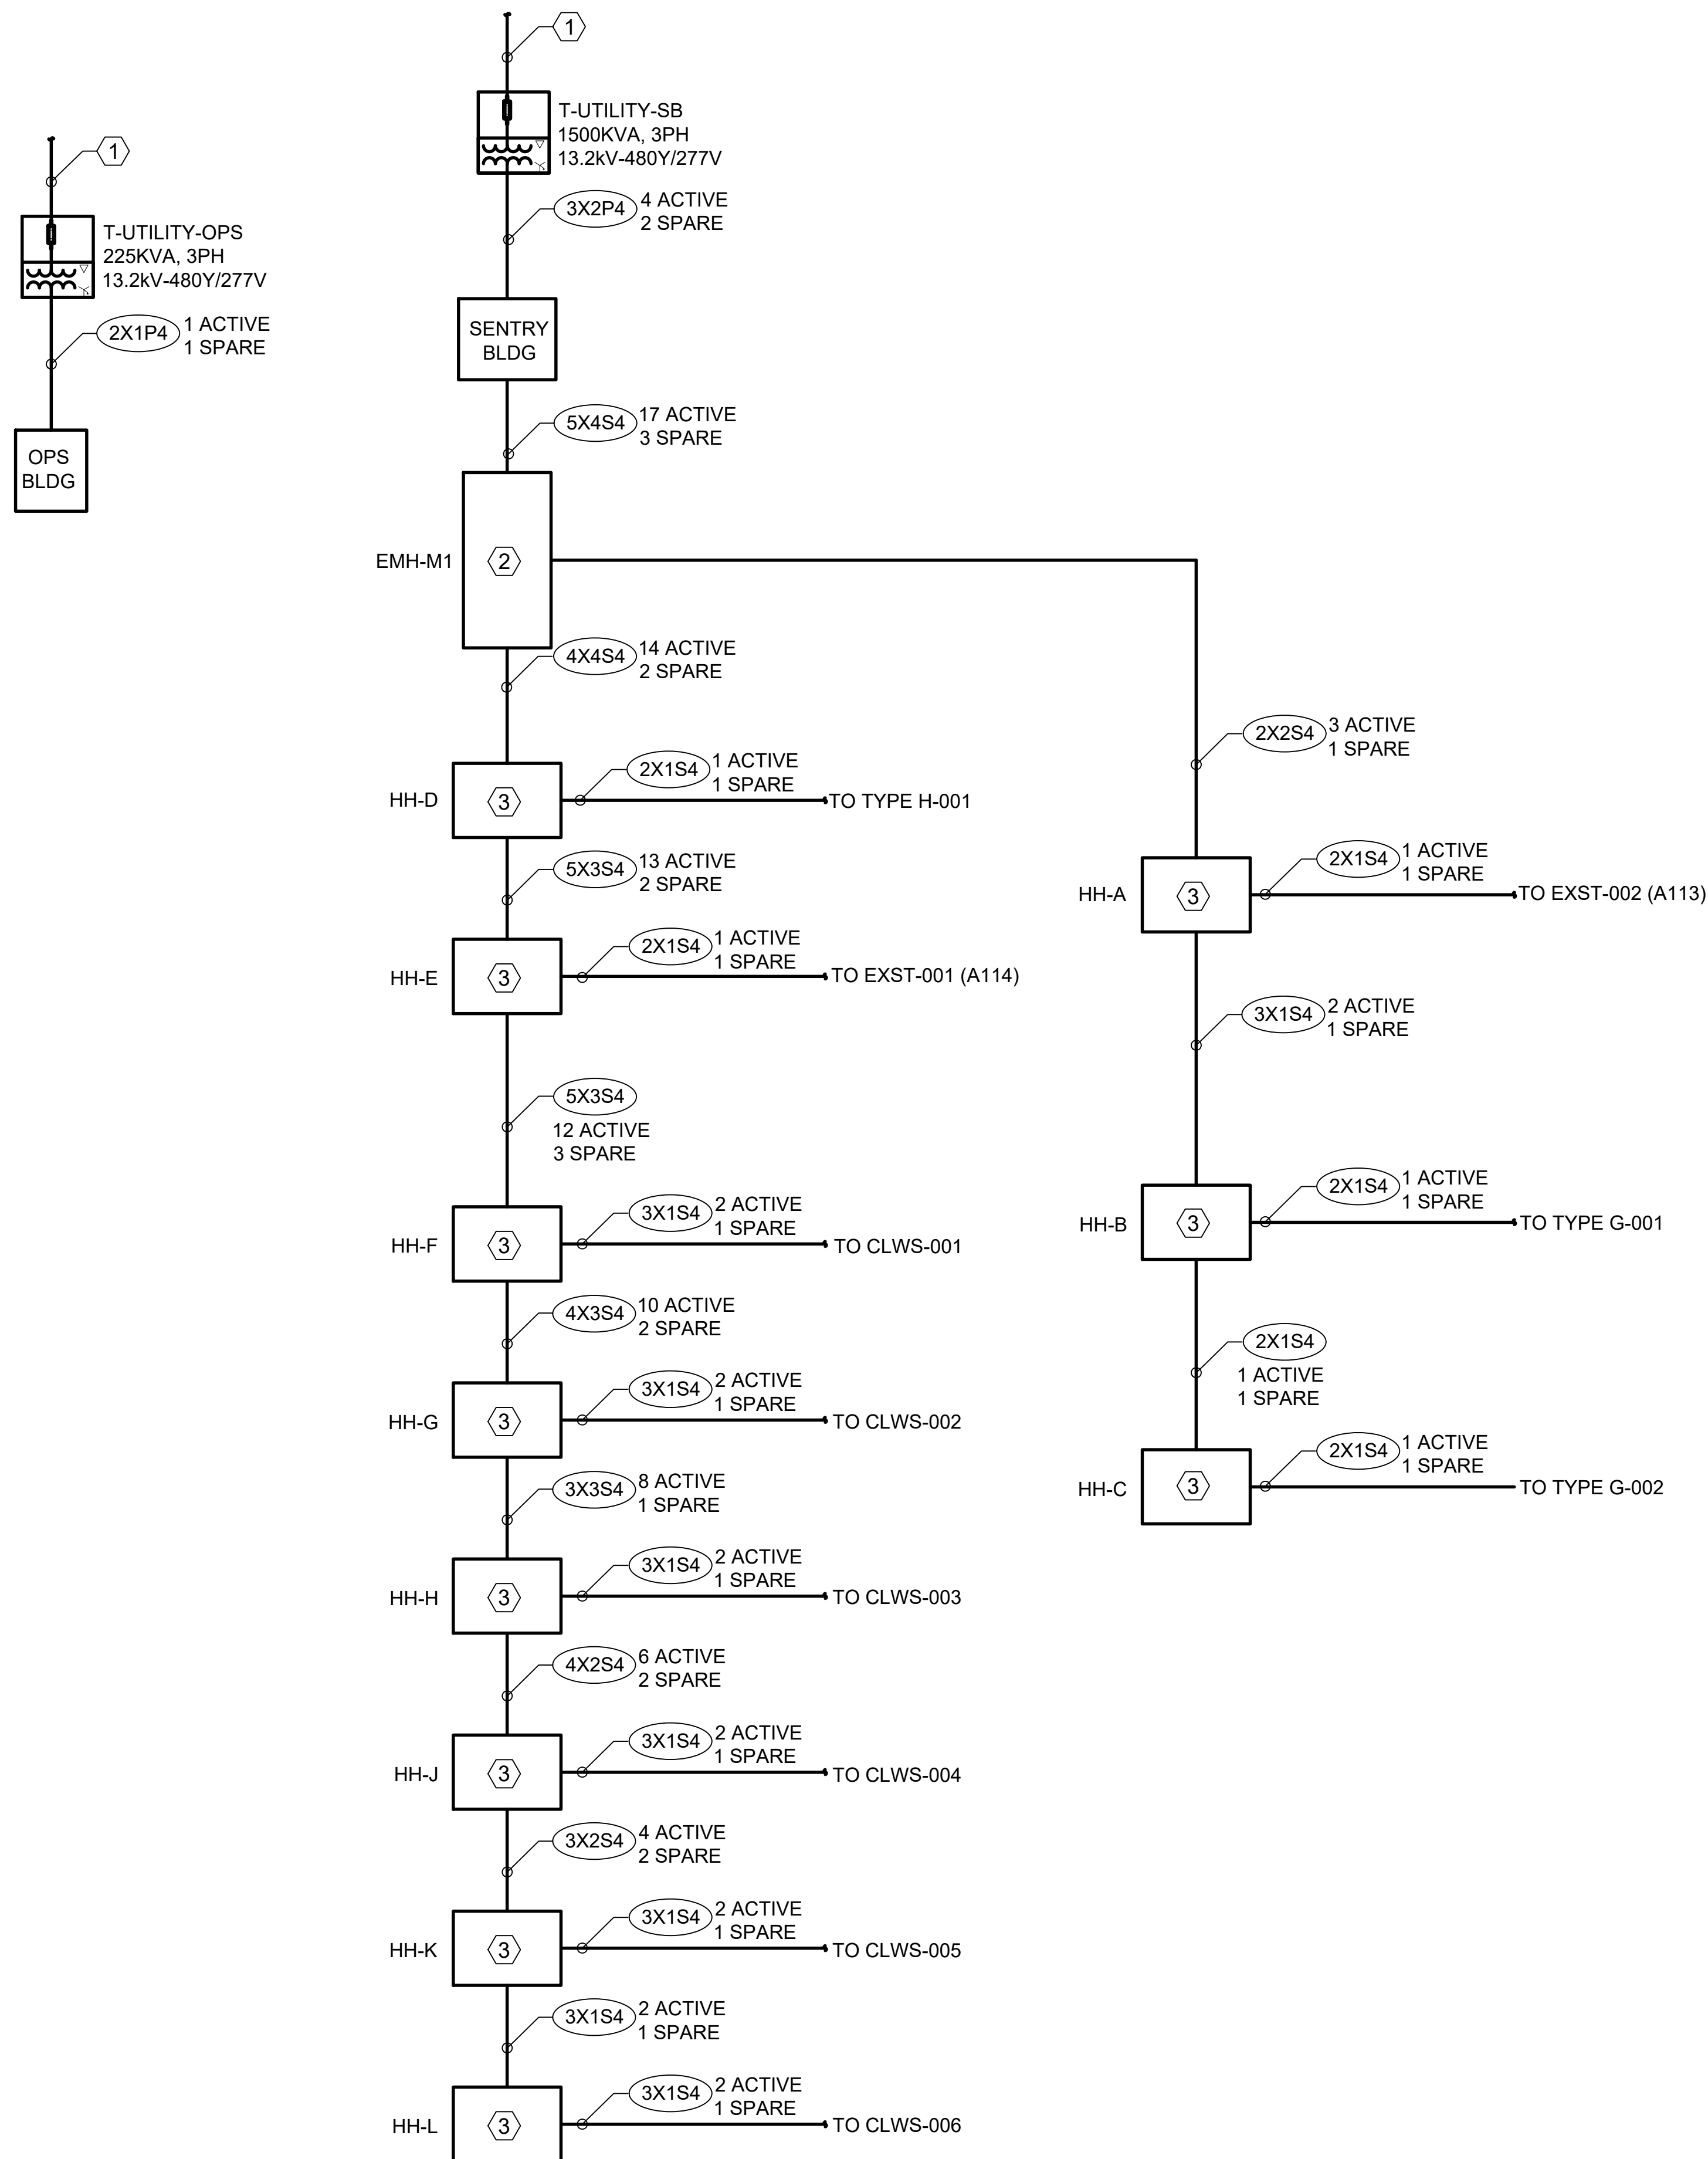


GENERAL SHEET NOTES

- A. REFER TO SHEET E-001 FOR ADDITIONAL NOTES.
- B. DUCTBANK DIAGRAM SHOWN ON THIS SHEET IS FOR DUCTBANK REQUIREMENTS FOR THE 480V DISTRIBUTION TO THE OPS BUILDING, SENTRY BUILDING, AND MAGAZINES. REFER TO OPS BUILDING AND SENTRY BUILDING DRAWINGS FOR ADDITIONAL WIRING INFORMATION.
- C. REFER TO DETAIL ON SHEET E-501 FOR TYPICAL DUCTBANK REQUIREMENTS.

KEYED NOTES

1. REFER TO MV SINGLE LINE DIAGRAM ON SHEET E-601 FOR ADDITIONAL INFORMATION.
2. PROVIDE 6' X 6' X 6.5' MANHOLE. REFER TO DETAILS ON SHEET E-501 FOR ADDITIONAL INFORMATION.
3. PROVIDE 4' X 4' HANDHOLE. REFER TO DETAILS ON SHEET E-501 FOR ADDITIONAL INFORMATION.

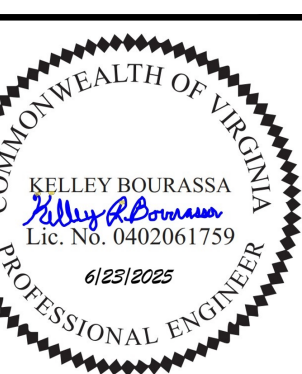

Jacobs

00 NORTH GLEBE ROAD
ITE 500
LINGTON, VIRGINIA 22201
1.218.1000
X: 571.218.1600

ED

COMMANDER NAVFAC

APPROVED BY LCDR ELIZABETH
DLOKODE NAVFAC NLOD FEAD
SECTOR NEW LONDON, GROTON, CT

STORY TO	DATE	05/27/2025
----------	------	------------

JHP	DRW	JHP	CHK	KB
-----	-----	-----	-----	----

SMS/CW.

CH MANAGER WR

ENG/ARCH
JW.

PROTECTION HPM

VA	JT	
----	----	--

OLK
ICU
TY

1171

AC

FA

4

NAME	ON	N,	OFF	NAME
...	...	...	...	...

TO	ATI	R ₁
----	-----	----------------

RO-
RA
AG

GF	PE	DIA
----	----	-----

	10	1
--	----	---

CE	IK
----	----

NC

BA	NA	EN
----	----	----

FILE NAME: C:\pwr_work\pwr003\pwr_phillip\14143269\E-701_ED2E1628.dwg LAYOUT NAME: E-701 PLOTTED: Thursday, June 12, 2025 - 9:32am USER: PHILLIP

D

C

B

A

LIGHTING FIXTURE SCHEDULE										
PLATE	TAG	DESCRIPTION	LAMP TYPE	WATTS	LUMENS	LAMP COLOR	LAMP COLOR RENDER INDEX	MOUNTING	VOLTAGE	DIMMING
XL-5	P1	LED POLE LIGHT WITH ONE (1) HEAD, TYPE II MEDIUM DISTRIBUTION WITH INTEGRAL PHOTOCELL AND MOTION SENSOR WITH AUTOMATIC DIMMING CAPABILITY TO 50%.	LED	90W	12,000 LM	4000K	70	30' POLE	277V	YES TO 50%
XL-5	P1A	LED POLE LIGHT WITH ONE (1) HEAD, TYPE V MEDIUM DISTRIBUTION WITH INTEGRAL PHOTOCELL AND MOTION SENSOR WITH AUTOMATIC DIMMING CAPABILITY TO 50%.	LED	90W	12,000 LM	4000K	70	30' POLE	277V	YES TO 50%
XL-5	P1M	LED POLE LIGHT WITH ONE (1) HEAD, TYPE V MEDIUM DISTRIBUTION.	LED	90W	12,000 LM	4000K	70	30' POLE	277V	NO


GENERAL FIXTURE SCHEDULE NOTES:

- LIGHTING FIXTURES, INSTALLATION, SUPPORT, WIRING AND RELATED WORK MUST COMPLY WITH GENERAL NOTES, FIXTURE SCHEDULE, LAMP/DRIVER REQUIREMENT TABLES, FIXTURE DETAILS, SPECIFICATIONS AND CONTRACT DRAWINGS.
- PROVIDE ACCESSORIES REQUIRED FOR A COMPLETE INSTALLATION AND COORDINATE WITH WORK BY OTHER TRADES. RECESSED FIXTURES MUST BE COMPLETELY SERVICEABLE FROM THE FIXTURE OPENING. PROVIDE REQUIRED MOUNTING HARDWARE, SUPPORTS, ACCESSORIES, AND TRIM REQUIRED FOR A COMPLETE INSTALLATION.
- FIXTURES MUST BE CBM APPROVED, LISTED AND LABELED BY ETL OR UL FOR WET LOCATIONS.
- DRIVERS MUST BE CBM APPROVED AND LISTED BY ETL OR UL. PROVIDE INTERNAL GREEN GROUNDING SCREW FOR FIXTURES.

LIGHTING CONTROL MATRIX															
SPACE TYPE	MANUAL ON	MANUAL OFF	MANUAL ADJUST	MANUAL OVERRIDE	TIMER ON	TIMER OFF	OCCUPANCY ON TO 100%	OCCUPANCY ON TO 50%	VACANCY OFF	VACANCY TO 50%	DAYLIGHT ADJUST	PHOTOCELL ON	PHOTOCELL OFF	SEQUENCE OF OPERATION	NOTES
MAGAZINE AREA SECURITY POLE LIGHTING				X		X						X	X	SOO A	
PARKING LOT										X		X	X	SOO B	
ROADWAY										X		X	X	SOO B	

SOO A	LIGHTS MUST TURN ON AT DUSK VIA PHOTOCELL AND OFF AT SPECIFIED TIME.
SOO B	LIGHTS MUST ON AT DUSK VIA PHOTOCELL. LIGHTING POWER TO AUTOMATICALLY REDUCE BY 50% DURING ANY PERIOD WHEN NO ACTIVITY HAS BEEN DETECTED FOR A TIME OF NO LONGER THAN 15 MINUTES. LIGHTING MUST TURN OFF WHEN SUFFICIENT DAYLIGHT IS AVAILABLE.

										APPR
										DATE
										DESCRIPTION
										SYM

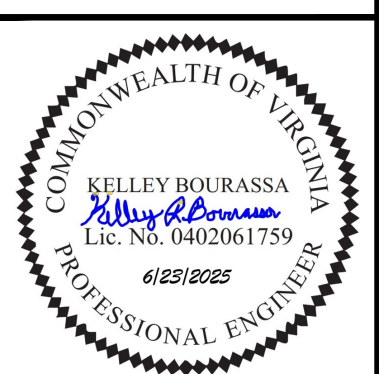

Jacobs

1100 NORTH GLEBE ROAD
SUITE 500
ARLINGTON, VIRGINIA 22201
571.218.1000
FAX: 571.218.1600

APPROVED

FOR COMMANDER NAVFAC

ACTIVITY: APPROVED BY LCDR ELIZABETH OLOKODE NAVFAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT

SATISFACTORY TO: DATE: 05/27/2025

DES: JHP | DRW: JHP | CHK: KB

PMIDM: SMS/CWJ

BRANCH MANAGER: WRB

CHIEF ENGINEER: JWJ

FIRE PROTECTION: HPN

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC
NAVAL STATION - GROTON, CT
NAVAL SUBMARINE BASE NEW LONDON
P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY
SITE

LIGHTING FIXTURE AND CONTROLS SCHEDULES

SCALE: NONE

EPROJECT NO.: 1667770

CONSTR. CONTR. NO.

NAVFAC DRAWING NO. 12893932

SHEET 126 OF 152

E-701


D

C

B

A

[illegible]

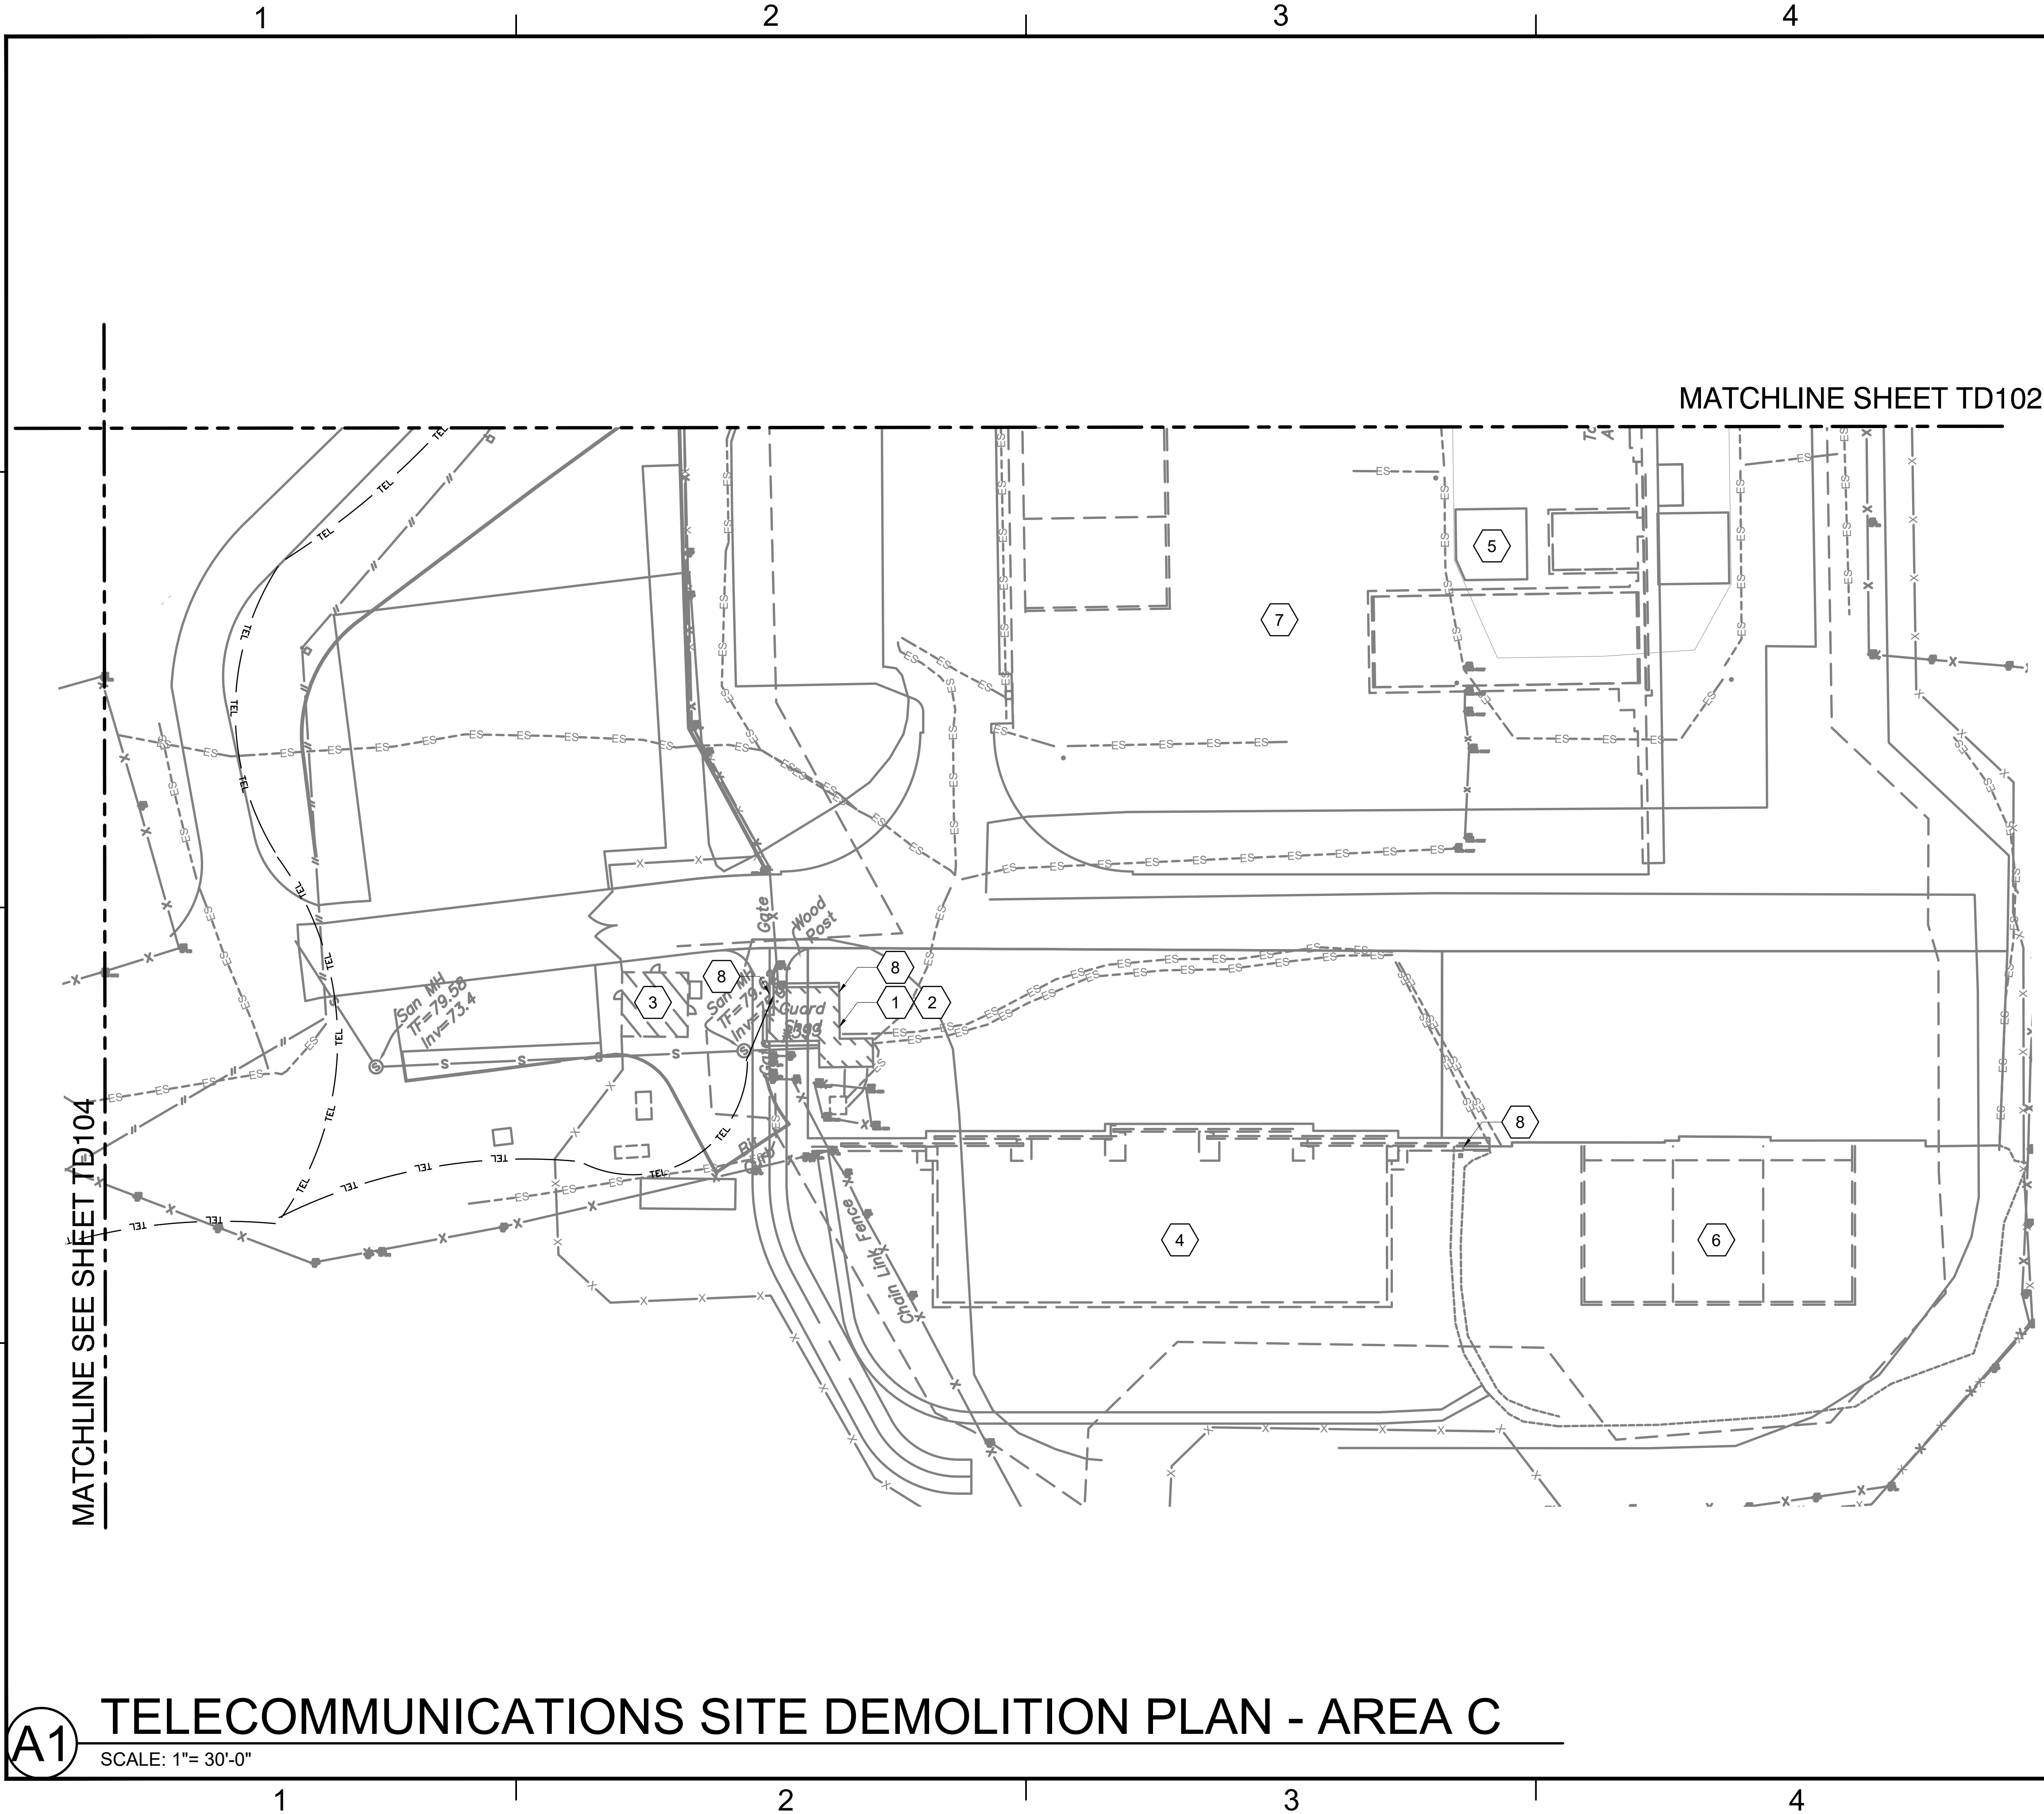

- ### GENERAL SHEET NOTES
- TRANSFER OF MUNITIONS FROM EXISTING MAGAZINES TO BOXD MAGAZINE EXST-001 (A114) OCCURS PRIOR TO DEMOLITION.
 - DEMOLISH EXISTING MAGAZINES A94, A95, A96, AND A97.
 - DEMOLITION OF COMMUNICATION CONDUITS WITH CABLING FOR MAGAZINE AREA AND FENCE LINE.

- ### KEYED NOTES
- PERFORM DEMOLITION OF EXISTING GUARD BUILDING 393.
 - PERFORM TRANSFER OF COMMUNICATION SERVICES TO SENTRY BUILDING (BLDG. B) OVER COPPER AND FIBER CABLES.
 - LOCATION OF SENTRY BUILDING (BLDG. B) SHOWN FOR REFERENCE.
 - APPROXIMATE LOCATION OF BOX D-001 MAGAZINE SHOWN FOR REFERENCE.
 - APPROXIMATE LOCATION OF EXISTING MAGAZINES A94, A95, A96, AND A97.
 - APPROXIMATE LOCATION OF BOX D MAGAZINE EXST-001 (A114) - DEMOLISH TELECOM CABLES FROM GUARD SHED #393.
 - PROTECT AND MAINTAIN SERVICE AND FUNCTION OF VIDEO SURVEILLANCE. PROTECT CABLES, CONNECTIONS, CAMERAS AND PATHWAYS. TYPICAL FOR CAMERAS LOCATIONS WITHIN THE MAGAZINE AND FENCE LINE AREA.
 - IDENTIFIES LOCATION OF VIDEO SURVEILLANCE CAMERA. MINI DOME HOUSING MOUNTED TO MAST OR BRACKET.

NORTH

PLAN NORTH

GRAPHIC SCALE

1"=30'

0'

30'

60'

TELECOMMUNICATIONS SITE DEMOLITION PLAN - AREA C

SCALE: 1"= 30'-0"

APPR

DATE

SYN

DESCRIPTION

6/23/2025

Bicsi

Rene Rubio

BICSID ID #112613

EXPIRES 12-31-26

RCDD

Jacobs

1100 NORTH GLEBE ROAD
SUITE 500
ARLINGTON, VIRGINIA 22201
571.218.1000
FAX: 571.218.1600

APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

APPROVED BY LCDR ELIZABETH OLOKODE NAVFAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT

SATISFACTORY TO

DATE

05/27/2025

DES

RR

DRW

TO

CHK

HF

PMIDM

SMS/CWJ

BRANCH MANAGER

WRB

CHIEF ENGINEER

JWJ

FIRE PROTECTION

HPN

DEPARTMENT OF THE NAVY

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC

NAVAL STATION - NORFOLK, VA

NAVAL SUBMARINE BASE NEW LONDON

GROTON, CONNECTICUT

P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY

SITE

TELECOMMUNICATIONS

SITE DEMO PLAN - AREA C

SCALE:

AS NOTED

EPROJECT NO.:

1667770

CONSTR. CONTR. NO.

NAVFAC DRAWING NO.

12893936


SHEET

130

OF

152

TD103

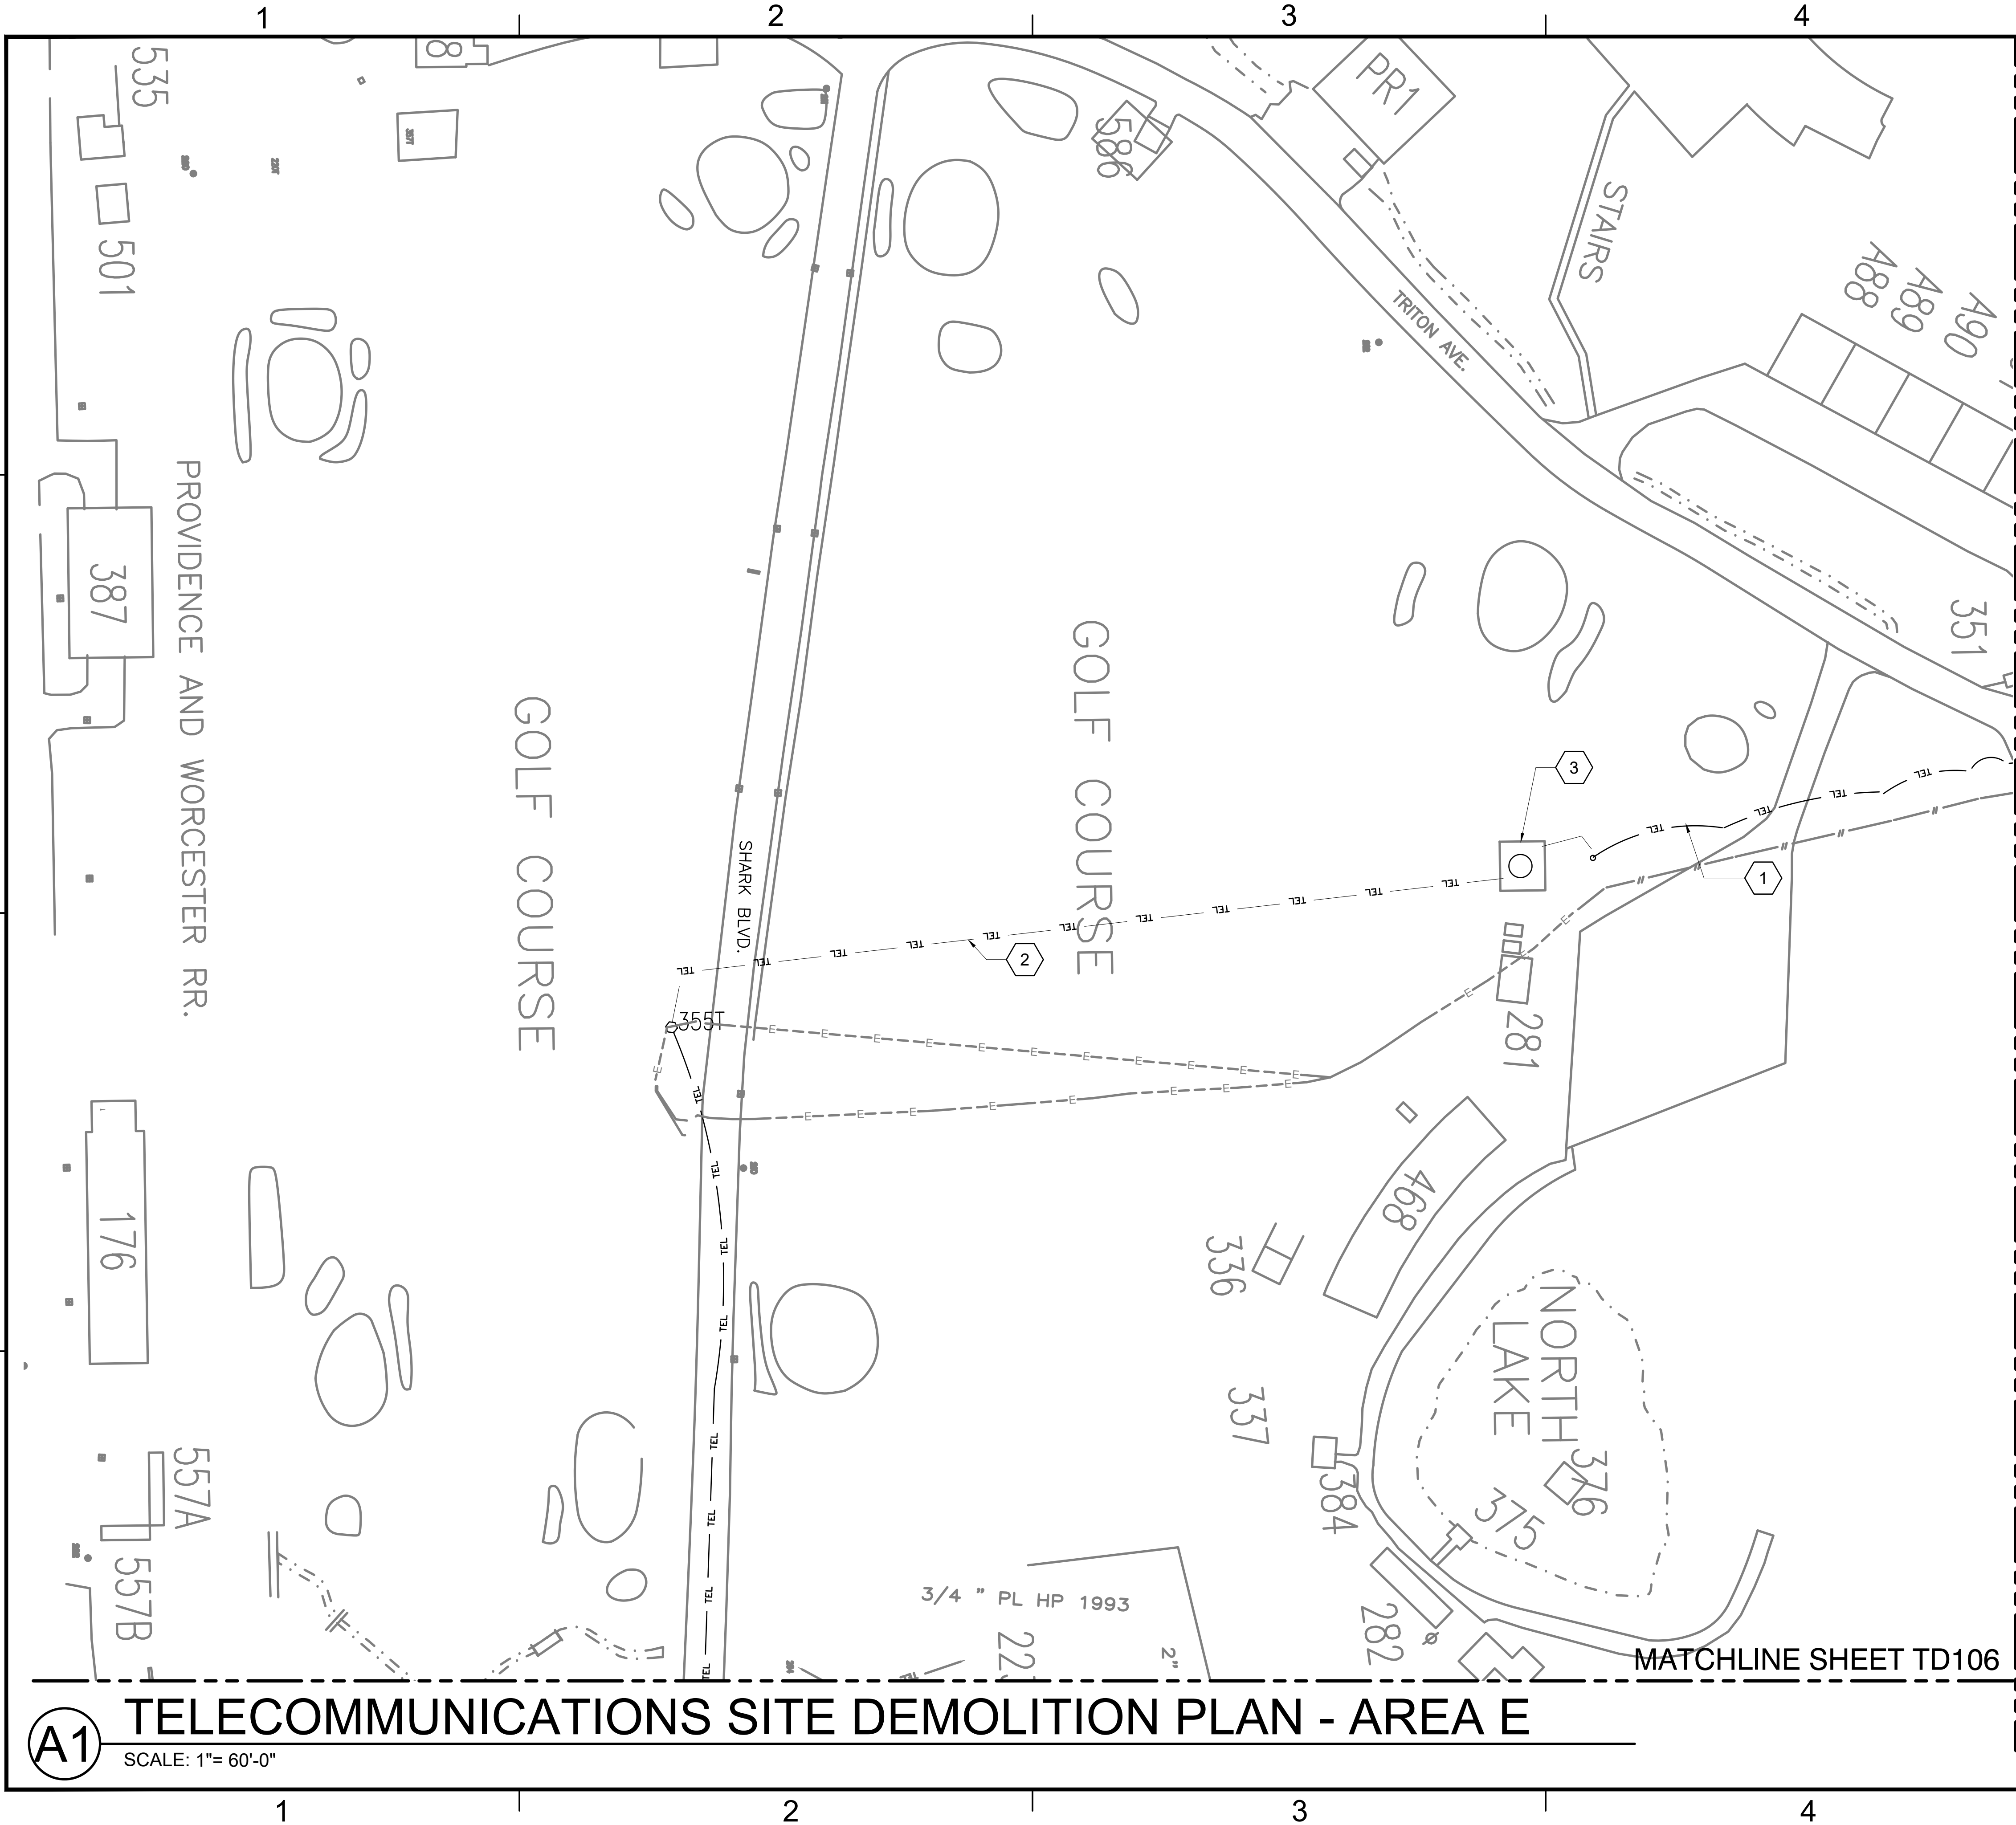

- ### GENERAL SHEET NOTES
- DEMOLISH COMMUNICATION CONDUITS WITH CABLING FOR MAGAZINE AREA AND FENCE LINE.
 - SUMMARY OF COPPER CONNECTIVITY. ALL COPPER MUST REMAIN OPERATIONAL AND DEMOLITION REQUIRES THE DIRECTION OF COMMAND AND APPROVAL FOR CUTOVER.
 - EXISTING 600 PAIR EXTENDS FROM BUILDING 106. 600 PAIR CONTINUES TO MANHOLE ALONG TRITON AVENUE.
 - CHANGES TO 200 PAIR AT MANHOLE
 - 200 PAIR CONTINUE TO MANHOLE AT GOLF COURSE THEN CHANGES FROM 200 PAIR TO 100 PAIR.
 - 100 PAIR CONTINUES VIA AERIAL POLE OUTSIDE BUILDING 325.
 - ALONG THE WAY, 6 PAIR SPLICE TO GUARD SHACK OUTSIDE OF WEAPONS COMPOUND AND THE GUNNERY BUILDING PR1.
 - 100 PAIR CONTINUES TO POLE OUTSIDE OF BUILDING 325. 50 PAIR EXTENDS FROM POLE TO BUILDING 325.
 - 100 PAIR EXTENDS FROM POLE OUTSIDE OF BUILDING 325 TO BUILDING 524
 - 6 PAIR SPLICE TO BUILDING 393.
 - COPPER TELEPHONE CABLING SUPPORTING BUILDINGS 325 AND 524 ROUTE WITHIN THE EXISTING DUCTBANK AND AERIAL ROUTES. DO NOT DEMOLISH OR INTERRUPT CONNECTIVITY.

- ### KEYED NOTES
- APPROXIMATE LOCATION OF EXISTING AERIAL ROUTE. PROTECT CABLES AND DO NOT INTERRUPT SERVICE UNTIL AFTER THE OPERATIONS BUILDING (BLDG A) IS ONLINE.
 - APPROXIMATE LOCATION OF DUCTBANK CARRYING EXISTING COPPER TELEPHONE AND FIBER OPTIC CABLES. PROTECT CABLES AND DO NOT INTERRUPT SERVICE UNTIL AFTER THE OPERATIONS BUILDING (BLDG A) IS ONLINE.
 - T235: EXISTING TRANSITION FROM UNDERGROUND TO AERIAL. SHOWN FOR REFERENCE.

SCALE: AS NOTED

PROJECT NO.: 1687770

CONSTR. CONTR. NO.

NAVJAC DRAWING NO. 12893938

SHEET 132 OF 152

TD105

APPR.	DATE	SYN	DESCRIPTION

1100 NORTH GLEBE ROAD
SUITE 500
ARLINGTON, VIRGINIA 22201
571.218.1000
FAX: 571.218.1600

APPROVED

FOR COMMANDER NAVJAC

ACTIVITY APPROVED BY LCDR ELIZABETH OLOKODE NAVJAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT

DES	RR	DRW	TO	CHK	HF

PMIDM SMS/CWJ

BRANCH MANAGER WRB

CHIEF ENGINEER JWI

FIRE PROTECTION HPN

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC


NAVAL SUBMARINE BASE NEW LONDON

GROTON, CONNECTICUT

P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY

TELECOMMUNICATIONS SITE

DEMO PLAN - AREA E

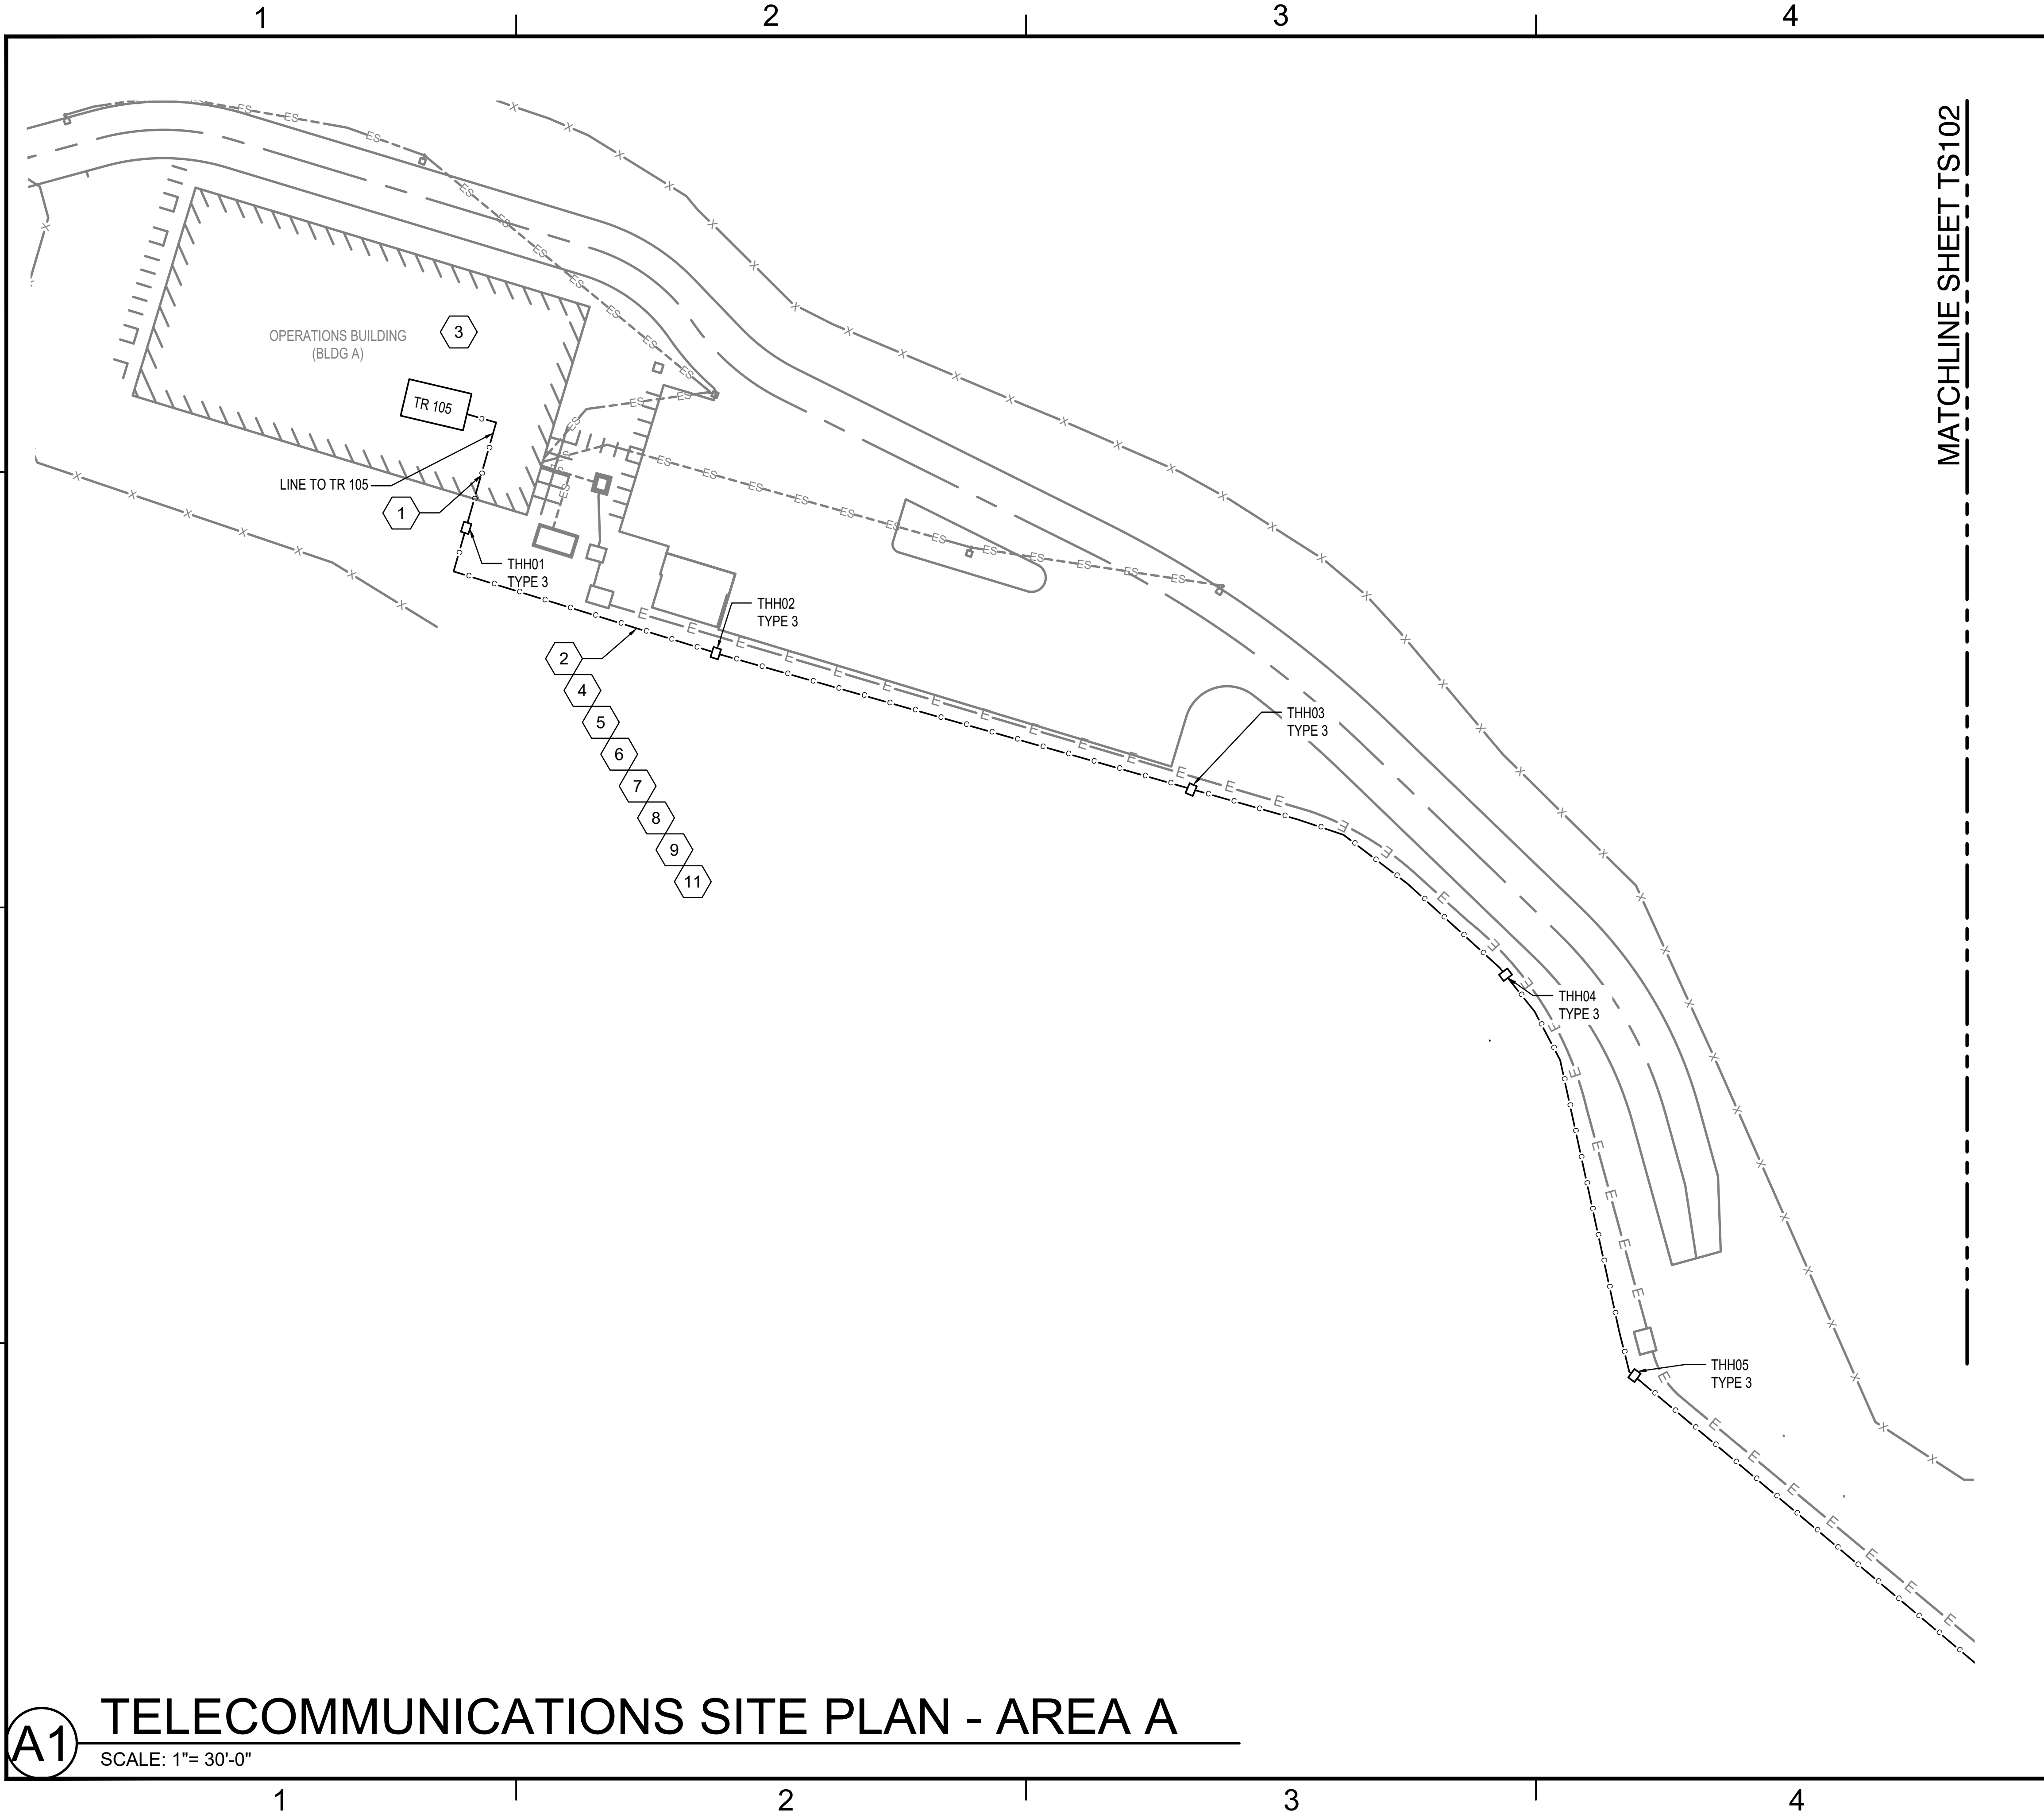

MATCHLINE SHEET TS102

A1 TELECOMMUNICATIONS SITE PLAN - AREA A


SCALE: 1"= 30'-0"

GENERAL SHEET NOTES

1. CONDUIT ROUTING SHOWN IS DIAGRAMMATIC. VERIFY IN FIELD FINAL ROUTING OF CONDUITS. ALIGNMENTS MAY CHANGE BASED ON SURVEY AND GEOTECHNICAL INFORMATION RECEIVED. REFERENCE SITE PLAN DETAILS T-508, T-509, TYPICAL FOR SITE PLAN.
2. PROVIDE 20FT SERVICE LOOP IN EACH PULL THROUGH MAINTENANCE HOLE OR 50FT SPLICE LOOP INSTALLED ON EACH SIDE OF A SPLICE CASE.
3. TMHXX - PROVIDE INGROUND TELECOMMUNICATIONS MAINTENANCE HOLE. H20 TRAFFIC RATED LIDS AND ASSEMBLIES MUST BE PROVIDED WHEN LOCATED IN OR WITHIN 20' OF ROADWAYS.

KEYED NOTES


1. ROUTE 2 X 2 DUCTBANK BETWEEN THE TMH01 AND TELECOM RM 105 IN-GROUND AND BELOW THE OPERATIONS BUILDING (BLDG A) SLAB.
2. PROVIDE (4) 4-INCH, CONCRETE ENCASED CONDUITS ARRANGED IN A 2 X 2 DUCTBANK. RUN COPPER AND FIBER OPTIC CABLES IN SEPARATE CONDUITS. INSTALL (3) 3-CELL FABRIC INNERDUCTS IN TWO CONDUITS. ONE CONDUIT MUST REMAIN OPEN AND LABELED AS SPARE.
3. OPERATIONS BUILDING (BLDG A).
4. PROVIDE ONE (1) 48-STRAND SM FOC BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 325 WITHIN TELECOMMUNICATIONS DUCTBANK.
5. PROVIDE ONE (1) 24-STRAND SM FOC BETWEEN THE OPERATIONS BUILDING (BLDG A) AND THE SENTRY BUILDING (BLDG B) WITHIN TELECOMMUNICATIONS DUCTBANK.
6. PROVIDE ONE (1) 48-STRAND SM FOC BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 77. ROUTE FOC WITHIN TELECOMMUNICATIONS DUCTBANK.
7. PROVIDE ONE (1) 12-STRAND SM FOC BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 433 (NMCI, NIPR) WITHIN TELECOMMUNICATIONS DUCTBANK.
8. PROVIDE ONE (1) 12-STRAND SM FOC BETWEEN THE OPERATIONS BUILDING (BLDG A) AND THE CLWS-001 MAGAZINE WITHIN TELECOMMUNICATIONS DUCTBANK.
9. PROVIDE ONE (1) 100-PAIR CU CABLE BETWEEN THE OPERATIONS BUILDING (BLDG A) AND THE SENTRY BUILDING (BLDG B) FOR VOICE AND SECURITY (IDS) WITHIN TELECOMMUNICATIONS DUCTBANK.
10. BUILDING 524 IS THE CURRENT IDS CENTER AND MUST REMAIN IN OPERATION UNTIL THE OPERATIONS BUILDING (BLDG A) IS ONLINE.
11. PROVIDE (1) ONE 100-PAIR OSP COPPER CABLE BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 325 FOR VOICE WITHIN THE TELECOMMUNICATIONS DUCTBANK.

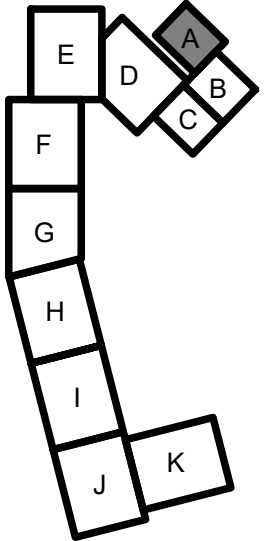

GRAPHIC SCALE


1"=40' 0' 40' 80'

APPR			
DATE			
SYN			
DESCRIPTION			
APPROVED			
FOR COMMANDER NAVFAC			
ACTIVITY			
APPROVED BY LCDR ELIZABETH OLOKODE NAVFAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT			
SATISFACTORY TO			
DES	RR	DRW	TO
CHK	HF		
BRANCH MANAGER			
SMS/CWJ			
WRB			
CHIEF ENGINEER			
JWJ			
FIRE PROTECTION			
HPN			
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND			
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC			
NAVAL STATION - NORFOLK, VA			
NAVAL SUBMARINE BASE NEW LONDON			
GROTON, CONNECTICUT			
P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY			
SITE			
TELECOMMUNICATIONS SITE PLAN - AREA A			
SCALE: AS NOTED			
EPROJECT NO.: 1667770			
CONSTR. CONTR. NO.			
NAVFAC DRAWING NO. 12893940			
SHEET 134 OF 152			
TS101			

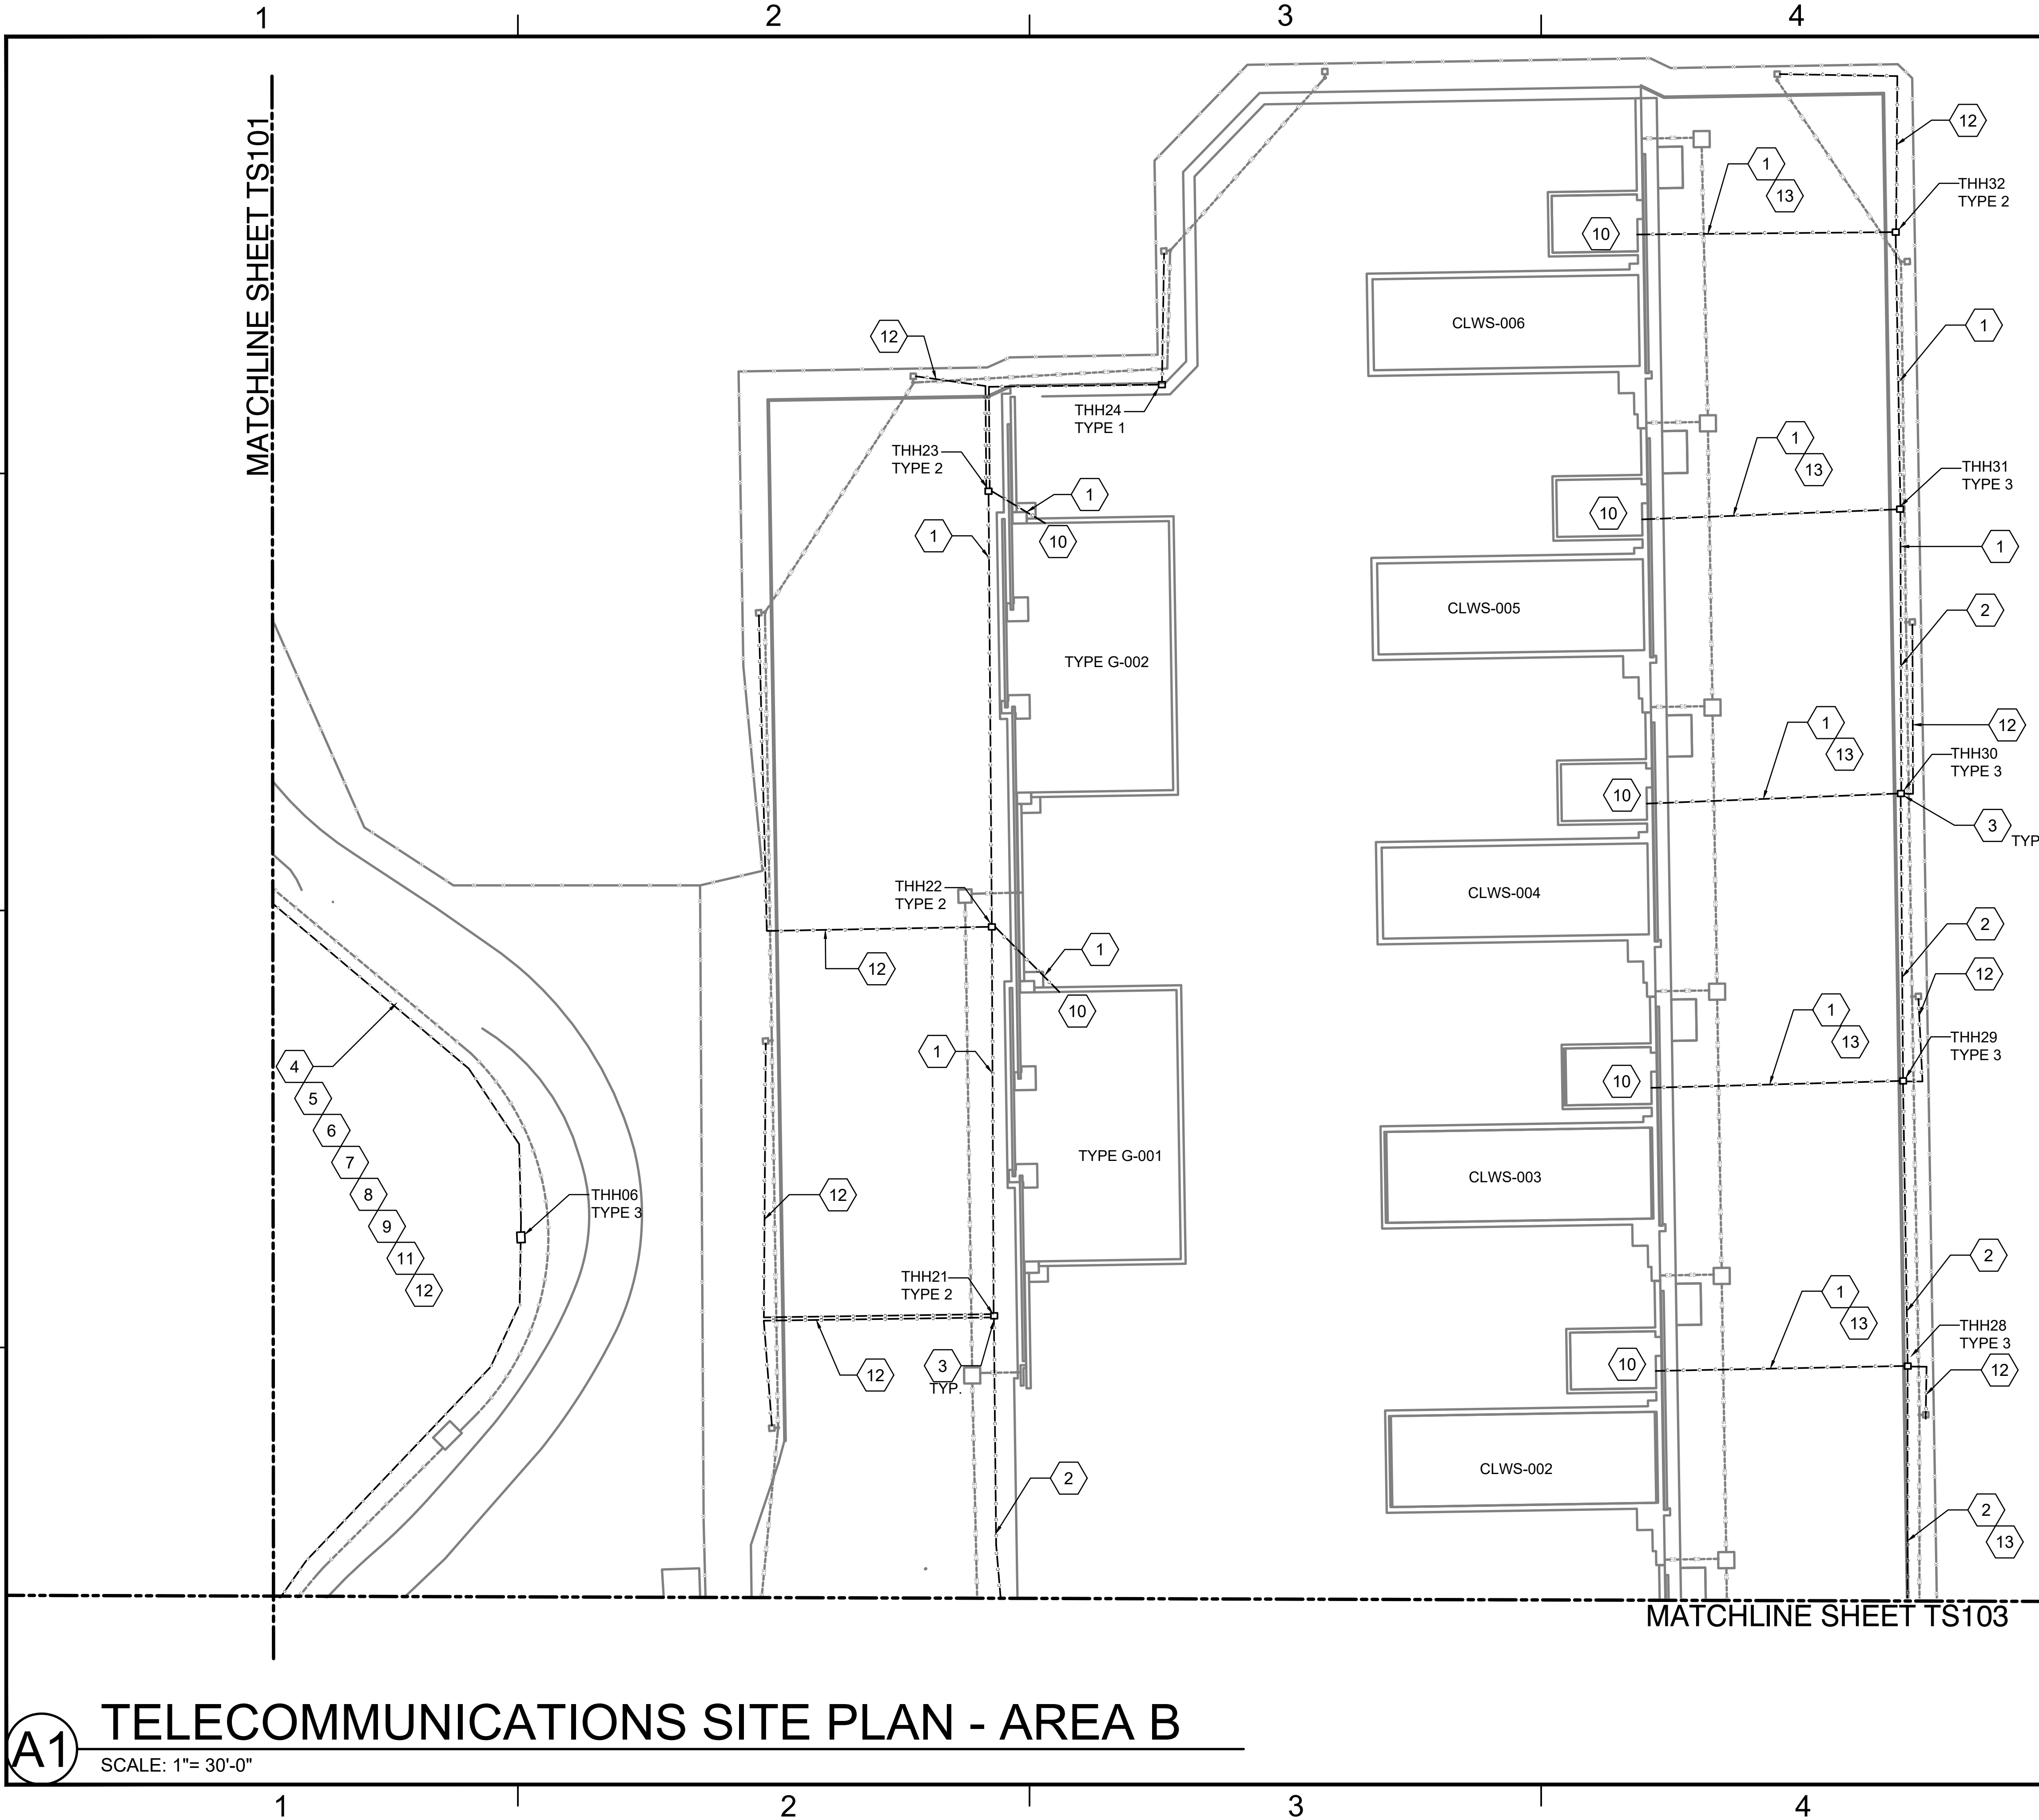


- ### GENERAL SHEET NOTES
- CONDUIT ROUTING SHOWN IS DIAGRAMMATIC. VERIFY IN FIELD FINAL ROUTING OF ALL CONDUITS. ALIGNMENTS MAY CHANGE BASED ON SURVEY AND GEOTECHNICAL INFORMATION RECEIVED. REFERENCE SITE PLAN DETAILS T-508, T-509, TYPICAL FOR SITE PLAN.
 - PROVIDE 20FT SERVICE LOOP IN EACH PULL THROUGH MAINTENANCE HOLE OR 50FT SPLICE LOOP INSTALLED ON EACH SIDE OF A SPLICE CASE. TYPICAL
 - TMHXX - PROVIDE INGROUND TELECOMMUNICATIONS MAINTENANCE HOLE. H20 TRAFFIC RATED LIDS AND ASSEMBLIES MUST BE PROVIDED WHEN LOCATED IN OR WITHIN 20' OF ROADWAYS.

- ### KEYED NOTES
- PROVIDE (2) 4-INCH, CONCRETE ENCASED CONDUITS.
 - PROVIDE (3) 4-INCH, CONCRETE ENCASED CONDUITS.
 - PROVIDE TELECOMMUNICATIONS HAND HOLE (HH) 48"X30"X24". HH FOR PULLING ONLY - DO NOT USE FOR CABLE STORAGE OR SPLICING.
 - PROVIDE ONE (1) 48-STRAND SM FOC BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 325 WITHIN TELECOMMUNICATIONS DUCTBANK.
 - PROVIDE ONE (1) 24-STRAND SM FOC BETWEEN THE OPERATIONS BUILDING (BLDG A) AND THE SENTRY BUILDING WITHIN TELECOMMUNICATIONS DUCTBANK.
 - PROVIDE ONE (1) 48-STRAND SM FOC BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 77. ROUTE FOC WITHIN TELECOMMUNICATIONS DUCTBANK.
 - PROVIDE ONE (1) 12-STRAND SM FOC BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 433 (NMCI, NIPR) WITHIN TELECOMMUNICATIONS DUCTBANK.
 - PROVIDE ONE (1) 12-STRAND SM FOC BETWEEN THE OPERATIONS BUILDING (BLDG A) AND THE CLWS-001 MAGAZINE WITHIN TELECOMMUNICATIONS DUCTBANK.
 - PROVIDE ONE (1) 100-PAIR CU CABLE BETWEEN THE OPERATIONS BUILDING (BLDG A) AND THE SENTRY BUILDING (BLDG B) FOR VOICE AND SECURITY (IDS) WITHIN TELECOMMUNICATIONS DUCTBANK.
 - PROVIDE ONE (1) 6-PAIR OSP COPPER CABLE BETWEEN THE SENTRY BUILDING (BLDG B) AND EACH MAGAZINE WITHIN TELECOMMUNICATIONS DUCTBANK.
 - PROVIDE (1) ONE 100-PAIR OSP COPPER CABLE BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 325 FOR VOICE WITHIN THE TELECOMMUNICATIONS DUCTBANK.
 - PROVIDE ONE (2), 1 1/2-INCH CONDUIT FOR GFGI VIDEO SURVEILLANCE CAMERA. STUB CONDUIT UP AT POLE AND TERMINATE WITHIN 18" BY 18" NEMA 4 ENCLOSURE MOUNTED 48" A.F.F. AND AFFIXED TO POLE. REFERENCE DETAILS ON TY-503.
 - PROVIDE 3-3 CELL FABRIC INNERDUCT WITHIN ONE CONDUIT.

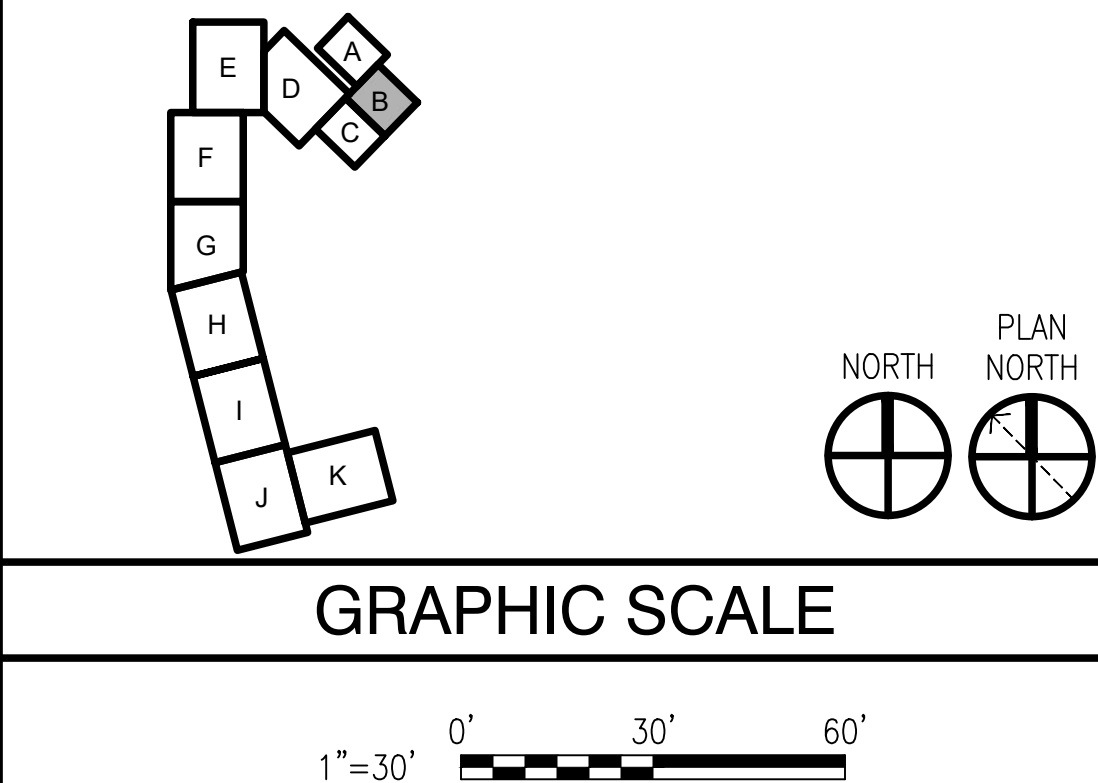


APPR	DATE	SYN	DESCRIPTION
APPROVED			
FOR COMMANDER NAVFAC			
ACTIVITY: APPROVED BY LCDR ELIZABETH OLOKODE NAVFAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT			
SATISFACTORY TO: DATE: 05/27/2025			
DES	RR	DRW	TO
CHK	HF		
BRANCH MANAGER: SMS/CWJ			
CHIEF ENGINEER: JMU			
FIRE PROTECTION: HPN			
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC			
NAVAL STATION - NORFOLK, VA			
NAVAL SUBMARINE BASE NEW LONDON			
GROTON, CONNECTICUT			
P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY			
SITE			
TELECOMMUNICATIONS SITE PLAN - AREA B			
SCALE: AS NOTED			
PROJECT NO.: 1667770			
CONSTR. CONTR. NO.			
NAVFAC DRAWING NO. 12893941			
SHEET 135 OF 152			
TS102			

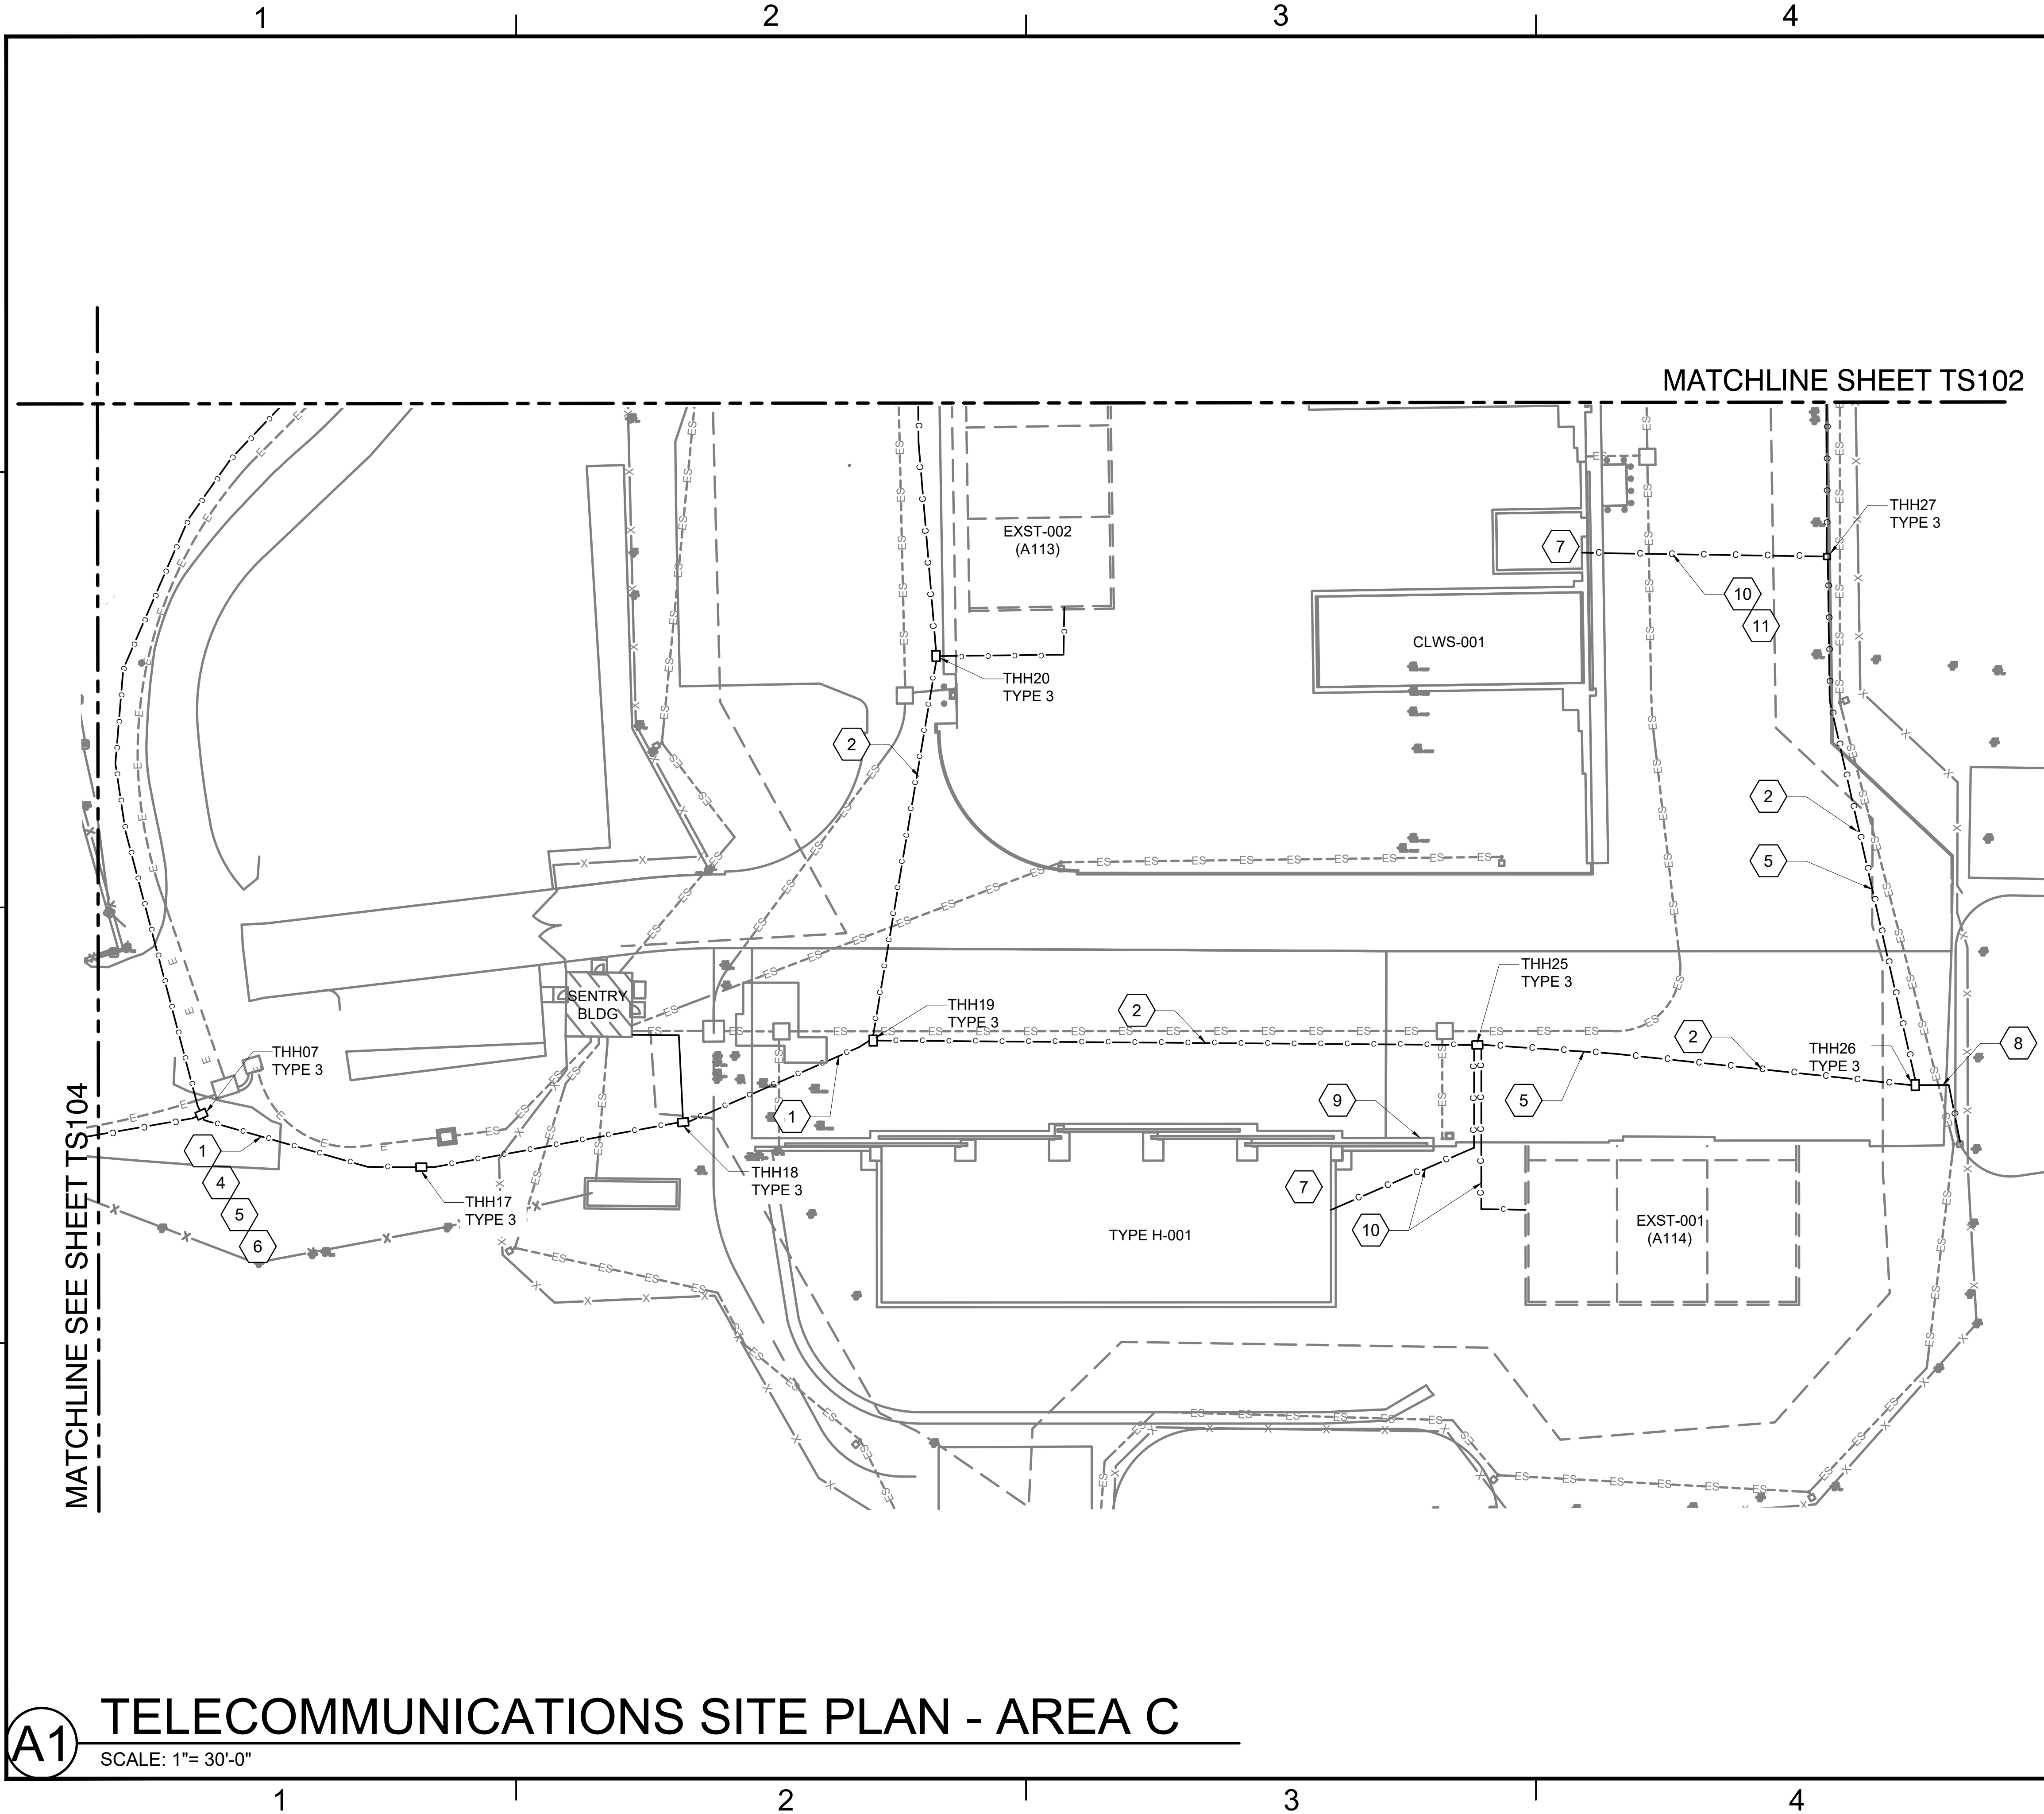


A1 TELECOMMUNICATIONS SITE PLAN - AREA C
SCALE: 1"= 30'-0"

- ### GENERAL SHEET NOTES
- CONDUIT ROUTING SHOWN IS DIAGRAMMATIC. VERIFY IN FIELD FINAL ROUTING OF ALL CONDUITS. ALIGNMENTS MAY CHANGE BASED ON SURVEY AND GEOTECHNICAL INFORMATION RECEIVED. REFERENCE SITE PLAN DETAILS T-508, T-509, TYPICAL FOR SITE PLAN.
 - PROVIDE 20FT SERVICE LOOP IN EACH PULL THROUGH MAINTENANCE HOLE OR 50FT SPLICE LOOP INSTALLED ON EACH SIDE OF A SPLICE CASE. TYPICAL.
 - TMHXX - PROVIDE IN-GROUND TELECOMMUNICATIONS MAINTENANCE HOLE. H20 TRAFFIC RATED LIDS AND ASSEMBLIES MUST BE PROVIDED WHEN LOCATED IN OR WITHIN 20' OF ROADWAYS.

- ### KEYED NOTES
- PROVIDE (4) 4-INCH, CONCRETE ENCASED CONDUITS ARRANGED IN A 2 X 2 DUCTBANK. RUN COPPER AND FIBER OPTIC CABLES IN SEPARATE CONDUITS. INSTALL (3) 3-CELL FABRIC INNERDUCTS IN EACH CONDUIT.
 - PROVIDE (3) 4-INCH, CONCRETE ENCASED CONDUITS. RUN COPPER AND FIBER OPTIC CABLES IN SEPARATE CONDUITS. INSTALL (3) 3-CELL FABRIC INNERDUCTS IN TWO CONDUITS.
 - PROVIDE TELECOMMUNICATIONS HAND HOLE 24"X24"X24"
 - PROVIDE ONE (1) 24-STRAND SM FOC BETWEEN THE OPERATIONS BUILDING (BLDG A) AND THE SENTRY BUILDING (BLDG B) WITHIN TELECOMMUNICATIONS DUCTBANK.
 - PROVIDE ONE (1) 12-STRAND SM FOC BETWEEN THE OPERATIONS BUILDING (BLDG A) AND THE CLWS-001 MAGAZINE WITHIN TELECOMMUNICATIONS DUCTBANK.
 - PROVIDE ONE (1) 100-PAIR CU CABLE BETWEEN THE OPERATIONS BUILDING (BLDG A) AND THE SENTRY BUILDING (BLDG B) FOR VOICE WITHIN TELECOMMUNICATIONS DUCTBANK.
 - PROVIDE ONE (1) 6-PAIR OSP COPPER CABLE BETWEEN THE SENTRY BUILDING (BLDG B) AND EACH MAGAZINE WITHIN TELECOMMUNICATIONS DUCTBANK.
 - PROVIDE ONE (2), 1 1/2-INCH CONDUIT FOR FGFI VIDEO SURVEILLANCE CAMERA. STUB CONDUIT UP AT POLE AND TERMINATE WITHIN 18" BY 18" NEMA 4 ENCLOSURE MOUNTED 48" A.F.F. AND AFFIXED TO POLE. REF DETAILS ON TY-503.
 - PROVIDE 2"X8" STEEL MAST POLE ATTACHED TO STRUCTURE FOR CCTV CAMERA. PROVIDE 1" CONDUIT AND TIE INTO EXISTING RUN.
 - PROVIDE (2) 4-INCH, CONCRETE ENCASED CONDUITS.
 - PROVIDE 3-3 CELL FABRIC INNERDUCT WITHIN ONE CONDUIT.

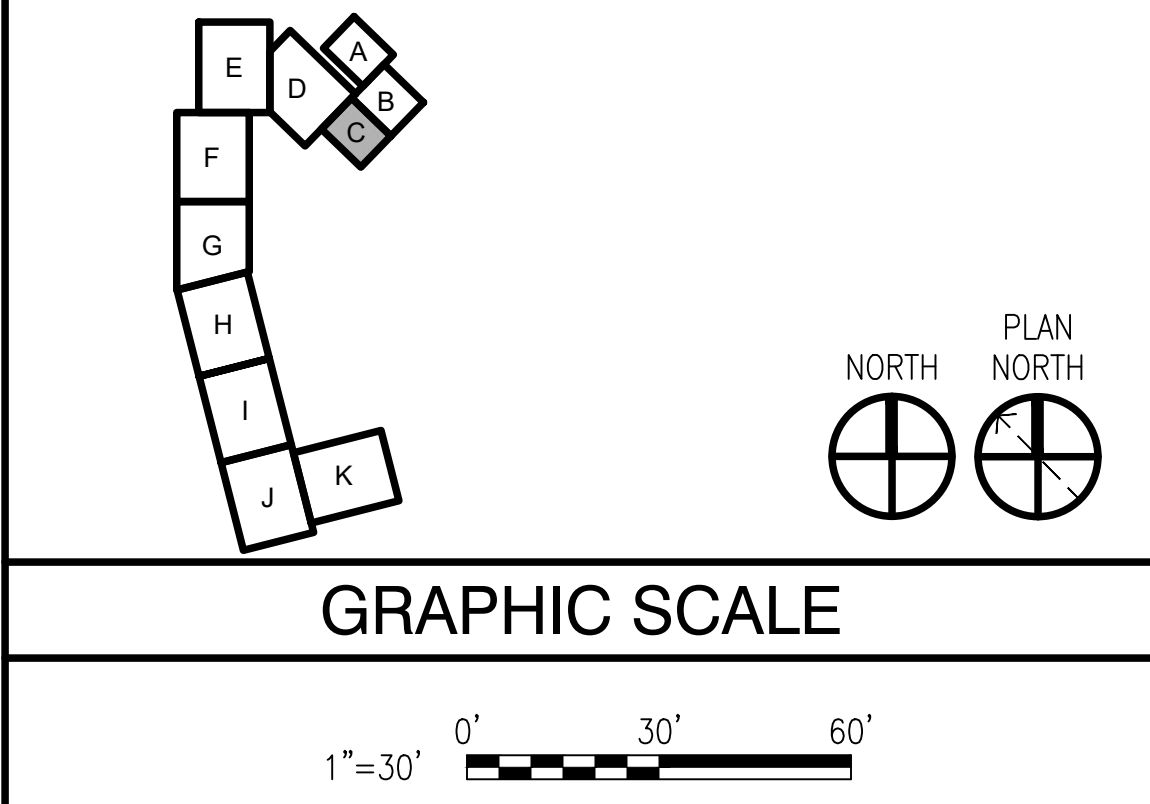


APPR	
DATE	
SYN	
DESCRIPTION	
SEAL	
APPROVED	
FOR COMMANDER NAVFAC	
ACTIVITY: APPROVED BY LCDR ELIZABETH OLOKODE NAVFAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT	
SATISFACTORY TO DATE: 05/27/2025	
DES	RR
DRW	TO
CHK	HF
FMIDM	SMS/CWJ
BRANCH MANAGER	WRB
CHIEF ENGINEER	JWJ
FIRE PROTECTION	HPN
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC	
NAVAL STATION - NORFOLK, VA	
NAVAL SUBMARINE BASE NEW LONDON	
GROTON, CONNECTICUT	
P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY	
SITE	
TELECOMMUNICATIONS SITE PLAN - AREA C	
SCALE: AS NOTED	
EPROJECT NO.: 1667770	
CONSTR. CONTR. NO.	
NAVFAC DRAWING NO. 12893942	
SHEET 136 OF 152	
TS103	

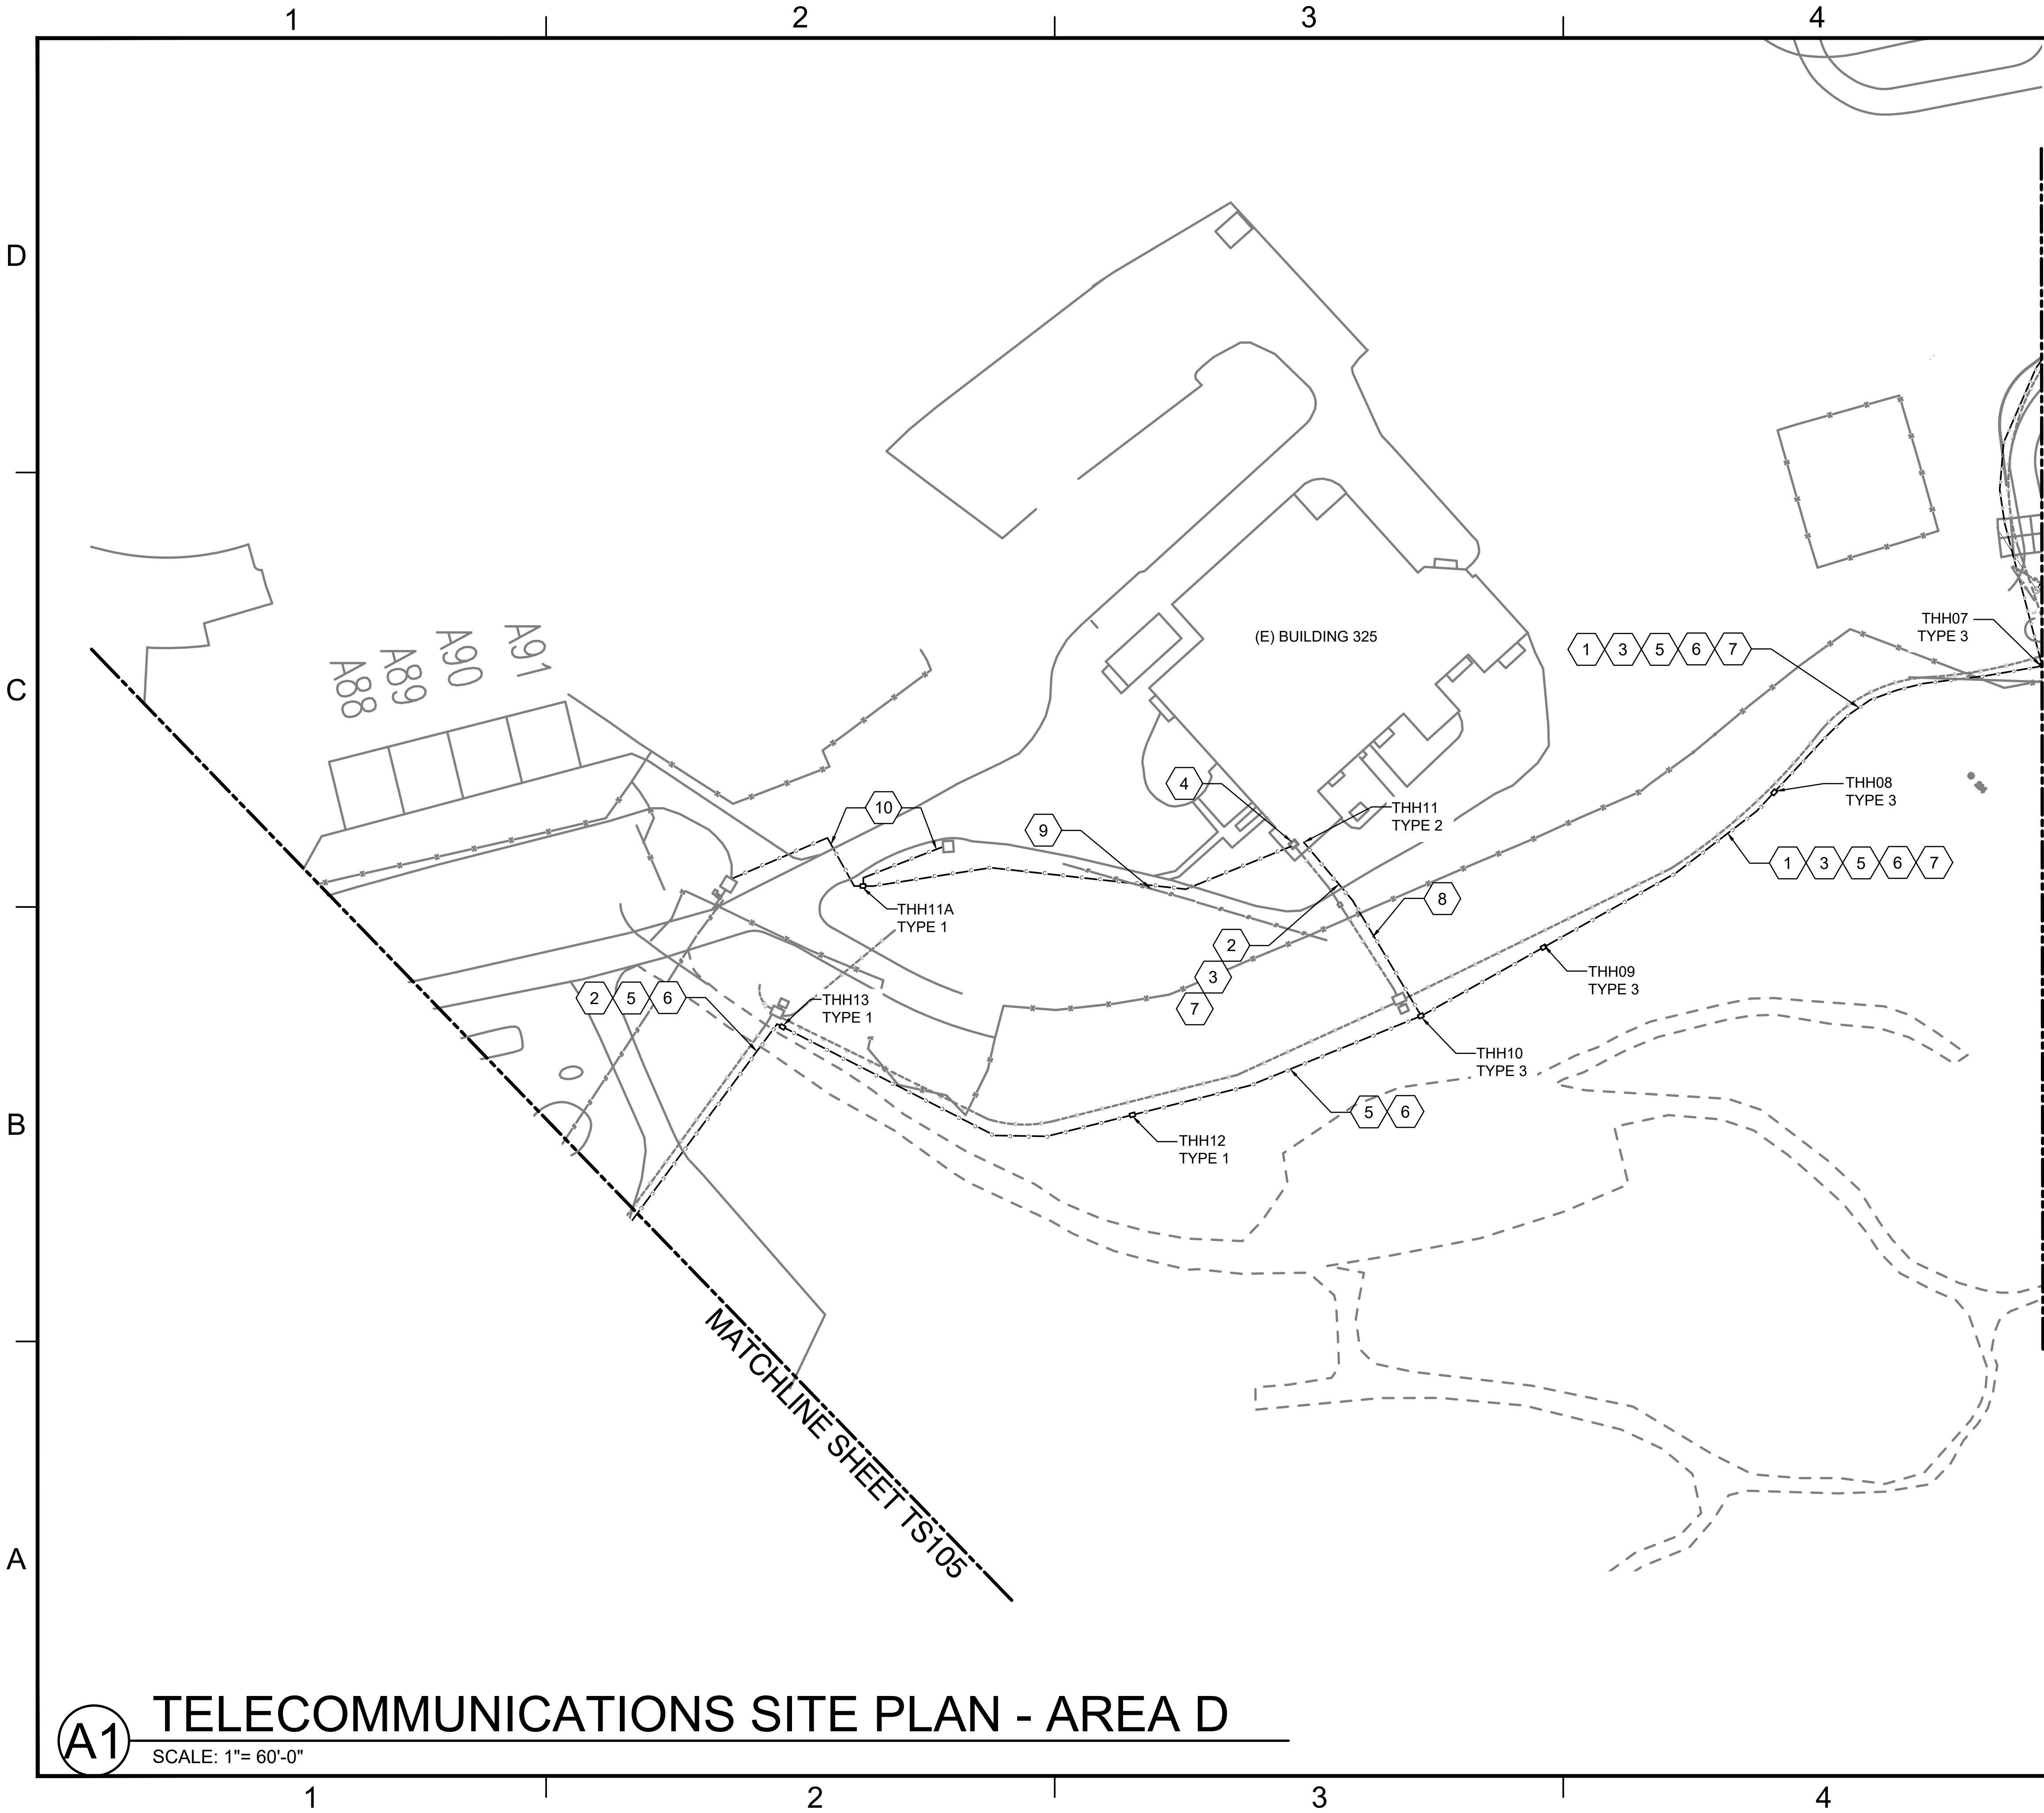

- ### GENERAL SHEET NOTES
1. CONDUIT ROUTING SHOWN IS DIAGRAMMATIC. VERIFY IN FIELD FINAL ROUTING OF CONDUITS. ALIGNMENTS MAY CHANGE BASED ON SURVEY AND GEOTECHNICAL INFORMATION RECEIVED.
 2. PROVIDE 20FT SERVICE LOOP IN EACH PULL THROUGH MAINTENANCE HOLE OR 50FT SPLICE LOOP INSTALLED ON EACH SIDE OF A SPLICE CASE.
 3. TMHXX - PROVIDE IN-GROUND TELECOMMUNICATIONS MAINTENANCE HOLE. H20 TRAFFIC RATED LIDS AND ASSEMBLIES MUST BE PROVIDED WHEN LOCATED IN OR WITHIN 20' OF ROADWAYS.
 4. TOTAL LENGTH OF FIBER RUN BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 433 IS APPROXIMATELY 2 MILES. FUSION SPLICE PERMITTED ALONG ROUTE FOR BUILDING 77 AND 433. PROVIDE INSTALLATION PLAN FOR OWNER APPROVAL AND VERIFY ACTUAL LENGTH PRIOR TO INSTALLING CABLE.

- ### KEYED NOTES
1. PROVIDE (4) 4-INCH, CONCRETE ENCASE CONDUITS ARRANGED IN A 2 X 2 DUCTBANK. RUN COPPER AND FIBER OPTIC CABLES IN SEPARATE CONDUITS. INSTALL (3) 3-CELL FABRIC INNERDUCTS IN TWO CONDUITS. ONE CONDUIT MUST REMAIN OPEN AND LABELED AS SPARE.
 2. PROVIDE (2) 4-INCH, CONCRETE ENCASED CONDUITS. RUN COPPER AND FIBER OPTIC CABLES IN SEPARATE CONDUITS. INSTALL (3) 3-CELL FABRIC INNERDUCTS IN EACH CONDUIT.
 3. PROVIDE ONE (1) 48-STRAND SM FOC BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 325 WITHIN TELECOMMUNICATIONS DUCTBANK.
 4. COORDINATE TIE-IN OF FOC WITH BCO IT POC. PROVIDE PANEL, CONNECTORS, TERMINATION, AND PATCH CORDS FOR A COMPLETE CHANNEL CONNECTION TO EXISTING NETWORK.
 5. PROVIDE ONE (1) 48-STRAND SM FOC BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 77. ROUTE FOC WITHIN TELECOMMUNICATIONS DUCTBANK.
 6. PROVIDE ONE (1) 12-STRAND SM FOC BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 433 (NMCI, NIPR) WITHIN TELECOMMUNICATIONS DUCTBANK
 7. PROVIDE (1) ONE 100-PAIR OSP COPPER CABLE BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 325 FOR VOICE AND SECURITY (IDS) WITHIN THE TELECOMMUNICATIONS DUCTBANK..
 8. BUILDING DEMARCATION LOCATED INSIDE ELECTRICAL ROOM. TIE TMH10 INTO BUILDING TO COMPLETE PATHWAY VIA IN GROUND OR SURFACE MOUNTED 4" RIGID STEEL CONDUIT.
 9. PROVIDE (1) 4-INCH CONCRETE ENCASED CONDUIT
 10. PROVIDE (1) 1-1/2 INCH CONDUIT BETWEEN TELECOMMUNICATIONS HAND HOLE AND CAMERA LOCATION ON EXISTING POLE.

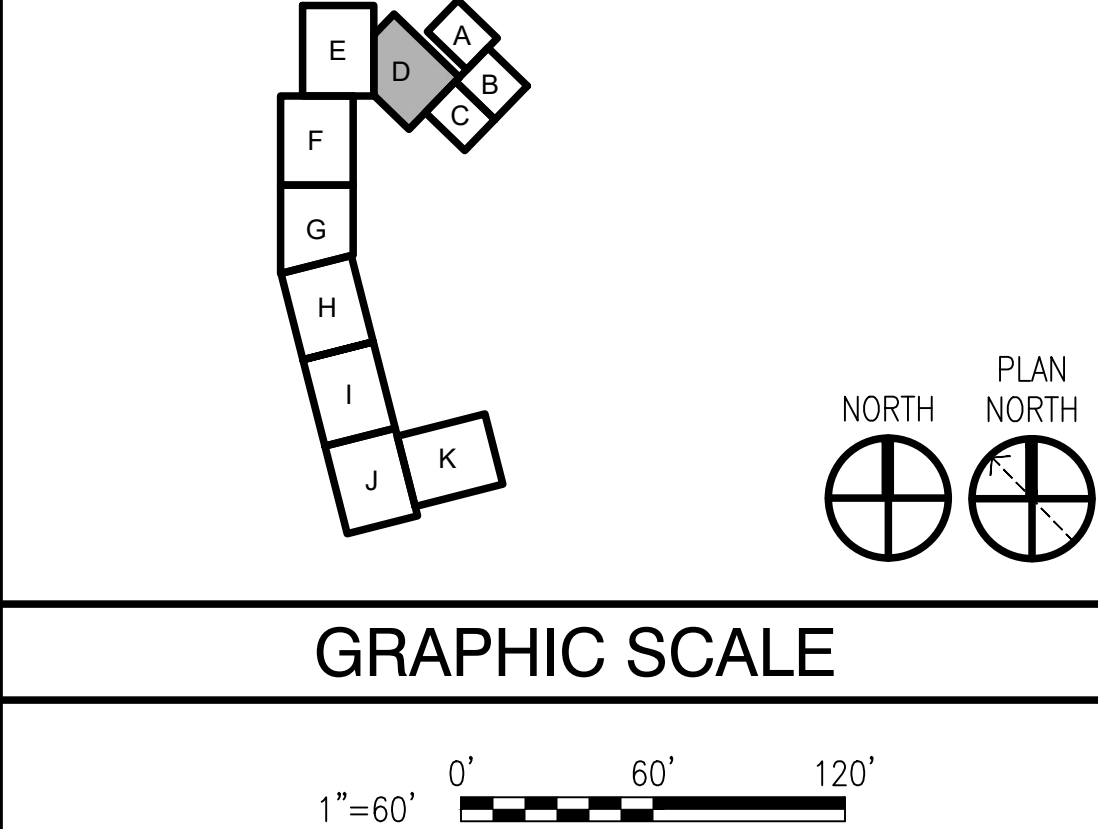

TELECOMMUNICATIONS SITE PLAN - AREA D
SCALE: 1"= 60'-0"

APPR	DATE	SYN	DESCRIPTION


1100 NORTH GLEBE ROAD
SUITE 500
ARLINGTON, VIRGINIA 22201
571.218.1000
FAX: 571.218.1600

FOR COMMANDER NAVFAC			
APPROVED BY LCDR ELIZABETH OLOKODE NAVFAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT			
SATISFACTORY TO	DATE	05/27/2025	
DES	RR	DRW	TO
PMIDM	SMS/CWJ		
BRANCH MANAGER	WRB		
CHIEF ENGINEER	JWJ		
FIRE PROTECTION	HPN		

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC
NAVAL STATION - NORFOLK, VA
NAVAL SUBMARINE BASE NEW LONDON
P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY SITE


TELECOMMUNICATIONS SITE PLAN - AREA D

SCALE:	AS NOTED
PROJECT NO.:	1667770
CONSTR. CONTR. NO.	
NAVFAC DRAWING NO.	12893943
SHEET	137 OF 152
TS104	

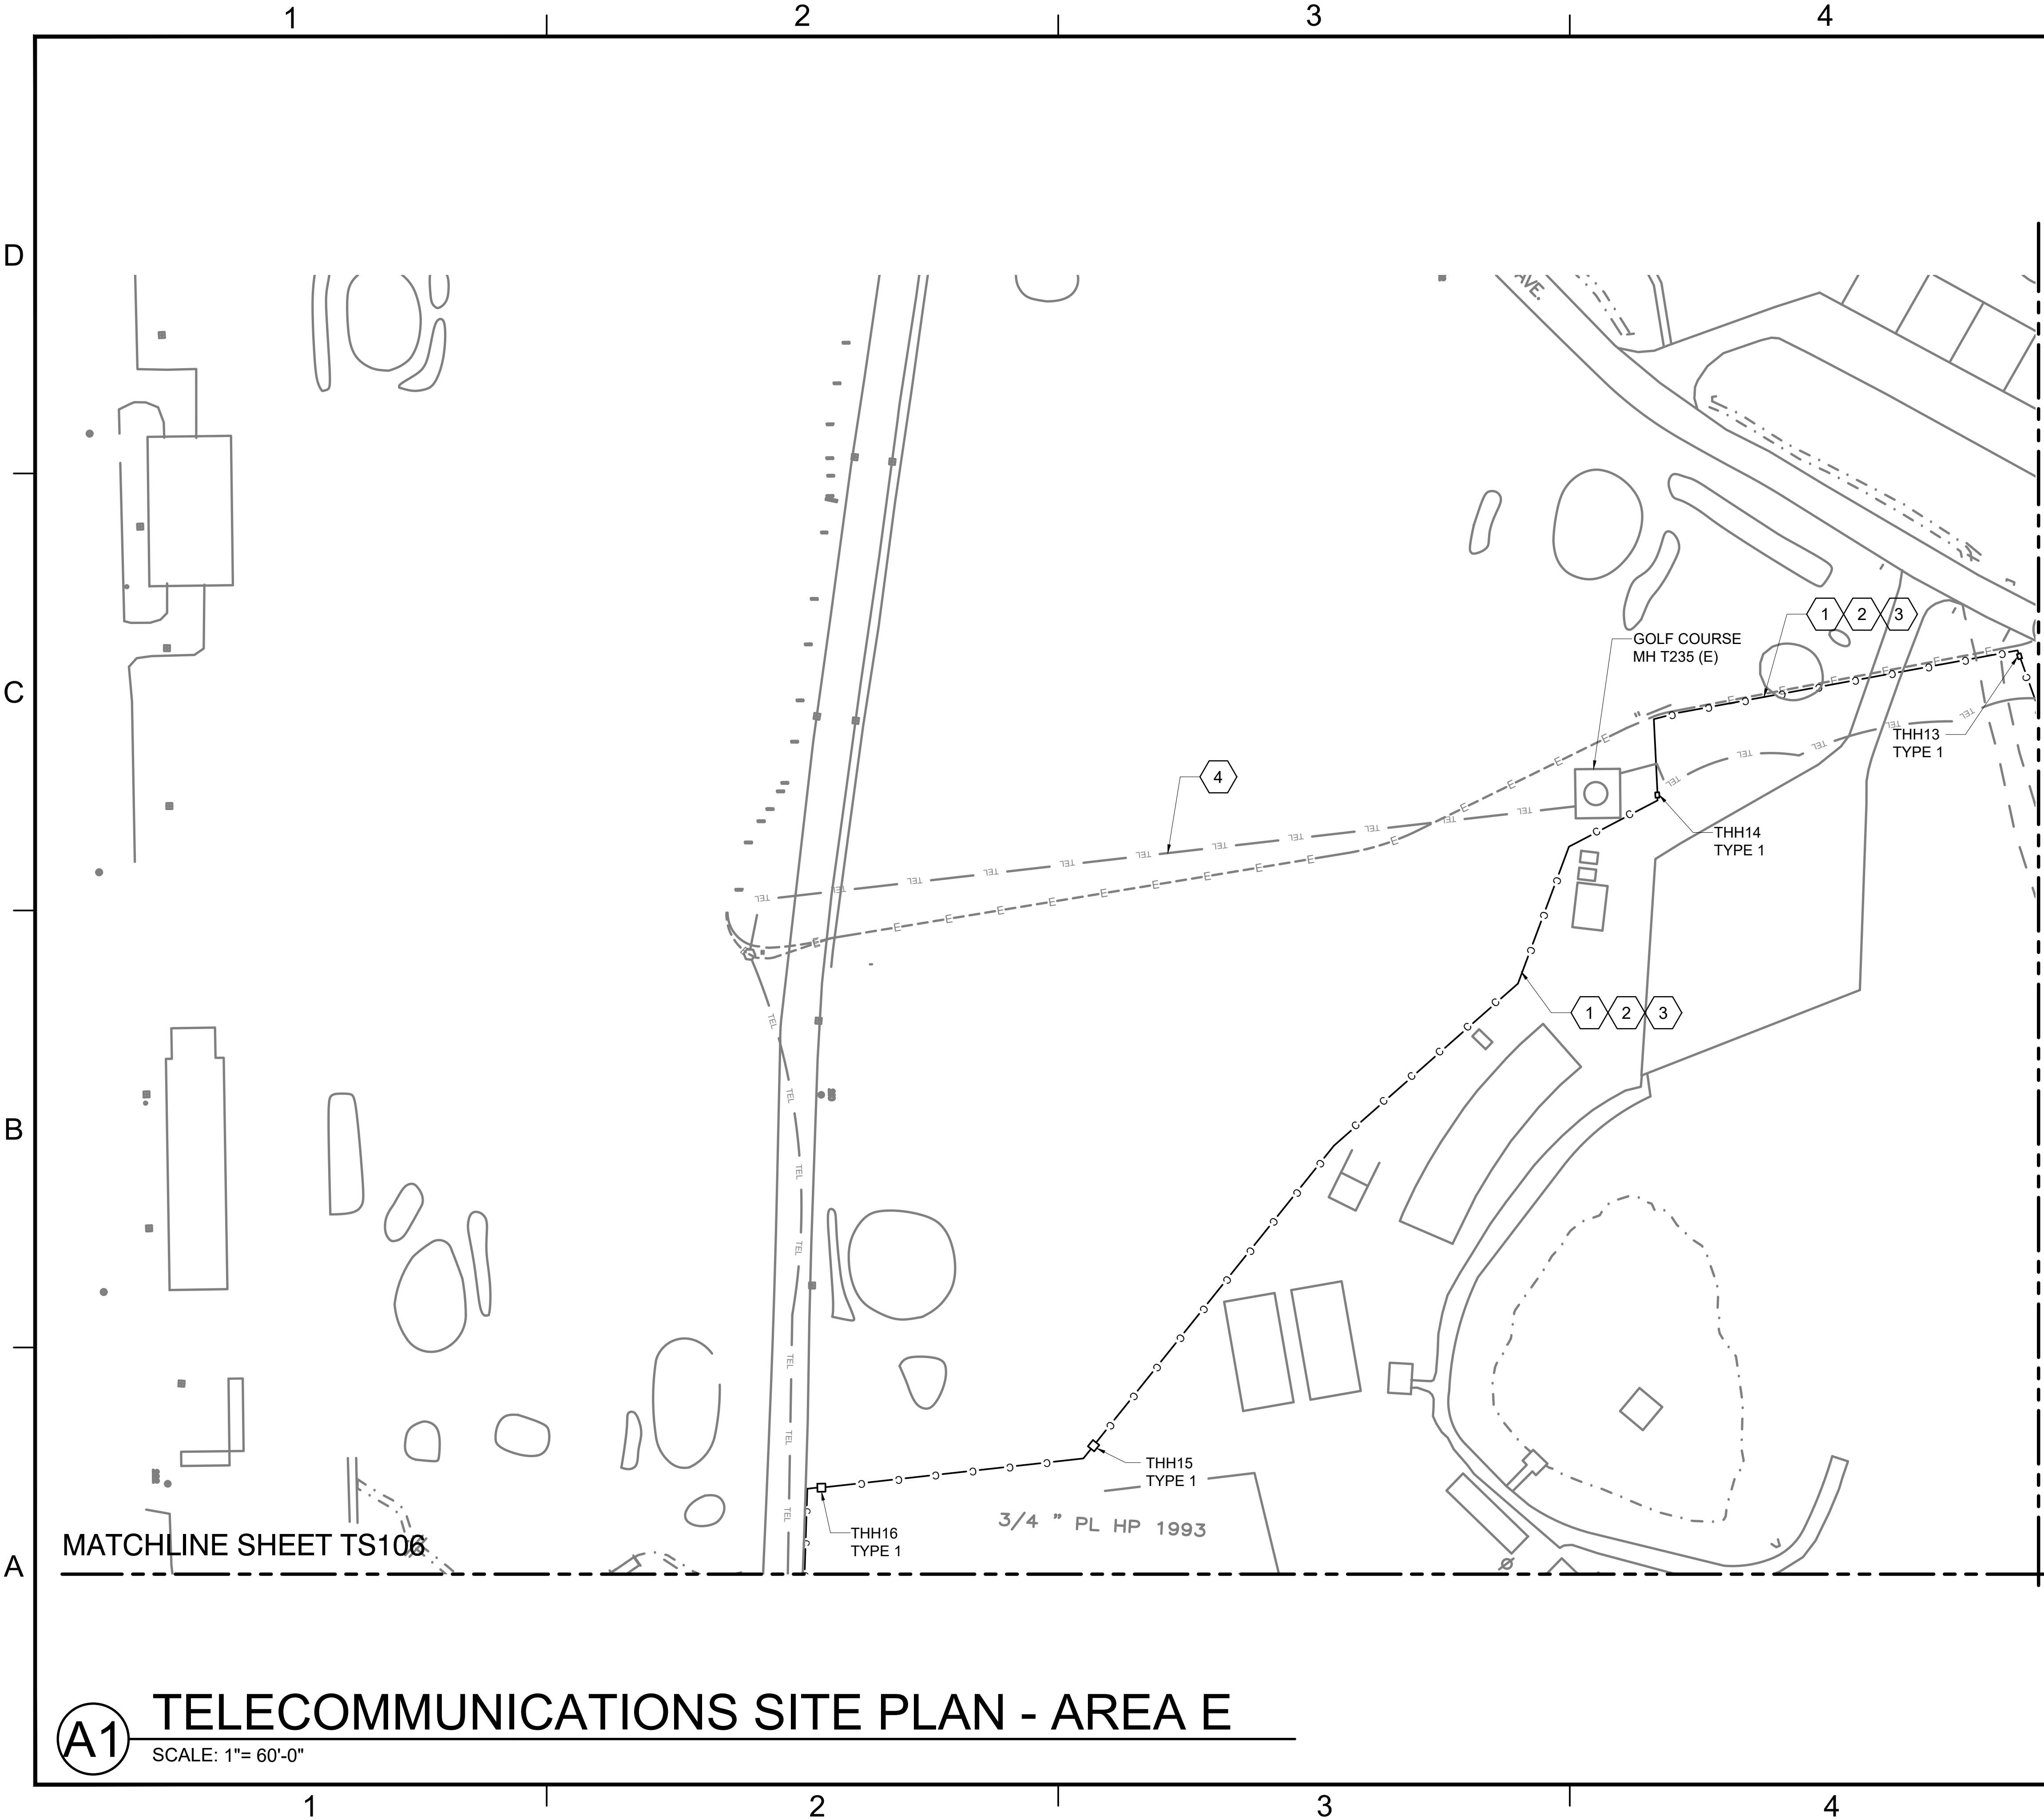

- ### GENERAL SHEET NOTES
1. CONDUIT ROUTING SHOWN IS DIAGRAMMATIC. VERIFY IN FIELD FINAL ROUTING OF CONDUITS. ALIGNMENTS MAY CHANGE BASED ON SURVEY AND GEOTECHNICAL INFORMATION RECEIVED. REFERENCE SITE PLAN DETAILS T-508, T-509, TYPICAL FOR SITE PLAN.
 2. PROVIDE 20FT SERVICE LOOP IN EACH PULL THROUGH MAINTENANCE HOLE OR 50FT SPLICE LOOP INSTALLED ON EACH SIDE OF A SPLICE CASE. TYPICAL.
 3. TMHXX - PROVIDE IN-GROUND TELECOMMUNICATIONS MAINTENANCE HOLE. H20 TRAFFIC RATED LIDS AND ASSEMBLIES MUST BE PROVIDED WHEN LOCATED IN OR WITHIN 20' OF ROADWAYS.
 4. AERIAL COMMUNICATIONS PATHWAY MUST MAINTAIN A DISTANCE OF 24 INCHES FROM POWER CONDUCTORS.
 5. AERIAL FIBER SPLICES MUST NOT BE USED WITHOUT GOVT. APPROVAL. PLACE FIBER OPTIC SPLICE IN A PEDESTAL AT THE BOTTOM OF THE POLE.
 6. MINIMUM VERTICAL CLEARANCES ALLOWED OVER STREETS AND ROADS IS 18 FEET. PROVIDE SLACK LOOP OF 100 FEET AT AERIAL ROAD CROSSINGS.
 7. COMMUNICATIONS PATHWAYS SHARING UTILITY POLES WITH POWER MUST RUN PARALLEL AND MAINTAIN A MINIMUM SEPARATION OF 24 INCHES AT ANY POINT IN THE SPAN. PLACE COMMUNICATIONS CONDUCTORS BELOW POWER. REF NEC 800.44
 8. TOTAL LENGTH OF FIBER RUN BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 433 IS APPROXIMATELY 2 MILES. FUSION SPLICE PERMITTED ALONG ROUTE FOR BUILDING 77 AND 433. PROVIDE INSTALLATION PLAN FOR OWNER APPROVAL AND VERIFY ACTUAL LENGTH PRIOR TO INSTALLING CABLE.

- ### KEYED NOTES
1. PROVIDE (2) 4-INCH, CONCRETE ENCASED CONDUITS ARRANGED IN A 1 X 2 DUCTBANK. RUN COPPER AND FIBER OPTIC CABLES IN SEPARATE CONDUITS. INSTALL (1) 3-CELL FABRIC INNERDUCTS IN ONE CONDUIT. ONE CONDUIT MUST REMAIN OPEN AND LABELED AS SPARE.
 2. PROVIDE ONE (1) 48-STRAND SM FOC BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 77. ROUTE FOC WITHIN TELECOMMUNICATIONS DUCTBANK.
 3. PROVIDE ONE (1) 12-STRAND SM FOC BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 433 (NMCI, NIPR) WITHIN TELECOMMUNICATIONS DUCTBANK
 4. EXISTING IN-GROUND DUCT BANK BETWEEN 354T, 355T AND 235T IS COLLAPSED AND NOT USABLE. EXISTING FEEDER CABLES TRANSITION TO AERIAL BETWEEN T235 AND UTILITY POLES HERE.

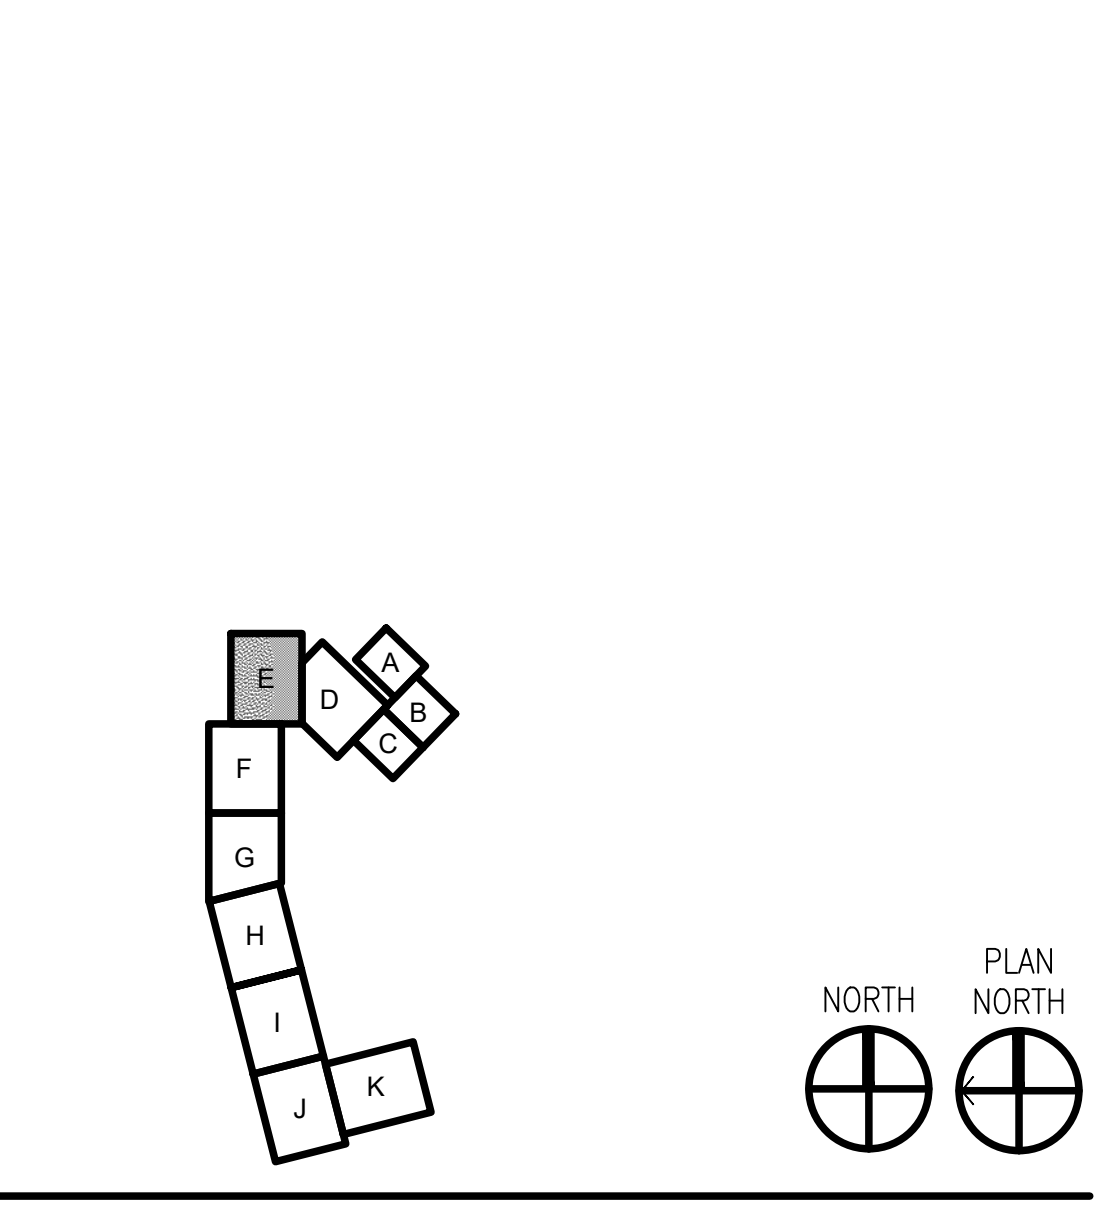

GRAPHIC SCALE

1"=60'

0' 60' 120'

APPR.	DATE	SYN.	DESCRIPTION
APPROVED			
FOR COMMANDER NAVFAC			
ACTIVITY: APPROVED BY LCDR ELIZABETH OLOKODE NAVFAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT			
SATISFACTORY TO: DATE: 05/27/2025			
DES	RR	DRW	TO
CHK	HF		
BRANCH MANAGER: SMS/CWJ			
CHIEF ENGINEER: WRB			
FIRE PROTECTION: JMU			
HPN			
DEPARTMENT OF THE NAVY			
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC			
NAVAL STATION - NORFOLK, VA			
NAVAL SUBMARINE BASE NEW LONDON			
GROTON, CONNECTICUT			
P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY			
SITE			
TELECOMMUNICATIONS SITE PLAN - AREA E			
SCALE: AS NOTED			
EPROJECT NO.: 1667770			
CONSTR. CONTR. NO.			
NAVFAC DRAWING NO. 12893944			
SHEET 138 OF 152			
TS105			

MATCHLINE SHEET TS108

A1



1. CONDUIT ROUTING SHOWN IS DIAGRAMMATIC. VERIFY IN FIELD FINAL ROUTING OF CONDUITS. REFERENCE SITE PLAN DETAILS T-508, T-509, TYPICAL FOR SITE PLAN.
2. PROVIDE 20FT SERVICE LOOP IN EACH PULL THROUGH MAINTENANCE HOLE OR 50FT SPLICE LOOP INSTALLED ON EACH SIDE OF A SPLICE CASE. TYPICAL.
3. TMHXX - PROVIDE IN-GROUND TELECOMMUNICATIONS MAINTENANCE HOLE.
4. TOTAL LENGTH OF FIBER RUN BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 433 IS APPROXIMATELY 2 MILES. FUSION SPLICE PERMITTED ALONG ROUTE FOR BUILDING 77 AND 433. PROVIDE INSTALLATION PLAN FOR OWNER APPROVAL AND VERIFY ACTUAL LENGTH PRIOR TO INSTALLING CABLE.




NAVFAC




	KEYED NOTES
1.	PROVIDE ONE (1) 48-STRAND SM FOC BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 77. ROUTE FOC WITHIN TELECOMMUNICATIONS DUCTBANK
2.	PROVIDE ONE (1) 12-STRAND SM FOC BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 433 (NMCI, NIPR) WITHIN TELECOMMUNICATIONS DUCTBANK

- _____

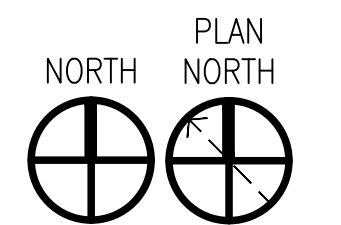

1"=60' 0' 60' 120'

					
1100 NORTH GLEBE ROAD SUITE 500 ARLINGTON, VIRGINIA 22201 571.218.1000 FAX: 571.218.1600					
A/E INFO					
APPROVED					
FOR COMMANDER NAVFAC					
ACTIVITY APPROVED BY LCDR ELIZABETH OLOKODE NAVFAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT					
SATISFACTORY TO		DATE 05/27/2025			
DES	RR	DRW	TO	CHK	HF
					SMS/CWJ
PMIDM					WRB
BRANCH MANAGER					JWJ
CHIEF ENGINEER					HPN
FIRE PROTECTION					
DEPARTMENT OF THE NAVY NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC MID-ATLANTIC NAVAL STATION NORFOLK VA NAVAL SUBMARINE BASE NEW LONDON GROTON, CONNECTICUT P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY SITE TELECOMMUNICATIONS SITE PLAN - AREA G					
SCALE: AS NOTED					
PROJECT/NO.: 1667/770					
CONSTR. CONTR. NO.					
NAVFAC DRAWING NO. 12893946					
SHEET 140	OF 152				
TS107					

MATCHLINE SHEET TS107

MATCHLINE SHEET TS109

A1

TELECOMMUNICATIONS SITE PLAN - AREA H



SCALE: 1"= 60'-0"

GENERAL SHEET NOTES

- CONDUIT ROUTING SHOWN IS DIAGRAMMATIC. VERIFY IN FIELD FINAL ROUTING OF CONDUITS. REFERENCE SITE PLAN DETAILS T-508, T-509, TYPICAL FOR SITE PLAN.
- PROVIDE 20FT SERVICE LOOP IN EACH PULL THROUGH MAINTENANCE HOLE OR 50FT SPLICE LOOP INSTALLED ON EACH SIDE OF A SPLICE CASE. TYPICAL.
- TMHXX - PROVIDE IN-GROUND TELECOMMUNICATIONS MAINTENANCE HOLE.
- TOTAL LENGTH OF FIBER RUN BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 433 IS APPROXIMATELY 2 MILES. FUSION SPLICE PERMITTED ALONG ROUTE FOR BUILDING 77 AND 433. PROVIDE INSTALLATION PLAN FOR OWNER APPROVAL AND VERIFY ACTUAL LENGTH PRIOR TO INSTALLING CABLE.

KEYED NOTES

- PROVIDE ONE (1) 48-STRAND SM FOC BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 77. ROUTE FOC WITHIN TELECOMMUNICATIONS DUCTBANK
- PROVIDE ONE (1) 12-STRAND SM FOC BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 433 (NMCI, NIPR) WITHIN TELECOMMUNICATIONS DUCTBANK

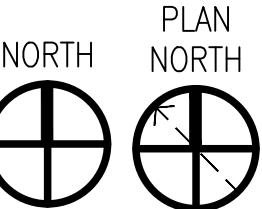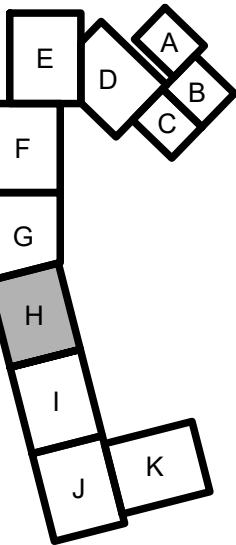

GRAPHIC SCALE



SYN	DESCRIPTION	DATE	APPR



Jacobs
1100 NORTH GLEBE ROAD
SUITE 500
ARLINGTON, VIRGINIA 22201
571.218.1000
FAX: 571.218.1600

APPROVED

A/E INFO

FOR COMMANDER NAVFAC
ACTIVITY APPROVED BY LCDR ELIZABETH OLOKODE NAVFAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT
SATISFACTORY TO DATE 05/27/2025
DES RR DRW TO CHK HF
PMIDM SMS/CWJ
BRANCH MANAGER WRB
CHIEF ENGINEER JWI
FIRE PROTECTION HPN

DEPARTMENT OF THE NAVY	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC	NAVAL STATION - NORFOLK, VA
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC	NAVAL SUBMARINE BASE NEW LONDON	GROTON, CONNECTICUT	P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY
TELECOMMUNICATIONS SITE PLAN - AREA H			SITE

SCALE: AS NOTED
PROJECT NO.: 1687770
CONSTR. CONTR. NO.
NAVFAC DRAWING NO. 12893947
SHEET 141 OF 152
TS108

MATCHLINE SHEET TS108



MATCHLINE SHEET TS110

A1

TELECOMMUNICATIONS SITE PLAN - AREA I

SCALE: 1"= 60'-0"



GENERAL SHEET NOTES

- CONDUIT ROUTING SHOWN IS DIAGRAMMATIC. VERIFY IN FIELD FINAL ROUTING OF ALL CONDUITS. REFERENCE SITE PLAN DETAILS T-508, T-509, TYPICAL FOR SITE PLAN.
- PROVIDE 20FT SERVICE LOOP IN EACH PULL THROUGH MAINTENANCE HOLE OR 50FT SPLICE LOOP INSTALLED ON EACH SIDE OF A SPLICE CASE. TYPICAL.
- TMHXX (N) - PROVIDE INGROUND TELECOMMUNICATIONS MAINTENANCE HOLE.
- TOTAL LENGTH OF FIBER RUN BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 433 IS APPROXIMATELY 2 MILES. FUSION SPLICE PERMITTED ALONG ROUTE FOR BUILDING 77 AND 433. PROVIDE INSTALLATION PLAN FOR OWNER APPROVAL AND VERIFY ACTUAL LENGTH PRIOR TO INSTALLING CABLE.



KEYED NOTES

- PROVIDE ONE (1) 48-STRAND SM FOC BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 77. ROUTE FOC WITHIN TELECOMMUNICATIONS DUCTBANK
- PROVIDE ONE (1) 12-STRAND SM FOC BETWEEN THE OPERATIONS BUILDING (BLDG A) AND BUILDING 433 (NMCI, NIPR) WITHIN TELECOMMUNICATIONS DUCTBANK

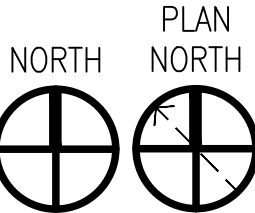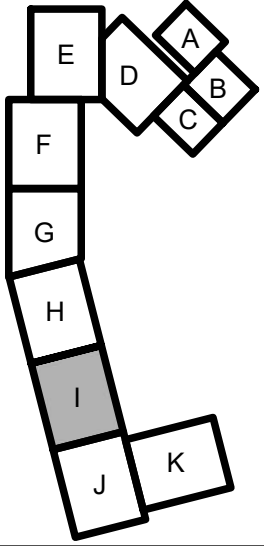

GRAPHIC SCALE



SYN	DESCRIPTION	DATE	APPR



Jacobs

1100 NORTH GLEBE ROAD
SUITE 500
ARLINGTON, VIRGINIA 22201
571.218.1000
FAX: 571.218.1600

APPROVED

FOR COMMANDER NAVFAC

ACTIVITY APPROVED BY LCDR ELIZABETH OLOKODE NAVFAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT

SATISFACTORY TO DATE 05/27/2025

DES	RR	DRW	TO	CHK	HF
-----	----	-----	----	-----	----

PMIDM SMS/CWJ

BRANCH MANAGER WRB

CHIEF ENGINEER JWI

FIRE PROTECTION HPN

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC
NAVAL STATION - NORFOLK, VA
NAVAL SUBMARINE BASE NEW LONDON
GROTON, CONNECTICUT
P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY
SITE
TELECOMMUNICATIONS SITE PLAN - AREA I

SCALE: AS NOTED
EPROJECT NO.: 1667770
CONSTR. CONTR. NO.

NAVFAC DRAWING NO. 12893948
SHEET 142 OF 152

TS109

1

SECURITY

CR

CARD READER

DA

DURESS ALARM

DC

ACS DOOR POSITION SENSOR

BMS

IDS HIGH SECURITY BALANCED MAGNETIC SWITCH

PCU

IDS PREMISE CONTROL UNIT

ACP

ACCESS CONTROL PANEL

J

IDS MOTION DETECTOR MOUNTED TO CEILING

EL

24VDC ELECTRIC LOCKSET W/ INTERNAL REQUEST-TO-EXIT
(PROVIDED BY DIV.08)

NS

NETWORK SWITCH

P

120VAC POWER CONNECTION (PROVIDED BY DIV.26)

DATA CONNECTION (PROVIDED BY DIV.27)

EXISTING ANALOG CAMERA

8MP FIXED LENS CCTV CAMERA

PNS

20MP MULTI-SENSOR PANORAMIC CCTV CAMERA

DIB

DOOR INTERFACE BOX

J

6" X 6" X 4" HINGED COVER KEY LOCKABLE ENCLOSURE

J1

10" X 10" X 4" HINGED COVER KEY LOCKABLE ENCLOSURE

J1

12" X 12" X 6" HINGED COVER KEY LOCKABLE ENCLOSURE

KP

IDS CONTROL KEYPAD

M

IDS MOTION DETECTOR PENDANT MOUNTED TO STRUCTURE

MW

IDS MOTION DETECTOR WALL MOUNTED

J1

INFORMATION TECHNOLOGY (IT) CABINET (BY DIV. 27)

NOTE: SECURITY SYMBOLS SHOWN ON DRAWINGS ARE SHOWN FOR COORDINATION PURPOSES AND ONLY INCLUDE ROUGH-IN FOR THE DEVICE. SECURITY SYSTEMS DEVICES, HARDWARE, SOFTWARE, AND WIRING ARE GFGI.

2

ABBREVIATIONS

AFF

ABOVE FINISHED FLOOR

BFC

BELOW FINISHED GRADE

CR

CARD READER

C

CONDUIT

EA

EACH

ER

EQUIPMENT ROOM

EX

EXISTING

GFCI

GOVERNMENT FURNISHED, CONTRACTOR INSTALLED

GFGI

GOVERNMENT FURNISHED, GOVERNMENT INSTALLED

IDS

INTRUSION DETECTION SYSTEM

MS

MOTION SENSOR

QU

QUANTITY

REQ'D

REQUIRED

RM

ROOM

SHT

SHEET

TR

TELECOMMUNICATION ROOM

TGB

TELECOMMUNICATION GROUNDING BUSBAR

TMGB

TELECOMMUNICATION MAIN GROUNDING BUSBAR

TBB

TELECOMMUNICATION BONDING BACKBONE

UNO

UNLESS NOTED OTHERWISE

SEPARATION DISTANCES BETWEEN DATA CABLES AND SPECIFIC EMI SOURCES

SOURCE OF DISTURBANCE	MINIMUM SEPARATION DISTANCE
FLUORESCENT LAMPS	6"
NEON LAMPS	6"
MERCURY VAPOUR LAMPS	6"
HIGH-INTENSITY DISCHARGE LAMPS	6"
ARC WELDERS	6"
FREQUENCY INDUCTION HEATING	40"

50' DISTANCE LIMIT RULE

IN NO CASE MUST A NON-LISTED OUTSIDE PLANT OR INCOMING SERVICE OUTDOOR RATED CABLE EXCEED 50 FEET FROM THE POINT OF ENTRANCE INTO ANY BUILDING. IF ON-SITE CONDITIONS RESULT IN A CASE WHERE THE CABLE EXCEEDS THE DISTANCE LIMIT THE CONTRACTOR MUST ADVISE A SOLUTION WITH THE PROJECT CONSULTANT. IN ALL CASES THE SOLUTION WOULD NEED TO INVOLVE EITHER TRANSITIONING FROM OUTDOOR NON-LISTED TO INDOOR LISTED CABLE VIA A SPLICE POINT (E.G. SPLICE CASE OR SPLICE ENCLOSURE FOR FIBIER, PROTECTOR BLOCK FOR COPPER ETC.) OR THE ALTERNATIVE MUST BE TO ENCLOSE THE OUTDOOR RATED CABLE WITHIN INTERMEDIATE METAL CONDUIT (IMC) OR RIGID METAL CONDUIT (RMC) THAT IS PROPERLY SEALED AND BONDED TO A GROUNDING ELECTRODE. RETAINING THE OUTDOOR CABLE WITHIN CONDUIT MUST EFFECTIVELY EXTEND THE POINT OF ENTRANCE INTO THE BUILDING.

OSP DETECTION TAPE INCLUSION

IN ORDER TO REDUCE THE CHANCE OF ACCIDENTAL DIG-UP OF OUTSIDE PLANT DUCTBANK ELEMENTS IN THE FUTURE, PROVIDE A DETECTABLE WARNING TAPE CONTAINING METALLIC TRACINGS ALONG THE DUCTBANK PATH AT 12" BELOW GRADE MINIMUM. COLOR OF THE DETECTABLE TAPE MUST BE ORANGE OR WHICHEVER COLOR THE COMMON GROUND ALLIANCE (CGA) HAS CURRENTLY DETERMINED FOR TELEVISION AND COMMUNITY ANTENNA TELEVISION (CATV) CABLES.

3

CONDUIT INSTALLATION NOTES

ASSOCIATED WITH DIVISION 26

THE RACEWAY SYSTEM FOR TELECOM CABLE MUST FOLLOW THE NEC AND ALL LOCAL CODES GOVERNING THIS PROJECT. ADDITIONAL REQUIREMENTS ARE AS FOLLOWS:
1. A PULL CORD (NYLON, 1/8" MINIMUM) MUST BE INSTALLED WITHIN ALL CONDUITS.
2. CONDUIT MUST RUN IN MOST DIRECT ROUTE POSSIBLE, USUALLY PARALLEL WITH BUILDING LINES.
3. CONDUIT SLEEVES MUST BE RIGID GALVANIZED STEEL FOR PENETRATIONS OF CONCRETE SLABS, CONCRETE WALLS. ALL SLEEVES MUST BE RIGIDLY INSTALLED USING APPROPRIATE FITTINGS AND ALL PENETRATIONS MUST BE GROUTED AROUND THE SLEEVE. SLEEVES MUST PROJECT A MINIMUM OF 4" BEYOND WALL OR FLOOR SURFACE. ALL PENETRATIONS MUST BE FIRESTOPPED.
4. CONDUIT RUN MUST CONTAIN NO CONTINUOUS SECTIONS LONGER THAN 100 FEET. IF RUNS TOTAL MORE THAN 100 FEET, PULL POINTS OR PULL BOXES MUST BE INSERTED.
5. CONDUIT RUNS TO WORK AREAS MUST SERVE NO MORE THAN ONE COMMUNICATION OUTLET. DAISY CHAINING IS NEVER ALLOWED.
6. CONDUIT MUST HAVE NO MORE THAN TWO 90 DEGREES OF BENDS AT ANY POINT OR MORE THAN 180 DEGREES OF CUMULATIVE BENDS BETWEEN PULL POINTS.
7. INSTALL CONDUITS WITH A MINIMUM OF BENDS AND OFFSETS. BENDS MUST NOT KINK OR DESTROY INTERIOR CROSS SECTION OF RACEWAY. FACTORY MADE BENDS MUST BE USED FOR RACEWAYS 1" TRADE SIZE AND LARGER. BENDS RADIUS MUST BE 6 TIMES INTERNAL DIAMETER FOR CONDUIT SIZES UP TO 2". A CONDUIT GREATER THAN 2" MUST HAVE BEND RADIUS AT LEAST 10 TIMES DIAMETER OF CONDUIT. DO NOT USE PULL BOX IN LIEU OF A BEND RADIUS. BEND RADIUS ON CABLING MUST ALWAYS BE MADE WITHIN THE CONDUIT.
8. DO NOT INSTALL CONDUIT OVER OR ADJACENT TO BOILERS, INCINERATORS, HOT WATER LINES, OR STEAM LINES.
9. REAM ALL CONDUIT ENDS AND FIT THEM WITH AN INSULATED BUSHING TO ELIMINATE SHARP EDGES THAT MAY DAMAGE CABLES.
10. AFTER INSTALLATION, LEAVE CONDUITS CLEAN, DRY AND UNOBSTRUCTED, REAMED AND FITTED WITH BUSHINGS.
11. ELECTRICAL METALLIC TUBING AND RIGID METAL CONDUIT ARE THE ONLY ALLOWED TYPES FOR INTERIOR BUILDING. FLEXIBLE METAL CONDUIT IS NEVER ALLOWED.
12. CONDUIT SYSTEM INSTALLATION:
12.1. CABLE IN EXTERIOR, ABOVE GRADE LOCATIONS: RIGID GALVANIZED STEEL.
12.2. INTERIOR LOCATIONS: EMT.
12.3. CABLE BELOW GRADE: SCHEDULE 40 PVC.
13. ALL METALLIC CONDUITS MUST BE APPROPRIATELY GROUNDED AS SPECIFIED IN THE NEC, ANSI/TIA/EIA J-STD-607-B AND PER MANUFACTURER'S SPECIFICATIONS.
14. CLEARLY MARK EACH CONDUIT TO INDICATE THE TRADE INTENDED TO SUPPORT.
15. CABLE PATHWAY MUST NOT EXCEED 295 FEET. THE LENGTH MUST BE MEASURED FROM THE OUTLET IN THE WORK AREA TO PATCH PANEL IN THE RACK.
16. FOR OUTSIDE PLANT CONDUITS ROUTES PROVIDE A SITE LEVEL ACCESSIBLE HANDHOLE EVERY (2) 90 DEGREE BENDS OR 180 DEGREES IN BENDS TOTAL. DISTANCE BETWEEN EACH HANDHOLE MUST NOT EXCEED 600 FEET DISTANCE. DO NOT USE HANDHOLE IN LIEU OF A BEND RADIUS. BEND RADIUS ON CABLING MUST ALWAYS BE MADE WITHIN THE CONDUIT.
17. OUTSIDE PLANT LOCATIONS, ROUTES, AND PULL POINTS ARE INDICATIVE ONLY. REVIEW THE PROJECT SITE AND SUBMIT SHOP DRAWING FOR REVIEW BEFORE COMMENCING WORK.

GENERAL PROJECT NOTES

A. ALL MOUNTING HEIGHTS ARE TO THE CENTER LINE OF THE DEVICE BACKBOX UNLESS NOTED OTHERWISE.
B. ALL BOXES AND CONDUITS IN WALLS AND CEILINGS MUST BE FLUSH MOUNTED OR CONCEALED UNLESS NOTED OTHERWISE.
C. ALL EXTERIOR OUTLETS MUST BE WEATHERPROOF.
D. EXACT LOCATION OF ALL TELECOM OUTLETS LOCATED IN FURNITURE AND MILLWORK TO BE VERIFIED WITH ARCHITECT PRIOR TO INSTALLATION.
E. ELECTRICAL OUTLETS MUST BE PROVIDED WITHIN THREE FEET OF COMMUNICATION OUTLETS AT EQUAL HEIGHT.

SEPARATION DISTANCES BETWEEN POWER AND DATA CABLES

CONDITION	MINIMUM SEPARATION DISTANCE		
	< 2kVA	2-5 kVA	> 5kVA
UNSHIELDED POWER LINES OR ELECTRICAL EQUIPMENT IN PROXIMITY TO OPEN OR NONMETAL PATHWAYS.	5"	12"	24"
UNSHIELDED POWER LINES OR ELECTRICAL EQUIPMENT IN PROXIMITY TO A GROUNDED METAL CONDUIT PATHWAY.	2.5"	6"	12"
POWER LINES ENCLOSED IN A GROUNDED METAL CONDUIT (OR EQUIVALENT SHIELDING) IN PROXIMITY TO A GROUNDED METAL CONDUIT PATHWAY.		3"	6"
ELECTRICAL MOTORS AND TRANSFORMERS.			48"

4

CABLE SCHEDULE

CABLE	DESCRIPTION	USE
A1	COMPOSITE OSDP: 2PR 24AWG OAS, 4C 22AWG, 4C 18AWG, 4C 18AWG CMP	DOOR INTERFACE BOX OSDP
A2	COMPOSITE WEIGAND: 3PR 18AWG, 4C 16AWG, 6C 18AWG CMP	DOOR INTERFACE BOX WEIGAND
B	2PR 24AWG	RS485
C1	1PR 22AWG, SHLD + 2C 16AWG PWR	CARD READER OSDP
C2	6C 22AWG, SHLD	CARD READER WEIGAND
D	2C 18AWG CMP	DPS
E	6C 22AWG CMP	HSS/BMS
F	4C 18AWG CMP	REX
G	4C 16AWG CMP	24VDC LOCK POWER
H	2C 20AWG CMP	TAMPER
J	4C 20AWG, SHLD	ALARM SENSOR
K	3PR 18 AWG, SHLD	ALARM SENSOR
L	2C 16AWG, SHLD	LOWER VOLTAGE POWER
M	CATEGORY 6 UTP	VIDEO SURVEILLANCE

CAMERA DEVICE SCHEDULE

LOCATION	DEVICE TYPE	DETAIL REFERENCE
TYPE G 001 EXTERIOR	POLE-MOUNTED CAMERA	TY501 / A1
TYPE G 002 EXTERIOR	POLE-MOUNTED CAMERA	TY501 / A1
TYPE G 002 EXTERIOR	POLE-MOUNTED CAMERA	TY501 / A1
CLWS-005 EXTERIOR	POLE-MOUNTED CAMERA	TY501 / A1
CLWS-006 EXTERIOR	POLE-MOUNTED CAMERA	TY501 / A1
TYPE H 001 EXTERIOR	POLE-MOUNTED CAMERA	TY501 / A1
EXST-001 EXTERIOR	POLE-MOUNTED CAMERA	TY501 / A1

5

TY001

APPROVED

FOR COMMANDER NAVFAC

ACTIVITY APPROVED BY LCDR ELIZABETH OLOKODE NAVFAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT

SATISFACTORY TO DATE 05/27/2025

DES MG DRW LA CHK RR

PMIDM SMS/CWJ

BRANCH MANAGER WRB

CHIEF ENGINEER JMJ

FIRE PROTECTION HPN

DEPARTMENT OF THE NAVY

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC

NAVAL STATION - NORFOLK, VA

NAVAL SUBMARINE BASE NEW LONDON

GROTON, CONNECTICUT

P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY

SITE

SECURITY SYMBOLS AND NOTES

SCALE:


EPROJECT NO.: 1667770

CONSTR. CONTR. NO.

NAVFAC DRAWING NO. 12894352

SHEET 145 OF 152

TY001

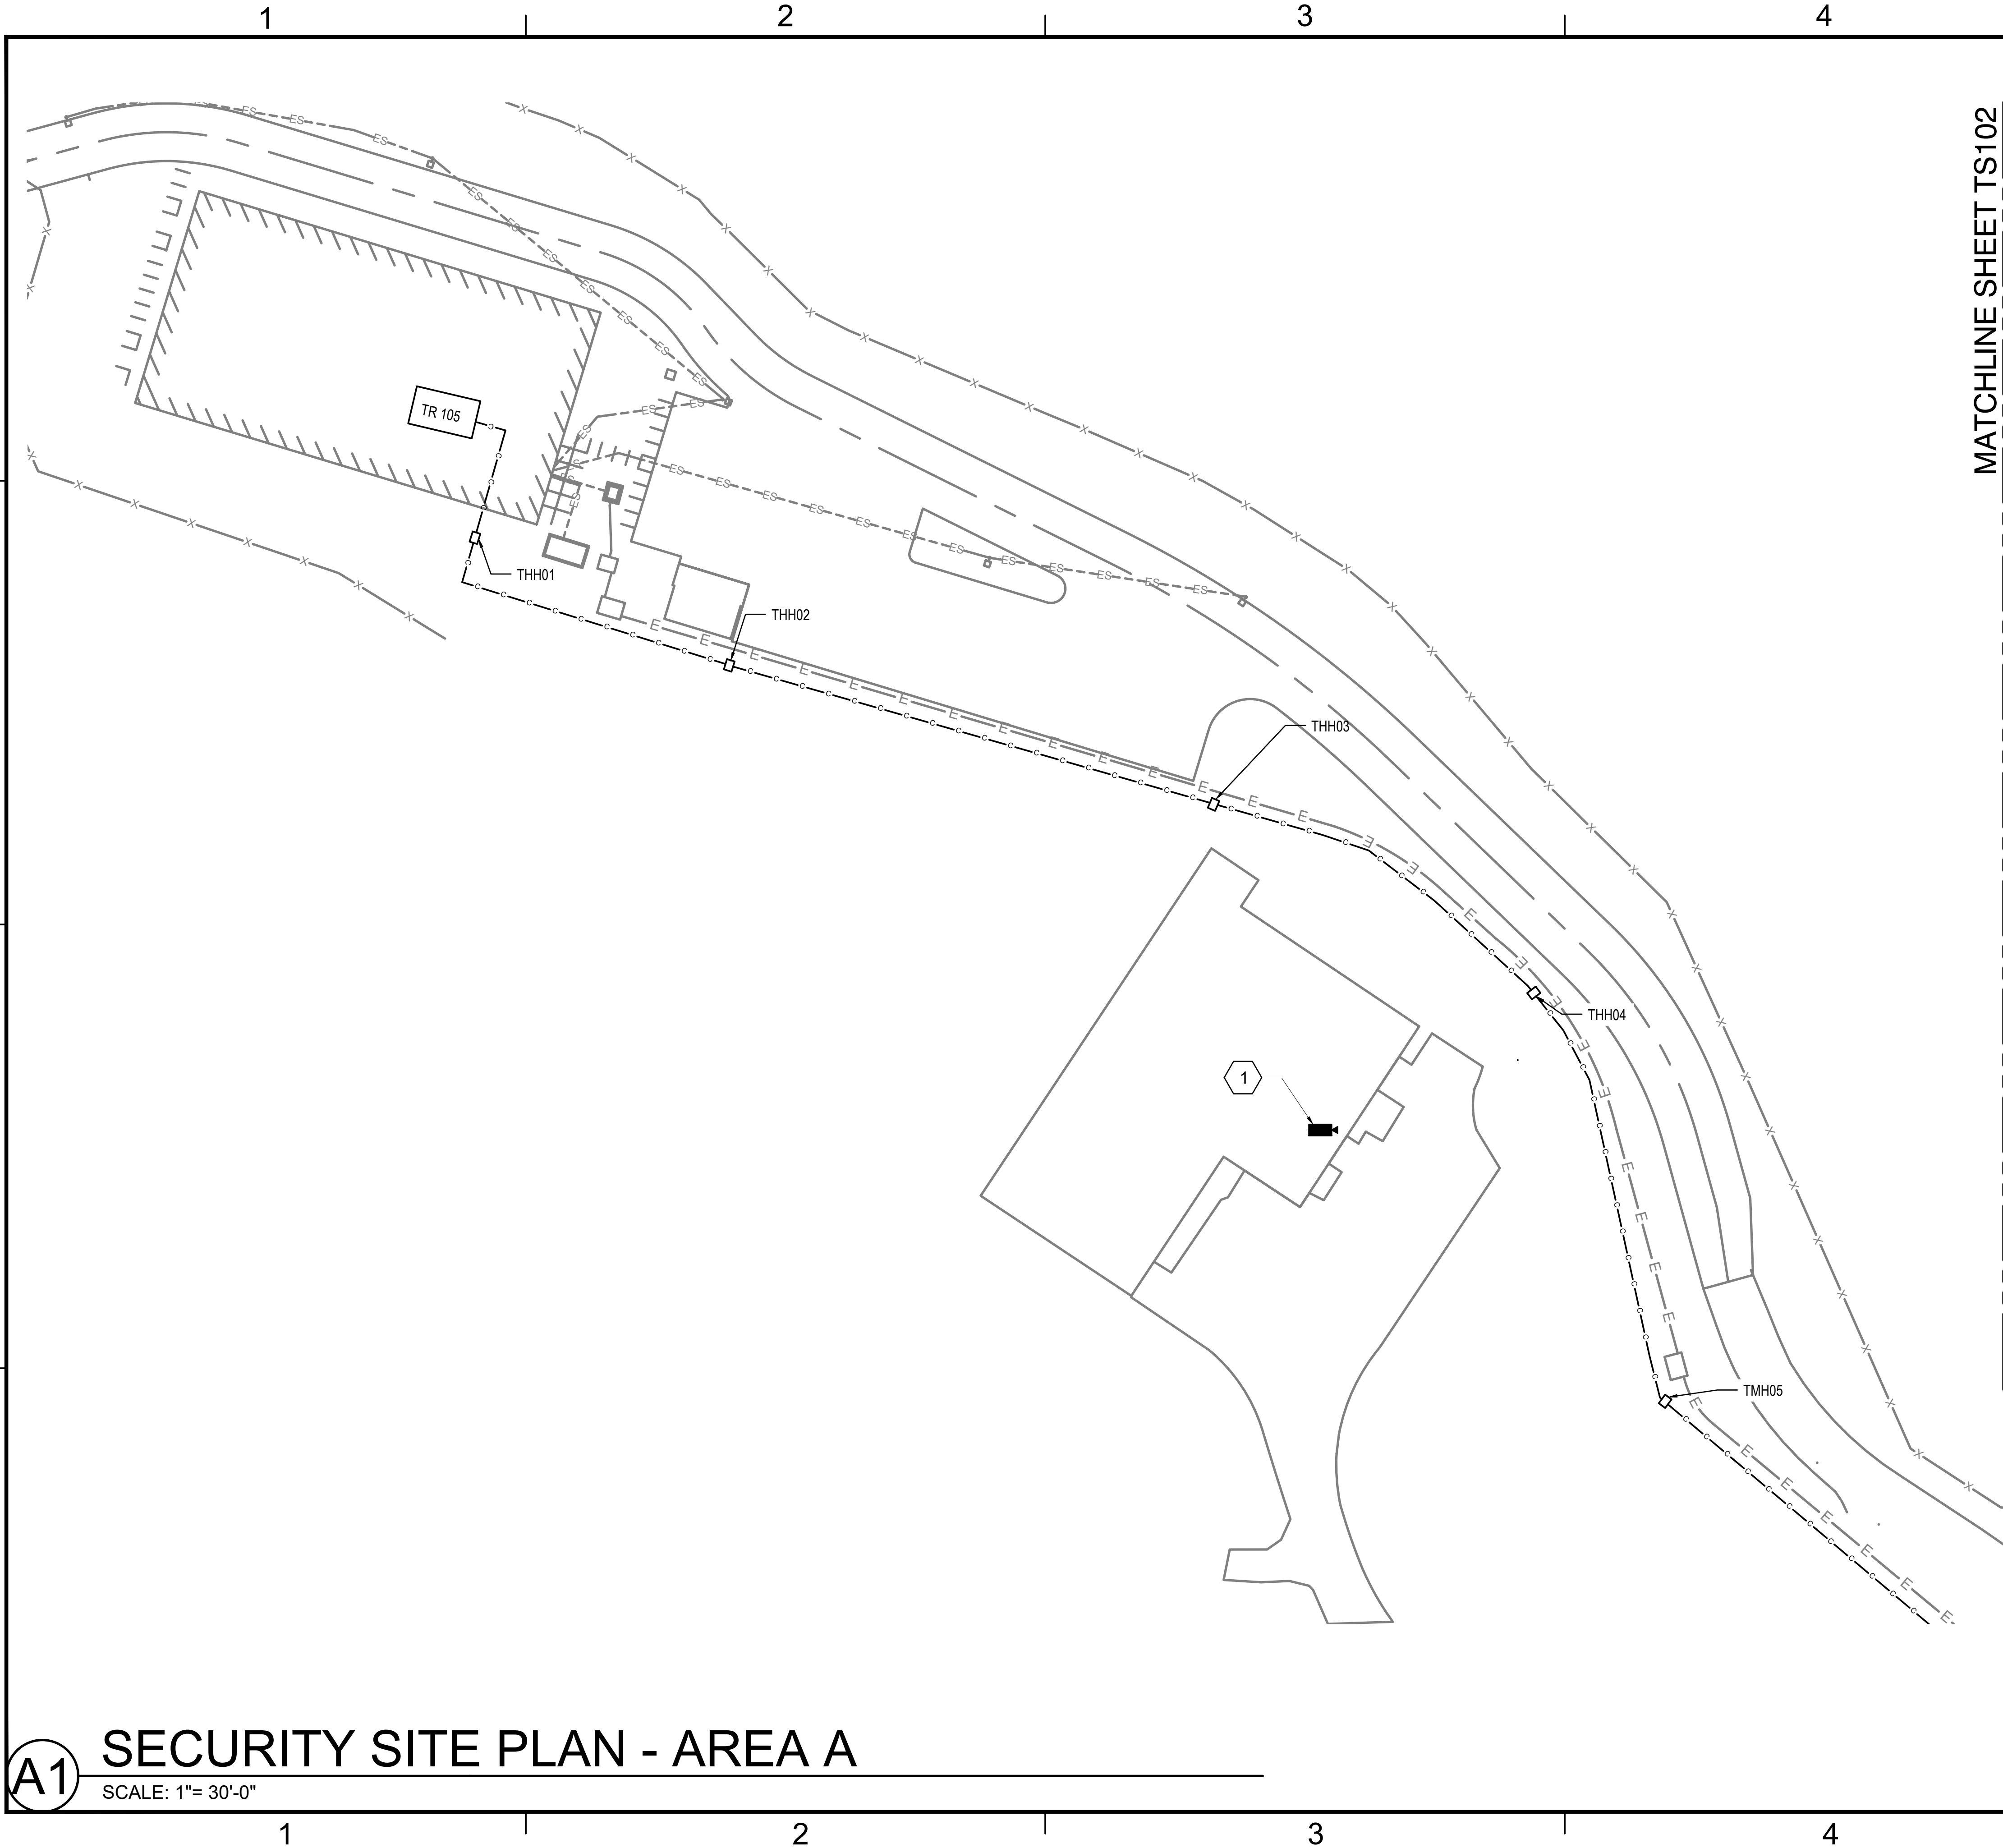

MATCHLINE SHEET TS102

A1

SECURITY SITE PLAN - AREA A

SCALE: 1"= 30'-0"

GENERAL SHEET NOTES

- CONDUIT ROUTING SHOWN IS DIAGRAMMATIC. VERIFY IN FIELD FINAL ROUTING OF CONDUITS. ALIGNMENTS MAY CHANGE BASED ON SURVEY AND GEOTECHNICAL INFORMATION RECEIVED. REFERENCE SITE PLAN DETAILS T-508, T-509, TYPICAL FOR SITE PLAN.
- PROVIDE 20FT SERVICE LOOP IN EACH PULL THROUGH MAINTENANCE HOLE OR 50FT SPLICE LOOP INSTALLED ON EACH SIDE OF A SPLICE CASE.
- TMHXX - PROVIDE INGROUND TELECOMMUNICATIONS MAINTENANCE HOLE. H20 TRAFFIC RATED LIDS AND ASSEMBLIES MUST BE PROVIDED WHEN LOCATED IN OR WITHIN 20' OF ROADWAYS.

KEYED NOTES

- EXISTING CAMERA MOUNTED TO B524 MUST REMAIN OPERATIONAL VIEWING THE DOG KIT AREA. CAMERA WILL BE DEMO'D ALONG WITH B524 UPON COMPLETION AND FULL COMMISSIONING OF OPERATIONS BUILDING A.

E
F
G
H
I
J
K

D
C
B
A


NORTH

PLAN NORTH

GRAPHIC SCALE

1"=40' 0' 40' 80'

APPR	DATE	SYN	DESCRIPTION
APPROVED			
FOR COMMANDER NAVFAC			
ACTIVITY: APPROVED BY LCDR ELIZABETH OLOKODE NAVFAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT			
SATISFACTORY TO	DATE	05/27/2025	
DES	MG	DRW	LA
PMIDM	SMS/CWJ		
BRANCH MANAGER	WRB		
CHIEF ENGINEER	JWJ		
FIRE PROTECTION	HPN		
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC			
NAVAL STATION - NORFOLK, VA			
NAVAL SUBMARINE BASE NEW LONDON			
GROTON, CONNECTICUT			
P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY			
SITE			
SECURITY SITE PLAN - AREA A			
SCALE: AS NOTED			
EPROJECT NO.: 1667770			
CONSTR. CONTR. NO.			
NAVFAC DRAWING NO. 12894327			
SHEET 147 OF 152			
TY101			

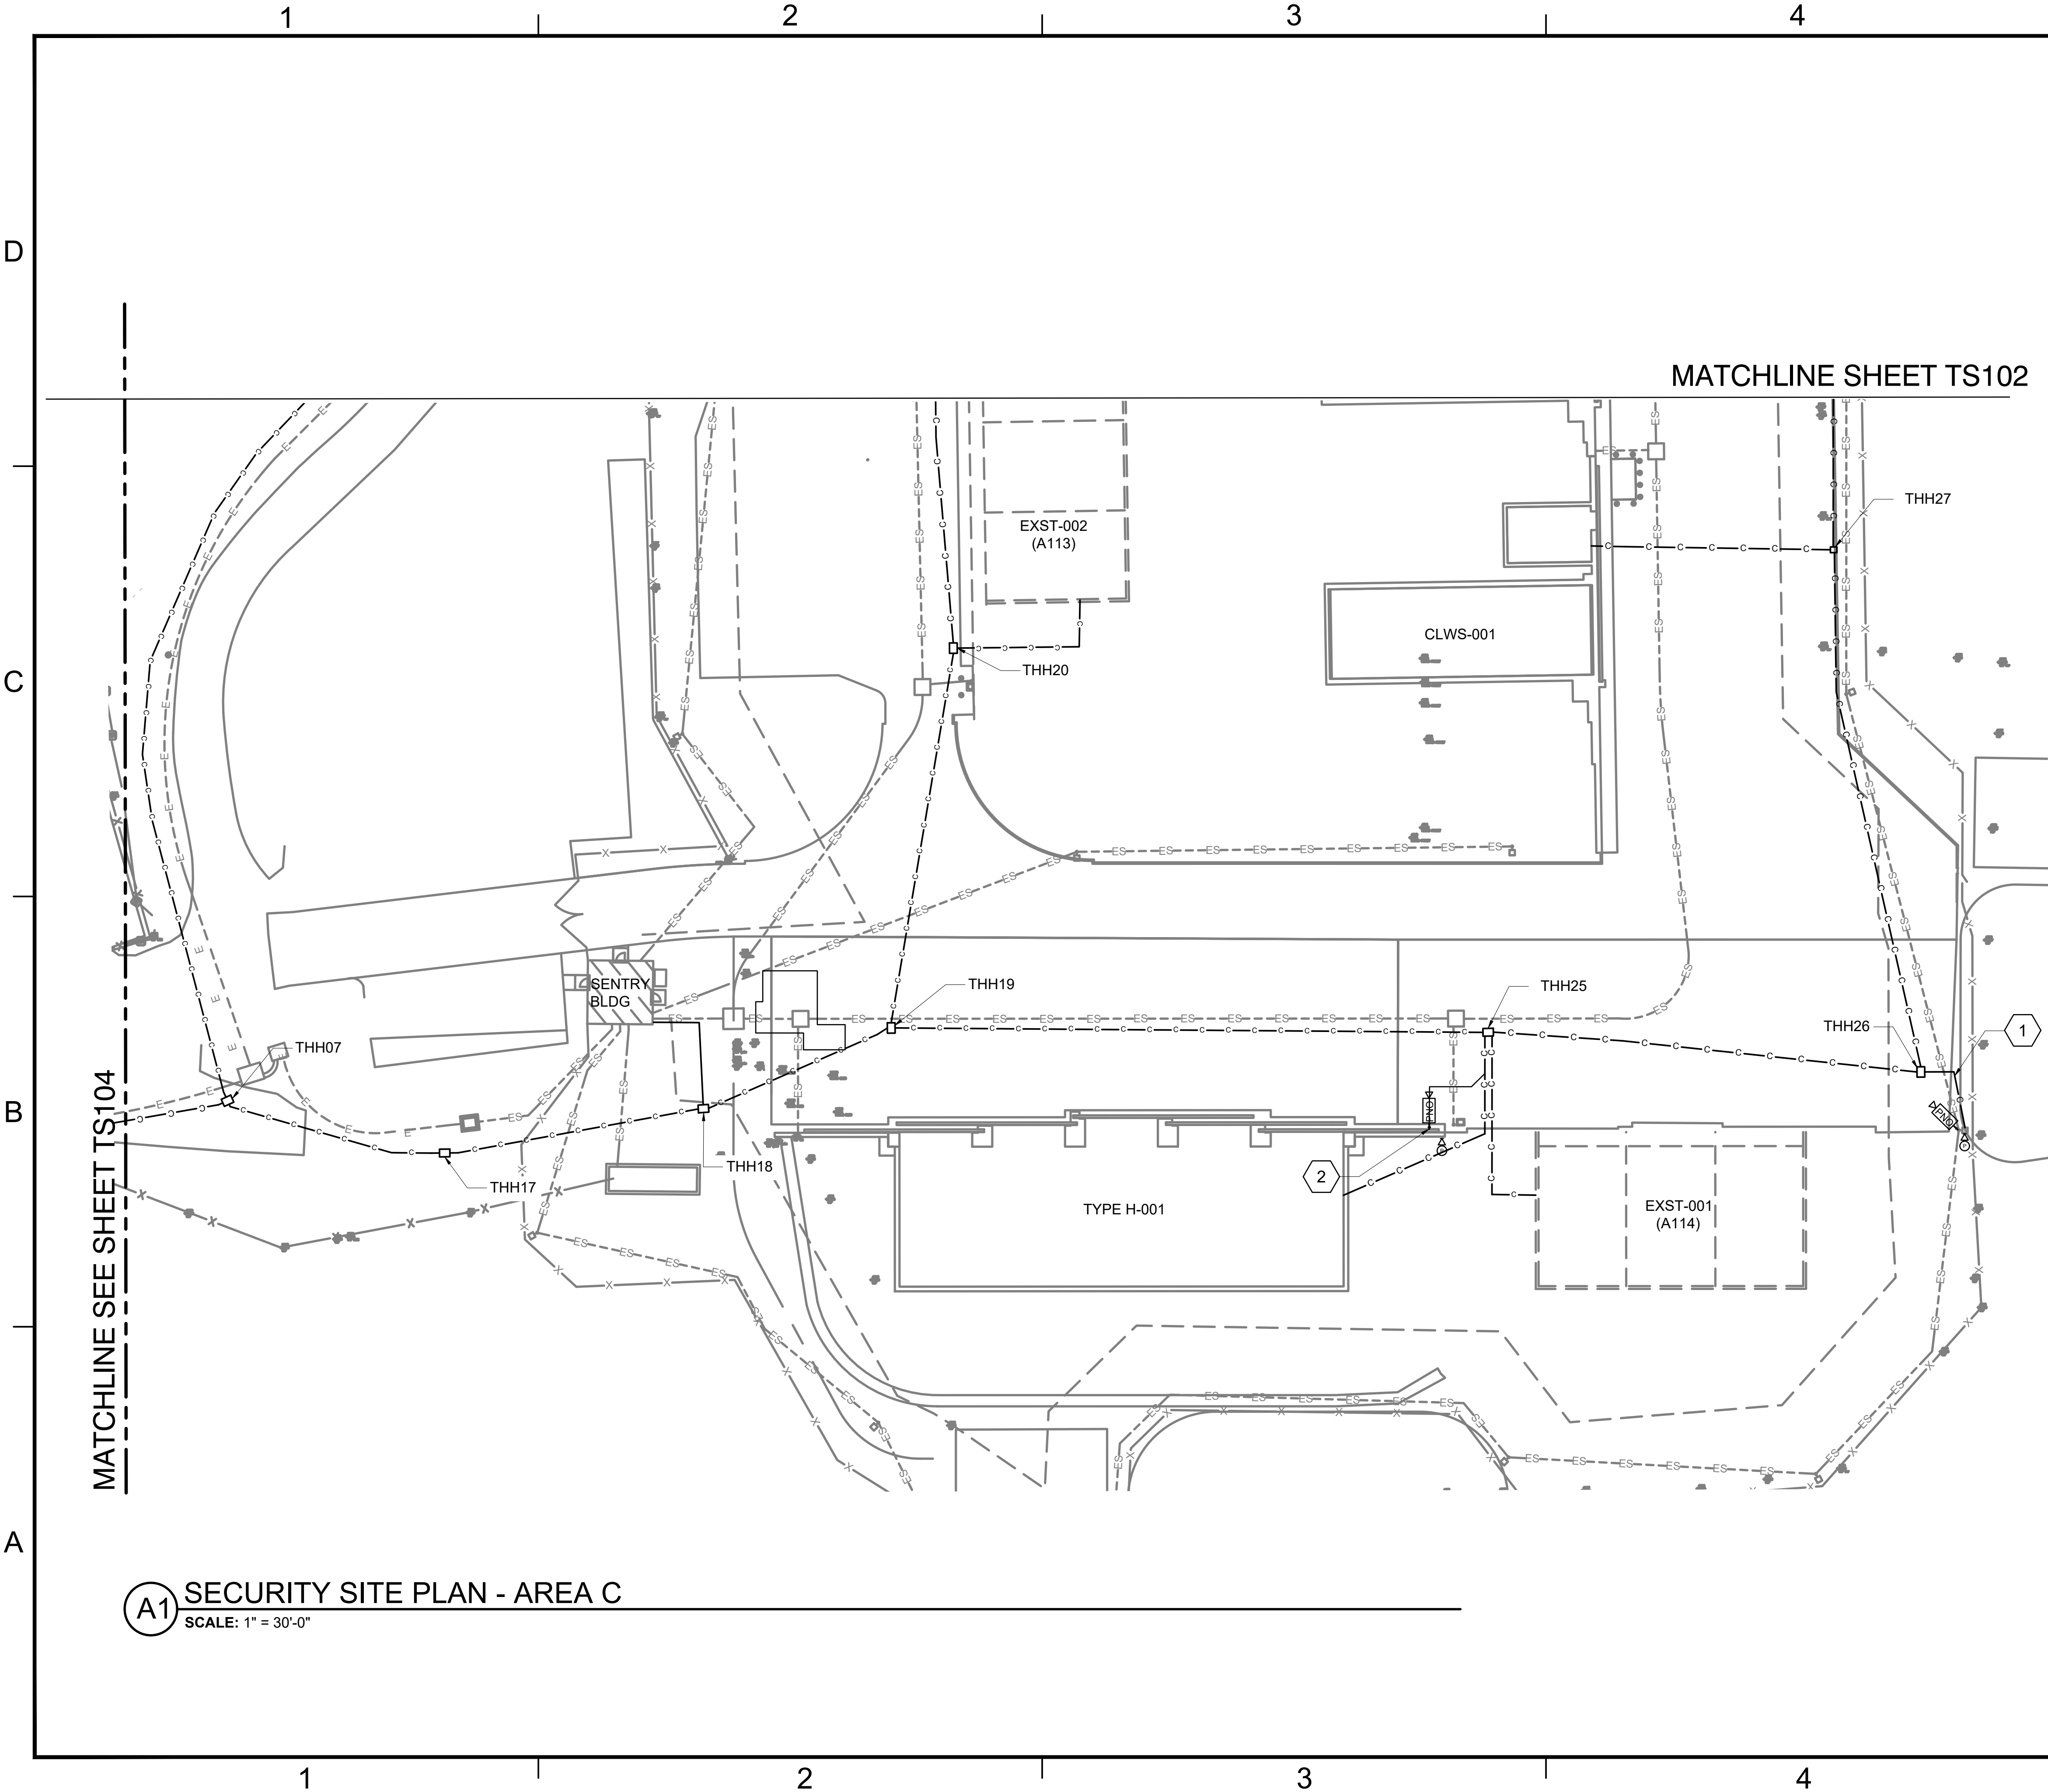


GENERAL SHEET NOTES

1. CONDUIT ROUTING SHOWN IS DIAGRAMMATIC. VERIFY IN FIELD FINAL ROUTING OF ALL CONDUITS. ALIGNMENTS MAY CHANGE BASED ON SURVEY AND GEOTECHNICAL INFORMATION RECEIVED. REFERENCE SITE PLAN DETAILS T-508, T-509, TYPICAL FOR SITE PLAN.
2. PROVIDE 20FT SERVICE LOOP IN EACH PULL THROUGH MAINTENANCE HOLE OR 50FT SPLICE LOOP INSTALLED ON EACH SIDE OF A SPLICE CASE. TYPICAL.
3. TMHXX - PROVIDE IN-GROUND TELECOMMUNICATIONS MAINTENANCE HOLE. H20 TRAFFIC RATED LIDS AND ASSEMBLIES MUST BE PROVIDED WHEN LOCATED IN OR WITHIN 20' OF ROADWAYS.

KEYED NOTES


- 1 CCTV CAMERA CONDUIT (BY DIV. 26)
- 2 PROVIDE 2" X 8' STEEL MAST POLE ATTACHED TO STRUCTURE FOR CCTV CAMERA. PROVIDE 1" CONDUIT AND TIE INTO EXISTING RUN.

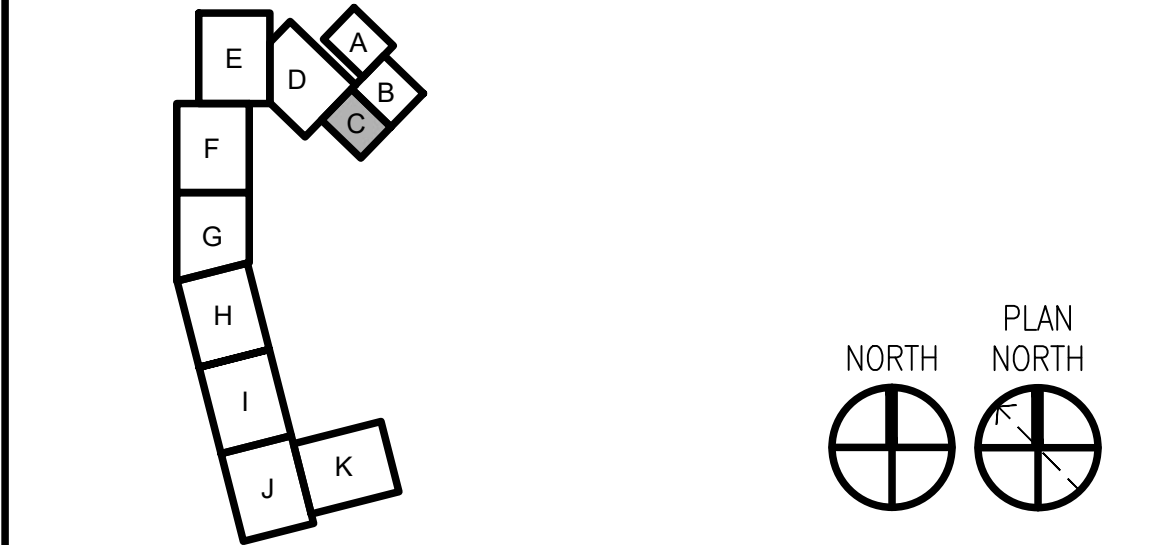

GRAPHIC SCALE



SYN	DESCRIPTION	DATE	APPR

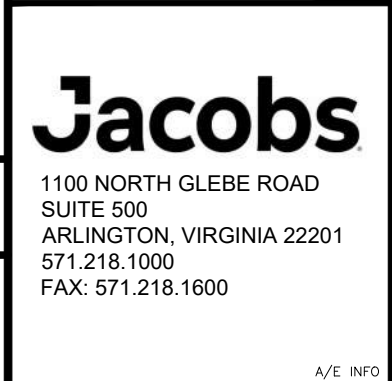

APPROVED	A/E INFO
FOR COMMANDER NAVFAC	
ACTIVITY	APPROVED BY LCDR ELIZABETH OLOKODE NAVFAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT
SATISFACTORY TO	DATE 05/27/2025
DES	MG
DRW	LA
CHK	RR
PMDM	SMS/CWJ
BRANCH MANAGER	WRB
CHIEF ENGINEER	JWJ
FIRE PROTECTION	HPN

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC	NAVAL STATION - NORFOLK, VA
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC	NAVAL SUBMARINE BASE NEW LONDON	GROTON, CONNECTICUT
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC	NAVAL SUBMARINE BASE NEW LONDON	GROTON, CONNECTICUT
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC	NAVAL SUBMARINE BASE NEW LONDON	GROTON, CONNECTICUT
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC	NAVAL SUBMARINE BASE NEW LONDON	GROTON, CONNECTICUT
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC	NAVAL SUBMARINE BASE NEW LONDON	GROTON, CONNECTICUT
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC	NAVAL SUBMARINE BASE NEW LONDON	GROTON, CONNECTICUT
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC	NAVAL SUBMARINE BASE NEW LONDON	GROTON, CONNECTICUT
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC	NAVAL SUBMARINE BASE NEW LONDON	GROTON, CONNECTICUT
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC	NAVAL SUBMARINE BASE NEW LONDON	GROTON, CONNECTICUT

SCALE:	AS NOTED
PROJECT NO.:	1687770
CONSTR. CONTR. NO.	
NAVFAC DRAWING NO.	12894355
SHEET	149 OF 152
TY103	



PATCH PANEL LOCATED IN
IT CABINET BY DIV 27

REFER TO CLWS, TYPE G,
TYPE H, SHEET T-601S


CATEGORY CABLE
BY DIV 27

120VAC POWER CIRCUIT (BY DIV 26)

SITE SECURITY
EQUIPMENT ENCLOSURE

SCALE: NTS

SHEET NOTES	
1.	REFER TO SHEET TY001 FOR SECURITY SYMBOLS AND ABBREVIATIONS.
2.	PROVIDE SEPARATE AND INDEPENDENT PATHWAYS FOR SECURITY CABLING.

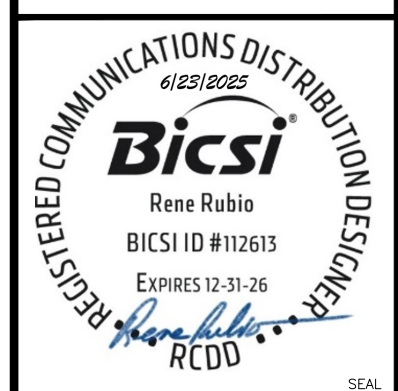[illegible]

Jacobs
1100 NORTH GLEBE ROAD
SUITE 500
ARLINGTON, VIRGINIA 22201
571.218.1000
FAX: 571.218.1600

APPROVED					A/E INFO	
FOR COMMANDER NAVFAC						
ACTIVITY						
APPROVED BY LCDR ELIZABETH OLOKODE NAVFAC NLOD FEAD DIRECTOR NEW LONDON, GROTON, CT						
SATISFACTORY TO				DATE		
DES				MC	DRW	LA
PM/DM				CHK	RR	
BRANCH MANAGER					SMS/CWJ	
CHIEF ENG/ARCH					WRB	
FIRE PROTECTION					JWJ	
					HPN	

DEPARTMENT OF THE NAVY	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC
MID-ATLANTIC	NAVAL STATION - NORFOLK, VA
NAVAL SUBMARINE BASE NEW LONDON	GROTON, CONNECTICUT
P-1102 WEAPONS MAGAZINE & ORDNANCE OPERATIONS FACILITY	
SITE	
SECURITY DIAGRAM	

SCALE:	
EPROJECT NO.:	1667770
CONSTR. CONTR. NO.	
NAVFAC DRAWING NO.	
12898113	
SHEET	152 OF 152
TY601	