

WWYK250003

RELOCATE FIRE ALARM

CIRCUIT, B3001, O-P AISLE

KEY PLAN:

TINKER GATE
PASS & ID B6611

VANCE GATE

EAKER GATE

BASE CIVIL
ENGINEER
B400

CONTRACTING
B3

FIRE DEPARTMENT
B117

HRUSKOCY GATE

BASE OPERATIONS
B240

PROJECT LOCATION

LANCER GATE

LIBERATOR GATE

HOPE GATE

GOTT GATE

TRUCK GATE

PIAZZA GATE

LEGEND

CONTRACTOR
HAUL ROUTE

TINKER AFB, OK
VICINITY MAP

GENERAL NOTES:

1. BRAND NAMES: REFERENCE TO SPECIFIC BRAND NAMES OR COMPANIES IS FOR THE PURPOSE OF ESTABLISHING MINIMUM QUALITY STANDARDS, IDENTIFICATION AND GUIDANCE AND IS NOT INTENDED TO LIMIT SELECTION OF OTHER MANUFACTURERS THAT ARE EQUAL OR EXCEED THE SPECIFIED ITEMS IN TERMS OF PHYSICAL PROPERTIES, INCLUDING, COLOR RANGE, FINISH, DURABILITY, APPEARANCE, PERFORMANCE CHARACTERISTICS, AND OTHER FACTORS. OTHER PRODUCTS, MATERIALS, COLORS AND SYSTEMS, MAY BE SUBMITTED FOR EVALUATION AND APPROVAL/DISAPPROVAL BY THE CONTRACTING OFFICER.

2. THIS SET OF CONSTRUCTION DOCUMENTS SHALL BE CONSIDERED AS A WHOLE IN THAT THE GENERAL CONTRACTOR AND ALL THE SUB-CONTRACTORS ARE RESPONSIBLE FOR THE INFORMATION PRESENTED ON ALL SHEETS ON THE SET OF DRAWINGS AND ALL SECTIONS OF THE SPECIFICATIONS.

3. THE CONTRACTOR IS RESPONSIBLE FOR ERECTING ALL CONSTRUCTION FENCING AND BARRICADES AS REQUIRED TO PROTECT CONSTRUCTION MATERIAL AND TO PREVENT ANY UNAUTHORIZED PERSONNEL FROM ENTERING THE CONSTRUCTION SITE.

4. ANY DAMAGE TO THE EXISTING GROUNDS OR FACILITIES CAUSED BY CONSTRUCTION TRAFFIC OR ANY CONSTRUCTION OPERATION SHALL BE REPAIRED OR REPLACED BY THE CONTRACTOR TO MATCH OR EXCEED EXISTING CONDITIONS AT NO ADDITIONAL COST TO THE GOVERNMENT.

5. ALL WORK NOTED & LOCATED IN THESE DOCS SHALL BE UNDERSTOOD BY THE CONTRACTOR TO REQUIRE ALL NEW LABOR & MATERIALS UNLESS SPECIFICALLY NOTED TO BE "EXISTING" OR "BY OTHERS".

6. THE PURPOSE OF THIS PROJECT IS TO REMOVE THE FIRE ALARM AND MASS NOTIFICATION DEVICES FROM THE CONVEYOR AS WELL AS REMOVING THE FIRE SPRINKLER PIPING SUPPORTED BY THE CONVEYOR STRUCTURE. THE CONTRACTOR WILL INSTALL NEW ALARM AND SPRINKLER EQUIPMENT FOR CODE COMPLIANT COVERAGE WITHIN THE SCOPE OF WORK AREA. NEW EXIT SIGNS WILL ALSO BE PROVIDED AND INSTALLED AS REQUIRED IN NFPA 101 IN THE SCOPE OF WORK AREA. THE EXIT SIGNS WILL NOT BE CONNECTED TO THE PRIMARY POWER CIRCUITS UNDER THE SCOPE OF THIS PROJECT, ONLY PROVIDED AND MOUNTED IN THE APPROPRIATE LOCATIONS.

PROJECT DRAWING INDEX

SEQ.	SHT.	SHEET TITLE
		GENERAL
1	G-101	GENERAL NOTES & VICINITY MAP
		DISCIPLINE
2	F-100	NOTES
3	F-101	FIRE ALARM AND SPRINKLER COMPOSITE PLAN
4	F-102	FIRE ALARM AND SPRINKLER COMPOSITE PLAN
5	F-103	FIRE ALARM AND SPRINKLER PLAN AREA "A"
6	F-104	FIRE ALARM AND SPRINKLER PLAN AREA "B"

SIGNATURES

CORROSION ENGINEER: (CECE)	DATE:
CE OPERATIONS: (CECO)	DATE:
ZONE MANAGER:	DATE:
CONSTRUCTION MANAGEMENT: (CECE)	DATE:
FIRE DEPARTMENT	DATE:
SAFETY:	DATE:
INDUSTRIAL HYGIENE:	DATE:
ENVIRONMENTAL:	DATE:
ASBESTOS EVALUATION:	DATE:
COMMUNICATIONS: (COMM)	DATE:
USING AGENCY:	DATE:
REVIEWED BY:	DATE:
REVIEWED BY:	DATE:
DESIGN MANAGER: (CECE)	DATE:
CHIEF DESIGN BRANCH: (CECE)	DATE:
CHIEF ENGINEER DIR: (CECE)	DATE:
BASE CIVIL ENGINEER: (CE)	DATE:

35%
DESIGN

WWYK250003
RELOCATE FIRE ALARM
CIRCUIT, B3001, O-P AISLE

TINKER AIR FORCE BASE, OKLAHOMA

ISSUE DATE: 10/15/2025

DESIGN GROUP: TEPA-CSAG

DESIGNED BY: A McPHERSON

DRAWN BY: S STARR

CHECKED BY: B JIMOH

DESIGN FILE LOCATION: Eng\Design\2020\2025\20250003\Support\Drawings\Model

GENERAL NOTES
AND
VICINITY MAP

SHEET NUMBER
G-101

SHEET 01 OF 06

A

B

C

D

E

1

2

3

4

5

EXISTING BUILDING SCOPE EXTENTS:

1.

UFC 3-600-01, SECTION 34-1.1, EXISTING FACILITIES, MINIMUM REQUIREMENTS: FACILITIES AS THEY EXIST, MUST MEET THE REQUIREMENTS OF NFPA 101, FOR EXISTING OCCUPANCIES. FACILITIES THAT DO NOT MEET THE REQUIREMENTS OF NFPA 101 FOR EXISTING OCCUPANCIES MUST CONFORM TO ONE OF THE FOLLOWING:

A.

UPGRADE THE DEFICIENCY TO MEET THE EXISTING OCCUPANCY REQUIREMENTS, OR

B.

ESTABLISH MANAGEMENT PROTOCOLS TO PROVIDE A LEVEL OF LIFE SAFETY EQUIVALENT TO THAT REQUIRED BY NFPA 101 FOR EXISTING OCCUPANCIES, UNTIL AN UPGRADE PROJECT CAN BE COMPLETED. MANAGEMENT PROTOCOLS MUST BE IN WRITING AND APPROVED BY THE COMPONENT FIRE PROTECTION ENGINEER.

2.

UFC 3-600-01, 34-1.2.1, WORK IN EXISTING FACILITIES: CONFORM TO THE REQUIREMENTS OF THE BUILDING REHABILITATION CHAPTER OF NFPA 101 FOR DESIGN AND CONSTRUCTION PROJECTS IN EXISTING BUILDINGS EXCEPT AS SPECIFIED IN UFC 3-600-01.

A.

THE ENTIRE FACILITY, AT A MINIMUM, MUST COMPLY WITH THE APPLICABLE EXISTING OCCUPANCY CHAPTER OF NFPA 101 BEFORE BEGINNING THE PROJECT FOR WORK IN EXISTING FACILITIES. THE PROJECT MAY INCLUDE BRINGING THE FACILITY INTO COMPLIANCE WITH THE APPLICABLE OCCUPANCY CHAPTER OF NFPA 101.

B.

THE AREAS OF THE FACILITY WHERE NO WORK IS BEING PERFORMED MUST MEET THE APPLICABLE EXISTING OCCUPANCY CHAPTER OF NFPA 101, BEFORE BEGINNING THE PROJECT OR BE INCLUDED AS PART OF THE PROJECT.

3.

NFPA 101, 43.2.2.1.3, MODIFICATION: THE RECONFIGURATION OF ANY SPACE; THE ADDITION, RELOCATION, OR ELIMINATION OF ANY DOOR OR WINDOW; THE ADDITION OR ELIMINATION OF LOAD BEARING ELEMENTS; THE RECONFIGURATION OR EXTENSION OF ANY SYSTEM; OR THE INSTALLATION OF ANY ADDITIONAL EQUIPMENT.

4.

NFPA 101, 43.5.1.3, GENERAL REQUIREMENTS: NEWLY CONSTRUCTED ELEMENTS, COMPONENTS, AND SYSTEMS SHALL COMPLY WITH THE REQUIREMENTS OF OTHER SECTIONS OF THIS CODE [NFPA 101] APPLICABLE TO NEW CONSTRUCTION.

EXIT SIGNS:

1.

LOCATE AND PROVIDE NEW EXIT SIGNS IN THE SCOPE OF WORK AREA WITHIN THE PATHWAY OF THE EXISTING CONVEYOR. EXIT SIGNS SHALL BE PROVIDED AS REQUIRED PER NFPA 101 IN THE SCOPE OF WORK AREA FOR THE PRIMARY EGRESS PATHWAYS ALONG THE EXISTING CONVEYOR. EXIT SIGNS SHALL BE PROVIDED WITH BATTERY BACKUP. THE NEW EXIT SIGNS WILL NOT BE CONNECTED TO POWER CIRCUITS TO ENERGIZE THE UNITS. THE GOVERNMENT WILL BE PROVIDING THE MATERIALS AND LABOR TO ENERGIZE THE EXIT SIGNS AT A LATER DATE. THE GOVERNMENT WILL PROVIDE THE EMT AND POWER CIRCUITS TO THE NEW EXIT SIGNS THAT THE CONTRACTOR PROVIDES AND INSTALLS. THE GOVERNMENT WILL BE WIRING AND ENERGIZING AND TESTING THE EXIT SIGNS OUTSIDE THE SCOPE OF THIS PROJECT AT A LATER DATE.

2.

PROVIDE A FLOOR PLAN THAT IDENTIFIES THE PROPOSED EXIT SIGN LOCATIONS FOR GOVERNMENT REVIEW. THE LAYOUT WILL BE REVIEWED FOR APPROVAL BY THE GOVERNMENT PRIOR TO INSTALLATION.

3.

THE CONTRACTOR IS NOT RESPONSIBLE FOR THE DEMOLITION OF THE EXISTING EXIT SIGNS. THE GOVERNMENT WILL DEMOLISH THE EXISTING EXIT SIGNS AFTER THE DEMOLITION OF THE CONVEYOR AT A LATER DATE, OUTSIDE THE SCOPE OF THIS PROJECT.

FIRE ALARM AND MASS NOTIFICATION DEMOLITION NOTES:

1.

CONTRACT DOCUMENTS WERE PREPARED FROM FIELD SURVEYS. THEY ARE NOT INTENDED TO DEPICT UNFORESEEN CONDITIONS THAT MAY ADVERSELY AFFECT DEMOLITION OR INSTALLATION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS PRIOR TO STARTING ANY WORK.

2.

THE BUILDING FIRE ALARM SYSTEM OUTSIDE THE PROJECT AREA SHALL REMAIN OPERATIONAL AT ALL TIMES. SUPERVISE FIRE PROTECTION IMPAIRMENTS IN ACCORDANCE WITH UFC 3-601-02. NO FIRE ALARM DEVICES SHALL BE DEMOLISHED UNTIL THE BUILDING OCCUPANTS HAVE BEEN REMOVED FROM THAT PORTION OF THE BUILDING OR FIRE WATCH IN PLACE.

3.

PROVIDE PROTECTION AS REQUIRED TO PREVENT DAMAGE TO EXISTING EQUIPMENT.

4.

COORDINATE DEMOLITION WITH NEW WORK. IF UNDOCUMENTED CONDITIONS EXIST, CONTACT THE CONTRACTING OFFICER BEFORE PROCEEDING.

5.

PROTECT EXISTING CONDITIONS INCLUDING BUT NOT LIMITED TO: STRUCTURES, CEILING, WALLS, EQUIPMENT, UTILITIES, ETC. DAMAGE TO EXISTING CONDITIONS SHALL BE REPAIRED AT NO ADDITIONAL COST TO THE GOVERNMENT.

6.

THE BUILDING WILL BE OCCUPIED DURING CONSTRUCTION. COORDINATE WORK WITH GOVERNMENT PRIOR TO COMMENCING WORK. CONTRACTOR SHALL BE RESPONSIBLE FOR WORKING AROUND OCCUPANT SCHEDULE AS DETERMINED BY THE GOVERNMENT AND MAINTAIN MINIMUM IMPACT DUE TO CONSTRUCTION.

FIRE ALARM AND MASS NOTIFICATION GENERAL NOTES:

1.

MODIFY THE EXISTING FIRE ALARM AND MASS NOTIFICATION SYSTEM AS INDICATED ON THE CONTRACT DOCUMENTS, AS EVIDENTLY INTENDED AND IN ACCORDANCE WITH NFPA 70 2023 EDITION, NFPA 72 2025 EDITION, UFC 3-600-01 WITH CHANGE 6, 05/08/2021, AND TINKER AFB FIRE PROTECTION STANDARDS, 2023. THE DRAWINGS ARE DIAGRAMMATIC IN NATURE AND INDICATE GENERAL ARRANGEMENTS OF SYSTEMS AND WORK, BUT DO NOT INCLUDE ALL INTERCONNECTIONS BETWEEN OTHER SYSTEMS. PROVIDE CONDUIT, BACK BOXES, RACEWAY AND WIRING AS REQUIRED TO ACCOMPLISH THE FUNCTIONS INTENDED AND REQUIRED BY CODE.

2.

COORDINATE WORK WITH THAT OF OTHER TRADES SO AS TO AVOID CONFLICTS. RESOLVE CONFLICTS THROUGH THE AE PRIOR TO ROUGH-IN. FAILURE TO PROVIDE SUCH COORDINATION PRIOR TO WORK BEING INSTALLED SHALL NOT BE CAUSE FOR ADDITIONAL COMPENSATION TO THE CONTRACTOR, AND MAY RESULT IN REJECTION OF THE WORK.

3.

COMMISSIONING AND PRELIMINARY AND FINAL ACCEPTANCE TESTING WILL BE IN ACCORDANCE WITH SPECIFICATION SECTIONS 28.31.76 FIRE ALARM AND MASS NOTIFICATION SYSTEM, FIRE PROTECTION, COORDINATE TESTING WITH OTHER TRADES AND BASE PERSONNEL PRIOR TO OPERATION. ALL FIRE SUPPRESSION AND FIRE ALARM TESTING WILL OCCUR SIMULTANEOUSLY TO EXPEDITE COMMISSIONING.

4.

THE BUILDING FIRE ALARM AND MASS NOTIFICATION SYSTEM SHALL REMAIN OPERATIONAL AT ALL TIMES. SUPERVISE ALL FIRE PROTECTION IMPAIRMENTS IN ACCORDANCE WITH UFC 3-601-02. NO PORTION OF THE BUILDING SHALL BE OCCUPIED UNTIL THE FIRE ALARM DEVICES HAVE BEEN INSTALLED OR FIRE WATCH IN PLACE.

5.

PROVIDE NEW MATERIALS, BEARING LABELS OR MARKING INDICATING THIRD PARTY TESTING AND APPROVAL, SUITABLE FOR THE APPLICATION INTENDED.

6.

INSTALL FIRE ALARM CABLE IN METAL RACEWAY. FREE-RUN CABLE IS NOT PERMITTED. RACEWAY SHALL BE CONCEALED IN FINISHED SPACES, AND MAY BE INSTALLED EXPOSED IN UNFINISHED SPACES SUCH AS MECHANICAL AND ELECTRICAL ROOMS. INSTALL RACEWAY PERPENDICULAR OR PARALLEL TO THE BUILDING'S STRUCTURAL COMPONENTS. RACEWAY SHOULD BE 3/4 INCH RED EMT.

7.

PROVIDE PULL AND JUNCTION BOXES AS REQUIRED TO MEET CODE AND INSTALLATION REQUIREMENTS. PULL AND JUNCTION BOXES SHALL BE CONCEALED IN FINISHED SPACES. COORDINATE WITH OTHER TRADES SO AS TO AVOID CONFLICTS. BOXES TO BE RED.

8.

SUPPORT CONDUIT AND BACK BOXES BY MEANS OF ANCHORS, RODS, HANGERS, ETC., TO MAINTAIN ALIGNMENT AND PREVENT MOVEMENT. SUPPORT CEILING MOUNTED BACK BOXES WITH "T" HANGERS OR EQUAL METHOD OF SUPPORT. BACK BOXES SHALL NOT BE SUPPORTED SOLELY BY CONDUIT.

9.

IDENTIFY CONDUCTORS AT EACH JUNCTION BOX, OUTLET BOX, CABINET, PULL BOX, ETC., WITH VINYL HEAT SHRINK TAGS INDICATING PANEL AND CIRCUIT NUMBER, CONTROL WIRE IDENTIFICATION NUMBER, OR OTHER APPROPRIATE INFORMATION.

10.

WHERE CONDUIT PASS THROUGH FIRE WALLS, FIRE BARRIERS, FIRE PARTITION, OR FLOORS, A FIRE SEAL WILL BE PLACED BETWEEN THE PIPE AND SLEEVE IN ACCORDANCE WITH REQUIRED FIRESTOPPING.

11.

SEAL PENETRATIONS AT FIRE OR SMOKE RATED CONSTRUCTION WITH FIRESTOPPING MATERIALS APPROVED AND LISTED FOR THE RATING OF THE CONSTRUCTION TO BE PENETRATED. PROVIDE DOCUMENTATION FOR EACH PENETRATION SEALING SYSTEMS FOR VERIFICATION OF PROPER INSTALLATION.

12.

PERFORM WORK ON DE-ENERGIZED SYSTEMS ONLY TO PREVENT PERSONNEL INJURY AND POTENTIAL SYSTEM FAILURE, WHERE WORK ON EXISTING SYSTEMS SHALL REQUIRE INTERRUPTION OF ELECTRICAL SERVICE, TEMPORARY PROVISIONS ACCEPTABLE TO THE OWNER SHALL BE REQUIRED.

13.

MODIFIED SYSTEM, CONSTRUCTION (SHOP) DRAWINGS AND CALCULATIONS MUST BE PREPARED BY AN INDIVIDUAL THAT HAS OBTAINED NATIONAL INSTITUTE FOR CERTIFICATION IN ENGINEERING TECHNOLOGIES, FIRE ALARM SYSTEMS, LEVEL III CERTIFICATION, AT A MINIMUM. THE QFPE MUST REVIEW THE SHOP DRAWINGS, CALCULATIONS AND MATERIAL SUBMITTALS. THE SHOP DRAWINGS MUST BEAR THE REVIEW STAMP OF THE QFPE PRIOR TO SUBMITTING THE FIRE ALARM AND MASS NOTIFICATION SYSTEM SHOP DRAWINGS TO THE GOVERNMENT.

14.

SUBMIT SHOP DRAWINGS AND CALCULATIONS TO THE GOVERNMENT FORE REVIEW. IN A MANNER AS REQUIRED PER NFPA 72 AND UFC 3-600-01. SUBMIT EQUIPMENT DATA SHEETS FOR A COMPLETE INSTALLATION OF THE FIRE ALARM AND MASS NOTIFICATION SYSTEM. APPROVED SHOP DRAWINGS, TESTING PLANS, DATA SHEETS, AND CALCULATIONS ARE REQUIRED PRIOR TO COMMENCEMENT OF WORK. THE FIRE ALARM AND MASS NOTIFICATION SYSTEM SUBMITTAL SHALL BE A COMPLETE PACKAGE, PARTIAL SUBMITTAL WILL NOT BE ACCEPTABLE.

SPRINKLER SYSTEM DEMOLITION NOTES:

1.

CONTRACT DOCUMENTS WERE PREPARED FROM FIELD SURVEYS. THEY ARE NOT INTENDED TO DEPICT UNFORESEEN CONDITIONS THAT MAY ADVERSELY AFFECT THE ARCHITECTURAL, ELECTRICAL, AND MECHANICAL SYSTEM DEMOLITION OR INSTALLATION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS PRIOR TO STARTING ANY WORK.

2.

THE EXISTING BUILDING SPRINKLER SYSTEM LOCATED OUTSIDE OF THE WORK AREA SHALL REMAIN OPERATIONAL AT ALL TIMES. THE FIRE ALARM SYSTEM SHALL MONITOR THE SPRINKLER SYSTEM WATER FLOW AND VALVE TAMPER DEVICES AT ALL TIMES. SUPERVISE ALL FIRE PROTECTION IMPAIRMENTS IN ACCORDANCE WITH UFC 3-601-02. NO SPRINKLER HEADS SHALL BE DEMOLISHED UNTIL THE BUILDING OCCUPANTS HAVE BEEN REMOVED FROM THE AFFECTED PORTION OF THE BUILDING.

3.

PERFORM DEMOLITION AND INSTALLATION IN A MANNER THAT SHALL HAVE LEAST ADVERSE EFFECT ON NORMAL BUILDING OPERATION. CONTRACTOR SHALL COORDINATE DEMOLITION AND INSTALLATION WITH THE BUILDING USER AND THE GOVERNMENT.

4.

HOT WORK ASSOCIATED WITH DEMOLITION AND CONSTRUCTION SHALL BE PERFORMED IN ACCORDANCE WITH NFPA 51B. SAFEGUARDS FOR HOT WORK OPERATIONS INCLUDE, BUT ARE NOT LIMITED TO THE RELOCATION OF COMBUSTIBLE STORAGE, THE USE OF FIRE RESISTIVE BARRIERS TO PROTECT COMBUSTIBLES THAT CANNOT BE RELOCATED, THE ESTABLISHMENT OF FIRE WATCH AND THE TERMINATION OF HOT WORK OPERATIONS WHEN FIRE PROTECTION SYSTEMS ARE OUT OF SERVICE. ADDITIONALLY, HOT WORK SHOULD NOT BE PERFORMED WHEN ALTERNATIVE METHODS CAN BE EMPLOYED TO DISMANTLE EXISTING OR ASSEMBLE NEW SYSTEMS.

5.

THE CONTRACTOR SHALL PROVIDE PORTABLE FIRE EXTINGUISHERS SUITABLE FOR THE COMBUSTIBLES PRESENT DURING CONSTRUCTION, WHERE EXISTING BUILDING EXTINGUISHERS AREA BLOCKED, REMOVED OR GENERALLY MADE INACCESSIBLE TO THE BUILDING OCCUPANTS. SUPPLEMENTAL EXTINGUISHERS SHALL BE PROVIDED SUCH THAT A PORTABLE FIRE EXTINGUISHER IS LOCATED WITHIN 75 FT OF ALL AREAS OF THE BUILDING. THE CONTRACTOR SHALL REGULARLY INSPECT (AT LEAST WEEKLY) PORTABLE EXTINGUISHERS LOCATED WITHIN THE WORK AREA TO ENSURE THAT THEY ARE CHARGED, FREE FROM DAMAGE AND ACCESSIBLE.

SPRINKLER SYSTEM GENERAL NOTES:

1.

CONTRACTOR IS RESPONSIBLE FOR FINAL INSTALLATION DESIGN AND COORDINATION. SIZING OF FIRE SUPPRESSION COMPONENTS WILL BE CONFIRMED BY CONTRACTOR. DESIGNER WILL BE A MINIMUM NICET LEVEL III TECHNICIAN.

2.

THESE DRAWINGS ARE CONCEPTUAL IN NATURE AND DEVICE PLACEMENTS ARE REPRESENTATIVE. CONTRACTOR TO VERIFY AND PROVIDE FULL DESIGN IN ACCORDANCE WITH APPLICABLE CODES (UFC, ICC, NFPA, ETC.).

3.

THE FIRE SPRINKLER CONTRACTOR WILL COORDINATE WITH THE FIRE ALARM CONTRACTOR AND OTHER TRADES FOR PROVISION OF CONNECTIONS BETWEEN THEIR RESPECTIVE SYSTEMS.

4.

ALL MATERIALS ARE TO BE UL LISTED OR FM APPROVED FOR USE IN FIRE PROTECTION SYSTEMS.

5.

COMMISSIONING AND PRELIMINARY AND FINAL ACCEPTANCE TESTING WILL BE IN ACCORDANCE WITH SPECIFICATION SECTIONS 21.13.13 WET PIPE SPRINKLER SYSTEM, FIRE PROTECTION, COORDINATE TESTING WITH OTHER TRADES AND BASE PERSONNEL PRIOR TO OPERATION. ALL FIRE SUPPRESSION AND FIRE ALARM TESTING WILL OCCUR SIMULTANEOUSLY TO EXPEDITE COMMISSIONING.

6.

THE BUILDING FIRE PROTECTION WATER SUPPLY IS SERVED BY EXISTING FIRE PUMPS.

7.

WHERE PIPES PASS THROUGH FIRE WALLS, FIRE BARRIERS, FIRE PARTITION, OR FLOORS, A FIRE SEAL WILL BE PLACED BETWEEN THE PIPE AND SLEEVE IN ACCORDANCE WITH SECTION 07.84.00 FIRESTOPPING.

8.

SLEEVES PENETRATING CONCRETE, MASONRY WALLS OR CONCRETE FLOORS WILL BE CUT FLUSH WITH EACH SURFACE. SLEEVE SIZES AND CLEARANCE BETWEEN PIPE AND SLEEVE WILL BE IN ACCORDANCE WITH NFPA 13.


9.


SPRINKLERS WILL BE SPACED IN ACCORDANCE WITH NFPA 13 OBSTRUCTION REQUIREMENTS. PROVIDE SPRINKLERS UNDER STAIRS, CATWALKS,

35%
DESIGN

PROJECT INFORMATION
WWYK250003
RELOCATE FIRE ALARM
CIRCUIT, B3001, O-P AISLE
TINKER AIR FORCE BASE, OKLAHOMA

REVISIONS		DATE	DESCRIPTION
MARK	A	01/08/26	REMOVED EXIT SIGNS FROM THE SCOPE OF WORK
MANAGEMENT INFORMATION			
ISSUE DATE: 10/15/2025		DESIGN GROUP: TEPA-CSAG	
DESIGNED BY: A McPHERSON		DRAWN BY: S STARR	
CHECKED BY: B JIMOH		DESIGN FILE LOCATION: Eng\Design\2020\2025\20250003\Support\Drawings\Model	

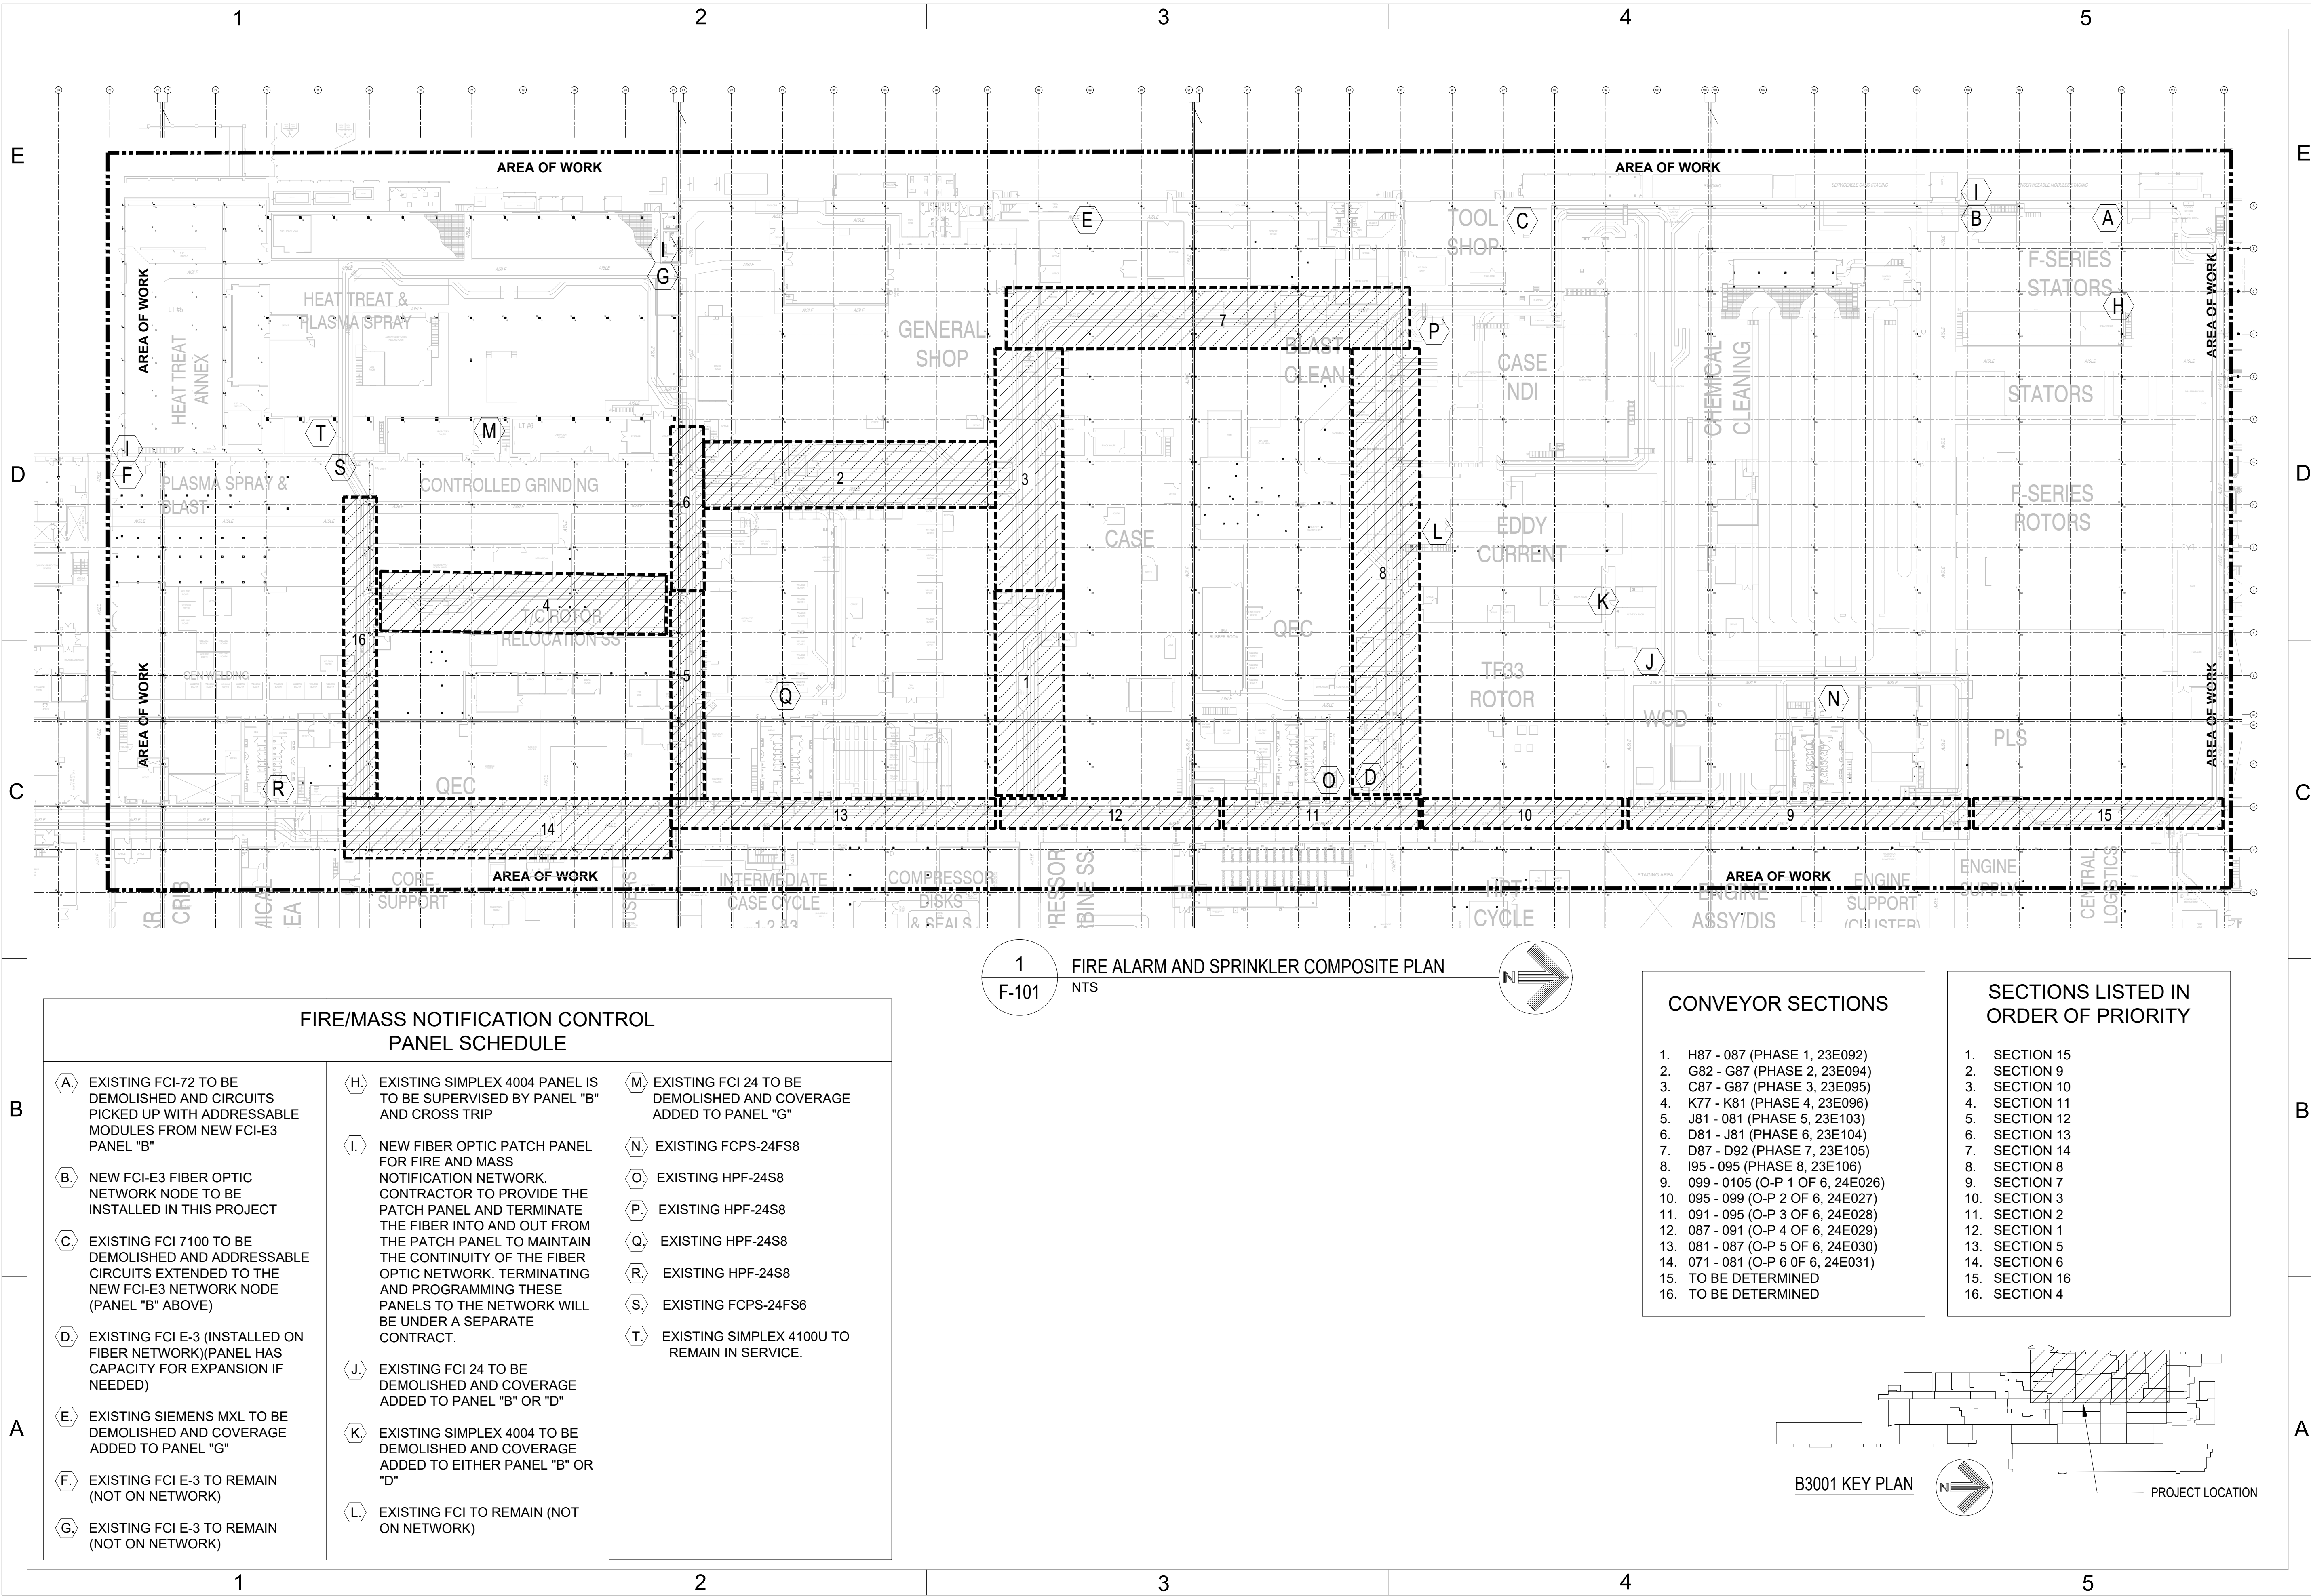

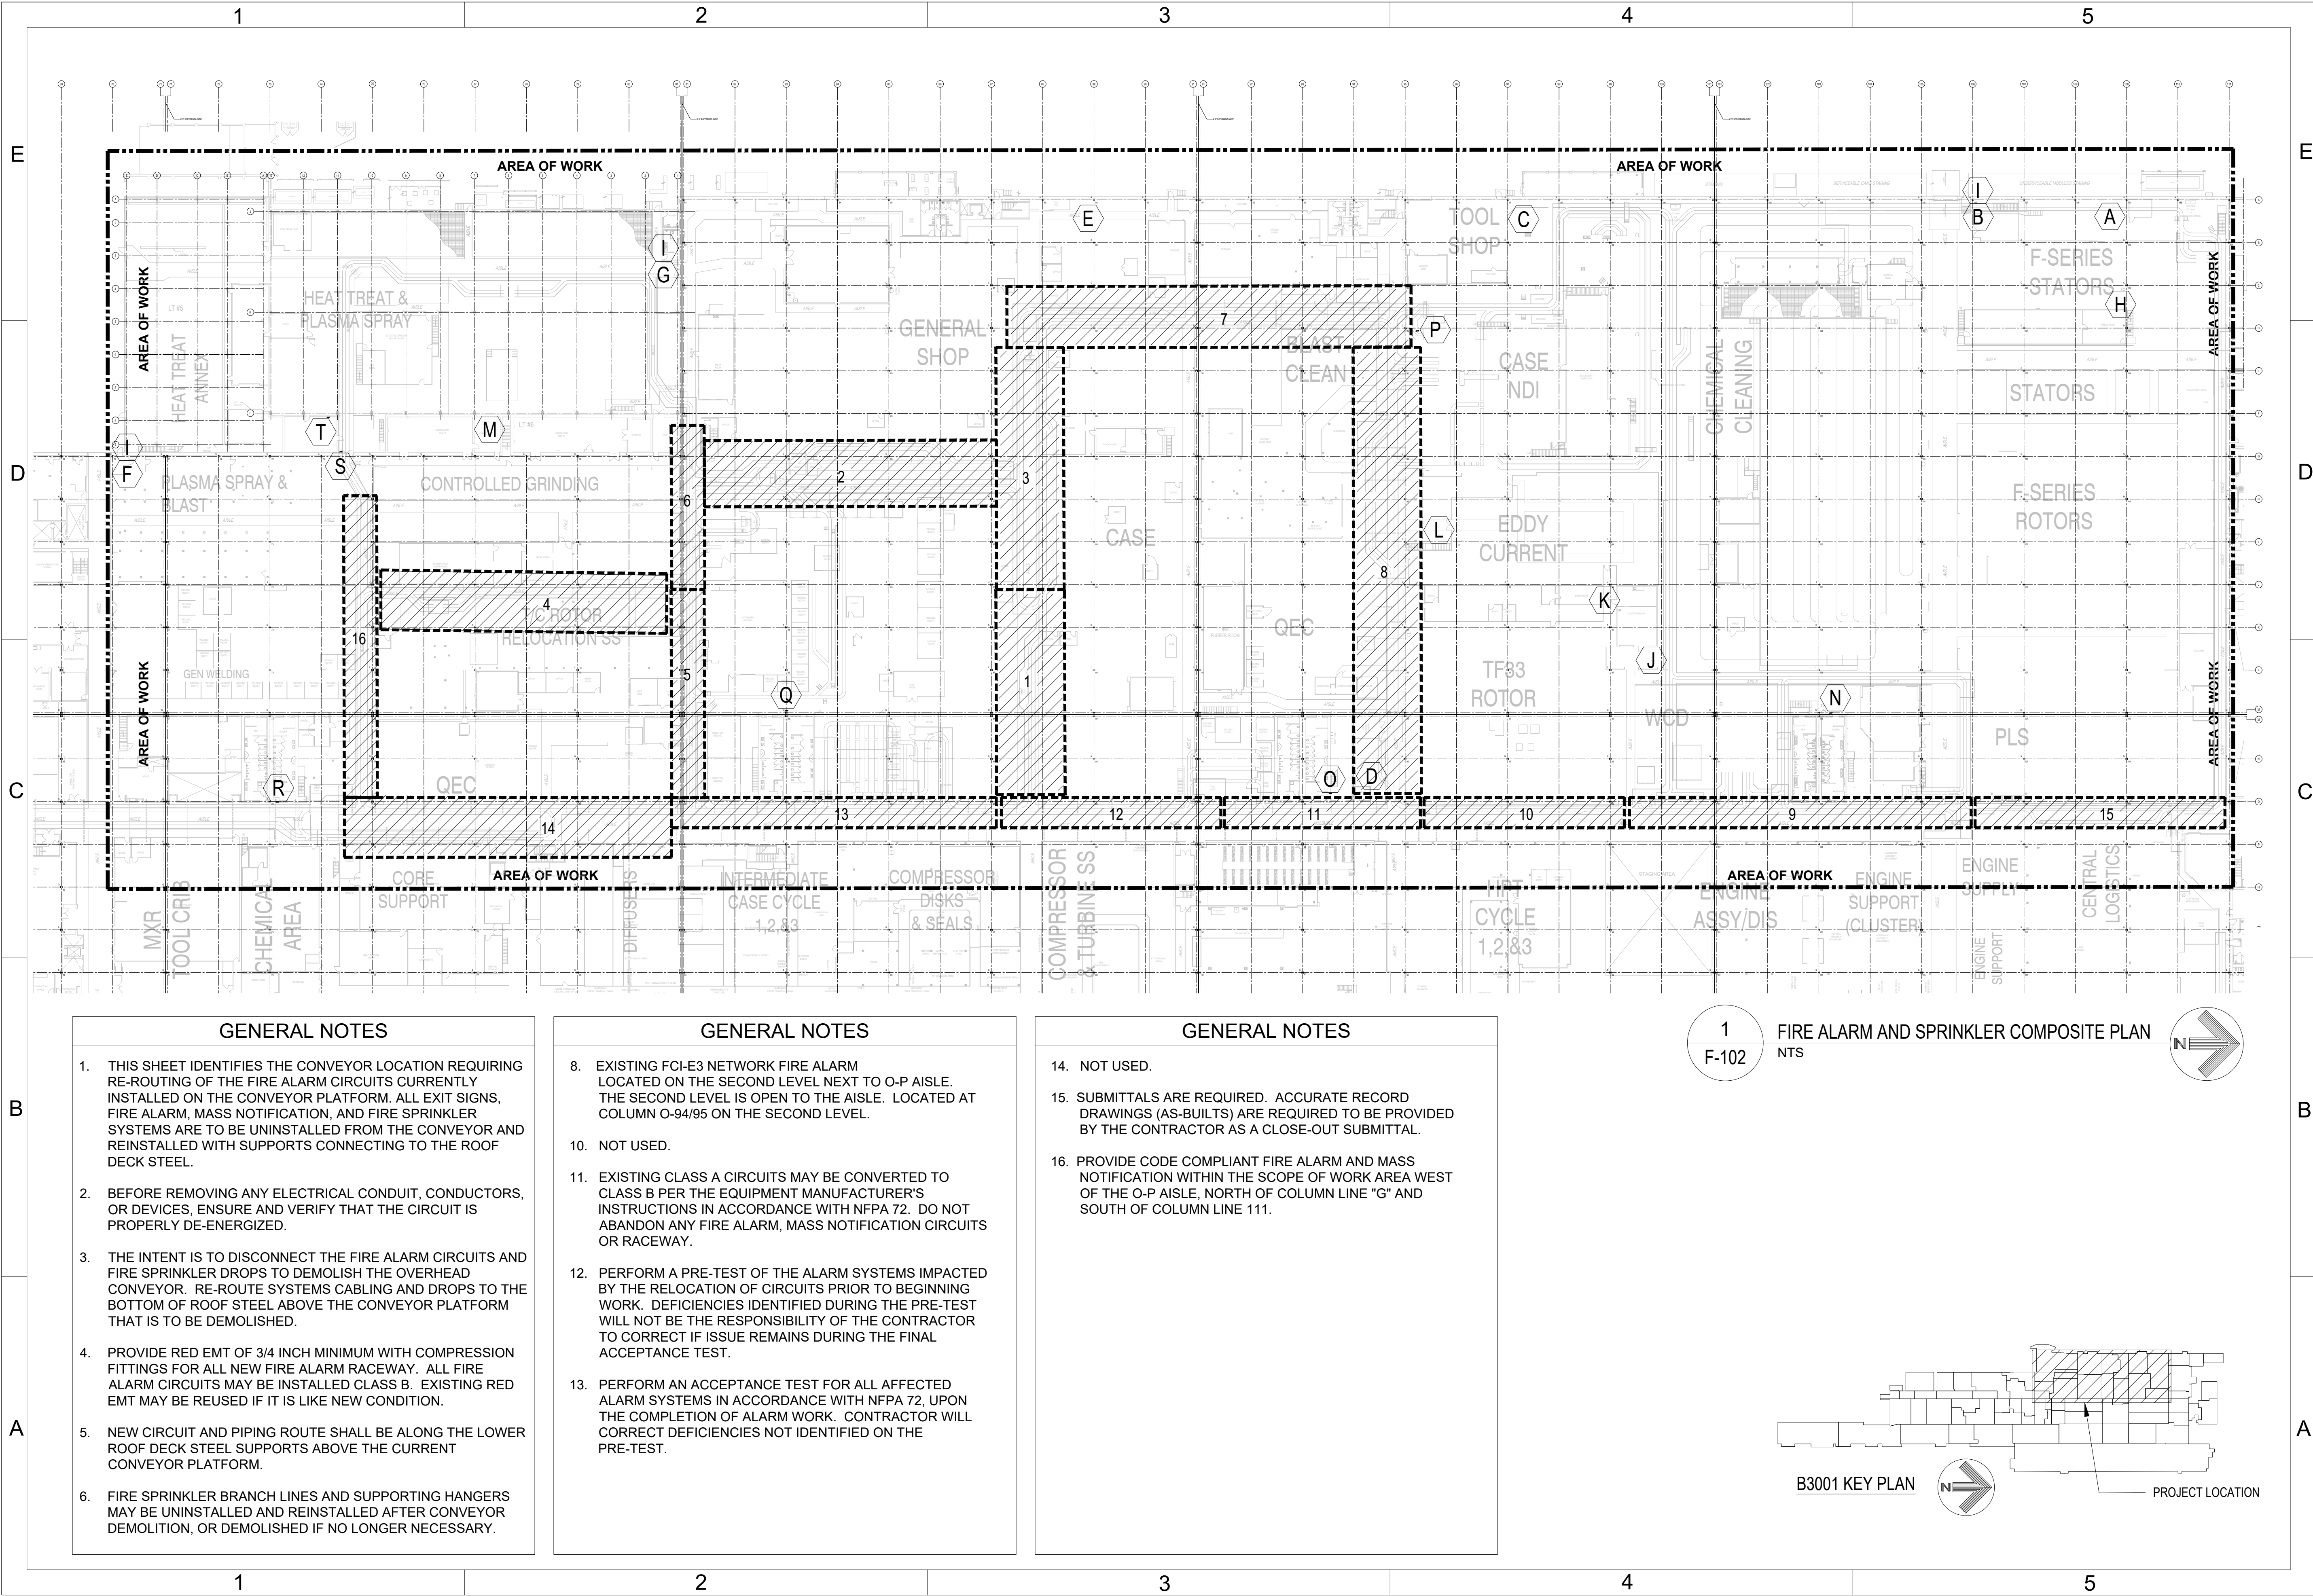


- GENERAL NOTES**
- THIS SHEET IDENTIFIES THE CONVEYOR LOCATION REQUIRING RE-ROUTING OF THE FIRE ALARM CIRCUITS CURRENTLY INSTALLED ON THE CONVEYOR PLATFORM. ALL EXIT SIGNS, FIRE ALARM, MASS NOTIFICATION, AND FIRE SPRINKLER SYSTEMS ARE TO BE UNINSTALLED FROM THE CONVEYOR AND REINSTALLED WITH SUPPORTS CONNECTING TO THE ROOF DECK STEEL.
 - BEFORE REMOVING ANY ELECTRICAL CONDUIT, CONDUCTORS, OR DEVICES, ENSURE AND VERIFY THAT THE CIRCUIT IS PROPERLY DE-ENERGIZED.
 - THE INTENT IS TO DISCONNECT THE FIRE ALARM CIRCUITS AND FIRE SPRINKLER DROPS TO DEMOLISH THE OVERHEAD CONVEYOR. RE-ROUTE SYSTEMS CABLING AND DROPS TO THE BOTTOM OF ROOF STEEL ABOVE THE CONVEYOR PLATFORM THAT IS TO BE DEMOLISHED.
 - PROVIDE RED EMT OF 3/4 INCH MINIMUM WITH COMPRESSION FITTINGS FOR ALL NEW FIRE ALARM RACEWAY. ALL FIRE ALARM CIRCUITS MAY BE INSTALLED CLASS B. EXISTING RED EMT MAY BE REUSED IF IT IS LIKE NEW CONDITION.
 - NEW CIRCUIT AND PIPING ROUTE SHALL BE ALONG THE LOWER ROOF DECK STEEL SUPPORTS ABOVE THE CURRENT CONVEYOR PLATFORM.
 - FIRE SPRINKLER BRANCH LINES AND SUPPORTING HANGERS MAY BE UNINSTALLED AND REINSTALLED AFTER CONVEYOR DEMOLITION, OR DEMOLISHED IF NO LONGER NECESSARY.

- GENERAL NOTES**
- EXISTING FCI-E3 NETWORK FIRE ALARM LOCATED ON THE SECOND LEVEL NEXT TO O-P AISLE. THE SECOND LEVEL IS OPEN TO THE AISLE. LOCATED AT COLUMN O-94/95 ON THE SECOND LEVEL.
 - NOT USED.
 - EXISTING CLASS A CIRCUITS MAY BE CONVERTED TO CLASS B PER THE EQUIPMENT MANUFACTURER'S INSTRUCTIONS IN ACCORDANCE WITH NFPA 72. DO NOT ABANDON ANY FIRE ALARM, MASS NOTIFICATION CIRCUITS OR RACEWAY.
 - PERFORM A PRE-TEST OF THE ALARM SYSTEMS IMPACTED BY THE RELOCATION OF CIRCUITS PRIOR TO BEGINNING WORK. DEFICIENCIES IDENTIFIED DURING THE PRE-TEST WILL NOT BE THE RESPONSIBILITY OF THE CONTRACTOR TO CORRECT IF ISSUE REMAINS DURING THE FINAL ACCEPTANCE TEST.
 - PERFORM AN ACCEPTANCE TEST FOR ALL AFFECTED ALARM SYSTEMS IN ACCORDANCE WITH NFPA 72, UPON THE COMPLETION OF ALARM WORK. CONTRACTOR WILL CORRECT DEFICIENCIES NOT IDENTIFIED ON THE PRE-TEST.

- GENERAL NOTES**
- NOT USED.
 - SUBMITTALS ARE REQUIRED. ACCURATE RECORD DRAWINGS (AS-BUILTS) ARE REQUIRED TO BE PROVIDED BY THE CONTRACTOR AS A CLOSE-OUT SUBMITTAL.
 - PROVIDE CODE COMPLIANT FIRE ALARM AND MASS NOTIFICATION WITHIN THE SCOPE OF WORK AREA WEST OF THE O-P AISLE, NORTH OF COLUMN LINE "G" AND SOUTH OF COLUMN LINE 111.

1
F-102

FIRE ALARM AND SPRINKLER COMPOSITE PLAN
NTS

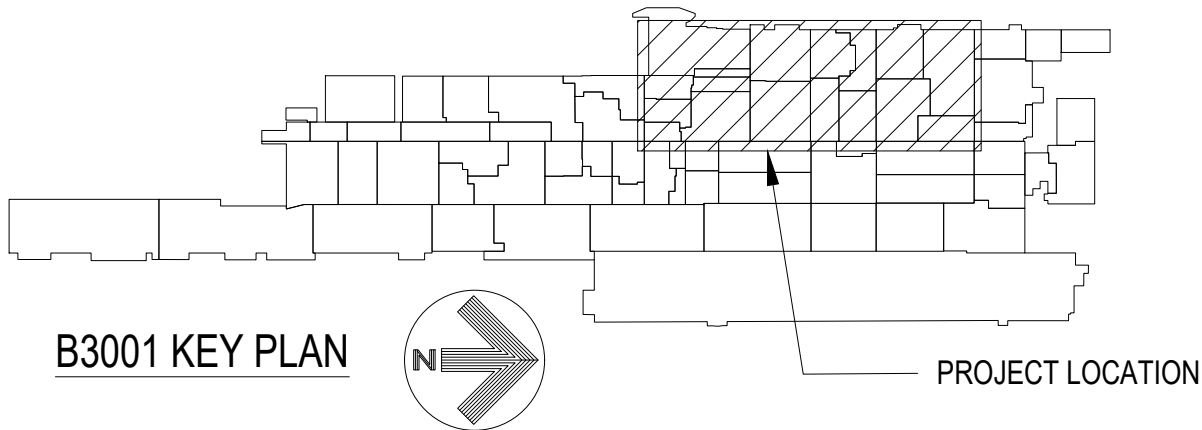

AIR FORCE MATERIAL COMMAND
72 ARW CIVIL ENGINEER DIRECTORATE
TINKER AFB, OK

35%
DESIGN

PROJECT INFORMATION
WWYK250003
RELOCATE FIRE ALARM
CIRCUIT, B3001, O-P AISLE
TINKER AIR FORCE BASE, OKLAHOMA

MANAGEMENT INFORMATION		REVISIONS	
ISSUE DATE	DESIGN GROUP	DATE	DESCRIPTION
10/15/2025	TEPA-CSAG	01/08/26	REMOVED EXIT SIGNS FROM THE SCOPE OF WORK
DESIGNED BY: A McPHERSON			
DRAWN BY: S STARR			
CHECKED BY: B JIMOH			
DESIGN FILE LOCATION: Engr\Design\2020\2025\20250003\Support\Drawings\Model			


FIRE ALARM
AND SPRINKLER
COMPOSITE PLAN

SHEET NUMBER
F-102

SHEET 04 OF 06

SHEET NOTES

16. NO LIFE SAFETY SYSTEMS IN THIS CONVEYOR SECTION.

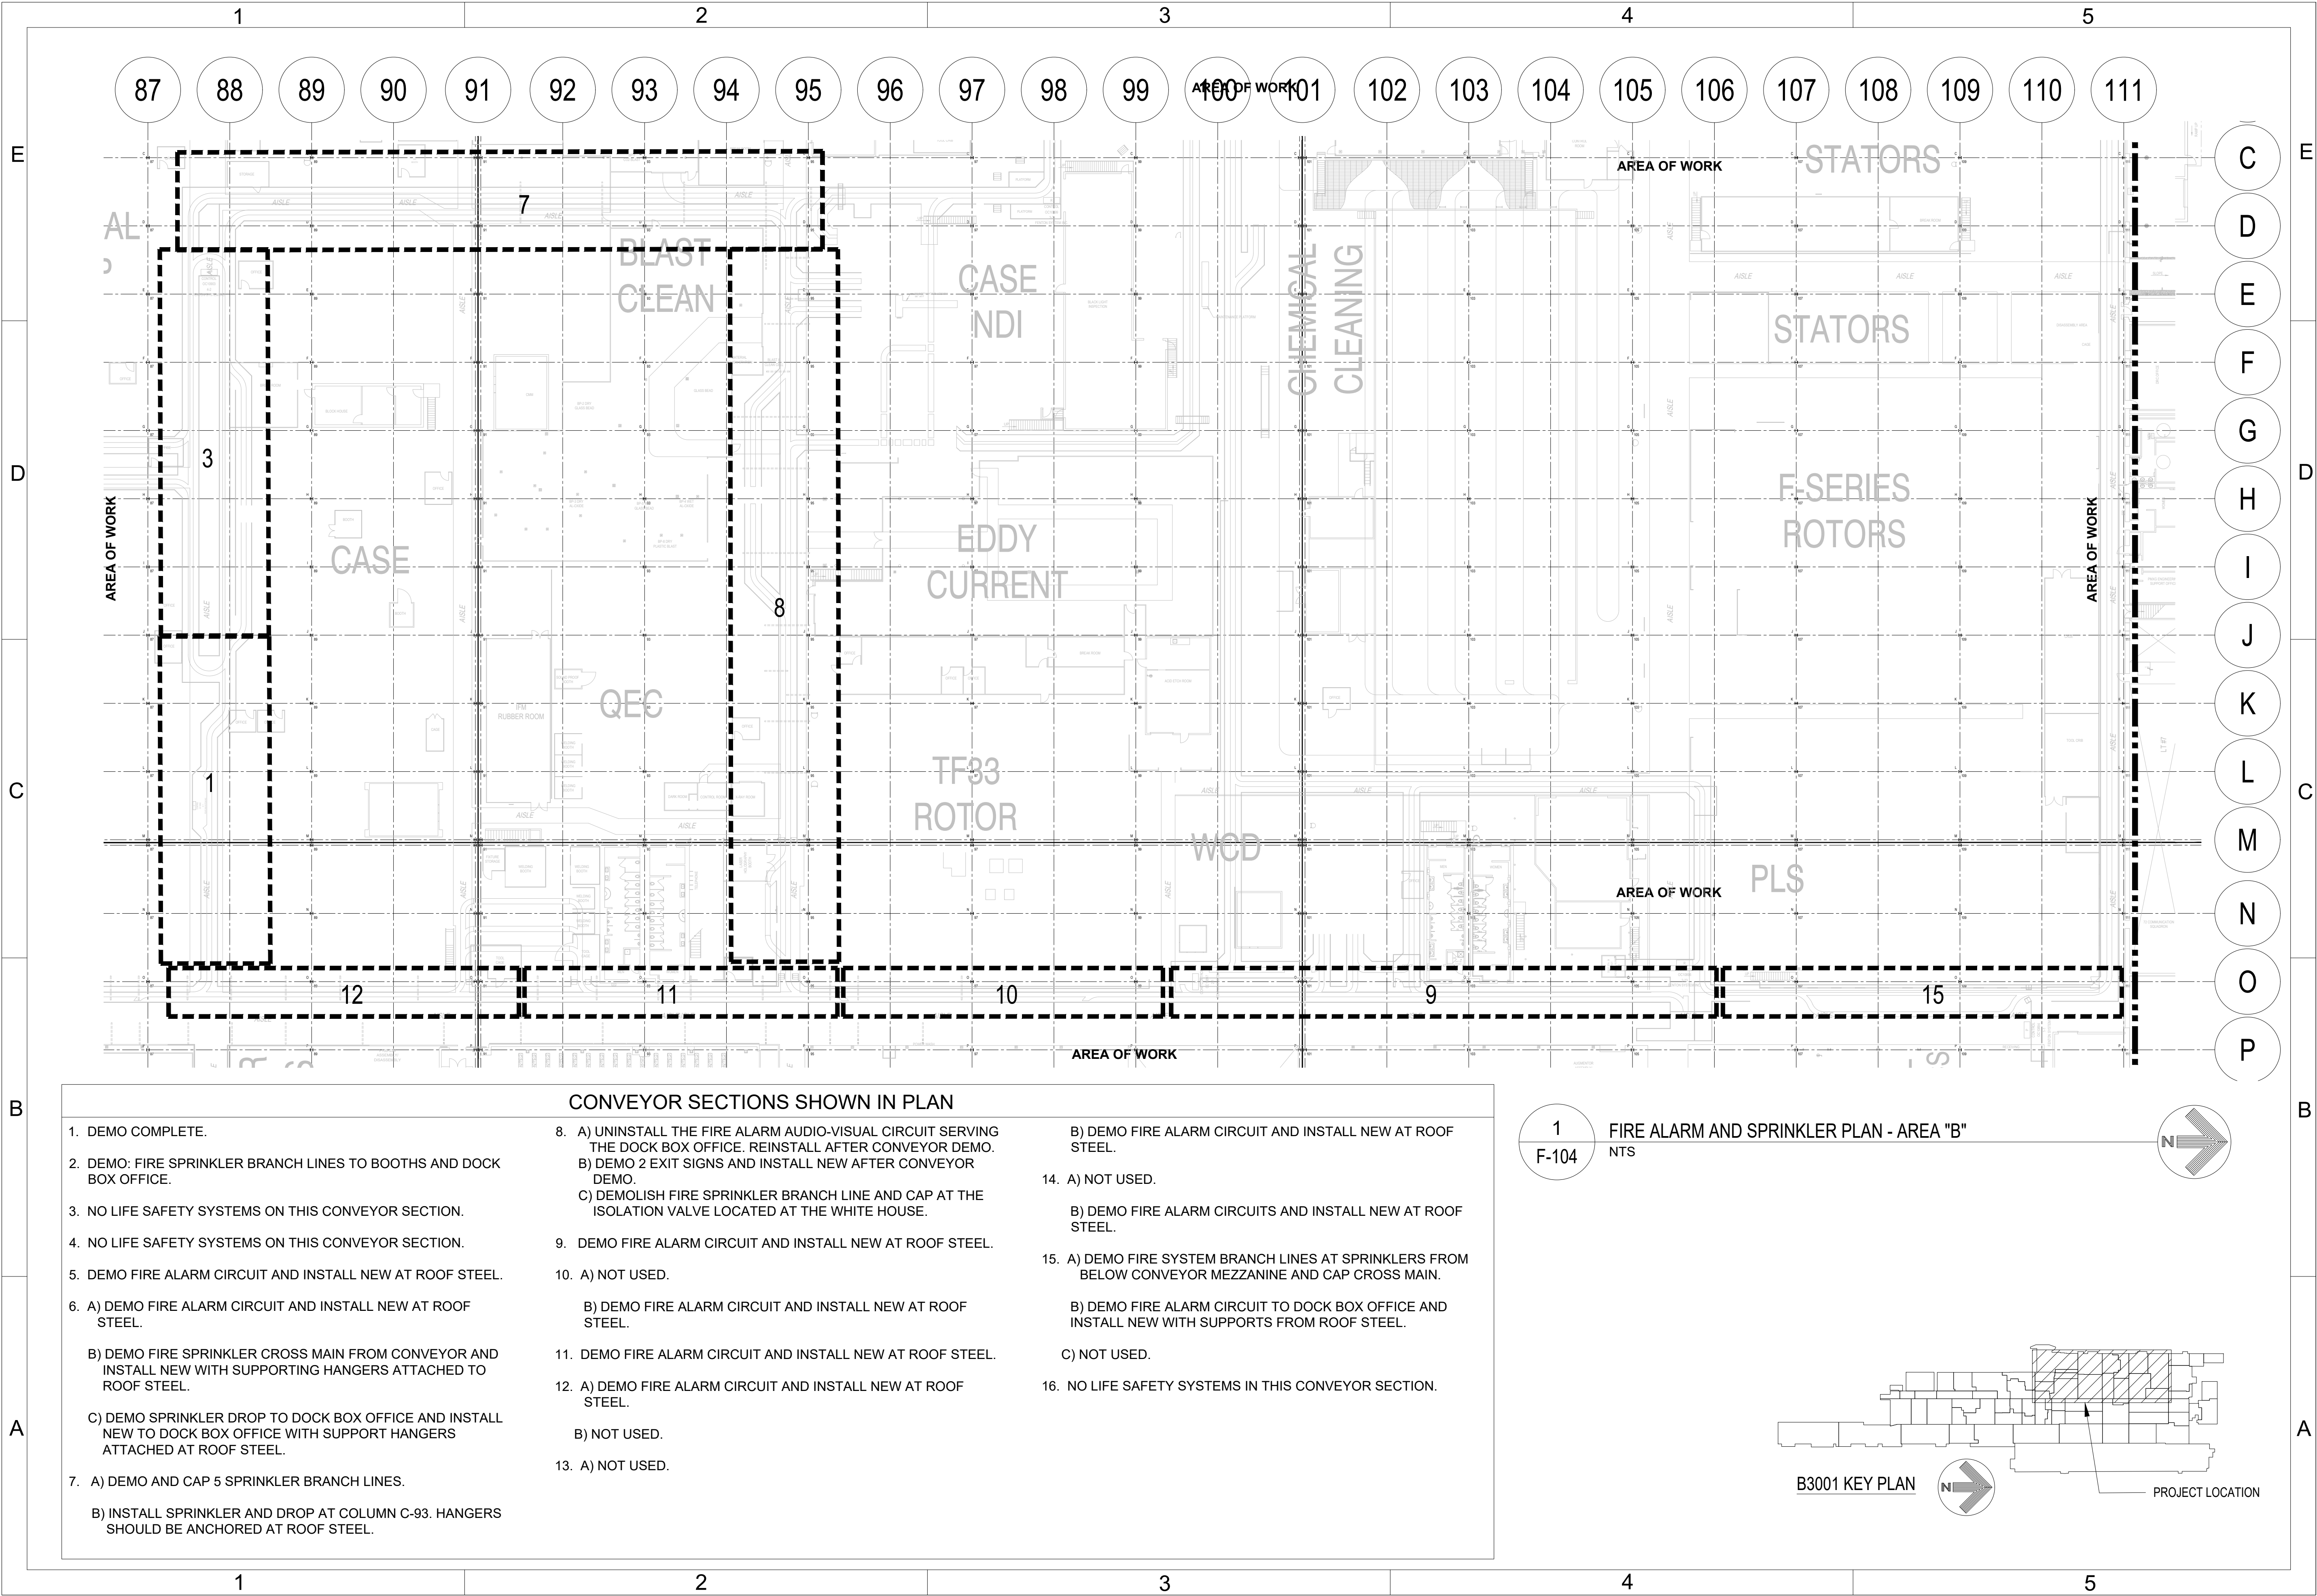

CONVEYOR SECTIONS SHOWN IN PLAN

1. DEMO COMPLETE.

2. DEMO: FIRE SPRINKLER BRANCH LINES TO BOOTHS AND DOCK BOX OFFICE.

3. NO LIFE SAFETY SYSTEMS ON THIS CONVEYOR SECTION.

4. NO LIFE SAFETY SYSTEMS ON THIS CONVEYOR SECTION.

5. DEMO FIRE ALARM CIRCUIT AND INSTALL NEW AT ROOF STEEL.

6. A) DEMO FIRE ALARM CIRCUIT AND INSTALL NEW AT ROOF STEEL.

B) DEMO FIRE SPRINKLER CROSS MAIN FROM CONVEYOR AND INSTALL NEW WITH SUPPORTING HANGERS ATTACHED TO ROOF STEEL.

C) DEMO SPRINKLER DROP TO DOCK BOX OFFICE AND INSTALL NEW TO DOCK BOX OFFICE WITH SUPPORT HANGERS ATTACHED AT ROOF STEEL.

7. A) DEMO AND CAP 5 SPRINKLER BRANCH LINES.

B) INSTALL SPRINKLER AND DROP AT COLUMN C-93. HANGERS SHOULD BE ANCHORED AT ROOF STEEL.
8. A) UNINSTALL THE FIRE ALARM AUDIO-VISUAL CIRCUIT SERVING THE DOCK BOX OFFICE. REINSTALL AFTER CONVEYOR DEMO.
B) DEMO 2 EXIT SIGNS AND INSTALL NEW AFTER CONVEYOR DEMO.
C) DEMOLISH FIRE SPRINKLER BRANCH LINE AND CAP AT THE ISOLATION VALVE LOCATED AT THE WHITE HOUSE.

9. DEMO FIRE ALARM CIRCUIT AND INSTALL NEW AT ROOF STEEL.

10. A) NOT USED.

B) DEMO FIRE ALARM CIRCUIT AND INSTALL NEW AT ROOF STEEL.

11. DEMO FIRE ALARM CIRCUIT AND INSTALL NEW AT ROOF STEEL.

12. A) DEMO FIRE ALARM CIRCUIT AND INSTALL NEW AT ROOF STEEL.

B) NOT USED.

13. A) NOT USED.
- B) DEMO FIRE ALARM CIRCUIT AND INSTALL NEW AT ROOF STEEL.

14. A) NOT USED.

B) DEMO FIRE ALARM CIRCUITS AND INSTALL NEW AT ROOF STEEL.

15. A) DEMO FIRE SYSTEM BRANCH LINES AT SPRINKLERS FROM BELOW CONVEYOR MEZZANINE AND CAP CROSS MAIN.


B) DEMO FIRE ALARM CIRCUIT TO DOCK BOX OFFICE AND INSTALL NEW WITH SUPPORTS FROM ROOF STEEL.

C) NOT USED.

16. NO LIFE SAFETY SYSTEMS IN THIS CONVEYOR SECTION.

1
F-104

FIRE ALARM AND SPRINKLER PLAN - AREA "B"
NTS

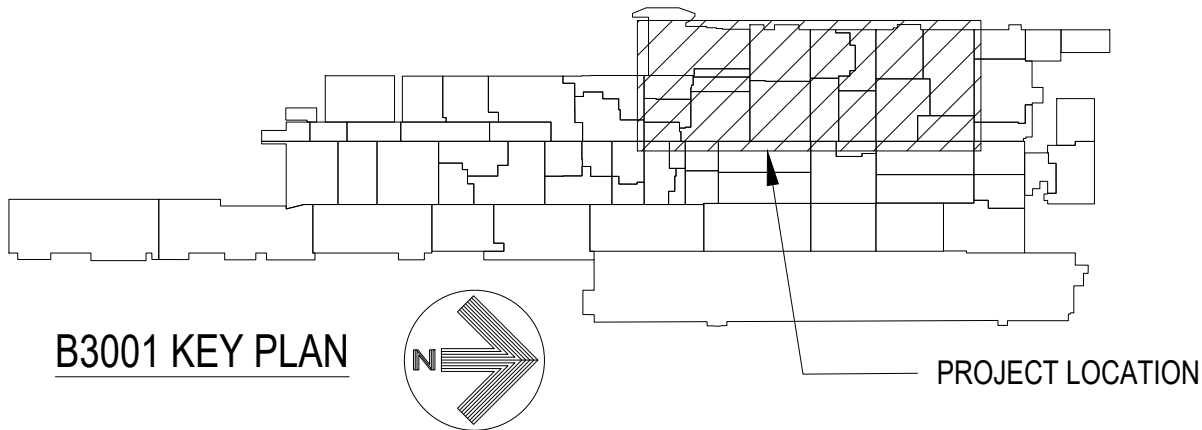

AIR FORCE MATERIAL COMMAND
72 ARMY CIVIL ENGINEER DIRECTORATE
TINKER AFB, OK

35%
DESIGN

PROJECT INFORMATION

WWYK250003
RELOCATE FIRE ALARM
CIRCUIT, B3001, O-P AISLE

TINKER AIR FORCE BASE, OKLAHOMA

MANAGEMENT INFORMATION

ISSUE DATE: 10/15/2025
DESIGN GROUP: TEPA-CSAG
DESIGNED BY: A McPHERSON
DRAWN BY: S STARR
CHECKED BY: B JIMOH
DESIGN FILE LOCATION:
Engr\Design\2020\2025\20250003\Support\Drawings\Model

REVISIONS

MARK	DATE	DESCRIPTION
A	01/09/26	REMOVED EXIT SIGNS FROM THE SCOPE OF WORK

REVISIONS

MARK	DATE	DESCRIPTION
A	01/09/26	REMOVED EXIT SIGNS FROM THE SCOPE OF WORK

SHEET TITLE

FIRE ALARM AND
SPRINKLER PLAN AREA "B"

SHEET NUMBER

F-104

SHEET 06 OF 06