



US Army Corps
of Engineers®

Jacksonville District


SPONSOR REVIEW



NAVAL SUBMARINE BASE KINGS BAY MAINTENANCE DREDGING

Camden County, Georgia

Construction Solicitation and Specifications Task Order

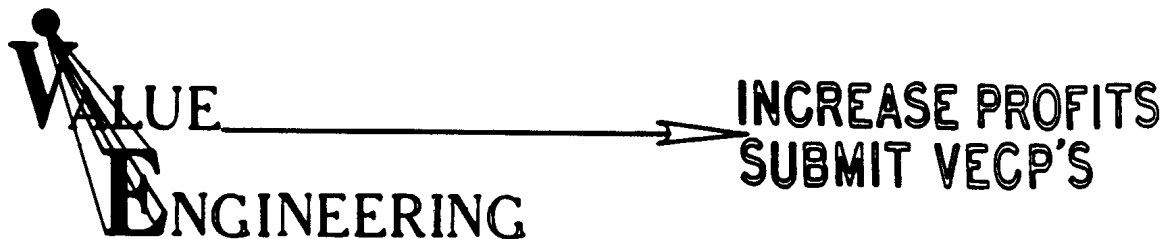

08-Apr-2026

DESIGN AUTHENTICATION

I, the undersigned Technical Lead, hereby confirm that all required quality control procedures have been duly followed and completed for this project by the Jacksonville District, U.S. Army Corps of Engineers. This certification is made in accordance with ECB No. 2024-3.

BARRY.KATHRYN.ROSE.1368408340

Digitally signed by BARRY.KATHRYN.ROSE.1368408340
Date: 2026.03.06 15:14:24 -05'00'

KATHRYN R. BARRY, P.E.
Technical Lead
CESAJ-EN-SN

Date

This project was designed by the Jacksonville District, U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment as required by ER 1110-1-8152.

BOGINA.VIKTORI
A.M.1366852472

Digitally signed by
BOGINA.VIKTORIA.M.1366852472
Date: 2026.03.06 15:32:22 -05'00'

VIKTORIA M. BOGINA, P.E.
Chief, Navigation Section
CESAJ-EN-SN

Date

ZEVENEY.DENNIS.
J.1249349085

Digitally signed by
ZEVENEY.DENNIS.J.1249349085
Date: 2026.03.09 08:52:12 -04'00'

DENNIS J. ZEVENEY, P.E.
Chief, Geosystems Branch
CESAJ-EN-G

Date

REILLY.WILLIAM.L
UKE.1527897994

Digitally signed by
REILLY.WILLIAM.LUKE.1527897994
Date: 2026.03.17 13:38:24 -04'00'

WILLIAM L. REILLY, P.E.
Chief, Waterways Branch
CESAJ-EN-S

Date

REILLY.WILLIAM.L
UKE.1527897994

Digitally signed by
REILLY.WILLIAM.LUKE.1527897994
Date: 2026.03.17 13:38:50 -04'00'

Acting
for: JASON A. ENGLE, P.E.
Chief, Engineering Division
CESAJ-EN

Date



DEPARTMENT OF THE ARMY
U.S. ARMY CORPS OF ENGINEERS, JACKSONVILLE DISTRICT
701 SAN MARCO BOULEVARD
JACKSONVILLE, FLORIDA 32207-8137

April 8, 2026

Contracting Division

SUBJECT: Request for Proposal (RFP) Number GROUP1-26-R-J003, Naval Submarine Base Kings Bay, Maintenance Dredging, Camden County, Georgia

1. In accordance with FAR 16.505(b), Orders under multiple-award contracts, the subject requirement is being offered to all contractors in the South Atlantic Divisional Small Business Multiple Award Task Order Contract (MATOC) for Maintenance Dredging pool, as identified below, giving each a fair opportunity to compete for this action by issuance of this Request for Proposal (RFP) letter. All contractors must submit their proposal in accordance with the criteria specified herein.

W912EP25D0011
AGM Marine Contractors Inc.
7 Fish IS
New Bedford, MA 02740-7227
jonah.mikutowicz@agmmarine.com

W912EP25D0012
AHTNA Marine & Construction Company, LLC
444 W Boynton Beach Blvd # E
Boynton Beach, FL 33435-4027
corourke@ahtna.net

W912EP25D0013
Atlantic & Gulf Dredging & Marine LLC
16654 SW Warfield Blvd
Indiantown, FL 34956-4407
joey@agdmarine.com

W912EP25D0014
Coastal Dredging Co, Inc
19128 Robert Rd
Hammond, LA 70401-3855
tommy@coastaldredging.net

W912EP25D0015
Cottrell Contracting Corporation
328 N Battlefield Blvd

Chesapeake, VA 23320-3916
jmc@cottrellcontracting.com

W912EP25D0016
Next Generation Logistics, LLC
614 Tchoupitoulas St
New Orleans, LA 70130-3212
eddie@nlgcompanies.com

W912EP25D0017
Southern Dredging Co Inc.
STE C, 925 Wappoo Rd
Charleston, SC 29407-5969
kimberly.richmond@southerndredging.NET

W912EP25D0018
Southwind Construction Corp
14649 Highway 41 N STE 100
Evansville, IN 47725-9368
cseibert@southwindco.com

W912EP25D0019
Waterfront Property Services, LLC
13630 50TH WAY N
Clearwater, FL 33760-3731
c.clausen@gatordredging.com

2. DESCRIPTION OF WORK

Refer to Section 01 11 00 for complete project description.

3. MAGNITUDE OF CONSTRUCTION:

Between \$10,000,000.00 and \$25,000,000.00

4. **THIS SOLICITATION IS TOTAL SMALL BUSINESS SET ASIDE.**

5. THE NAICS CODE FOR THIS NOTICE OF INTENT IS 237990 AND THE SMALL BUSINESS SIZE STANDARD IS \$37 MILLION.

6. BONDS

6.1. Bid Guarantee. See FAR Clause 52.228-1, Bid Guarantee, Enclosure 3 - Provisions and Clauses.

6.2. Payment and Performance. The offeror must furnish any required Performance and Payment Bonds within **10 calendar days** after Award. See FAR Clause 52.228-15 Performance and Payment Bonds-Construction, in Section 00700 of your contract.

7. RFP REQUIREMENTS

7.1. Offers are due by **2:00 PM EDT** on **08 May 2026**.

7.2. The Contractor shall begin performance within **60 calendar days** and complete it within **305 calendar days** (Base: 230 calendar days; Option A: 5 calendar days (concurrent with construction); Option B: 45 calendar days; Option C: 30 calendar days) after receiving notice to proceed (See FAR Clause 52.211-10 COMMENCEMENT, PROSECUTION, AND COMPLETION OF WORK in Section 00700, Enclosure 3 – Provisions and Clauses).

7.3. Offers providing less than **60 calendar days** for Government acceptance after the date offers are due will not be considered and will be rejected.

7.4. YOU MUST BE REGISTERED IN SAM IN ORDER TO RECEIVE AN AWARD FROM THIS RFP. THE SAM WEBSITE IS LOCATED AT WWW.SAM.GOV.

7.5. All revisions/amendments shall be acknowledged.

8. BASIS FOR AWARD

See Enclosure 2 – Proposal Submission Requirements

9. ELECTRONIC PROPOSALS

9.1. **Please note, due to PEE numbering limitations, the Solicitation number in PEE will be GROUP1-26-R-J003.**

9.2. **The only authorized transmission method for offers in response to this RFP is electronically via the PEE Solicitation Module.** The Offeror's proposal shall be submitted electronically in PDF format by the time stated in paragraph 7. "RFP REQUIREMENTS", above.

9.2.1. The Offeror's proposal shall not contain classified data. The use of hyperlinks in proposals are prohibited. Submissions that are received after the submission time requested will be considered late and as such will be processed in accordance with FAR 15.208.

9.2.2. **Note:** Submission requirements and evaluation criteria are detailed within Enclosure 2 – Proposal Submission Requirements

9.3. Instructions to Gain Access to PEE Website

Instructions to Gain Access to PEE Website

Web Based Training for registration and proposal submission is available as a separate portal on the main page of the site or by visiting:

<https://pieetraining.eb.mil/wbt/xhtml/wbt/sol/index.xhtml>

Although you can search, review, and open non-restricted solicitations without logging in, you must establish a personal account in the system and register for the Proposal Manager role before you are able to submit a proposal. This account is activated by your Contractor Administrator (CAM).

Instructions for registering are as follows:

- 1) Navigate to <https://piee.eb.mil/>
- 2) Select Register [top right]
- 3) Select Vendor
- 4) Create a User ID and Password and follow the prompts [next]
- 5) Create Security Questions [next]
- 6) Complete your User Profile Information [next]
- 7) Complete your supervisor or Approving Official Information. This official will act as the CAM who will ultimately approve your account. If you are unsure of who this is, please go to:
<https://piee.eb.mil/xhtml/unauth/lookup/gamLookup.xhtml> to locate the CAM for your company for assistance. [next]
- 8) Complete Roles:
 - a. Step 1. Select SOL-Solicitation,
 - b. Step 2. Select Proposal Manager,
 - c. Step 3. Click Add Roles,
 - d. Step 4. Fill in your Location Code (CAGE Code) [next]
- 9) Provide a justification for your registration [next]

VERIFY ACCOUNT STATUS/CAPABILITIES. Once the Proposal Manager account has been approved, verify that your account is showing active under the profile page. Also, once you click on the specified solicitation, verify that the “Offer” tab is visible next to the “Solicitation” tab at the top of the page. The proposal will be submitted through the “Offer” tab. It is imperative that this is verified early in the process to mitigate any potential problems with the submission of your proposal.

9.4. Instructions for Offer Submission

In order to submit through the Solicitation Module in PIEE, you must have an active Proposal Manager role in PIEE at <https://piee.eb.mil/>.

To upload the proposal in Solicitation module in PIEE:

- 1) Ensure you have an active role as with the Proposal Manager in PIEE.
- 2) Log into PIEE at <https://piee.eb.mil/> to access the Solicitation Module.
- 3) Select Solicitation icon.
- 4) At the Home screen of the Solicitation Module, select the Search link to find the solicitation you intend to post an offer against.
- 5) In the Solicitation Search Criteria filter by entering the complete solicitation number and for Status, select Open, then click Search.
- 6) When search results display, select the solicitation number link to open the solicitation.

- 7) The solicitation displays, with information as view only.
- 8) To post the offer, click the Offer tab.
- 9) Click the Add button to add an offer to the solicitation.
- 10) Select the applicable CAGE Code for which you are submitting the offer. The list is prefiltered based on the CAGEs in the Proposal Manager's profile.
- 11) Click on the Choose Files link to upload attachments that comprise your offer.
- 12) Enter Signature Date and click Signature button after entering all necessary information.
- 13) Sign Document pop-up will be displayed requiring the user to enter a Digital Pin and One Time Password (OTP). Click the Sign and Submit button to continue.
- 14) After successfully adding the Offer a success message of the submission will be displayed providing confirmation of on-time/late proposal receipt.

10. INQUIRIES

Technical inquiries and questions to this RFP are to be submitted in writing via "Bidder Inquiry" in ProjNET at www.projnet.org. To submit and review inquiry items, prospective vendors will need to use the Bidder Inquiry Key presented below and follow the instructions listed below the key for access. A prospective vendor who submits a comment / question will receive an acknowledgement of their comment/question via email, *followed by an answer to the comment/question after it has been processed by our technical team.*

The Government will close the Bidder Inquiries on 27 April 2026, End of Day.
Any questions submitted after closure of Bidder Inquiries are considered late and may not be addressed.

Solicitation Number is: **GROUP1-26-R-J003**

Bidder Inquiry Key is: **REMJ79-SXA7SQ**

Instructions for ProjNet Bid Inquiry Access from ProjNet home page:

1. *Identify the Agency. This should be marked as USAGE.*
2. *Email. Enter the email address you would like to use for communication.*
3. *Key. Enter the Bidder Inquiry Key listed above.*
4. *Click Continue. A page will then open saying that a user account was not found and will ask you to create one using the provided form.*
5. *Enter your First Name, Last Name, Company, City, State, Phone, Email, Secret Question, Secret Answer, and Time Zone. Make sure to remember your Secret Question and Answer as they will be used from this point on to access the ProjNet system.*
6. *Click Add User. Once this is completed you are now registered within ProjNet and are currently logged into the system.*

Instructions for Future ProjNet Bid Inquiry Access from ProjNet home page:

1. For future access to ProjNet, you will not be emailed any type of password. You will utilize your Secret Question and Secret Answer to log in.
2. Identify the Agency. This should be marked as USAGE.
3. Email. Enter the email address you used to register previously in ProjNet.
4. Key. Enter the Bidder Inquiry Key listed above.
5. Click Continue. A page will then open asking you to enter the answer to your Secret Question.
6. Enter your Secret Answer and click Login. Once this is completed you are now logged into the system.

11. WAGES

The following Wage Determinations (WDs) apply to this solicitation. The full WDs are located at Enclosure 4, "Wage Rates."

No.	Title	Date
1	General Decision Number GA20260060	01/23/2026

Offerors are reminded that wage determinations are subject to change prior to award. All proposed pricing shall be based on the most current wage rates. All offerors are encouraged to review wage rates established by the Department of Labor prior to submitting proposals.

12. SITE VISIT

A site visit, and subsequent pre-proposal telephonic conference will be held for the subject project. See FAR 52.236-27 Alternate I, Site Visit (Construction) in Enclosure 3 - Provisions and Clauses, for details.

Should you have any questions, please reach out to Mr. Guesley Leger at Phone 904-232-3850, or via email at, guesley.leger@usace.army.mil.

Sincerely,

HUMPHREY.TI
MOTHY.GLEN
N.1107820724
Digitally signed by
HUMPHREY.TIMOTHY
.GLENN.1107820724
Date: 2026.04.08
15:51:35 -04'00'
Timothy Humphrey
Contracting Officer

Enclosure(s)

1. Line Items and Pricing Schedule
2. Proposal Submission Requirements
3. Provisions and Clauses
4. Wage Rates

ENCLOSURE 1 – Section 00 10 00 Solicitation, Contract Line Item Number (CLIN) Schedule

SECTION 00 10 00
SOLICITATION, CONTRACT LINE ITEM NUMBER (CLIN) SCHEDULE

NAVAL SUBMARINE BASE KINGS BAY,
MAINTENANCE DREDGING
CAMDEN COUNTY, GEORGIA

<u>LINE ITEM</u>	<u>DESCRIPTION</u>	<u>QUANTITY</u>	<u>UNIT</u>	<u>UNIT PRICE</u>	<u>TOTAL</u>
<u>BASE</u>					
0001	MOBILIZATION AND DEMOBILIZATION		JOB		\$ _____
0002	EXCAVATION, UNCLASSIFIED; RANGE H TO I AND UPPER TURNING BASIN (UTB) STATION 43+300 TO STATION 48+175 (ESTIMATED QUANTITY - SEE NOTE 2)				
0002AA	FROM 0 TO 115,000 CUBIC YARDS	115,000	CUBIC YARD	\$ _____	\$ _____
0002AB	FROM 115,001 CUBIC YARDS TO 305,000 CUBIC YARDS	190,000	CUBIC YARD	\$ _____	\$ _____
0003	EXCAVATION, UNCLASSIFIED; RANGE G TO H AND EXPLOSIVE HANDLING BASIN (EHB) STATION 39+141 TO STATION 43+300 (ESTIMATED QUANTITY - SEE NOTE 2)				
0003AA	FROM 0 TO 275,000 CUBIC YARDS	275,000	CUBIC YARD	\$ _____	\$ _____
0003AB	FROM 275,001 CUBIC YARDS TO 450,000 CUBIC YARDS	175,000	CUBIC YARD	\$ _____	\$ _____
0004	EXCAVATION, UNCLASSIFIED; RANGE E TO G AND MAGNETIC SILENCING FACILITY (MSF) NORTH STATION 31+800 TO STATION 39+141 (ESTIMATED QUANTITY - SEE NOTE 2)				
0004AA	FROM 0 TO 80,000 CUBIC YARDS	80,000	CUBIC YARD	\$ _____	\$ _____
0004AB	FROM 80,001 CUBIC YARDS TO 150,000 CUBIC YARDS	70,000	CUBIC YARD	\$ _____	\$ _____
0005	EXCAVATION, UNCLASSIFIED; SITE SIX NORTH (SS-N) STATION 36+850 TO STATION 38+800 (ESTIMATED QUANTITY - SEE NOTE 2)				
0005AA	FROM 0 TO 35,000 CUBIC YARDS	35,000	CUBIC YARD	\$ _____	\$ _____
0005AB	FROM 35,001 CUBIC YARDS TO 50,000 CUBIC YARDS	15,000	CUBIC YARD	\$ _____	\$ _____
0006	EXCAVATION, UNCLASSIFIED; SITE SIX SOUTH (SS-S) AND ARDM YOKE; STATION 34+233.1 TO STATION 36+548; (ESTIMATED QUANTITY - SEE NOTE 2)				
0006AA	FROM 0 TO 6,000 CUBIC YARDS	6,000	CUBIC YARD	\$ _____	\$ _____
0006AB	FROM 6,001 CUBIC YARDS TO 30,000 CUBIC YARDS	24,000	CUBIC YARD	\$ _____	\$ _____
0007	EXCAVATION, UNCLASSIFIED; EXPLOSIVE HANDLING WHARVES (EHW) STATION 41+420 TO STATION 43+320 (ESTIMATED QUANTITY - SEE NOTE 2)				
0007AA	FROM 0 TO 45,000 CUBIC YARDS	45,000	CUBIC YARD	\$ _____	\$ _____
0007AB	FROM 45,001 CUBIC YARDS TO 70,000 CUBIC YARDS	25,000	CUBIC YARD	\$ _____	\$ _____

SECTION 00 10 00
SOLICITATION, CONTRACT LINE ITEM NUMBER (CLIN) SCHEDULE

NAVAL SUBMARINE BASE KINGS BAY,
MAINTENANCE DREDGING
CAMDEN COUNTY, GEORGIA

<u>LINE ITEM</u>	<u>DESCRIPTION</u>	<u>QUANTITY</u>	<u>UNIT</u>	<u>UNIT PRICE</u>	<u>TOTAL</u>
<u>BASE (CONTINUED)</u>					
0008	EXCAVATION, UNCLASSIFIED; REFIT WHARVES STATION 45+850.4 TO STATION 48+175 (ESTIMATED QUANTITY - SEE NOTE 2)				
0008AA	FROM 0 TO 30,000 CUBIC YARDS	30,000	CUBIC YARD	\$ _____	\$ _____
0008AB	FROM 30,001 CUBIC YARDS TO 40,000 CUBIC YARDS	10,000	CUBIC YARD	\$ _____	\$ _____
0009	EXCAVATION, UNCLASSIFIED; SMALL BOAT BASIN STATION 43+497.5 TO STATION 45+207.1 (ESTIMATED QUANTITY - SEE NOTE 2)				
0009AA	FROM 0 TO 20,000 CUBIC YARDS	20,000	CUBIC YARD	\$ _____	\$ _____
0009AB	FROM 20,001 CUBIC YARDS TO 30,000 CUBIC YARDS	10,000	CUBIC YARD	\$ _____	\$ _____
0010	EXCAVATION, UNCLASSIFIED; PORT SECURITY BARRIER MOORING AREA STATION 46+100 TO STATION 47+393.6 (ESTIMATED QUANTITY - SEE NOTE 2)				
0010AA	FROM 0 TO 15,000 CUBIC YARDS	15,000	CUBIC YARD	\$ _____	\$ _____
0010AB	FROM 15,001 CUBIC YARDS TO 25,000 CUBIC YARDS	10,000	CUBIC YARD	\$ _____	\$ _____
0011	EXCAVATION, UNCLASSIFIED; DRY DOCK CAISSON GATE SILL AND DRY DOCK CAISSON GATE MOORING FACILITY		JOB		\$ _____
0012	ENVIRONMENTAL AND WATER QUALITY MONITORING		JOB		\$ _____
0013	STANDBY TIME (SEE NOTE 3)	120	HOUR	\$ _____	\$ _____
<u>OPTION A (ONE LINE ITEM - TOTAL)</u>					
0014	FIELD-CUT RISER BOARDS (ESTIMATED QUANTITY)	200	EACH	\$ _____	\$ _____
<u>OPTION B SECONDARY MAINTENANCE DREDGING</u>					
0015	EXCAVATION, UNCLASSIFIED; SITE SIX SOUTH (SS-S) AND ARDM YOKE STATION 34+233.1 TO STATION 36+548 (ESTIMATED QUANTITY - SEE NOTE 2)	15,000	CUBIC YARD	\$ _____	\$ _____
0016	EXCAVATION, UNCLASSIFIED; SITE SIX NORTH (SS-N) STATION 36+850 TO STATION 38+800 (ESTIMATED QUANTITY - SEE NOTE 2)	35,000	CUBIC YARD	\$ _____	\$ _____
0017	EXCAVATION, UNCLASSIFIED; EXPLOSIVE HANDLING WHARVES (EHW) STATION 41+420 TO STATION 43+320 (ESTIMATED QUANTITY - SEE NOTE 2)	20,000	CUBIC YARD	\$ _____	\$ _____

SECTION 00 10 00
SOLICITATION, CONTRACT LINE ITEM NUMBER (CLIN) SCHEDULE

NAVAL SUBMARINE BASE KINGS BAY,
MAINTENANCE DREDGING
CAMDEN COUNTY, GEORGIA

<u>LINE ITEM</u>	<u>DESCRIPTION</u>	<u>QUANTITY</u>	<u>UNIT</u>	<u>UNIT PRICE</u>	<u>TOTAL</u>
0018	EXCAVATION, UNCLASSIFIED; REFIT WHARVES STATION 45+850.4 TO STATION 48+175 (ESTIMATED QUANTITY - SEE NOTE 2)	20,000	CUBIC YARD	\$ _____	\$ _____
0019	EXCAVATION, UNCLASSIFIED; DRY DOCK CAISSON GATE SILL AND DRY DOCK CAISSON GATE MOORING FACILITY		JOB		\$ _____
0020	ENVIRONMENTAL AND WATER QUALITY MONITORING		JOB		\$ _____
0021	STANDBY TIME (SEE NOTE 3)	24	HOUR	\$ _____	\$ _____
<u>OPTION C (ONE LINE ITEM - TOTAL)</u>					
0022	MOBILIZATION AND DEMOBILIZATION (SEE NOTE 4)		JOB		\$ _____
TOTAL BASE (LINE ITEMS 0001 THROUGH 0013)					\$ _____
TOTAL OPTION A (LINE ITEM 0014)					\$ _____
TOTAL OPTION B (LINE ITEMS 0015 THROUGH 0021)					\$ _____
TOTAL OPTION C (LINE ITEM 0022)					\$ _____
TOTAL BID ITEMS (LINE ITEMS 0001 THROUGH 0022)					\$ _____

NOTES: (1) OFFER MUST PRICE ALL LINE ITEMS.

(2) QUANTITY INCLUDES REQUIRED DEPTH, ALLOWABLE OVERDEPTH, AND SHOALING ESTIMATED TO OCCUR BETWEEN THE DATES OF THE SURVEYS AND THE ACTUAL DREDGING. DO NOT PERFORM WORK IN EXCESS OF THE TOTAL ESTIMATED QUANTITY GIVEN FOR EACH LINE ITEM WITHOUT PRIOR APPROVAL BY THE CONTRACTING OFFICER. NOTIFY THE CONTRACTING OFFICER AT LEAST ONE WEEK PRIOR TO THE ANTICIPATED DATE THAT THE ESTIMATED QUANTITY MAY BE EXCEEDED.

(3) STANDBY TIME IS DEFINED AS WHEN, AT THE DIRECTION OF THE CONTRACTING OFFICER, THE DREDGE IS PUT OUT OF OPERATION FOR REASONS OUTSIDE THE REQUIREMENTS IN THE CONTRACT. SEE SECTION 01 20 00 PRICE AND PAYMENT PROCEDURES.

(4) WORK ASSOCIATED WITH CLIN 0022 MOBILIZATION AND DEMOBILIZATION WILL NOT BE EXECUTED IF WORK ASSOCIATED WITH THE SECONDARY MAINTENANCE DREDGING OPTION IS EXECUTED PRIOR TO DEMOBILIZATION FROM THE BASE WORK. SEE CLAUSE PAYMENT FOR MOBILIZATION AND DEMOBILIZATION.

ENCLOSURE 2 – Proposal Submission Requirements

1. To ensure your submission is received and processed appropriately, it is important that interested parties CAREFULLY ensure their electronic files adhere to the following naming convention: Each filename shall begin with the solicitation number, followed by the word “RESPONSE”, followed by your firm’s name, and finally the Volume Number / Document title.

EXAMPLE:

“GROUP1-26-R-J003_Response_[Firm name]_Volume 1.pdf”

2. ALL RESPONSES SHALL BE SUBMITTED ELECTRONICALLY. You shall submit your proposal via PIEE. Be sure to allow yourself enough time for transmission as large files may take longer to receive. Do not assume that electronic communication is instantaneous. Please make allowances for delays in transmittal. The time and date received will be the time and date recorded. Late proposals will not be accepted. Please follow up your submission with an email to Mr. Timothy Humphrey at Timothy.g.humphrey@usace.army.mil and Mr. Guesley Leger at Guesley.Leger@usace.army.mil. If you do not get a confirmation, please notify Tim Humphrey and Guesley Leger immediately. The PIEE system is fairly new, and it has had some glitches with time zones, so if your transmission shows as late please email to verify.
3. Proposals are due in accordance with the time and date stated in Paragraph 7.1 of the RFP Letter.
4. The Government will not be responsible for proposals or bid bonds delivered to any location or to anyone other than those designated to receive proposals on its behalf. Offerors are responsible for ensuring that proposals are submitted so as to reach the designated recipient of proposals. Offerors are responsible for allowing sufficient time for the proposal and the bid bond to be received in accordance with the information provided.
5. Offerors shall acknowledge all revisions to the RFP issued prior to the due date for the submission of proposals in writing via a cover letter accompanying the proposal, unless instructed to do otherwise by the Contracting Officer.
6. For all revisions to the RFP issued after the submission of proposals, the offerors shall acknowledge the revision in writing, at the time and place directed by the Contracting Officer in the revision letter.

7. BASIS FOR AWARD.

- 7.1 Subject to the provisions contained herein, award will be made to one offeror who is deemed responsible in accordance with FAR 9.104-1; whose proposal conforms to the solicitation requirements; provides the lowest evaluated price; and whose proposal, judged by an overall assessment of the evaluation criteria and other considerations specified in this solicitation, meets the

technically acceptable standard for the non-price factors. Prices will be evaluated to determine fair and reasonableness in accordance with FAR 15.404-1.

7.2 The Lowest Price Technically Acceptable (LPTA) process is selected as appropriate for this acquisition because the best value is expected to result from selection of the lowest evaluated price proposal with an acceptable non-priced proposal (Technical Approach Plan and Past Performance). These non-priced factors will be evaluated on an "Acceptable" or "Unacceptable" basis. In order for an offeror to be considered eligible for award, the proposal must receive an "Acceptable" rating in each non-priced factor. The lowest priced technically acceptable proposal will then be evaluated to determine price fairness and reasonableness in accordance with FAR 15.404-1(a). A proposal receiving a rating of "Unacceptable" in any non-priced factor will not be eligible for award. The Source Selection Authority (SSA) shall select the offeror whose proposal offers the lowest evaluated price and for which any non-priced factors are rated as Acceptable in accordance with established criteria in the solicitation.

7.3 Consistent with FAR 52.215-1, the Government reserves the right to make award without discussions, if, in the discretion of the Contracting Officer, discussions are not needed (except clarifications as described in FAR 15.306(a)). If the SSA determines that discussions are necessary and if the SSA determines that the number of proposals that would otherwise be in the competitive range exceeds the number at which an efficient competition can be conducted, the SSA may limit the number of proposals in the competitive range to the greatest number that will permit an efficient competition among the most highly rated proposals. Therefore, the offeror's initial proposal should contain the offeror's best terms from a price and technical standpoint.

8. PROPOSAL REQUIREMENTS

8.1 Your proposal shall include the following items. Failure to provide any of these requirements may result in your offer being rejected.

PROPOSAL CONTENTS			
Location	Description	Format	Maximum Pages
Title Page	Include the title of the solicitation, solicitation number, Offeror name, and date of the submittal.	Digital (PDF)	1
Volume I	Technical Merit -Dredge(s)	Digital (PDF)	25 pages for Technical Merit - Dredge.
Volume II	Past Performance	Digital (PDF)	25
Volume III	Price	Digital (PDF)	No page limit

9. **DISCUSSIONS:** In accordance with FAR Clause 52.215-1, Competitive Acquisitions, the Government reserves the right to make award without discussions. Therefore, Offerors should submit their best price terms in their initial offer and not automatically assume that they will have an opportunity to participate in discussions, if later determined to be in the best interests of the Government, or to submit a revised offer. Discussions, if held, may be held with only the highest rated Offerors or Offeror.

10. **FACTOR 1 – Availability of Technically Acceptable Dredge(s) (Volume 1)**

The contractor shall provide a letter on company letterhead identifying the dredge(s) the contractor proposes to do the work and the current location of dredge(s).

Evaluation Method:

The Government will evaluate all identified dredge(s) submitted to determine whether the identified dredge(s) have been found technically acceptable by the Contracting Officer prior to the proposal due date. The Government will also determine whether the dredge(s) are available to meet the required period of performance as stated in the RFP.

To be determined Acceptable for Factor 1, the identified dredge(s) must have been found technically acceptable prior to the proposal due date and available to meet the required period of performance.

11. **FACTOR 2 - Past performance (Volume 2)**

NO SUBMISSION REQUIREMENT. Past Performance information submitted in response to the Dredging MATOC (Solicitation No. W912EP25R0010) will be used to determine the offeror's record of complying with contractual requirements and meeting acceptable levels of performance risk.

Evaluation Method:

Past Performance was recently evaluated for all contractors under the Dredging MATOC. An "Acceptable" rating was earned under Past Performance for all offerors that received an award in accordance with the solicitation evaluation criteria for the Dredging MATOC (Solicitation No. W912EP25R0010). Therefore, for this task order all offerors will receive the Past Performance rating of "Acceptable".

Note: For future task orders, the Government reserves the right to use recent and relevant project data independently obtained from other Government or commercial sources or from any other sources available to include, but not limited to: (1) the Contractor Performance Assessment Reporting System (CPARS), (2) Responsibility / Qualification (was FAPIS.gov) or (3) Electronic Subcontract Reporting System (eSRS), or other data bases; (4) interviews with

Program/Project Managers and Contracting Officers or rely upon personal business experience with the offeror; and (5) consider any information the offeror submits which explains any problems encountered on the identified contract and the offeror's corrective actions. The Government reserves the rights to obtain and evaluate past performance information from any source it deems appropriate. Information related to the contractor's (or contractor's team) performance in Quality, Schedule, Management, Regulatory Compliance, and Safety/Security will be reviewed from the aforementioned additional sources to determine the offeror "Acceptable" or "Unacceptable."

12. FACTOR 3 – Price.

The Offeror's submission for this factor shall be fully completed. Offeror completeness addresses the extent to which the elements of the price proposal are consistent with the requirements of the RFP.

Offerors are required to submit the following:

12.1 Completed Solicitation, Section 00 10 00 Solicitation, Contract Line Item Number (CLIN) Schedule

12.2 Bid Guarantee. See FAR Clause 52.228-1, Bid Guarantee, Enclosure 3 Provisions and Clauses.

ENCLOSURE 3 – Provisions and Clauses

ADDENDUM TO SECTION 00100, INSTRUCTIONS TO OFFERORS THE REQUIRED FILL-INS FOR FOLLOWING CLAUSES OF SECTION 00100 ARE HEREBY PROVIDED:

52.216-1 TYPE OF CONTRACT (APR 1984)

The Government contemplates award of one (1) Firm Fixed Price (FFP) Task Order resulting from this Request for Proposals.

(End of provision)

52.217-5 Evaluation of Options (July 1990)

Except when it is determined in accordance with FAR 17.206(b) not to be in the Government's best interests, the Government will evaluate offers for award purposes by adding the total price for all options to the total price for the basic requirement. Evaluation of options will not obligate the Government to exercise the option(s).

(End of provision)

52.228-1 BID GUARANTEE (SEP 1996)

(a) Failure to furnish a bid guarantee in the proper form and amount, by the time set for opening of bids, may be cause for rejection of the bid.

(b) The bidder shall furnish a bid guarantee in the form of a firm commitment, e.g., bid bond supported by good and sufficient surety or sureties acceptable to the Government, postal money order, certified check, cashier's check, irrevocable letter of credit, or, under Treasury Department regulations, certain bonds or notes of the United States. The Contracting Officer will return bid guarantees, other than bid bonds, (1) to unsuccessful bidders as soon as practicable after the opening of bids, and (2) to the successful bidder upon execution of contractual documents and bonds (including any necessary coinsurance or reinsurance agreements), as required by the bid as accepted.

(c) The amount of the bid guarantee shall be 20 percent of the bid price or \$3,000,000 whichever is less.

(d) If the successful bidder, upon acceptance of its bid by the Government within the period specified for acceptance, fails to execute all contractual documents or furnish executed bond(s) within 10 days after receipt of the forms by the bidder, the Contracting Officer may terminate the contract for default.

(e) In the event the contract is terminated for default, the bidder is liable for any cost of acquiring the work that exceeds the amount of its bid, and the bid guarantee is available to offset the difference.

(End of provision)

52.236-27 SITE VISIT (CONSTRUCTION) (FEB 1995) (ALTERNATE I) (FEB 1995)
(CESAJ ADAPTATION)

(a) The clauses at 52.236-2, Differing Site Conditions, and 52.236-3, Site Investigations and Conditions Affecting the Work, will be included in any contract awarded as a result of this solicitation. Accordingly, offerors or quoters are urged and expected to inspect the site where the work will be performed.

(b) An organized site visit has been scheduled for **Thursday, 23 April 2026 at 09:00 AM, Eastern Daylight Time (EDT).**

(c) Participants should contact **POC Jennifer Tyler at Jennifer.L.Tyler@usace.army.mil on or before Wednesday, 15 April 2026, to make arrangements. If you have any questions, call Jennifer Tyler at 561-379-2854.**

(d) **A Pre-Bid Conference will be held virtually on Monday, 27 April 2026, at 10:00 AM, EDT. Please utilize the link and call information provided below to join the TEAMS Meeting:**

- **LINK:** [HTTPS://WWW.MICROSOFT.COM/EN-US/MICROSOFT-TEAMS/JOIN-A-MEETING](https://www.microsoft.com/en-us/microsoft-teams/join-a-meeting)
- **Meeting ID:** 993 325 182 157 / **PASSCODE:** 85YU3Wy3
- **DIAL IN BY PHONE:** +1 503-207-9433 / **PHONE CONFERENCE ID:** 793 526 23#

(End of provision)

ADDENDUM TO SECTION 00700, CONTRACT CLAUSES
THE REQUIRED FILL-INS FOR FOLLOWING CLAUSES OF SECTION 00700
ARE HEREBY PROVIDED:

**52.211-10 COMMENCEMENT, PROSECUTION, AND COMPLETION OF WORK
(APR 1984)**

The Contractor shall be required to (a) commence work under this contract within 60 calendar days after the date the Contractor receives the notice to proceed, (b) prosecute the work diligently, and (c) complete the entire work ready for use not later than 305 calendar days after receipt of Notice to Proceed (NTP). The time stated for completion shall include final cleanup of the premises.

The total period of performance of 305 calendar days includes the following:
 Base Bid: 230 calendar days (inclusive of 60 calendar days for mob/demob)

Option A: 5 calendar days (concurrent with construction)

Option B: 45 calendar days

Option C: 30 calendar days

A Partial Notice to Proceed will be issued within 15 calendar days from award, pending acceptance of Payment and Performance bonds, directing the contractor to proceed with the requirements at Section 01 11 00, subparagraph "Security Requirements." No more than 5 calendar days after receipt of the Partial Notice to Proceed, the Designated Contractor Security Administrator shall submit a Contractor Intake Form with all contractor employees requiring access to SUBASE Kings Bay Security Manager at Building 1063 Fluckey Hall and submit a Contractor Intake Form -Submission Notification to the Contracting Officer (see Section 01 11 00 for additional details).

(End of clause)

52.211-12 LIQUIDATED DAMAGES--CONSTRUCTION (SEP 2000)

(a) If the Contractor fails to complete the work within the time specified in the contract, the Contractor shall pay liquidated damages to the Government in the amount of \$3,237.00 for each calendar day of delay until the work is completed or accepted.

(b) If the Government terminates the Contractor's right to proceed, liquidated damages will continue to accrue until the work is completed. These liquidated damages are in addition to excess costs of repurchase under the Termination clause.

(End of clause)

52.217-7 OPTION FOR INCREASED QUANTITY--SEPARATELY PRICED LINE ITEM (MAR 1989)

The Government may require the delivery of the numbered line item, identified in the Schedule as an option item, in the quantity and at the price stated in the Schedule. The Contracting Officer may exercise the option by written notice to the contractor on or before December 15, 2026. Delivery of added items shall continue at the same rate that like items are called for under the contract, unless the parties otherwise agree.

If exercised, Option A is to be performed before completion of the Base work. If exercised, Option B and Option C work is to be performed between March 1, 2027, and May 30, 2027.

52.236-4 PHYSICAL DATA (APR 1984)

Data and information furnished or referred to below is for the Contractor's information. The Government shall not be responsible for any interpretation of or conclusion drawn from the data or information by the Contractor.

(a) The indications of physical conditions on the drawings and in the specifications are the result of site investigations. See Section(s) 00 31 32 and 01 10 00 of the Specifications.

(b) Weather conditions. See Section 00 33 50 of the Specifications

(c) Transportation facilities. See Specification Section 01 10 00 and Drawings

252.236-7001 CONTRACT DRAWINGS AND SPECIFICATIONS (AUG 2000)

(a) The Government will provide to the Contractor, without charge, one set of contract drawings and specifications, except publications incorporated into the technical provisions by reference, in electronic or paper media as chosen by the Contracting Officer.

(b) The Contractor shall--

(1) Check all drawings furnished immediately upon receipt;

(2) Compare all drawings and verify the figures before laying out the work;

- (3) Promptly notify the Contracting Officer of any discrepancies;
 - (4) Be responsible for any errors that might have been avoided by complying with this paragraph (b); and
 - (5) Reproduce and print contract drawings and specifications as needed.
- (c) In general—
- (1) Large-scale drawings shall govern small-scale drawings; and
 - (2) The Contractor shall follow figures marked on drawings in preference to scale measurements.
- (d) Omissions from the drawings or specifications or the misdescription of details of work that are manifestly necessary to carry out the intent of the drawings and specifications, or that are customarily performed, shall not relieve the Contractor from performing such omitted or misdescribed details of the work. The Contractor shall perform such details as if fully and correctly set forth and described in the drawings and specifications.
- (e) The work shall conform to the specifications and the contract drawings identified on the following index of drawings:

(f)

Title	File	Drawing No.
Naval Submarine Base Kings Bay, Maintenance Dredging, Camden County, Georgia	GROUP1-26-R-J003	G-01

(End of clause)

5152.211-9000 Evaluation of Subline Items.

As prescribed in 5111.703(c)(i), insert the following provision:
EVALUATION OF SUB LINE ITEMS (DEC 2019)

Item Nos. 0002 through 0010 are subdivided into two or more estimated quantities and are to be separately priced. The Government will evaluate each of these items on the basis of total price of its subline items.

(End of provision)

5152.211-9001 VARIATIONS IN ESTIMATED QUANTITIES -- SUB LINE ITEMS (Dec 2019)

This variation in estimated quantities clause is applicable only to item Nos. 0002, 0003, 0004, 0005, 0006, 0007, 0008, 0009 and 0010.

(a) Variation from the estimated quantity in the actual work performed under any second or subsequent subline item or elimination of all work under such a second or subsequent subline item will not be the basis for an adjustment in contract unit price.

(b) Where the actual quantity of work performed for item Nos. 0002, 0003, 0004, 0005, 0006, 0007, 0008, 0009, and 0010 is less than 85% of the quantity of the first subline item listed under such item, the contractor will be paid at the contract unit price for that subline item for the actual quantity of work performed and, in addition, an equitable adjustment shall be made in accordance with the clause at Federal Acquisition Regulation (FAR) 52.211-18, Variation in Estimated Quantities.

(c) If the actual quantity of work performed under item Nos. 0002, 0003, 0004, 0005, 0006, 0007, 0008, 0009, and 0010 exceeds 115% or is less than 85% of the total estimated quantity of the subline item under that item and/or if the quantity of the work performed under the second sub line item or any subsequent subline item under item Nos. 0002, 0003, 0004, 0005, 0006, 0007, 0008, 0009, and 0010 exceeds 115% or is less than 85% of the estimated quantity of any such subline item, and if such variation causes an increase or a decrease in the time required for performance of this contract the contract completion time will be adjusted in accordance with the clause FAR 52.211-18, Variation in Estimated Quantities.

Enclosure 4 – Wage Rates

"General Decision Number: GA20260060 01/23/2026

Superseded General Decision Number: GA20250060

State: Georgia

Construction Type: Heavy

Heavy Construction, Includes Water and Sewer Lines, and Heavy Construction on Treatment Plant Sites and Industrial Sites (Refineries, Power Plants, Chemical and Manufacturing Plants, Paper Mills, Etc.)

Counties: Appling, Atkinson, Bacon, Ben Hill, Berrien, Calhoun, Camden, Charlton, Clay, Clinch, Coffee, Colquitt, Cook, Decatur, Grady, Irwin, Jeff Davis, Miller, Mitchell, Pierce, Quitman, Randolph, Seminole, Telfair, Thomas, Tift, Turner, Ware and Wayne Counties in Georgia.

Modification Number	Publication Date
0	01/02/2026
1	01/23/2026

* ELEC0177-003 12/02/2024

CHARLTON COUNTY

	Rates	Fringes
ELECTRICIAN.....	\$ 35.60	14.97

PAID HOLIDAYS: New Year's Day, MLK, Memorial Day, 4th of July, Labor Day, Thanksgiving Day, The Day after Thanksgiving and Christmas Day.

ELEC0508-010 09/01/2025

APPLING, ATKINSON, BACON, CAMDEN, CLINCH, COFFEE, PIERCE, WARE,
& WAYNE COUNTIES

	Rates	Fringes
ELECTRICIAN.....	\$ 33.35	13.40

ELEC0613-019 03/03/2025

CLAY & QUITMAN COUNTIES

Rates	Fringes
-------	---------

00700A-19

ELECTRICIAN.....\$ 38.65 33%

ELEC1205-008 06/01/2025

BERRIEN, COOK, DECATUR, GRADY, SEMINOLE, & THOMAS COUNTIES

Rates Fringes

ELECTRICIAN.....\$ 33.50 3%+12.85

ELEC1316-015 09/01/2024

JEFF DAVIS & TELFAIR COUNTIES

Rates Fringes

ELECTRICIAN.....\$ 32.00 5.5%+12.95

ELEC1531-008 12/01/2024

BEN HILL, CALHOUN, COLQUITT, IRWIN, MILLER, MITCHELL, RANDOLPH,
TIFT, & TURNER COUNTIES

Rates Fringes

ELECTRICIAN.....\$ 29.50 4%+13.70

SUGA2012-090 08/11/2012

Rates Fringes

CARPENTER (Form Work Only).....\$ 15.21 0.00

CEMENT MASON/CONCRETE FINISHER...\$ 14.11 1.78

LABORER: Common or General.....\$ 11.00 0.00

LABORER: Pipelayer.....\$ 12.00 0.00

OPERATOR:
Backhoe/Excavator/Trackhoe.....\$ 17.23 0.00

OPERATOR: Grader/Blade.....\$ 18.88 1.32

OPERATOR: Loader.....\$ 15.92 0.00

TRUCK DRIVER: Dump Truck.....\$ 12.00 2.14

WELDERS - Receive rate prescribed for craft performing
operation to which welding is incidental.

=====

Note: Executive Order (EO) 13706, Establishing Paid Sick Leave for Federal Contractors applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2017. If this contract is covered by the EO, the contractor must provide employees with 1 hour of paid sick leave for every 30 hours they work, up to 56 hours of paid sick leave each year. Employees must be permitted to use paid sick leave for their own illness, injury or other health-related needs, including preventive care; to assist a family member (or person who is like family to the employee) who is ill, injured, or has other health-related needs, including preventive care; or for reasons resulting from, or to assist a family member (or person who is like family to the employee) who is a victim of, domestic violence, sexual assault, or stalking. Additional information on contractor requirements and worker protections under the EO is available at <https://www.dol.gov/agencies/whd/government-contracts>.

Note: Executive Order 13658 generally applies to contracts subject to the Davis-Bacon Act that were awarded on or between January 1, 2015 and January 29, 2022, and that have not been renewed or extended on or after January 30, 2022. Executive Order 13658 does not apply to contracts subject only to the Davis-Bacon Related Acts regardless of when they were awarded. If a contract is subject to Executive Order 13658, the contractor must pay all covered workers at least \$13.30 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on the contract in 2025. The applicable Executive Order minimum wage rate will be adjusted annually. Additional information on contractor requirements and worker protections under Executive Order 13658 is available at www.dol.gov/whd/govcontracts.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (iii)).

The body of each wage determination lists the classifications and wage rates that have been found to be prevailing for the type(s) of construction and geographic area covered by the wage determination. The classifications are listed in alphabetical order under rate identifiers indicating whether the particular rate is a union rate (current union negotiated rate), a survey rate, a weighted union average rate, a state adopted rate, or a supplemental classification rate.

Union Rate Identifiers

A four-letter identifier beginning with characters other than ""SU"", ""UAVG"", ?SA?, or ?SC? denotes that a union rate was

prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2024. PLUM is an identifier of the union whose collectively bargained rate prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. The date, 07/01/2024 in the example, is the effective date of the most current negotiated rate.

Union prevailing wage rates are updated to reflect all changes over time that are reported to WHD in the rates in the collective bargaining agreement (CBA) governing the classification.

Union Average Rate Identifiers

The UAVG identifier indicates that no single rate prevailed for those classifications, but that 100% of the data reported for the classifications reflected union rates. EXAMPLE: UAVG-OH-0010 01/01/2024. UAVG indicates that the rate is a weighted union average rate. OH indicates the State of Ohio. The next number, 0010 in the example, is an internal number used in producing the wage determination. The date, 01/01/2024 in the example, indicates the date the wage determination was updated to reflect the most current union average rate.

A UAVG rate will be updated once a year, usually in January, to reflect a weighted average of the current rates in the collective bargaining agreements on which the rate is based.

Survey Rate Identifiers

The ""SU"" identifier indicates that either a single non-union rate prevailed (as defined in 29 CFR 1.2) for this classification in the survey or that the rate was derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As a weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SUFL2022-007 6/27/2024. SU indicates the rate is a single non-union prevailing rate or a weighted average of survey data for that classification. FL indicates the State of Florida. 2022 is the year of the survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. The date, 6/27/2024 in the example, indicates the survey completion date for the classifications and rates under that identifier.

?SU? wage rates typically remain in effect until a new survey is conducted. However, the Wage and Hour Division (WHD) has the discretion to update such rates under 29 CFR 1.6(c)(1).

State Adopted Rate Identifiers

The ""SA"" identifier indicates that the classifications and prevailing wage rates set by a state (or local) government were adopted under 29 C.F.R 1.3(g)-(h). Example: SAME2023-007 01/03/2024. SA reflects that the rates are state adopted. ME refers to the State of Maine. 2023 is the year during which the state completed the survey on which the listed classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. The date, 01/03/2024 in the example, reflects the date on which the classifications and rates under the ?SA? identifier took effect under state law in the state from which the rates were adopted.

WAGE DETERMINATION APPEALS PROCESS

1) Has there been an initial decision in the matter? This can be:

- a) a survey underlying a wage determination
- b) an existing published wage determination
- c) an initial WHD letter setting forth a position on a wage determination matter
- d) an initial conformance (additional classification and rate) determination

On survey related matters, initial contact, including requests for summaries of surveys, should be directed to the WHD Branch of Wage Surveys. Requests can be submitted via email to davisbaconinfo@dol.gov or by mail to:

Branch of Wage Surveys
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

Regarding any other wage determination matter such as conformance decisions, requests for initial decisions should be directed to the WHD Branch of Construction Wage Determinations. Requests can be submitted via email to BCWD-Office@dol.gov or by mail to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2) If an initial decision has been issued, then any interested party (those affected by the action) that disagrees with the decision can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Requests for review and reconsideration can be submitted via email to dba.reconsideration@dol.gov or by mail to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210.

=====

END OF GENERAL DECISION"

PROJECT TABLE OF CONTENTS

DIVISION 00 - PROCUREMENT AND CONTRACTING REQUIREMENTS

00 31 21 CONTROL MONUMENT DESCRIPTIONS
00 33 50 WEATHER, WATER STAGE AND TIDE DATA

DIVISION 01 - GENERAL REQUIREMENTS

01 11 00 SUMMARY OF WORK
01 20 00 PRICE AND PAYMENT PROCEDURES
01 30 00 ADMINISTRATIVE PROCEDURES (SEE BASE MATOC)
01 32 01 PROJECT SCHEDULE ALTERNATIVE (SEE BASE MATOC)
01 33 00 SUBMITTAL PROCEDURES (SEE BASE MATOC)
01 35 26 GOVERNMENTAL SAFETY REQUIREMENTS (SEE BASE MATOC)
01 45 00 RESIDENT MANAGEMENT SYSTEM CONTRACTOR MODE (RMS CM) (SEE
BASE MATOC)
01 45 05 DREDGING/BEACH FILL PLACEMENT - QUALITY CONTROL (SEE BASE
MATOC)
01 50 02 TEMPORARY CONSTRUCTION FACILITIES AND CONTROLS
01 57 20 ENVIRONMENTAL PROTECTION

DIVISION 35 - WATERWAY AND MARINE CONSTRUCTION

35 20 23 DREDGING
35 20 26 NATIONAL DREDGING QUALITY MANAGEMENT PROGRAM - SCOW ULLAGE
PROFILE (SEE BASE MATOC)
35 20 27 NATIONAL DREDGING QUALITY MANAGEMENT PROGRAM - PIPELINE
HYDRAULIC DREDGE (SEE BASE MATOC)

-- End of Project Table of Contents --


SECTION 00 31 21 CONTROL MONUMENT DESCRIPTIONS

Designation: USCG KINGS BAY ARP

Stamping: N/A

Setting: Unspecified setting

Description: From the Stimson gate at the Naval Submarine Base Kings Bay, proceed through entry control point then east on USS Henry L Stimson Road/Drive 3.3 mi to the end at the intersection of USS James Monroe Ave. Turn right and go south on USS James Monroe Ave for 1.7 mi to road on left going to Site-6 Pier. Turn left on road and take most northern pier 0.3 mi to station location. Point is the GPS antenna attached to an aluminum pole mounted to the SW corner of the handrail on roof of maintenance building.

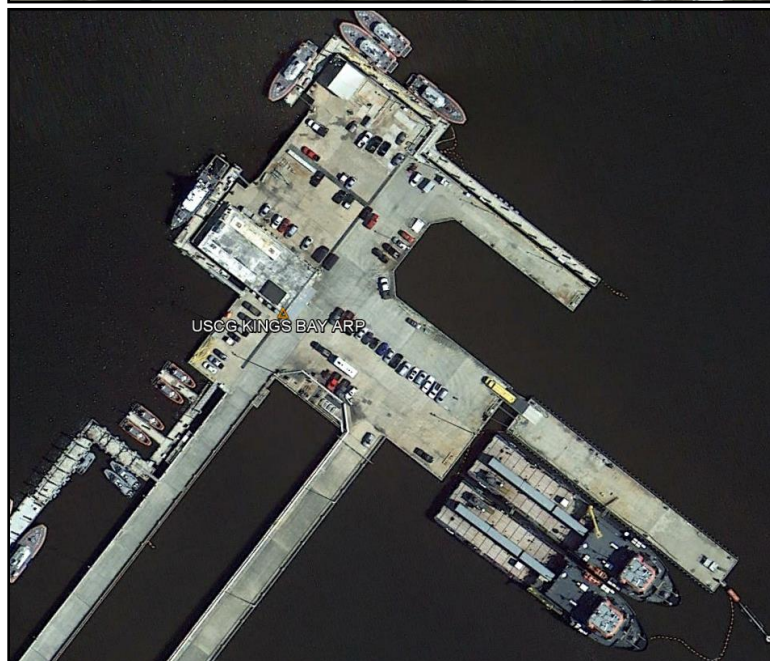

SECTION 00 31 21 CONTROL MONUMENT DESCRIPTIONS



Designation: 867 9511 F TIDAL

Stamping: 9511 F 1989

Stability: May hold, commonly subject to ground movement

Setting: Massive structures (other than listed below)

Description: From the intersection of I-95 and SR-40, proceed SE on SR-40 for 3 miles to Kings Bay Rd. Turn left onto Kings Bay Rd and proceed 3 miles to the entrance of the Naval Submarine Base (Stimson Gate). After entering base, proceed straight on USS Henry L. Stimson Dr. to its end at the Port Services T-Pier. Mark is located on north side of pier approximately 99 feet NE of a fire hydrant and 14 feet NW of pier centerline.

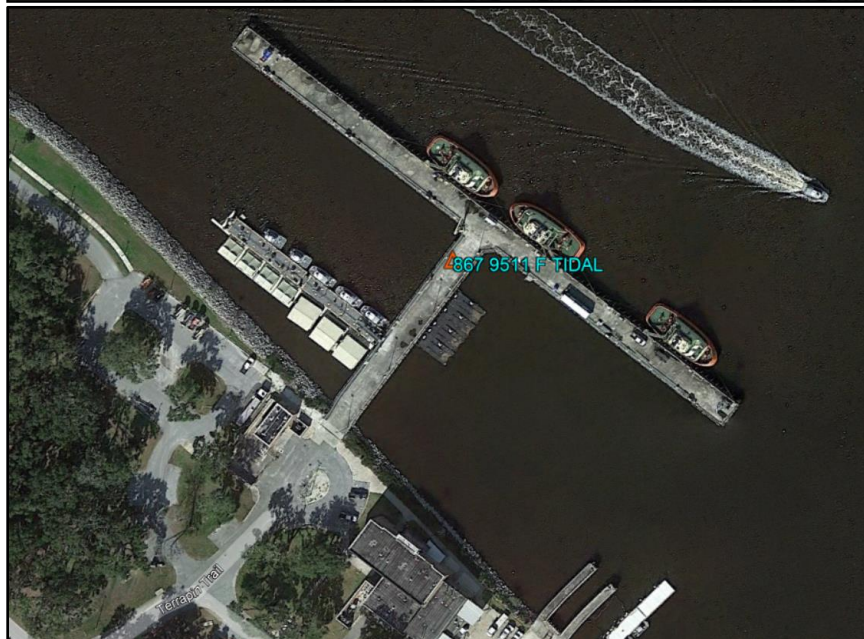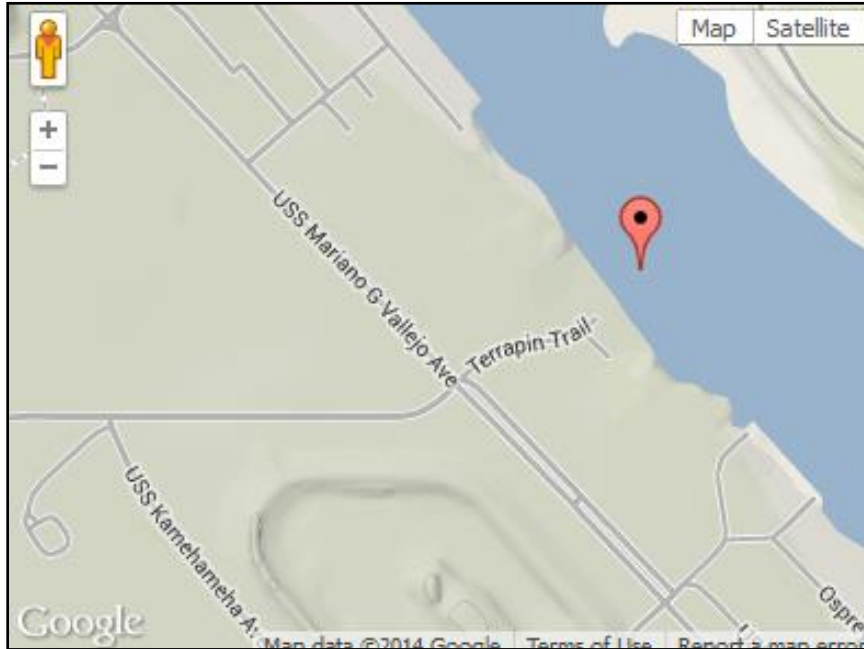

SECTION 00 31 21 CONTROL MONUMENT DESCRIPTIONS

Designation: 867 9598 E

Stamping: 9598 E 2022

Stability: Monument will probably hold position well

Setting: Stainless steel rod in sleeve (10FT+ or 3.048M+)


Description: THE BENCH MARK IS 144.8 FT (44.1 M) NORTHWEST FROM THE CENTER OF A SEWER LID STAMPED 'SIGNAL' SET IN A CONCRETE SIDEWALK THAT RUNS PARALLEL WITH USS JAMES MONROE AVENUE, 112.5 FT (34.3 M) SOUTH OF A NAIL MARKED PALM TREE IN A STAND OF PALM TREES, 41.7 FT (12.7 M) EAST OF THE CENTERLINE OF USS JAMES MONROE AVENUE, 33.65 FT (10.3 M) WEST OF THE WESTERN EDGE OF A SIDEWALK THAT RUNS PARALLEL WITH USS JAMES MONROE AVENUE, 0.82 FT (25 CM) WEST OF A NOAA WITNESS POST. ENCASED IN A 5-INCH PVC PIPE.



SECTION 00 31 21 CONTROL MONUMENT DESCRIPTIONS

Designation: KBFD-1

NO DESCRIPTIVE TEXT OR IMAGES AVAILABLE. REFER TO OPERATIONS DIVISION
HYDROGRAPHIC SURVEY BRANCH (CESAJ-OD-H) FOR INFORMATION REGARDING THIS MARK.

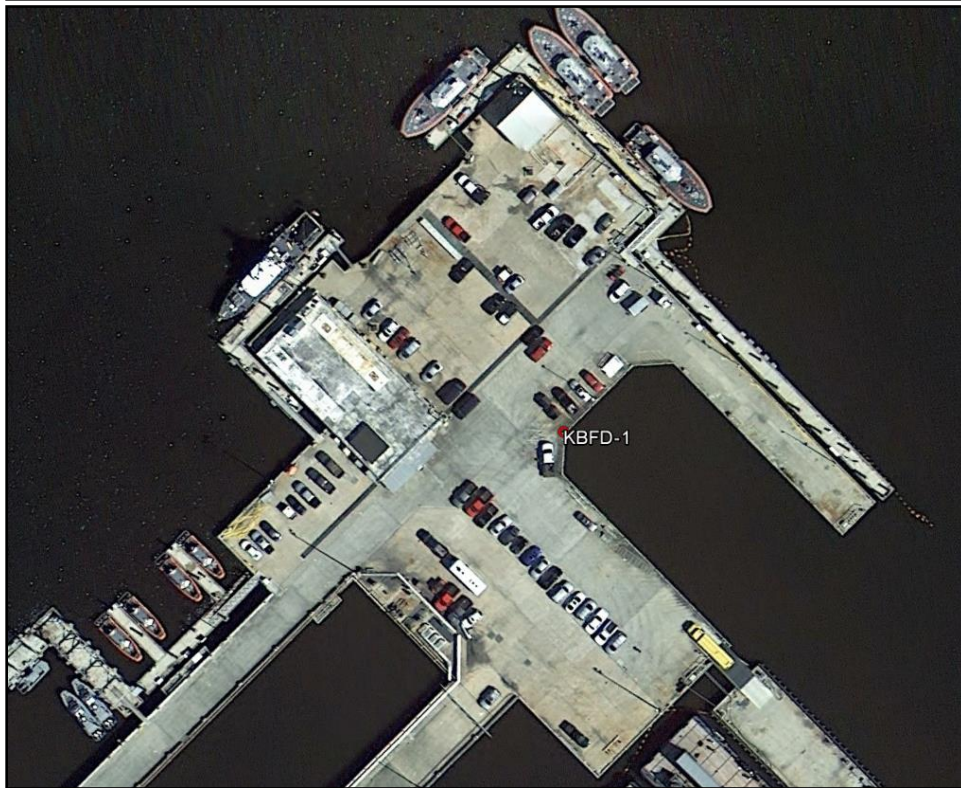

SECTION 00 31 21 CONTROL MONUMENT DESCRIPTIONS

Designation: RF ASTRO

PID: BBGG91

Stamping: RF ASTRO 1988 DET 4 GSS

Stability: May hold, commonly subject to ground movement

Setting: Set in top of concrete monument

Description: The station is located on Navy Submarine Base Kings Bay, Georgia in the Refit Wharf area. The station is in a grassy area between the Dock Masters building and a maintenance building. The station is a standard Defense Mapping Agency brass disk stamped "RF ASTRO 1988 DET4 GSS." It is on a 0.6 x 0.6 m concrete pad and is 34.45 ft east of a lamp post, 27.89 ft south of a fire hydrant, and 34.45 ft east of the intersection of a sidewalk.

Site photos are not available due to security restrictions.

SECTION 00 31 21 CONTROL MONUMENT DESCRIPTIONS

Designation: EHW BASE

PID: BBGG92

Stamping: EHW BASE 2018

Stability: May hold, commonly subject to ground movement

Setting: Pavement (street, sidewalk, curb, etc.)

Description: The station is a standard 2-inch brass NGA disk located in the center of a concrete sidewalk in a grassy area approximately 32 meters outside of the security fence around, and about midway between, EHW1 and EHW2 wharves. The station is 61.19 feet SE of the SE corner of Building #5013, 38.52 feet SE of the center of a steel manhole lid, 28.12 feet south of a Carsonite witness post, and 71.69 feet NE of the east edge of a parking lot.

Site photos are not available due to security restrictions.

SECTION 00 31 21 CONTROL MONUMENT DESCRIPTIONS

Designation: SITE 6

PID: BBBW88

Stamping: SITE-6 2010 JAX DIST

Stability: May hold, commonly subject to ground movement

Setting: Mat foundation or concrete slab other than pavement

Description: To reach from the Stimson gate at the Naval Submarine Base Kings Bay, proceed through entry control point and then east on USS Henry L Stimson Rd/Dr 3.3 miles to end at intersection of USS James Monroe Ave. Turn right and go south on USS James Monroe Ave for 1.7 miles to parking lot on left and area known as Site VI (a.k.a. Warrior Wharf). Turn left on access road and into parking lot then proceed to southeast corner of parking lot at motorcycle parking area.

Site photos are not available due to security restrictions.

SECTION 00 33 50 WEATHER, WATER STAGE AND TIDE DATA

1. The following water stage, wind, wave, and weather data are provided for inclusion in the subject project's P&S. The water level datums provided here are for information only and are not for use in conjunction with any contract-related hydrographic surveying.

a) Water Stages. Water levels in the project area are mainly affected by wind and semi-diurnal tidal fluctuations in the East River. The project area is subject to tropical system storm surge from June through November. Surge from extratropical storms may affect areas near the inlet, south of the project area, any time of the year and could affect mobilization or demobilization activities that utilize this area.

Elevations of tidal datums in the vicinity of the project area were gathered using the National Oceanic and Atmospheric Administration's (NOAA) National Ocean Service (NOS) tide station shown in Figure 1 and Table 1. The elevations in Table 1 are taken from NOAA's Tide Station 8679511 (Kings Bay, GA). These elevations are based on data from a one-year analysis from January 1990 through December 1990 from a gauge located on a pier within Naval Submarine Base Kings Bay, which is within the limits of the project area. These data are referenced to Mean Lower-Low Water (MLLW) from the tidal epoch period of 1983-2001 and are based on a controlling tide station near Fernandina Beach, Florida (NOAA Tide Station 8720030). Additional tidal data on stations in the vicinity of the subject project area can be found at the following website: <https://tidesandcurrents.noaa.gov/map/index.html?region=Georgia>.

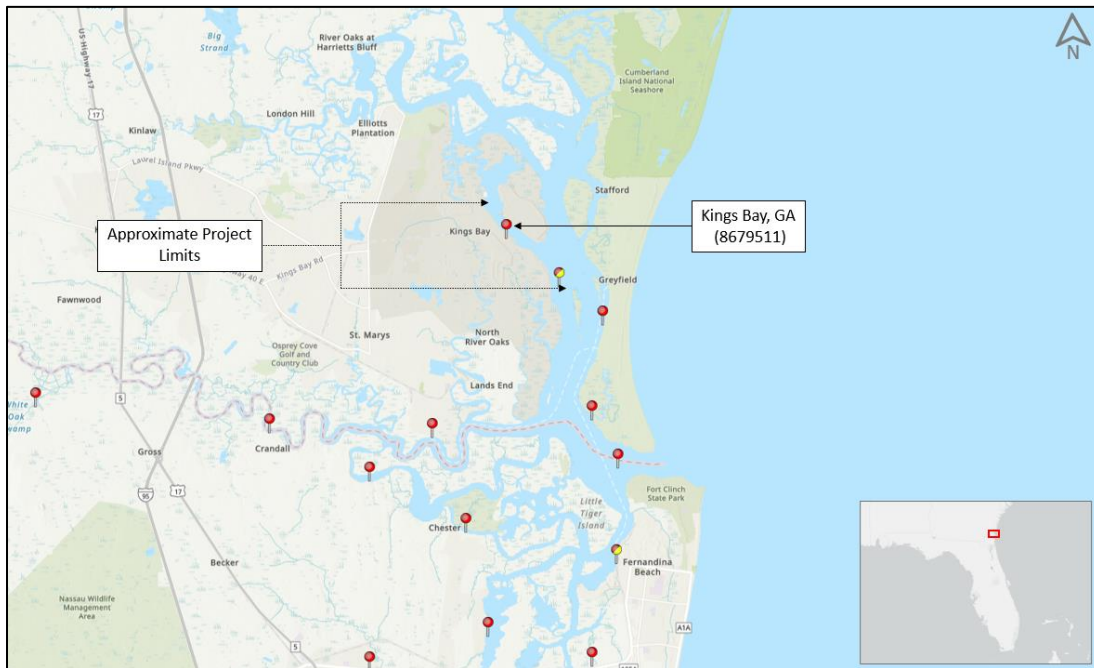


Figure 1. NOAA Tide Stations in the Vicinity of Naval Submarine Base Kings Bay

SECTION 00 33 50 WEATHER, WATER STAGE AND TIDE DATA

Table 1. Datums from NOAA Station 8679511 (Kings Bay, GA)

Location: 30° 47.8' N, 81° 30.9' W	
Analysis Period: January 1990 through December 1990	
Datum	Elevation (ft-MLLW)
Highest Observed (5/24/1990)	8.85
Mean Higher-High Water (MHHW)	7.01
Mean High Water (MHW)	6.64
Mean Sea Level (MSL)	3.56
Mean Tide Level (MTL)	3.43
Mean Low Water (MLW)	0.21
Mean Lower-Low Water (MLLW)	0.00
Lowest Observed (2/24/1990)	-2.48

Daily tidal predictions at locations along the coastline of North and South America, including locations in the vicinity of the project area, are included in the publication East Coast of North and South America Tide Tables, United States (U.S.) Department of Commerce, National Oceanic and Atmospheric Administration, National Ocean Service. In addition to daily tidal predictions, this publication provides mean tide levels, diurnal tide ranges, and some astronomical data (sunrise, sunset, moonrise, and moonset). Of note, tidal data provided in this publication are also listed at the following website: https://tidesandcurrents.noaa.gov/tide_predictions.html.

b) Wind and Wave Data. The publications in this section include wind and wave information in the vicinity of the project area. They are available for review at the websites or agencies indicated.

i. U.S. Coast Pilot Volume 4, Atlantic Coast: Cape Henry to Key West, U.S. Department of Commerce, National Oceanic and Atmospheric Administration, National Ocean Service is a publication that supplements the navigational information shown on NOAA's NOS nautical charts and provides miscellaneous meteorological data. This publication is available through NOAA or on the following website: <https://nauticalcharts.noaa.gov/publications/coast-pilot/index.html>.

ii. U.S. Army Corps of Engineers' Coastal & Hydraulics Laboratory, Wave Information Study (WIS) Database is a wave hindcast database for various stations located along the U.S. Atlantic, Gulf Coast, and Caribbean coastlines. WIS Station ST63401 is in roughly 15.0 meters (m) or 49.2 feet (ft) of water relative to the Mean Sea Level (MSL) datum at 30° 40.0' N, 81° 15.0' W. This station lies approximately 15.0 miles east of the mouth of the St. Marys River. Available data includes a hindcast time series of wave height, wave spread, wave period, wave and wind direction, and wind speed at 1-hour intervals for the 44-year period of 1980 through 2024. The following website provides links to WIS summary tables and plots, as well as other sources of wave data: <https://wisportal.erdc.dren.mil/>.

iii. National Data Buoy Center (NDBC) Website provides a wide range of real-time and archived meteorological and oceanographic data collected at offshore and nearshore stations worldwide. Data provided on this website include wind speed, wind gusts, atmospheric pressure, air temperature, sea temperature, wave height, and wave period. Gauge readings are updated hourly, and archived data is available for most stations. Data relevant to Georgia projects are found at the following website: <https://www.ndbc.noaa.gov/>.

SECTION 00 33 50 WEATHER, WATER STAGE AND TIDE DATA

c) Weather Conditions. The project area is subject to tropical systems June through November and to windy and rainy weather any time of the year. The climate of the area is essentially tropical, as temperatures below freezing are seldom. During the wet season (May through October), rainfall events are usually short and sporadic and closely associated with convective activity. Winter months generally constitute the dry season, where rainfall is typically associated with mid-latitude, or extratropical, systems and distributed in a more spatially uniform pattern. Daily rainfall events in the dry season are occasionally heavy when mid-latitude systems impact southeast Georgia. Notably, hazardous thunderstorms can occur in this area at any time of the year.

i. It is the contractor's responsibility to obtain information concerning weather conditions in the project area. The Climate Data Online website (<https://www.ncdc.noaa.gov/cdo-web/>) published by NOAA's National Centers for Environmental Information (formerly the National Climatic Data Center) in Asheville, North Carolina contains climatological and meteorological data relevant to this region. Available data include quality-controlled daily, monthly, seasonal, and yearly measurements of temperature, precipitation, wind, and degree days as well as radar data and 15- to 30-year climate normals.

NOAA's Climate Data Online website includes Monthly Normals (average values) for temperature, precipitation, and other climatological information over three periods: 1981-2010, 1991-2020, and 2006-2020. NOAA's Brunswick 23 S, GA gauge (ID USW00063856) is located roughly 2.0 miles east of the project area at 30° 48.5' N, 81° 27.6' W. The most applicable period for data at this site is likely 1991-2020 and is found at the following website: <https://www.ncei.noaa.gov/maps/normals/>.

SECTION TABLE OF CONTENTS

DIVISION 01 - GENERAL REQUIREMENTS

SECTION 01 11 00

SUMMARY OF WORK

PART 1 GENERAL

- 1.1 REFERENCES
- 1.2 WORK COVERED BY CONTRACT DOCUMENTS
 - 1.2.1 Project Layout
 - 1.2.2 Project Description
 - 1.2.2.1 Base
 - 1.2.2.2 Option A
 - 1.2.2.3 Option B
 - 1.2.2.4 Option C
 - 1.2.3 Project Location
 - 1.2.4 Safety Requirements
 - 1.2.5 Work Performed by Others
 - 1.2.5.1 Coordination with Other Contracts
 - 1.2.5.1.1 Adjacent Contractor
- 1.3 SUBMITTALS
- 1.4 COMMENCEMENT, PROSECUTION AND COMPLETION OF WORK
- 1.5 LIQUIDATED DAMAGES - CONSTRUCTION
- 1.6 PHYSICAL DATA
 - 1.6.1 Physical Conditions
 - 1.6.2 Weather, Water Stage and Tide Data
 - 1.6.3 Contractor Investigation
 - 1.6.4 Maritime Traffic
 - 1.6.5 Obstruction of Channel
 - 1.6.6 Hydrographic Surveys
- 1.7 CONTRACTOR ACCESS AND USE OF PREMISES
 - 1.7.1 List of Contact Personnel
 - 1.7.2 Naval Submarine Base Kings Bay Station Access/Regulations
 - 1.7.2.1 Citizenship
 - 1.7.2.2 Security Requirements
 - 1.7.2.3 Site Security
 - 1.7.2.4 Vehicle Permits
 - 1.7.2.5 Special Working Conditions and Entry to Work Area
 - 1.7.2.6 Diving Plans
 - 1.7.2.7 Coordination with The Navy
 - 1.7.2.8 Materials Delivery
 - 1.7.2.9 Waterborne Base Access and Security Requirements
 - 1.7.2.10 Vessel Waterfront Restricted Area (WRA) Security Requirements
 - 1.7.2.11 Transmitting Devices
 - 1.7.2.12 Firearms and Weapons
 - 1.7.2.13 Drug Abuse by Contract Employees
 - 1.7.2.14 Tobacco Use
- 1.8 LAYOUT OF WORK
 - 1.8.1 Established Project Survey Control
 - 1.8.2 Layout

Naval Submarine Base Kings Bay MD
Camden County, Georgia

- 1.8.3 Survey
- 1.9 DAMAGE TO WORK
- 1.10 EXISTING WORK
- 1.11 LOCATION OF UNDERGROUND FACILITIES
 - 1.11.1 Notification Prior to Excavation
- 1.12 SECURITY FORMS

PART 2 PRODUCTS (NOT USED)

PART 3 EXECUTION (NOT USED)

-- End of Section Table of Contents --

SECTION 01 11 00

SUMMARY OF WORK

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

U.S. ARMY CORPS OF ENGINEERS (USACE)

GDR

Geotechnical Data Report for Naval
Submarine Base Kings Bay, Maintenance
Dredging, Camden County, Georgia

EM 385-1-1

(2024) Safety and Occupational Health
(SOH) Requirements

1.2 WORK COVERED BY CONTRACT DOCUMENTS

1.2.1 Project Layout

The project work consists of maintenance dredging of shoal material at the Naval Submarine Base Kings Bay.

1.2.2 Project Description

Work is divided into a Base and three options as indicated below. For the base and dredging option, this contract incorporates two feet of allowable overdepth throughout.

1.2.2.1 Base

Work consists of maintenance dredging the locations to required depths indicated in the table below and shown on the drawings. The placement of the dredged material will be at Disposal Area 1 (D/A-1) and Disposal Area 2 (D/A-2) as shown on the drawings and as directed by the Contracting Officer. Additional Base work also includes environmental and water quality monitoring and standby time.

LOCATION	REQUIRED DEPTH
Range H to I and Upper Turning Basin (UTB)	45-foot UTB, 45-foot and 47-foot Channel
Range G to H and Explosive Handling Basin (EHB)	44-foot and 47-foot EHB, 44-foot and 47-foot Channel
Range E to G and Magnetic Silencing Facility (MSF) North	44-foot
Site Six North (SS-N)	39-foot

Naval Submarine Base Kings Bay MD
Camden County, Georgia

LOCATION	REQUIRED DEPTH
Site Six South (SS-S) and Medium Auxiliary Repair Dock (ARDM) Yoke	45-foot
Explosive Handling Wharves (EHW)	47-foot
Refit Wharves	47-foot
Small Boat Basin	24-foot
Port Security Barrier Mooring Area	12-foot
Dry Dock Caisson Gate Sill and Dry Dock Caisson Gate Mooring Facility	46-foot

1.2.2.2 Option A

Work consists of supplying additional field cut weir riser boards as requested by the Contracting Officer.

1.2.2.3 Option B

Work consists of secondary maintenance dredging. The locations and required depths are indicated in the table below and shown on the drawings. The placement of the dredged material will be at Disposal Area 1 (D/A-1) and Disposal Area 2 (D/A-2) as shown on the drawings and as directed by the Contracting Officer. Option B work also includes environmental and water quality monitoring and standby time.

LOCATION	REQUIRED DEPTH
Site Six South (SS-S) and Medium Auxiliary Repair Dock (ARDM) Yoke	45-foot
Site Six North (SS-N)	39-foot
Explosive Handling Wharves (EHW)	47-foot
Refit Wharves	47-foot
Dry Dock Caisson Gate Sill and Dry Dock Caisson Gate Mooring Facility	46-foot

1.2.2.4 Option C

Work consists of Mobilization/Demobilization for secondary maintenance dredging if demobilization from the site occurs after completing all the Base work.

1.2.3 Project Location

Kings Bay Naval Submarine Base is located near St. Marys, Camden County,

Naval Submarine Base Kings Bay MD
Camden County, Georgia

Georgia, or five miles north of the Georgia/Florida Border and 28 miles north of Jacksonville International Airport (JAX). Water access to the SUBASE is approximately 10 nautical miles from the Atlantic Ocean through the confluence of the St. Marys and Amelia Rivers at Cumberland Sound and along the Atlantic Intracoastal Waterway (AIWW). The channel connecting the inshore waterways to the submarine base is known as Kings Bay Inner Channel (KBIC) and is approximately 8.6 nautical miles west of the mouth of the St. Marys Entrance (River Stations 00+000 to 48+250).

1.2.4 Safety Requirements

See Section 01 35 26 GOVERNMENTAL SAFETY REQUIREMENTS and EM 385-1-1. In addition, comply with the requirements of Naval Submarine Base Kings Bay Instruction 11262.4A, Subject CONTRACTOR OPERATED WEIGHT HANDLING EQUIPMENT AND MATERIAL HANDLING EQUIPMENT OVERSIGHT, in Appendix A after the end of this section.

1.2.5 Work Performed by Others

1.2.5.1 Coordination with Other Contracts

1.2.5.1.1 Adjacent Contractor

A recurring contract to dredge the Kings Bay Entrance Channel occurs on a regular basis. There will also be active construction near the Magnetic Silencing Facility (MSF) north of Station 31+ 00 Range E. Coordinate any activities that may impact or be impacted by adjacent contractors with the Contracting Officer.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. Transmit submittal items in accordance with Section 01 33 00 SUBMITTAL PROCEDURES.

SD-01 Preconstruction Submittals

List of Contact Personnel

Contractor Intake Form - Submission Notification; G, R0

Worksite Access List; G, R0

1.4 COMMENCEMENT, PROSECUTION AND COMPLETION OF WORK

Read this paragraph in conjunction with the Clause COMMENCEMENT, PROSECUTION, AND COMPLETION OF WORK (FAR 52.211-10).

1.5 LIQUIDATED DAMAGES - CONSTRUCTION

Refer to the Clause LIQUIDATED DAMAGES - CONSTRUCTION (FAR 52.211-12).

1.6 PHYSICAL DATA

Read this paragraph in conjunction with the Clause PHYSICAL DATA (FAR 52.236-4).

1.6.1 Physical Conditions

The indications of physical conditions on the drawings and in the specifications are the result of site investigations by surveys and/or by core borings. When the indicated physical conditions are the result of site investigations by core borings, the core boring logs and laboratory data are in GEOTECHNICAL DATA REPORT (GDR) and the core boring locations are shown on the drawings. Also, see the GDR for instructions concerning availability of core borings for inspection.

1.6.2 Weather, Water Stage and Tide Data

See Section 00 33 50 WEATHER, WATER STAGE AND TIDE DATA.

1.6.3 Contractor Investigation

Refer to the Clause SITE INVESTIGATION AND CONDITIONS AFFECTING THE WORK (FAR 52.236-3).

1.6.4 Maritime Traffic

Marine Traffic in the project area consists of Naval, commercial, pleasure, and small recreational vessels of all types and sizes which can be accommodated by existing depths.

1.6.5 Obstruction of Channel

The Government will not undertake to keep the channel free from vessels or other obstructions, except to the extent of such regulations, if any, as may be prescribed by the Secretary of the Army, in accordance with the provisions of Section 7 of the River and Harbor Act approved 8 August 1917. Conduct the work in such manner as to obstruct navigation as little as possible, and in case the Contractor's plant so obstructs the channel as to make difficult or endanger the passage of any vessels, promptly move said plant on the approach of any vessel to such an extent as may be necessary to afford a practicable passage. Upon completion of the work, promptly remove the plant, including ranges, buoys, piles, and other marks placed under the Contract in navigable waters or on shore.

1.6.6 Hydrographic Surveys

Hydrographic surveys will be provided to the awardee. Survey numbers are indicated on the drawings.

1.7 CONTRACTOR ACCESS AND USE OF PREMISES

Security and base access varies between bases as well as between various locations within individual bases and must be recognized. It is incumbent on the Contractor to ascertain the current security and base access requirements appropriate to the project location and incorporate the cost, if any, for compliance to said requirements into Contractor's proposal. Lack of knowledge of current requirements does not constitute a basis for an adjustment to the contract.

Ensure that Contractor personnel employed on the activity become familiar with and obey activity regulations including safety, fire, traffic and security regulations. Keep within the limits of the work and avenues of ingress and egress. Wear hard hats in designated areas. Do not enter any restricted areas unless cleared by the Contracting Officer.

1.7.1 List of Contact Personnel

Furnish a list of contact personnel of the Contractor and subcontractors including addresses and telephone numbers for use in the event of an emergency. Include a Designated Contractor Security Administrator responsible for maintaining an accurate list and routing necessary SUBASE security access paperwork. As changes occur and additional information becomes available, correct and change the information contained in previous lists.

1.7.2 Naval Submarine Base Kings Bay Station Access/Regulations

The Contractor and his employees and subcontractor(s) will become familiar with and obey all station regulations, including fire, traffic and security regulations. All Contractor personnel will keep within the limits of the work (and avenues of ingress and egress), and will not enter any restricted areas unless required to do so and are cleared for such entry. The Contractor's and his sub-contractor's equipment will be conspicuously marked for identification.

1.7.2.1 Citizenship

Contractor employees and representatives performing work under this contract are required to be United States citizens.

1.7.2.2 Security Requirements

Access to SUBASE Kings Bay requires consent to a National Crime Information Center (NCIC) background check. Consent to an NCIC is codified using Department of the Navy Population Identification Card Base Access Pass Registration (SECNAV Form 5512/1), which is available at <https://www.cnic.navy.mil/om/dbids.html>. Before the SUBASE Commanding Officer (CO) or representative grants an individual access to SUBASE Kings Bay, the results of the NCIC background check must be reviewed and found to not meet disqualifying criteria (See Appendix B after the end of this section). Specific conditions or offenses considered prejudicial to good order, discipline, and morale of the installation constitute permanently disqualifying fitness determination standards.

Obtain access to Navy installations through participation in the Defense Biometrics Identification System (DBIDS). Requirements for Contractor employee registration, and transition for employees currently under Navy Commercial Access Control System (NCACS), are available at <https://www.cnic.navy.mil/om/dbids.html>. No fees are associated with obtaining a DBIDS credential.

Gate permits into the Naval Submarine Base, Kings Bay Complex are obtained at the Contractor Pass and I.D. Facility, Building 6011, Franklin Gate, Naval Submarine Base, Kings Bay, Georgia, and only during Franklin Pass and ID office hours (0600 - 1430, Monday through Friday, last customer intake by 1420). The office is closed on weekends and observed holidays.

Commercial vehicles will access the installation through the Franklin Gate. All Weight Handling Equipment will be inspected at Franklin Gate prior to entry by Naval Facilities Engineering Systems Command (NAVFAC) SE Public Works Transportation Department. Seatbelts are required to be worn by all persons operating or riding in any vehicle onboard SUBASE Kings Bay. No riders are allowed in beds of pickup trucks or vans. Use of

cell phones while operating a vehicle on DoD Installations is NOT authorized.

Additional security screening for access to worksite is required and accomplished through a government issued trustworthiness determination and in accordance with the Waterfront Restricted Area (WRA) access requirements (SWFLANTINST 5530.7); therefore, know and/or perform the following:

- a. No more than 5 calendar days after receipt of Notice to Proceed (Partial), the Designated Contractor Security Administrator will submit a Contractor Intake Form with all contractor employees requiring access to SUBASE Kings Bay Security Manager at Building 1063 Fluckey Hall, and submit a [Contractor Intake Form - Submission Notification](#) to the Contracting Officer. An Excel file of the Contractor Intake Form will be provided by the Government. The SUBASE Security Manager will determine if contractor employees have met the access requirements and at their discretion, will initiate the National Background Investigation Services (NBIS) electronic application (eApp) for a trustworthiness determination (or Tier 1 Investigation). New investigations require contractor employees to complete electronic forms through NBIS eApp. The NBIS eApp email link is only valid for 5 five days. If contractor employee fails to activate the NBIS eApp link, one reset will be granted.
- b. Upon submission of the necessary documentation through NBIS eApp, the contractor employee will report to Building 1063 Fluckey Hall Security Office and request digital fingerprints. The Designated Contractor Security Administrator will notify the SUBASE Security Manager when contractor employees have submitted fingerprints. At the discretion of the SUBASE Security Manager, an interim 90-day Unescorted access badge can be granted to the contractor employee after the NBIS eApp and fingerprints are submitted and investigation shows "Open" in Defense Information Security Systems (DISS). Once the T1 is open, SUBASE Security Manager hands off to NAVFAC's Industrial Security Specialist/COR to initiate Badging and any subsequent visit requests for the contractors. Once NAVFAC signs the Access badge, the PIDAS Access Request Form will need to be submitted by NAVFAC Industrial Security Specialist. Two additional interim 90-day Unescorted access badges can be granted at the discretion of the SUBASE Security Manager. The contractor employee must receive a "Favorable" determination after the 270 days from the original "Open" date (three consecutive 90 day periods) in order to maintain Unescorted status. It is the Contractor's responsibility to ensure the screening process is completed prior to the commencement of work. If a "Favorable" determination is not obtained by the 270th day of the "Open" date, the individual will require an escort. Unescorted access to the WRA to employees with open T1's will only be given if fingerprint results come back good and the SF-85 has been reviewed and has a favorable standing.
- c. Once the DBIDS Badge is issued, submit a copy of SUBASE Badge application to NAVFAC Security. Personnel will report to Franklin Gate Pass and ID Office to be enrolled into the WRA Perimeter Intrusion Detection and Assessment System (PIDAS) and have their badge encoded for entry. PIDAS includes an Automated Entry Control System (AECS) which is required for WRA entry.
- d. The Prime Contractor may provide designated escorts for employees and

subcontractors if: the Prime Contractor Management Team (Project Manager, Superintendent, Quality Control Manager, and Site Safety Officer) have "Favorable" adjudicated trustworthiness determinations or clearance, the designated escort has a "Favorable" adjudicated trustworthiness determination or clearance, the designated escort is a direct employee of the Prime Contractor, and the designated escort is performing in a supervisory role. Supervisory role is defined as the individual has no other duties or work to perform other than maintain positive control of up to five Uncleared employees or subcontractors onsite. Designated escorts can be held liable for the actions of the Uncleared employees or subcontractors under their supervision.

- e. Provide certification of U.S. citizenship for all personnel to be employed at the worksite (including subcontractor/temporary hires/delivery vendors). Certification of U.S. citizenship is accomplished by viewing government issued document such as certified birth certificate, U.S. Passport, Certificate of Naturalization, etc. Possession of a state issued driver's license is not an authorized document for proof of U.S. citizenship.
- f. Prepare and maintain a [worksite access list](#). Submit the initial worksite access list, no more than 5 calendar days after Notice to Proceed (Partial), containing: company name, individual's full name, access/privileges requested in CIF, current investigation/badge status, expiration date of issued badges, date and place of birth, date, citizenship. If applicable, include company cage code and type and issuing authority of individual's personnel security investigation/trustworthiness determination of all personnel requiring access to the worksite. Maintain and update the worksite access list in an accurate manner throughout the period of contract performance. Adhere to personnel worksite access requirements stated above when hiring subcontractor or temporary service personnel.
- g. For material deliveries to the worksite other than government authorized vehicles, provide name of company, name of driver, U.S. citizenship, vehicle information, purpose of delivery, actual date, time, point of contact (including phone number) and description of load material on government provided Vendor Delivery Data Sheet to Security Office. Provide notification at least 1 working day prior to expected arrival. An authorized representative must escort persons delivering materials to the job site.
 - (1) Per SUBASEINST 5530.17, all commercial, contractor and vending vehicles (cargo carrying including semis, dump trucks, pick-up trucks, utility trucks, station wagons, cars and vans) will be required to enter and exit the Franklin Gate Monday through Friday 0530-2130. Upon entry, vehicles will be directed and inspected at the Commercial Vehicle Inspection Station (CVISTA) or Vehicle Inspection Cargo Scanner (VICS) located approximately 100 yards inside the Franklin Gate. Prior to exiting Franklin Gate, vehicles will be inspected at the same Station for proper delivery, in accordance with bills of lading, and unauthorized removal of Government property. For deliveries to the WRA, a bill of lading will not be accepted by SWFLANT. It must be a badged employee due to a visit request or badge application that has been routed and PIDAS Form sent.
- h. Vehicles requiring access to WRA must have affixed permanent company

logo. A Restricted Area Vehicle Access Request, SWFLANT form 5530/57, must also be completed for all vehicles entering the WRA. Non-cleared delivery personnel are required to be escorted while inside a restricted area and must consent to NCIC background check for access to Submarine Base, Kings Bay, GA. Limited number of contractor personnel may be authorized escort privileges upon favorable completion of Tier 1 (T1) process. Otherwise the individual delivery personnel must have a completed T1 package.

1.7.2.3 Site Security

Job site security is a Contractor responsibility. Notify Base Security Office of any special measures taken (night watchmen, alarms, etc.).

1.7.2.4 Vehicle Permits

As prescribed by SUBASE Security Franklin Gate, vehicle permits require documentary proof of liability insurance coverage, registration and all pertinent identification/description such as manufacturer's model, body type, and engine number. Company vehicles must have permanently affixed company identification prominently displayed on the vehicle. All Contractor vehicles and equipment, when not in use, will be locked or removed from the Base or otherwise disabled so that operation by unauthorized personnel will be prohibitive.

1.7.2.5 Special Working Conditions and Entry to Work Area

Entry to work areas located in the Navy operational area is limited to that needed to accomplish work in or adjacent to these structures. No unessential entry into operational areas is allowed. Access may be denied any time special Navy security and safety restrictions are set.

1.7.2.6 Diving Plans

Station regulations prohibit underwater diving at any location in the Waterfront Restricted Area (WRA). If diving services are needed, then the Contractor will have to leave the WRA and perform the needed diving outside of the project area.

1.7.2.7 Coordination with The Navy

Coordination with elements of the Navy is usually accomplished through the Contracting Officer. Base specific items such as coordination of opening the security gates, equipment inspections, etc. will be coordinated with NAVFAC SE Public Works Department and Designated USACE Project Manager. The NAVFAC SE Public Works Representative will serve as the Security Area Requesting Official for the Contractor and provide guidance to the Designated Contractor Security Administrator for routing and submitting security forms.

1.7.2.8 Materials Delivery

The inspection station for clearing materials shipments is open 0530-1800 Monday through Friday. Materials delivery requires a bill of lading.

1.7.2.9 Waterborne Base Access and Security Requirements

The following security requirements must be adhered to by the Contractor when entering or exiting NSB Kings Bay by waterborne vessel. Entry

control administrative inspection time will vary depending on the type and number of vessels being searched. Security personnel will do a walk-through of all spaces, normally accompanied by a Military Working Dog. The vessel inspection is conducted at Site Six pier or as directed by NSB Kings Bay Security Department. This listing is not inclusive of all possible situations the security force may encounter while conducting the inspection.

- a. Give Port Operations and Base Security a minimum of 48 hours notification of all vessels moving into the Submarine Base Kings Bay waterfront area. The Watch Commander can be reached for scheduling at (912) 674-6831, 0700-1800 Monday through Friday. Additionally, send an email to the contacts listed below, with subject "Vetting Request - Equipment Arriving", containing the following information: date vetting is needed, requested time for vetting, specific list of equipment, and specify that the Waterfront Restricted Area (WRA) will NOT be entered. Specific names and contact information will be provided by the Contracting Officer at the Preconstruction Meeting.

Contact List:

Title:	Contact Info:
Port Operations	To be provided
PSDO's	To be provided
Public Works	To be provided
USACE	To be provided

- b. Personnel must be in possession of an approved SUBASE badge with code 12 at all times along the waterfront. Personnel requiring access to the Waterfront Restricted Area (WRA) will need to meet the requirements described in subparagraph "Vessel Waterfront Restricted Area (WRA) Security Requirements" below. Instructions on obtaining the badges are described in subparagraph "Security Requirements" above.
- c. Inspection Procedure:
 - (1) The Superintendent or the Captain of the vessel will notify Harbor Control of arrival at Kings Bay requesting location to standby and receive a security inspection. Clearance must be received before proceeding or securing the vessel or barges awaiting inspection. Contact information will be provided at the Preconstruction Conference.
 - (2) The Guard Force Sentry will verify with the Superintendent or the Captain of the vessel that they do not possess any prohibited items.
 - (3) The Superintendent or Captain of the vessel will be instructed to secure the engine and identify any hazardous cargo or hazardous areas aboard the vessel prior to starting the inspection.
 - (4) Depending on the size of the vessel, vessel crew members may be directed to a location on the vessel or on the pier, out of the way of the inspection process.
 - (5) The Superintendent or Captain will be directed to illuminate all spaces and to open all compartments, containers, and hatches for inspection.
 - (6) The security force will inspect compartments, spaces, and

containers looking for weapons, explosives, explosive devices, cameras, contraband, etc.

- (7) As the security guard inspects, the guard will not close vessel compartments or hatches, but direct the owner of the vessel to restore the vessel.
- (8) If the security guard discovers any unopened compartments or containers, they will direct the Superintendent, Captain, or contract representative to open them.
- (9) Once the inspection is successfully completed, the guard will direct all occupants to present their SUBASE badge for verification and board the vessel.
- (10) Once a vessel has been inspected the Superintendent or Captain will be permitted to move equipment within the waterfront area.

1.7.2.10 Vessel Waterfront Restricted Area (WRA) Security Requirements

The following security requirements must be adhered to by the Contractor when exiting or entering the WRA by waterborne vessel. Entry control administrative inspection time will vary depending on the type and number of vessels being searched. Security personnel will do a walkthrough of all spaces, normally accompanied by a Military Working Dog. The vessel inspection is conducted at Site Six pier or as directed by SWFLANT. This listing is not inclusive of all possible situations the security force may encounter while conducting the inspection.

- a. Give the SWFLANT Waterfront Security Coordinator a minimum of 48 hours notification of all vessels moving into or out of the WRA. The SWFLANT Waterfront Security Coordinator can be reached for scheduling at (912) 573-3748, 0700-1800 Monday through Friday. Additionally, send an email to the contacts listed below, with subject "WRA Gate Opening Request Day/Month/Year", containing the following information: date gate opening is needed, requested time for opening, specific list of equipment moving into or exiting the WRA, and an estimated timeframe for the evolution. Specific names and contact information will be provided by the Contracting Officer at the Preconstruction Conference.

Contact List:

Title:	Contact Info:
Port Operations	To be provided
PSDO's	To be provided
SWFLANT	To be provided
Public Works	To be provided
USACE	To be provided

- b. Personnel must be in possession of an approved SUBASE badge with codes 12 and 10 at all times inside the WRA. Personnel requiring access to areas 4 and 7 will require additional justification. Instructions on obtaining the badges are described in subparagraph "Security Requirements" above.
- c. A vessel that leaves the restricted area must be re-inspected prior to reentry, unless that vessel was under the continuous observation of the Waterfront Security Force while outside the restricted area. If continuous observation by the Waterfront Security Force is needed it

must be prior coordinated with SWFLANT to ensure guard force availability to maintain observation.

- d. The Superintendent or designated representative will be granted permission to work within an agreed upon location. If small boats leave this area, permission must be obtained through Harbor Control.
- e. Permission, from Waterfront Security Division is required 24 hours prior to coming within 100 yards of a moored submarine.
- f. Inspection Procedure:
 - (1) The Superintendent or the Captain of the vessel will notify Harbor Control of arrival at Kings Bay requesting location to standby and receive a security inspection. Clearance must be received before proceeding or securing the vessel or barges awaiting inspection. Contact information will be provided at the Preconstruction Conference.
 - (2) The Guard Force Sentry will verify with the Superintendent or the Captain of the vessel that they do not possess any prohibited items.
 - (3) The Superintendent or Captain of the vessel will be instructed to secure the engine and identify any hazardous cargo or hazardous areas aboard the vessel prior to starting the inspection.
 - (4) Depending on the size of the vessel, vessel crew members may be directed to a location on the vessel or on the pier, out of the way of the inspection process.
 - (5) The Superintendent or Captain will be directed to illuminate all spaces and to open all compartments, containers, and hatches for inspection.
 - (6) The security force will inspect compartments, spaces, and containers looking for weapons, explosives, explosive devices, cameras, contraband, etc.
 - (7) As the security guard inspects, the guard will not close vessel compartments or hatches, but direct the owner of the vessel to restore the vessel.
 - (8) If the security guard discovers any unopened compartments or containers, they will direct the Superintendent, Captain or contract representative to open them.
 - (9) Once the inspection is successfully completed, the guard will direct all occupants to present their SUBASE badge for verification and board the vessel.
 - (10) The Security Inspection team leader will instruct the Superintendent or Captain of restricted areas within the WRA to keep clear of or any hazardous operations and to notify Harbor Control prior to getting under way while within the WRA.
 - (11) Once a vessel has been inspected the Superintendent or Captain will be directed to immediately enter the restricted area, position the vessel near the waterborne gates, or remain at site

six under the supervision of the security force until they enter the restricted area.

1.7.2.11 Transmitting Devices

No cameras or other photographic and/or video equipment, to include cell phones, laptop computers, and Personal Data Assistants (PDAs) capable of taking photographs or video are allowed in any SWFLANT restricted areas unless accompanied by an authorized common camera pass issued by SWFLANT.

No radio transmission is allowed within the SWFLANT Controlled Areas, Limited Areas or Waterfront Restricted Areas without prior approval from SPK Safety Office, (912) 573-4058. Radio transmitting devices (including cellular phones and all other devices using radio wave transmission) must be approved and have Hazard Electro-magnetic Radiation to Ordinance (HERO) stickers attached. Citizen Band (CB) and HAM radios will not be authorized on base.

1.7.2.12 Firearms and Weapons

As defined by Naval Submarine Base, Kings Bay instruction, weapons and firearms, including ammunition, are prohibited on board Naval Submarine Base, Kings Bay and any off base detachment.

Firearms: Firearms are any devices that, when operated, propels an object or any device that produces a visible or audible effect by combustion, explosion, deflagration or detonation, including blank pistols, air guns, BB guns, electrical arms such as stun guns.

Weapons: Weapons are any object used, displayed, offered or brandished in any manner to inflict, instill fear or inflicting bodily harm; or any object that by its very nature would be considered by a reasonable and prudent person to have been designed for the purpose of inflicting bodily harm. Some such weapons include but are not limited to; blackjacks, steel knuckles, switchblade knives, bows and arrows, crossbows and pocketknives with blades longer than 3 1/2-inches. Pocketknives will be considered weapons unless there is evidence to show the knife is required for some other legitimate use, such as work.

Note: Illegal firearms and weapons found on Naval Submarine Base Kings Bay will be confiscated by station police or by Security Detachment personnel. Weapons and firearms confiscated will not be returned and will be disposed of by normal supply channels pursuant to property disposal regulations.

1.7.2.13 Drug Abuse by Contract Employees

Every effort will be made to deter and detect drug offenses by civilian and contract employees on military installations. Measures to be taken include routine, random inspections of vehicles on entry or exit, with drug detection dog teams, and random inspection of personal possessions on entry or exit. When there is probable cause to believe that a civilian or contract employee on a military installation has been engaged in use, possession or trafficking of drugs, that employee may be restricted or detained for the period necessary until the employee can be removed from the installation or can be turned over to local law enforcement authorities having jurisdiction, when appropriate. In any event, civilians or contract employees suspected of committing a drug offense on a military installation may be removed there from at the earliest

opportunity. When illegal drugs are discovered in the course of an inspection or search of a vehicle operated by a civilian or contract employee, the employee vehicle may be detained for a reasonable period of time necessary to turn the employees and the vehicle over to appropriate civil law enforcement officials, and action may be taken to suspend, revoke or deny installation driving privileges. Implicit with the acceptance of this contract is the contractor's agreement to comply with all federal statutes, laws and regulations, including those regulations issued by the "MATERIAL AND WORKMANSHIP" of the Contract Clauses.

1.7.2.14 Tobacco Use

Smoking is permitted only in areas as may be designated by the Commanding Officer.

1.8 LAYOUT OF WORK

Read this paragraph in conjunction with the Clause LAYOUT OF WORK (FAR 52.236-17).

1.8.1 Established Project Survey Control

The Government has established monuments along the work site(s). Each monument is represented in the contract drawings by a Designation and in most cases, an alphanumeric Permanent Identifier (PID). Information concerning the location and elevations can be found within the Survey Notes on the plan sheets. The Survey Notes for each included field survey will cite a particular survey number, and specify the control used to conduct that survey. Additional information is included in the Survey Notes that must be duplicated if an attempt to recreate the subject survey is desired.

For navigation channels, the Government has established tidal calibration sites for projects constructed and maintained to a tidal datum. Each tidal calibration site is represented in the plan sheet drawings by Station ID, and is cited in the Survey Notes. Calibrate all projects constructed and maintained to a tidal datum to the Station ID specified in the plan sheet drawings. Information regarding the location and associated benchmarks of the referenced Station ID is included in the Monument Description section of these specifications.

See Section 00 31 21 CONTROL MONUMENT DESCRIPTIONS.

1.8.2 Layout

From the monuments, control data and elevations established by the Government, complete the layout of the work and obtain all measurements that may be required for the execution of the work to the location and limit marks prescribed in the specifications or on the contract drawings, subject to such modifications as the Contracting Officer may require to meet changed conditions or as a result of necessary modifications to the contract work.

1.8.3 Survey

Provide equipment, tools, material, labor for laying out any part of the work from the monuments, control data, and elevations established by the Government. Maintain and preserve all monuments, stakes and other marks established by the Contracting Officer until authorized to remove them,

and if such marks or monuments are destroyed by the Contractor or through negligence, prior to their authorized removal, they may be replaced by the Contracting Officer, at their discretion, and the expense of replacement will be deducted from any amounts due or to become due the Contractor. The Contracting Officer may require that work be suspended at any time when location and limit marks established by the Contractor are not reasonably adequate to permit checking of the work.

1.9 DAMAGE TO WORK

The responsibility for damage to any part of the permanent work will be as set forth in Clause PERMITS AND RESPONSIBILITIES. However, if any part of the permanent work performed by the Contractor is damaged by flood, earthquake, hurricane, or tornado, which damage is not due to the failure of the Contractor to take reasonable precautions or to exercise sound engineering and construction practices in the conduct of the work, make the repairs as ordered by the Contracting Officer and full compensation for such repairs will be made at the applicable Contract unit or job prices as fixed and established in the Contract. If, in the opinion of the Contracting Officer, there are no contract unit or job prices applicable to any part of such work, an equitable adjustment pursuant to Clause CHANGES will be made as full compensation for the repairs of that part of the permanent work for which there are no applicable contract unit or job prices. Except as herein provided, repair damage to all work (including temporary construction), utilities, materials, equipment and plant at the Contractor's expense, regardless of the cause of such damage.

1.10 EXISTING WORK

In addition to FAR 52.236-9, Protection of Existing Vegetation, Structures, Equipment, Utilities, and Improvements:

- a. Remove or alter existing work in such a manner as to prevent injury or damage to any portions of the existing work which remain.
- b. Repair or replace portions of existing work which have been altered during construction operations to match existing or adjoining work, as approved by the Contracting Officer. At the completion of operations, existing work must be in a condition equal to or better than that which existed before new work started.

1.11 LOCATION OF UNDERGROUND FACILITIES

Coordinate with the Contracting Officer to contact the Public Works Department who will conduct utility surveys. Verify the elevations of existing piping, utilities, and any type of underground obstruction not indicated or specified to be removed but indicated in locations to be traversed by piping, ducts, and other work to be installed. Verify elevations before installing new work closer than nearest manhole or other structure at which an adjustment in grade can be made.

1.11.1 Notification Prior to Excavation

Notify the Contracting Officer and Public Works Department at least 15 calendar days prior to starting excavation work. Contractor is responsible for marking all utilities not marked by the Public Work Department.

Naval Submarine Base Kings Bay MD
Camden County, Georgia

1.12 SECURITY FORMS

The forms mentioned in paragraph CONTRACTOR ACCESS AND USE OF PREMISES of this Section are appended at the end of this Section.

PART 2 PRODUCTS (NOT USED)

PART 3 EXECUTION (NOT USED)

-- End of Section --



DEPARTMENT OF THE NAVY

NAVAL SUBMARINE BASE
1063 USS TENNESSEE AVENUE
KINGS BAY, GEORGIA 31547-2606

SUBASEINST 11262.4A

N4

2 Mar 17

NAVAL SUBMARINE BASE KINGS BAY INSTRUCTION 11262.4A

From: Commanding Officer, Naval Submarine Base, Kings Bay

Subj: CONTRACTOR OPERATED WEIGHT HANDLING EQUIPMENT AND
MATERIAL HANDLING EQUIPMENT OVERSIGHT

Ref: (a) NAVFAC P-307, Management of Weight Handling Equipment
(b) NAVFAC SE Instruction 11240.1 Management of Certified
Equipment
(c) NAVFAC P-300 Management of Civil Engineering Support Equipment
(d) CORPS OF ENGINEERS/MANUAL EM 385-1-1
(e) NAVFAC GUIDE SPEC NFGS-01525
(f) OSHA REGULATIONS (STANDARDS 29 CFR 1926.32)

Encl: (1) Certificate of Compliance Form P-1 from reference (a)
(2) Contractor Crane or Rigging Operation Checklist
(3) Contractor WHE/MHE Operating Permit
(4) Contractor WHE/MHE Non-Operation Permit
(5) Contractor WHE/MHE Discrepancy Form
(6) Contractor WHE/MHE Discrepancy Response Form
(7) Crane and Rigging Accident Report Form from reference (a)

1. Purpose. To establish a contractor crane operated weight handling equipment and material handling equipment (WHE/MHE) oversight plan per references (a) and (b) to minimize the potential for damage to government property and injury to government personnel by contractors operating cranes and equipment on board Naval Submarine Base (SUBASE) Kings Bay. This oversight plan is intended to implement policy and provide guidance for contractor owned and operated WHE/MHE.

2. Cancellation. SUBASEINST 11262.4.

3. Scope. This oversight plan relates directly to the use of non-Navy-owned cranes and multi-purpose equipment such as backhoes, excavators, loaders, fork trucks and aerial lifts etc. used in weight handling operations and operated by contractor personnel, conducting business on SUBASE. These WHE/MHE often come from a variety of sources and are incidental to the construction contracts, ship repair contracts, demolition contracts, maintenance and other service contracts, deliveries of supplies and equipment. Numerous organizations, including tenant activities, ships, supply departments, Facilities Engineering and Acquisition Department have contracting authority which often involves the use of non-Navy-owned and operated WHE/MHE.

SUBASEINST 11262.4A

2 Mar 17

4. General requirements

a. The Public Works Department is responsible for the oversight of all contractor WHE/MHE.

b. Contractor WHE/MHE oversight services are provided by Naval Facilities Engineering Command (NAVFAC) Southeast (SE) in support of Commander, Naval Installations Command (CNIC).

c. For entry requirements and for other specific requirements of the installation during normal work hours (0730 - 1600, Monday through Friday), Security shall notify WHE/MHE surveillance personnel and not allow the WHE/MHE to enter the installation without the proper documentation. The following contact numbers are provided:

Transportation Branch Head:	(912) 573-4640
Equipment Specialist (weight handling):	(912) 573-8309
Performance Assessment Representative:	(912) 573-4640
Facsimile:	(912) 573-2444

d. NAVFAC SE WHE/MHE surveillance personnel shall review documentation, inspect contractor WHE/MHE and associated rigging gear for compliance with applicable Occupational Safety and Health Administration regulations and reference (a). Contractor Crane Compliance Review Form (enclosure (1)) shall be used as a guide to ensure compliance with applicable requirements. If the WHE/MHE is determined to be in compliance and all required documentation has been verified, the person conducting the review shall issue a WHE/MHE Operating Permit (enclosure (3)) and enclosure (2) shall be used for initial set up of contractor cranes and multi-purpose equipment. The Operating Permit shall be valid for the duration of the contract, but not to exceed 30 days. For contracts with duration of more than 30 days, a complete review of the WHE/MHE documentation will be required and if found to be in compliance, a new Operating Permit will be issued. The following documentation will be required at the designated point of entry:

(1) WHE/MHE annual maintenance record.

(2) Certificate of compliance.

(3) Copies of operator medical certificate & qualifications by a source that qualifies crane operators (union, governmental agency, or an organization that tests and qualifies crane operators for the equipment being operated).

(4) Personnel designated and qualified by the crane contractor to conduct weight-handling operations or to perform Rigger-in-Charge duties as identified in reference (a), section 10.2.1.1 shall refer to paragraph 6c of this instruction for further guidance.

SUBASEINST 11262.4A
2 Mar 17

- (5) Copy of the load chart for that specific crane.
 - (6) Waterfront operational permit if applicable.
 - (7) Cribbing plan if applicable.
 - (8) Routine and critical lift plan (e.g. weights, crane radius, net crane capacity, type of rigging gear, rigging gear net capacity).
 - (9) Listing of rigging gear to be used with original equipment manufacturer specifications.
 - (10) Other documentation specific to the contracting officer.
- e. Commercial service vehicles and other commercial vendors often enter SUBASE with category 4 cranes/MHE that they do not intend to operate. For those instances and in lieu of a compliance review the contractor may elect to complete a Contractor WHE/MHE Non-Operation Permit (enclosure (5)) certifying that the WHE/MHE will not be operated on the property. The permit must be posted in a conspicuous location on the WHE/MHE or in the cab and shall be obtained from the NAVFAC SE crane surveillance personnel.
- f. Contractor WHE/MHE access to SUBASE shall be per reference (a) and shall be restricted to the Franklin Gate.
- g. NAVFAC SE WHE/MHE surveillance personnel shall not allow entry of any contractor WHE/MHE without issuance of a valid Contractor WHE/MHE Operating Permit posted in the front windshield or a Contractor Crane Non-Operation Permit posted on the crane or in the vehicle cab.
- h. NAVFAC SE WHE/MHE surveillance personnel shall randomly monitor contractor crane operations on a daily basis when possible. To ensure contractor compliance, surveillance personnel will check for valid Crane Operating Permits, Certificates of Compliance, and crane operator qualifications. In addition to verifying proper documentation, surveillance personnel shall randomly observe crane operations for safe crane operation, proper set up, adequate pier support and proper rigging practices.
- i. Deficiencies noted during WHE/MHE and documentation review, or while monitoring WHE/MHE operations shall be documented on the contractor WHE/MHE oversight discrepancy form (enclosure (5)) and forwarded to the appropriate contracting official for resolution. Contracting officials shall submit a written response to all discrepancies within 10 work days to the NAVFAC SE WHE/MHE surveillance personnel. The contractor WHE/MHE discrepancy response form (enclosure (6)) shall be used to identify the root cause(s) and any corrective actions taken to prevent recurrence.

SUBASEINST 11262.4A

2 Mar 17

j. NAVFAC SE WHE/MHE surveillance personnel shall provide the Commanding Officer and the Certified Equipment Program Manager with a monthly status report of contractor WHE/MHE operations. The monthly status report shall consist of all documented deficiencies during oversight of contractor cranes and a brief summary of the overall status of contractor WHE/MHE compliance.

5. Contractor crane accidents

a. Any crane or rigging gear accident as defined in reference (a), section 12 must be reported and investigated. In the event of an accident, contractors shall secure the accident site, protect evidence and immediately notify the Department of Defense (DoD) contracting officer (or the designated local representative) and the NAVFAC SE Crane WHE/MHE personnel. Additional notification must be made to the Navy Crane Center within the guidelines set forth by reference (a).

b. The DOD contracting officer or local representative, will notify the NAVFAC SE Certified Equipment Program Manager upon notification by the contractor at W_NAVFAC_JAXS_PWBL_BSVE_Certified_Equipment_US01@navy.mil. Additionally, the contracting officer/representative must notify the Navy Crane Center (610) 595-0505 (or at accident@ncc.navy.mil) of an accident involving a fatality, in-patient hospitalization, overturned crane, collapsed boom or any other major damage to the crane or adjacent property as soon as possible (preferably within 24 hours of notification by the contractor).

c. The contractor will conduct an immediate accident investigation to establish the root cause(s). Crane operations shall not proceed until the cause is determined and corrective actions (including recovery plans) have been approved and implemented to the satisfaction of the contracting officer and the investigation team.

d. Within 25 days, the contractor must provide the contracting officer and the NAVFAC SE Certified Equipment Program Manager the WHE/MHE accident report using enclosure (7) to include summary of circumstances, an explanation of cause(s), photographs (if available) and corrective actions taken. The contracting officer must forward this report to Navy Crane Center (regardless of severity) within five (5) days (total of 30 days) after receipt from the contractor.

e. These notifications and reporting requirements are in addition to those promulgated by OPNAVINST 5100.23 (series) and related claimant instructions.

6. Tenant commands responsibilities

a. Ensure all existing and future contracts include requirements of this instruction for contractor WHE/MHE being operated on SUBASE.

SUBASEINST 11262.4A

2 Mar 17

- b. Recognize this instruction as the “DoD contracting officer oversight plan for contractor WHE/MHE operations” for the installation.
- c. Designate in writing the NAVFAC SE WHE/MHE surveillance personnel as the agent for promulgating discrepancies and practices.
- d. Designate in writing the NAVFAC SE WHE/MHE surveillance personnel as the agent(s) to oversee contractor crane accident investigations and resulting corrective actions.

7. DoD contracting officer for WHE/MHE services responsibilities

- a. Include the minimum requirements of reference (a) for contractor WHE/MHE in contracts and require the WHE/MHE contractor to comply with specific installation regulations governing WHE/MHE safety. For NAVFAC construction contracts, ensure the requirements of references (a), (d) and (e) are cited and followed.
- b. Ensure WHE/MHE contractors provide documentation to the NAVFAC SE WHE/MHE surveillance personnel as identified within paragraph 3d. of this instruction.
- c. Require the WHE/MHE contractor that is conducting weight-handling operations to recognize their responsibilities for the safe operation of the WHE/MHE. This includes the designation of qualified personnel to perform Rigger-in-Charge duties as identified within reference (a), section 10. DoD personnel (military and civilian employees) designated to perform Rigger-In-Charge duties shall be qualified and trained per reference (a), section 13.2, table 13-1 and have prior approval by the NAVFAC SE Certified Equipment Program Manager. Non-DoD personnel designated to perform Rigger-in-Charge duties shall be qualified as defined within reference (f), 1926.32 (m).
- d. Provide oversight in conjunction with the NAVFAC SE WHE/MHE surveillance personnel.
- e. Ensure the requirements of paragraph 4 of this instruction are cited and followed.

8. NAVFAC SE WHE/MHE surveillance personnel responsibilities

- a. Manage the entry process of all contractor WHE/MHE onto SUBASE Kings Bay.
- b. Serve as the Commanding Officer's and DoD contracting officer's “agent” in matters pertaining to contractor WHE/MHE requirements per references (a) and (b).
- c. Provide coordination between WHE/MHE contractors and NAVFAC SE WHE/MHE Engineering in matters of ground loading permits.

SUBASEINST 11262.4A

2 Mar 17

- d. Provide incidental oversight to contractor WHE/MHE operations.
 - e. Provide accident reporting and investigation as required per reference (a) and herein.
9. Records Management. Records created as a result of this instruction, regardless of media and format, must be managed per the Secretary of the Navy Manual 5210.1 of January 2012.
10. Review and Effective Date. Per OPNAVINST 5215.17A, the SUBASE Safety Officer will review this instruction annually on the anniversary of its effective date to ensure applicability, currency and consistency with Federal, DoD, SECNAV and Navy policy and statutory authority using OPNAV 5215/40 Review of Instruction. This instruction will automatically expire 5 years after effective date unless reissued or canceled prior to the 5-year anniversary date or an extension has been granted.



BRIAN LEPINE

Releasability and distribution:

This instruction is cleared for public release and is available electronically only, via SUBASE Intranet, <https://webkb.wh.nads.navy.mil:9011/>

SUBASEINST 11262.4A

2 Mar 17

CERTIFICATE OF COMPLIANCE	
This certificate shall be signed by an official of the company that provides cranes (or multi-purpose machines, MHE, or construction equipment used to lift loads suspended by rigging gear) or rigging gear for any application under this contract. Post a completed certificate on each crane or alternate machine (or in the contractor's on-site office for rigging operations) brought onto Navy property.	
CONTRACTING OFFICER'S POINT OF CONTACT (Government Representative)	PHONE
PRIME CONTRACTOR/PHONE	CONTRACT NUMBER
CRANE OR ALTERNATE MACHINE SUPPLIER/PHONE (if different from prime contractor)	CRANE OR ALTERNATE MACHINE NUMBER (i.e., ID number)
CRANE OR ALTERNATE MACHINE MANUFACTURER/TYPE/CAPACITY	
CRANE OR ALTERNATE MACHINE OPERATOR'S NAME(S)	
I certify that 1. The above noted crane or alternate machine and all rigging gear conform to applicable OSHA regulations (host nation regulations for naval activities in foreign countries) and applicable ASME B30 or other standards. The following OSHA regulations and ASME or other standards apply: _____ 2. The operators noted above have been trained and are qualified for the operation of the above noted crane(s) or alternate machine(s). 3. All safety devices and operator aids are enabled and functioning properly and the operators noted above have been trained not to bypass safety devices and operator aids during lifting operations. 4. The operators, riggers and company officials are aware of the actions required in the event of an accident as specified in the contract. 5. Signal persons used in construction work are qualified in accordance with 29 CFR 1926.1428. 6. Riggers are qualified in accordance with NAVFAC P-307, paragraph 11.1.k. 7. All personnel working on the job site have been trained to not stand under a load or in the fall zone of a suspended load unless specifically allowed by USACE EM 385-1-1.	
COMPANY OFFICIAL SIGNATURE	DATE
COMPANY OFFICIAL NAME/TITLE	
POST ON CRANE (OR ALTERNATE MACHINE) (IN CAB OR VEHICLE) (or in the contractor's on-site office for rigging operations)	

Enclosure (1)

SUBASEINST 11262.4A

2 Mar 17

CONTRACTOR CRANE OR RIGGING OPERATION CHECKLIST				
		YES	NO	N/A
1	Is the Certificate of Compliance, P-1, in the operator's cab (or in the contractor's on-site office for rigging operations) with the current operator's name listed?			
2	Is the crane/machine transited to and from the job site correctly? Are the OEM instructions for travel being followed?			
3	Does the operator know the weight of the load to be lifted?			
4	Is the load to be lifted within the crane/machine manufacturer's rated capacity in its present configuration?			
5	Are outriggers/stabilizers required and, if so, are they properly extended and down?			
6	If outrigger/stabilizers are used, and the wheels are not off the ground is this the correct setup in accordance with the OEM?			
7	Is the crane/machine level and on firm ground, or if the ground is not firm are adequate supporting materials provided?			
8	If supporting materials are provided, is the entire surface of the outrigger/stabilizer pad supported and is the supporting material of sufficient strength to safely support the loaded outrigger/stabilizer pad?			
9	If outriggers/stabilizers are not used, is the crane/machine rated for on-rubber lifts by the OEM's load chart?			
10	Is the swing radius of the crane counterweight clear of people and obstructions and are accessible areas within the swing area barricaded to prevent injury or damage?			
11	Has the hook been centered over the load in such a manner to minimize swing?			
12	Is the load well secured and balanced in the sling or lifting device after it is lifted a few inches for verification?			
13	Is the lift and rotation path clear of obstructions?			
14	If rotation of the load being lifted is hazardous, is a tagline or other restraint being used?			
15	Are personnel prevented from standing or passing under a suspended load?			
16	Is the operator paying full attention to the signal person?			
17	Are proper signals being used? Is the operator responding properly to the signals? Are radios used for blind lifts?			
18	Are empty hooks lashed or otherwise secured during travel to prevent swinging?			
19	Does the operator remain at the controls while the load is suspended?			
20	Does the operator ensure that side loading is prohibited?			
21	Are personnel prevented from riding on a load?			
22	Are start and stop motions in a smooth fluid motion (no sudden acceleration or deceleration)?			
23	Is the lift a critical lift?			
24	If so, is a lift plan provided and understood and check-off sheets initialed and signed off?			
25	If overhead power lines are in the vicinity, is a critical lift plan provided addressing the requirements of 29 CFR 1926.1407-1411?			

Enclosure (2)

SUBASEINST 11262.4A

2 Mar 17

		YES	NO	N/A
26	If pick and carry operations are allowed and performed, are OEM directions followed (e.g. rotation lock engaged, boom centered over front or rear, etc.)?			
27	When the crane/machine is left unattended, is it in a safe condition?			
28	Is rigging gear undamaged and acceptable for the application?			
29	Does rigging gear meet applicable ASME or host nation standards (e.g., ASME B30.9 for slings, B30.10 for hooks, B30.26 for rigging hardware such as shackles, safety hoist rings, and eyebolts, B30.20 for below the hook lifting devices)?			
30	Was the rigging gear inspected prior to use?			
31	Is sling protection used to protect slings (especially synthetic slings) and equipment from damage due to abrasion and sharp corners and edges?			
32	Is the rigging gear used in accordance with its working load limit? Is the working load limit marked on the rigging gear?			
33	Are positive latching devices (or "mousing") used on crane and rigging hooks?			
34	If a mobile crane is used on a barge, are all rules of 29 CFR 1926.1437(construction) being followed?			
35	If a mobile crane is used on a barge are the outriggers/stabilizers blocked or are the crawlers traveling in a defined space as allowed by 29 CFR 1926.1437 (construction)?			
36	For floating cranes, are rules of 29 CFR 1915 (ship repair) or 29 CFR 1926.1437 (construction) being followed?			
37	If a multi-purpose machine, forklift, or construction equipment is being used, is there proof from the OEM (or qualified PE) that the machine is approved for suspended load lifting and is there a load chart?			
38	If a personnel lift is being performed with a crane or base mounted hoist, are all requirements of NAVFAC P-307, paragraph 11.1.g(5) for a crane or 11.1.m for a base mounted hoist being followed?			
Contractor:		Subcontractor:		
Location:		Date:		
Notes:				
Signature of Government Representative:				

SUBASEINST 11262.4A
2 Mar 17

NAVFAC SE CONTRACTOR WHE/MHE OPERATING PERMIT

DATE ISSUED

EXPIRATION DATE

CONTRACTING OFFICIAL PHONE # _____

CONTRACT # _____

AUTHORIZED LOCATION _____

CRANE CONTRACTOR _____

CRANE NUMBER _____

Enclosure (3)

SUBASEINST 11262.4A
2 Mar 17

CONTRACTOR WHE/MHE NON-OPERATION PERMIT (CATEGORY 4 CRANES) POST IN A CONSPICUOUS LOCATION ON THE CRANE OR IN THE VEHICLE CAB	
Company:	Point of Contact (Name / Phone)
Crane Manufacture:	Vehicle ID / Serial Number:
Contracting Official:	Phone:
Work Location:	
I certify that this vehicle will be used for the transportation of personnel and materials only. At no time will the crane be operated while on Navy property.	
Company Official / Title: (print)	
Signature:	Date:

Enclosure (4)

SUBASEINST 11262.4A
2 Mar 17

CONTRACTOR WHE/MHE DISCREPANCY FORM

Date:	Crane: _____ Rigging: _____ Operations: _____	Control #
Contractor:		Sub Contractor:
Crane Owner:	Crane Mfg:	Model / Ser #
Location Of Operations:		
Contracting Official:	Phone:	Contract #

Note: Contracting Officials shall submit a written response to all discrepancies within 10 work days to the NAVFAC SE WHE/MHE Surveillance Personnel. Identify the root cause(s) and any corrective / preventive actions taken to prevent recurrence.

Item #	Discrepancy
Oversight Personnel's Signature:	Date:

Enclosure (5)

SUBASEINST 11262.4A
2 Mar 17

Date:	Control #	Contractor:	
Subcontractor:		Crane Owner:	
Location Of Operations:			
Contracting Official:		Phone:	Contract #
Root Cause			
Corrective / Preventive Action Action Taken To Prevent Recurrence			
Contracting Representatives Signature:			Date:

CONTRACTOR CRANE DISCREPANCY RESPONSE FORM

Note: Contracting Officials shall submit a written response to all discrepancies within ten (10) work days to the NAVFAC SE WHE/MHE surveillance personnel. Identify the root cause(s) and any corrective/preventive actions taken to prevent recurrence.

Enclosure (6)

CRANE AND RIGGING ACCIDENT REPORT					
Accident Category: ☐ Crane Accident ☐ Rigging Accident					
Reporting Activity:				Copy To: Navy Crane Center Bldg. 491 NNSY Portsmouth, VA 23709 Fax: 757-967-3808	
UIC:					
Activity Responsible for the Accident:			Report No:		
UIC:			Accident Location:		Accident Date:
BOS Contractor: ☐ Yes ☐ No If Yes, Contract No:			Contractor Equip. ☐ Yes ☐ No		
Crane No:		Crane Type:		Category:	
Crane OEM:					
Crane Capacity:		Hoist Capacity:		Weight of Load on hook:	
Weather:					
Complex Lift or Complex Non-Crane Rigging Operation? ☐ Yes ☐ No					
Lost Work Days? ☐ Yes ☐ No		Fatality or Permanent Disability? ☐ Yes ☐ No		Material/ Property Cost Estimate:	
Accident Type (check all that apply):					
☐ Personal Injury ☐ Overload ☐ Two Blocked ☐ Power Line Contact ☐ Dropped Load ☐ Derail ☐ Crane Collision ☐ Damaged Crane ☐ Damaged Rigging Gear ☐ Damaged Load ☐ Load Collision ☐ Other: Specify _____					
Cause of Accident (check all that apply):					
☐ Improper Operation ☐ Equipment Failure ☐ Inadequate Visibility ☐ Improper Rigging ☐ Switch Alignment ☐ Inadequate Communication ☐ Track Condition ☐ Procedural Failure ☐ Other: Specify _____					
Responsibility (check all that apply):					
☐ Crane Walker ☐ Rigger ☐ Operator ☐ Signal Person ☐ Maintenance ☐ Management/Supervision ☐ Other: Specify _____					
Crane Function:					
☐ Travel ☐ Hoist ☐ Rotate ☐ Luffing ☐ Telescoping ☐ Other ☐ N/A					
Is this accident indicative of a recurring problem? ☐ Yes ☐ No					
If yes, list Accident Report Nos.: _____					
ATTACH COMPLETE AND CONCISE SITUATION DESCRIPTION AND CORRECTIVE/PREVENTIVE ACTIONS TAKEN AS ENCLOSURE (1). Include root cause and contributing factors. Assess damages and define responsibility. For equipment malfunction or failure, include specific description of the component and the resulting effect or problem caused by the malfunction or failure. List immediate and long term corrective/preventive actions assigned and respective codes.					
INCLUDE: Printed Name, Code and Date.					
Preparer:		Phone:		E-mail:	
Concurrence		Code:		Date:	
Concurrence WHE Program Manager (if Applicable)		Code:		Date:	
Certifying Official (Crane Accident Only):					

FOR OFFICIAL USE ONLY (when filled in)

Enclosure (7)

SECTION 01 11 00 APPENDIX A
CRANE AND RIGGING ACCIDENT REPORT INSTRUCTIONS

SUBASEINST 11262.4A
2 Mar 17

This form is designed for e-mail transmission, and with enclosures shall be the official document. Electronic submission will be accepted but the names of the preparer, concurring personnel, and certifying official (for crane accidents only) shall be filled in. The e-mail address is m_nfsh_ncc_accident@navy.mil.

1. Accident Category: Indicate either crane accident or rigging accident.
2. Reporting Activity/UIC: The activity and unit identification code responsible for reporting the accident.
3. Activity Responsible for the Accident/UIC: Self-explanatory.
4. Report No.: The activity assigned accident number (e.g., Activity UIC-FY-CA-01).
5. Accident Location: The detailed location where the accident took place (e.g., building 213, dry dock 5).
6. Accident Date: The date the accident occurred.
7. Time: The time (24 hour clock) the accident occurred (e.g., 1300).
8. Is the responsible party a BOS Contractor? Check yes or no. If yes, enter contract number.
9. Was the crane/equipment owned by a contractor? Check yes or no.
10. Crane No.: The activity assigned crane number (e.g., PC-5), if applicable.
11. Crane Type: The type of crane involved in the accident (e.g., mobile, bridge), if applicable.
12. Category: Identify category of crane (i.e., 1, 2, 3, or 4), if applicable.
13. Crane OEM: The original equipment manufacturer of the crane (e.g., Samsung, Grove, P&H), if applicable.
14. Crane Capacity: The certified capacity of the crane (e.g., 120,000 pounds), if applicable.
15. Hoist Capacity: The capacity of the hoist involved in the accident at the max radius of the operation, if applicable.
16. Weight of Load on Hook: The weight of the load on the hook, if applicable.
17. Weather: The weather conditions at time of accident (e.g., wind, rain, cold).
18. Complex lift: Was the crane or rigging gear being used in a complex lift? Check yes or no.
19. Lost Work Days? Check yes or no.
20. Fatality or Permanent Disability: Check yes or no.
21. Material/Property Cost Estimate: Estimate total cost of damage resulting from the accident.
22. Accident Type: Check all that apply.
23. Cause of Accident: Check all that apply.
24. Responsibility: Check all that apply.
25. Crane Function: Check all functions in operation at time of accident. Check N/A if a rigging gear accident.
26. Is this a recurring problem? Check yes or no. If yes, list Accident Report numbers.
27. Preparer: Printed name must be provided.
28. Concurrences: Printed name must be provided.
29. Certifying Official (Crane Accidents Only): Printed name must be provided.

Enclosure (1)

Brief Description: No more than one paragraph summarizing the resultant incident.

Root Cause and Detailed Description: Provide the relevant background in a descriptive timeline of preconditions leading up to the event, as well as a detailed description of the event.

Corrective Actions: List all short term and long term corrective actions that are taken to prevent recurrence of the incident. Short Term Corrective Actions are those actions taken that will allow return to work in short time frame. Long Term actions are more 'programmatic' in nature and typically include: process revision, changes in training, 'mistake proofing', etc.

NOTE: This report may be generated utilizing activity approved software provided all information required above is included.

CHAPTER 3
INVESTIGATIVE REQUIREMENTS FOR ACCESS TO CA AND WRA

1. Purpose. To issue requirements for access to the CA and WRA, hereafter known as restricted areas (RA).
2. Background. Reference (d) establishes the requirements for safeguarding a WRA. Reference (b) establishes the requirements for safeguarding RAs such as the CA. This chapter addresses access control requirements for government personnel, contractors, and vendors whose duties require access to the WRA and CA. Access requirements for tours, special events, ceremonies and visits within the WRA are provided in reference (c).
3. Information. Reference (d) establishes the WRA as a Level Three RA. Table 1-1 establishes buildings within the CA as Level One or Two, and therefore access to the CA may constitute access to a Level One or Two RA. Per reference (i), only those individuals whose duties require access and who have been granted appropriate authorization will be afforded access to an RA. Reference (b) establishes the RA access authorization requirements for contractors, vendors, and government personnel. Access requirements for foreign nationals are provided in reference (m). Per reference (i), access to RA can be accommodated by one of the following measures:
 - a. A contractor or vendor may be afforded unescorted RA access based upon a favorable trustworthiness determination or a clearance. If an interim clearance is used for unescorted access, the interim access must be granted in DISS or the system of record. The trustworthiness determination is based upon a favorable review of the Tier 1 (T1) investigation. The trustworthiness determination process is only applicable to contractors and vendors who do not require a clearance but require access to a RA while performing their duties. Contractor and vendor Personnel Security Investigation (PSI) guidance is provided in reference (o).
 - b. Government personnel may be afforded unescorted RA access with a temporary (interim) or final security clearance. A temporary security clearance may be granted based upon the requesting security manager's favorable review of the individual's security questionnaire (SF 86). If a temporary clearance is used for unescorted access, the temporary access must be granted in DISS or the system of record. The final security clearance is based upon Defense Counterintelligence and Security Agency (DCSA) Adjudication and Vetting Services (AVS), or the relevant adjudicative entity, favorable adjudication of the PSI. Government personnel PSI guidance is provided in reference (i).
 - c. Contractors, vendors, and government individuals who do not have a clearance or a trustworthiness determination may only be afforded access when escorted by an authorized escort.
4. Restricted Area Access Approval Authority. Requesting command's security manager or access control personnel, hereby referred to as security representative, will determine whether to employ the security clearance eligibility, trustworthiness determination, or escort process for

government personnel and contractors under their cognizance. Generally, contractors with less than 90 days, based on the individual, will not use the trustworthiness determination process and must be escorted.

a. Proper authority within each of these commands will approve or disapprove WRA access and escort privileges for their respective areas based on their determination of trustworthiness. SWFLANT, by virtue of WRA nuclear security requirements outlined in reference (d), has final authority for access to the WRA. WRA access will normally be granted based upon a local activity CO's recommendation. If access is denied to any individual, the decision is for the entire WRA. Once denied access, an individual is not authorized sponsorship by another command. Local activity CO may request the specific details of any adjudication. Once reviewed, the local area CO may appeal an adjudication on command letterhead. A response should be provided within 10 working days. SWFLANT retains the overall authority for security of the WRA.

b. With respect to all aspects of access to the CA and LA including escort responsibility, SWFLANT retains sole responsibility and final approval authority.

5. RA Access Procedures. References (i) and (o) provide clear and specific guidance with respect to the interim and final clearance process. Access to the RA, with respect to the trustworthiness determination process and escort requirements, is clarified in the following paragraphs.

a. Unescorted Access. Per reference (i), unescorted access applies if an individual has a security clearance or a favorably adjudicated trustworthiness determination.

(1) Trustworthiness Determination Process. Applies to contractors and vendors who do not possess a security clearance but require access to the RA to perform their assigned duties. Authorized access is based upon a favorable trustworthiness determination (a favorably adjudicated T1).

(2) An individual's trustworthiness determination must not be older than 5 years (with no break in service) for unescorted access into the WRA. If there is any doubt regarding a break in service, a new trustworthiness determination must be submitted.

(a) Trustworthiness determination process, outlined below, may be applied to authorize unescorted access into RAs. Contractor personnel must receive a favorable trustworthiness determination for unescorted access. Pending favorable adjudication, and provided no derogatory information exists, interim unescorted access may be granted once the trustworthiness determination investigation is verified to be in an "open" status. This is referred to as an interim trustworthiness determination.

(b) A favorable final trustworthiness determination results in issuing a badge for up to one year. An unfavorable trustworthiness determination results in revoking the temporary security badge, thereby removing access to the RA.

b. Escorted Access. Applies to contractors, vendors, and government personnel who require access to RAs while performing their assigned duties but who do not possess a security clearance or trustworthiness determination. These personnel may include day laborers, delivery personnel, one-time vendors, and limited service contractors. The following procedures are guidance for escorted access:

(1) Requesting command charges the visiting organization to provide the following information for all visitors:

(a) Name, social security number, date of birth, place of birth, citizenship, and company or organization.

(b) Estimated time of arrival and departure (period of visit for badge purposes).

(c) Details of any special assistance required.

(2) Requesting command security representative will request SUBASE security issue a temporary badge that requires an escort.

(3) Requesting command (or the command that is receiving direct benefit of the services) will provide escorts for the contractor when required.

(4) At the discretion of the requesting command security representative, DoD personnel and contractors who meet escort requirements will be authorized as an approved escort.

c. Escort Requirements. The escort process allows personnel without clearances or trustworthiness determinations access to the RA provided they are escorted at all times. Escorts ensure the security interest itself is protected from unauthorized access by visitors.

NOTE: The term “*visitor*” applies to contractors and other individuals that require RA access in order to provide a service to the government.

(1) Per reference (p), contractors may perform escort duties within the WRA provided they are effective and meet reference (d) nuclear weapon security (NWS) requirements. An effective escort is defined as a person devoid of conflicts of interest, reporting directly to the SWFLANT Commanding Officer (CO), and not held accountable to another contractor.

(2) In addition to SWFLANT, other government organizations and prime contractors that operate within SWFLANT require the hiring of qualified contractors to perform escort duties.

(3) Government agencies (e.g., Trident Refit Facility, Naval Facilities Engineering Command Southeast (NAVFAC SE), etc.) and Strategic Systems Programs (SSP) prime contractors (e.g., Lockheed Martin Space, General Dynamics, etc.) operating under a classified contract with a DD 254 are authorized to hire qualified contractors to perform escort duties.

(4) Prime contractors operating under a classified contract with a DD 254 are authorized to subcontract personnel who may perform escort duties. For example, the NAVFAC SE prime contractor operating under a cleared contract may subcontract company ABC to perform work and escort duties. The DD 254 for all contracts must state escorting is authorized and escorts are directly reportable to SWFLANT for all escorting issues.

(5) Prime contractors who are not operating under a classified contract may escort provided the contract specifies escorting is authorized. Subcontractors are not authorized to escort. Escorts for contractors who are not operating under a classified contract must be hired by the contracting agency.

(6) Contracted WRA escort personnel will adhere to reference (d) NWS requirements and will report security related matters directly to the SWFLANT Security Officer or his designated representative via WRA Guard force competent authority (e.g., WRA Officer of the Day (W-8)).

(7) Command or Contractor Duties and Responsibilities. The command or contractor providing the escort must ensure each escort meets the following minimum skills and qualifications.

(a) Escort must be a U. S. citizen.

(b) Escort must meet WRA clearance requirements. Trustworthiness determinations must be favorably adjudicated.

(c) Personnel with Trustworthiness Determination must be in a supervisory position.

(d) The contracted WRA escort is directly accountable to the SWFLANT CO. Failure to adhere to this accountability will result in the loss of WRA access.

(e) Escort authorization must be annotated in contract and DD 254 requirements.

(f) Escort may not perform any other duties while performing as an escort.

(g) Must possess a permanent SUBASE badge with escort privileges for the RA to be visited.

(h) Read and sign the Escort Duties and Responsibilities Statement, which is also on the back of the SUBASE badge application. Originals of all badge applications and escort duties forms are maintained at SUBASE VCC. The Escort Duties and Responsibilities Statement must be signed before escort privileges are approved on the badge application.

(8) Escort Composition, Duties, and Responsibilities. Personnel performing escort duties will not be assigned any other duties.

(a) The ratio of personnel to be escorted to the number of escorts must be such that the escorting personnel can perform their continuous surveillance and control duties satisfactorily. This ratio will not exceed 5:1 for working parties and 10:1 for tours without permission from the SWFLANT Security Director or Deputy.

(b) When the escort process is limited to confines of a vehicle, maximum number of visitors can be the safe capacity of the vehicle. One escort is required for each vehicle of visitors requiring escort. The escort will be in the vehicle with the visitor(s). If the vehicle cannot safely accommodate the escort, the escort can lead in a separate vehicle. The escort will only escort or lead one vehicle at a time.

6. Trustworthiness Determination Process

a. NCIC Check

(1) Requesting command requires the individual to complete and sign a consent form which authorizes SUBASE to conduct a NCIC Check.

(2) Requesting command forwards the consent form to SUBASE security.

(3) SUBASE security conducts the NCIC check and reports results to requesting command.

b. Favorable NCIC. If the NCIC check is favorable, the requesting command will require the individual to complete the following:

(1) Security questionnaire (SF-85) via e-QIP with extra coverage of credit.

(2) Set of electronic fingerprints with verified favorable results.

(3) Declaration of Federal Employment (OF-306).


(4) Requesting command reviews the completed SF-85 and OF-306 for accuracy and determines if the individual is suitable for temporary access to the RA as requested.

c. Unfavorable NCIC. Derogatory information disclosed will result in the contractor requiring an escort until the investigation is adjudicated favorably by SWFLANT Security Access Control Division.

NOTE: A favorable review is not automatic. The decision to grant temporary access rests with the requesting command security representative.

d. Favorable Review. Upon favorable review of the security questionnaire, OF-306, and fingerprint results, the requesting command's security representative will:

- (1) Electronically submit SF-85 and OF-306 to DCSA to conduct a T1 investigation.
- (2) Once the T1 shows a status of “open or scheduled” in the system of record, the applicable security representatives may authorize access to their respective areas via the security badge application or visit request process.
- (3) Notify SWFLANT Access Control that the individual has a favorable review and favorable fingerprints and is authorized to have temporary unescorted access.
- (4) Request SUBASE security issue the individual a 90-day, unescorted temporary badge. 90 days should allow adequate time for processing the T1. In the event the T1 investigation is delayed, the applicable security representative may extend this temporary badge for two additional 90-day periods (not to exceed 270 total days from the open date of the T1 investigation).
- (5) Track the status of the investigation. Respond to DCSA inquiries, if applicable, and ensure the investigation opens. Unescorted access is not authorized until the T1 investigation is open in the system of record.
- (6) Investigations must be conducted and adjudicated when they are submitted. Once the period of temporary unescorted access has expired, personnel will not receive another period of temporary unescorted access if they submit a trustworthiness determination at a later date.
 - e. Adjudication. When complete, DCSA will electronically submit the T1 results to CAS for adjudication. If investigation reveals derogatory information, CAS will forward the results to the submitting command for adjudication.
 - (1) When the T1 is received from CAS, the requesting command security representative will review the completed investigation and make a trustworthiness determination.
 - (2) The T1 results will then be forwarded for co-adjudication by SWFLANT, SUBASE, and TRF. This process should not take more than 4 weeks at each command.
 - (a) A favorable trustworthiness determination results in issuing a one year security badge to ensure NCIC checks are completed each year.
 - (b) An unfavorable suitability determination results in revocation of the temporary security badge, thereby removing unescorted access to the RAs. The requesting command security representative is responsible for recovering the badge for unfavorable determinations.

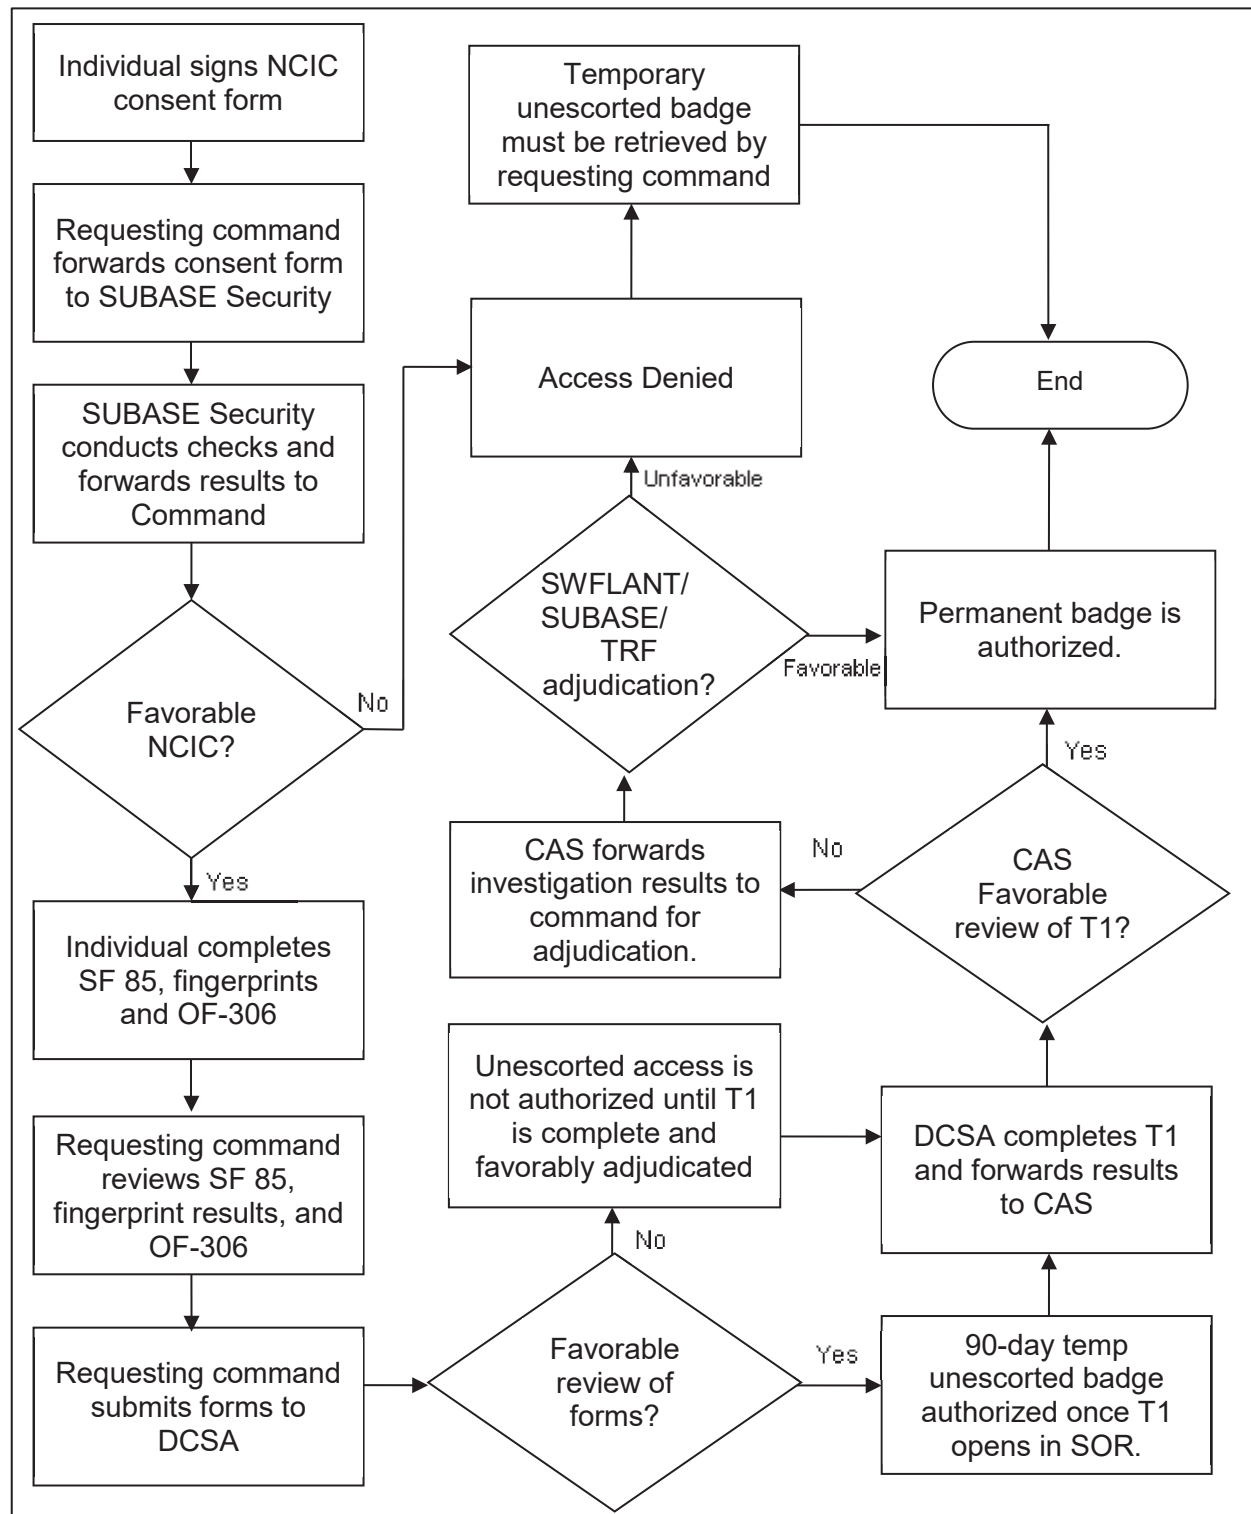DETERMINATION PROCESS FLOWCHART**Exhibit 3-1 Determination Process Flowchart**

This Page Intentionally Left Blank

SECTION TABLE OF CONTENTS

DIVISION 01 - GENERAL REQUIREMENTS

SECTION 01 20 00

PRICE AND PAYMENT PROCEDURES

PART 1 GENERAL

- 1.1 REFERENCES
- 1.2 SUBMITTALS
- 1.3 CONTRACT COST BREAKDOWN
- 1.4 SINGLE JOB PAYMENT ITEMS
 - 1.4.1 Mobilization and Demobilization (Line Items 0001 and 0022)
 - 1.4.1.1 Payment
 - 1.4.1.2 Unit of Measure
 - 1.4.2 Excavation, Unclassified; Dry Dock Caisson Gate Sill and Dry Dock Caisson Gate Mooring Facility (Line Items 0011 and 0019)
 - 1.4.2.1 Payment
 - 1.4.2.2 Unit of Measure
 - 1.4.3 Environmental and Water Quality Monitoring (Line Items 0012 and 0020)
 - 1.4.3.1 Payment
 - 1.4.3.2 Unit of Measure
- 1.5 UNIT PRICE PAYMENT ITEMS
 - 1.5.1 Excavation, Unclassified (Line Items 0002, 0003, 0004, 0005, 0006, 0007, 0008, 0009, 0010, 0015, 0016, 0017, and 0018)
 - 1.5.1.1 Payment
 - 1.5.1.2 Measurement
 - 1.5.1.3 Unit of Measure
 - 1.5.2 Standby Time (Line Items 0013 and 0021)
 - 1.5.2.1 Payment
 - 1.5.2.2 Measurement
 - 1.5.2.3 Unit of Measure
 - 1.5.3 Field-Cut Riser Boards (Line Item 0014)
 - 1.5.3.1 Payment
 - 1.5.3.2 Measurement
 - 1.5.3.3 Unit of Measure

PART 2 PRODUCTS (NOT USED)

PART 3 EXECUTION

- 3.1 PAYMENT PROCEDURES
- 3.2 Requesting Progress Payment
 - 3.2.1 Options and Modification CLINS

-- End of Section Table of Contents --

SECTION 01 20 00

PRICE AND PAYMENT PROCEDURES

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

U.S. ARMY CORPS OF ENGINEERS (USACE)

EM 1110-2-1003

(2013) Hydrographic Surveying

1.2 SUBMITTALS

Government approval is required for submittals with a "G" classification. Submittals not having a "G" classification are for information only. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES. Submit the following preconstruction submittal items no later than 30 calendar days after Notice to Proceed:

SD-01 Preconstruction Submittals

Cost Breakdown; G, R0

SD-03 Product Data

Request for Progress Payment; G, R0

1.3 CONTRACT COST BREAKDOWN

The Contractor must furnish within 30 days after the date of Notice to Proceed, and prior to the submission of its first partial payment estimate, a breakdown of its single job pay item or items which will be reviewed by the Contracting Officer as to propriety of distribution of the total cost to the various accounts. Any unbalanced items as between early and late payment items or other discrepancies will be revised by the Contracting Officer to agree with a reasonable cost of the work included in the various items. This Contract cost breakdown will then be utilized as the basis for progress payments to the Contractor.

1.4 SINGLE JOB PAYMENT ITEMS

Payment items for the work of this Contract for which Contract job payments will be made are listed in the SCHEDULE and described below. All costs for items of work, which are not specifically mentioned to be included in a particular job or unit price payment item, are included in the listed job item most closely associated with the work involved. The job price and payment made for each item listed constitutes full compensation for furnishing all plant, labor, materials, and equipment, and performing any associated Contractor quality control, environmental

protection, meeting safety requirements, tests and reports, and for performing all work required for which separate payment is not otherwise provided.

1.4.1 Mobilization and Demobilization (Line Items 0001 and 0022)

1.4.1.1 Payment

Payment will be made for costs associated with mobilization and demobilization of the Contractor's plant and associated equipment upon completion of all work whether or not options are exercised, and establishment of initial project management and coordination, as defined in Contract Clause PAYMENT FOR MOBILIZATION AND DEMOBILIZATION. Work associated with CLIN 0022 Mobilization and Demobilization will not be executed if work associated with the secondary maintenance dredging option is executed prior to demobilization from the base work.

1.4.1.2 Unit of Measure

Unit of measure: Job.

1.4.2 Excavation, Unclassified; Dry Dock Caisson Gate Sill and Dry Dock Caisson Gate Mooring Facility (Line Items 0011 and 0019)

1.4.2.1 Payment

Payment will be made for costs associated with or incidental to excavation, transportation and disposal of materials from Dry Dock Caisson Gate Sill and Dry Dock Caisson Gate Mooring Facility. See Sections 35 20 23 DREDGING and 01 57 20 ENVIRONMENTAL PROTECTION.

1.4.2.2 Unit of Measure

Unit of measure: Job.

1.4.3 Environmental and Water Quality Monitoring (Line Items 0012 and 0020)

1.4.3.1 Payment

Payment will be made for costs associated with or incidental to environmental species monitoring, bird monitoring, water quality sampling at the weir outfall, and will include the costs of reporting as specified. See Section 01 57 20 ENVIRONMENTAL PROTECTION.

1.4.3.2 Unit of Measure

Unit of measure: Job.

1.5 UNIT PRICE PAYMENT ITEMS

Payment items for the work of this Contract on which the Contract unit price payments will be made are listed in the SCHEDULE and described below. The unit price and payment made for each item listed constitutes full compensation for furnishing all plant, labor, materials, and equipment, and performing any associated Contractor quality control, environmental protection, meeting safety requirements, tests and reports, and for performing all work required for each of the unit price items.

1.5.1 Excavation, Unclassified (Line Items 0002, 0003, 0004, 0005, 0006, 0007, 0008, 0009, 0010, 0015, 0016, 0017, and 0018)

1.5.1.1 Payment

- a. Payment will be made for costs associated with and incidental to excavation, transportation, and disposal of materials; providing and maintaining access to the work site(s) and disposal area(s); noise control; and debris removal. See Section 35 20 23 DREDGING.
- b. Insofar as consistent with the paragraph CONTINUITY OF WORK of Section 35 20 23 DREDGING, monthly partial payments will be based on approximate quantities determined by soundings or sweepings performed by the Contractor behind the dredge. The term "area designated by the Contracting Officer" is also defined as "acceptance section" in paragraph CONTINUITY OF WORK of Section 35 20 23 DREDGING.
- c. Hydrographic surveys for final measurement and payment and for acceptance will be made by the Government. All surveys will be performed in accordance with USACE EM 1110-2-1003.

1.5.1.2 Measurement

- a. The maps and/or drawings already prepared (clause CONTRACT DRAWINGS AND SPECIFICATIONS) are believed to represent accurately average existing conditions, but the depths indicated thereon may be verified and corrected by soundings taken before dredging. Once quantities within a specified reach or section have been determined through the use of in-place measurement, they will not be reopened except on evidence of collusion, fraud, or obvious error.
- b. The total amount of material removed, and to be paid for under the contract, will be measured by the cubic yard in place. The volume computed will be between the bottom surface indicated by soundings taken within 3 weeks before dredging and the bottom surface indicated by the soundings taken within 2 weeks after the work specified in each acceptance section has been completed. Give 10 days advance notice, in writing, to the Contracting Officer of the need for a pre-dredging survey or after-dredging survey for final acceptance for each acceptance section. The quantity will include the volume within the limits of the side slopes described in subparagraph SIDE SLOPES of paragraph REQUIRED DEPTH, ALLOWABLE OVERDEPTH, AND SIDE SLOPES of Section 35 20 23 DREDGING, less any deductions that may be required for misplaced material described in subparagraph MISPLACED MATERIALS of paragraph DISPOSAL OF EXCAVATED MATERIAL of Section 35 20 23 DREDGING.

1.5.1.3 Unit of Measure

Unit of measure: Cubic Yard.

1.5.2 Standby Time (Line Items 0013 and 0021)

1.5.2.1 Payment

Payment will be made for costs associated with or incidental to standby of dredge plant only upon implementation of this line item. Standby time is defined as when, at the direction of the Contracting Officer, the dredge is put out of operation for reasons outside the requirements in the

contract.

1.5.2.2 Measurement

Standby time, when exercised by the Contracting Officer, will be measured for payment by each hour, or part thereof, that the plant is not in operation.

1.5.2.3 Unit of Measure

Unit of measure: Hour.

1.5.3 Field-Cut Riser Boards (Line Item 0014)

1.5.3.1 Payment

Payment will be made for costs associated with or incidental to furnishing all materials, equipment and labor required to meet contract requirements applicable to the manufacturing of field-cut weir riser boards. The Contractor will not be allowed payment for withdrawn, broken, or rejected weir riser boards (except for control test weir riser boards). Payment will be made in accordance with Section 35 20 23 DREDGING.

1.5.3.2 Measurement

Measurement will be made by the quantity of Field-Cut Riser Boards installed.

1.5.3.3 Unit of Measure

Unit of measure: Each.

PART 2 PRODUCTS (NOT USED)

PART 3 EXECUTION

3.1 PAYMENT PROCEDURES

Upon receiving initial Resident Management System import file, go to PAY ACTIVITIES and establish a link between bid breakdown schedule of values of PAY ACTIVITIES to contract CLINs using SCHEDULE ACTIVITIES data entry page.

3.2 Requesting Progress Payment

For progress payments, ensure ACTIVITY SCHEDULE, FEATURE SCHEDULE, submittal register, and punchlists are all up to date. Use PROGRESS PAYMENTS to REQUEST ACTIVITY for both ACTIVITY EARNINGS data entry page and OTHER EARNING. Provide hard copies of supporting invoices and quantity measurements to support all requested earnings. Ensure that sums of payment activities do not exceed contract award CLIN funding amounts, or unbalanced CLINs error will prevent processing the payment. Submit a [request for progress payment](#) monthly in accordance with Clause 52.232-5 PAYMENTS UNDER FIXED-PRICE CONSTRUCTION CONTRACTS. In addition to the items listed in Clause 52.232-5(b)(1), submit the following in the request for progress payment:

- a. Approved construction schedule.
- b. Up-to-date payroll records.

Naval Submarine Base Kings Bay MD
Camden County, Georgia

- c. Current submittal register.
- d. Professional Surveyor and Mapper (PSM) or Registered Land Surveyor (RLS) report and supporting data.
- e. Approved submittals on installed property.
- f. QA/QC deficiency tracking list.
- g. Environmental reports.
- h. Progress photographs.
- i. Working/current as-built drawings.

Once the complete pay application package is received to include the Contractor's signed ENG 93, the 14 calendar days will commence.

3.2.1 Options and Modification CLINS

When additional work is added by modification, existing CLINS funding amounts must be updated, or new CLINS for modification will be created. If contract has option CLINS not yet awarded, option CLINS will appear as zero dollar CLINS until option is awarded by modification. No payment may be requested for Options or Modification CLINS until contract modification has been funded and signed.

-- End of Section --

SUBMITTAL REGISTER

CONTRACT NO.
GROUP1-26-R-J003

TITLE AND LOCATION

Naval Submarine Base Kings Bay MD

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH	GOVT CLASSIFICATION	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION		DATE FWD TO APPR AUTH/	APPROVING AUTHORITY				MAILED TO CONTR/	REMARKS
						SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION	DATE RCD FROM CONTR	DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION	DATE RCD FRM APPR AUTH	
(a)	(b)	(c)	(d)	(e)	(f)	(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		01 11 00	SD-01 Preconstruction Submittals														
			List of Contact Personnel	1.7.1													
			Contractor Intake Form -	1.7.2.2	G RO												
			Submission Notification														
			Worksite Access List	1.7.2.2	G RO												
		01 20 00	SD-01 Preconstruction Submittals														
			Cost Breakdown	1.3	G RO												
			SD-03 Product Data														
			Request for Progress Payment	3.2	G RO												
		01 50 02	SD-01 Preconstruction Submittals														
			Construction Site Plan	1.4.1	G RO												
			Mobilization/Demobilization Plan	1.4.2	G RO												
			Security Plan	1.4.3	G RO												
			Vegetation Protection and	1.4.4	G RO												
			Restoration Plan														
			Documentation Of Existing	1.4.5	G RO												
			Conditions														
			Haul Road Plan	2.2.1	G RO												
			SD-02 Shop Drawings														
			Temporary Electric Drawings	3.2.6													
			SD-03 Product Data														
			Project Identification And Safety	2.1.2	G RO												
			Signs														
			SD-11 Closeout Submittals														
			Documentation Of Post	3.10.1	G RO												
			Construction Restoration														

SUBMITTAL REGISTER

CONTRACT NO.
GROUP1-26-R-J003

TITLE AND LOCATION

Naval Submarine Base Kings Bay MD

CONTRACTOR

ACTIVITY NO	TRANSMITTAL NO	SPEC SECT	DESCRIPTION ITEM SUBMITTED	PARAGRAPH	GOVT CLASS S I F I C A T I O N A / E R E V I O W N R	CONTRACTOR: SCHEDULE DATES			CONTRACTOR ACTION		DATE FWD TO APPR AUTH/ DATE RCD FROM CONTR	APPROVING AUTHORITY				MAILED TO CONTR/ DATE RCD FRM APPR AUTH	REMARKS
						SUBMIT	APPROVAL NEEDED BY	MATERIAL NEEDED BY	ACTION CODE	DATE OF ACTION		DATE FWD TO OTHER REVIEWER	DATE RCD FROM OTH REVIEWER	ACTION CODE	DATE OF ACTION		
(a)	(b)	(c)	(d)	(e)	(f)	(g)	(h)	(i)	(j)	(k)	(l)	(m)	(n)	(o)	(p)	(q)	(r)
		01 57 20	SD-01 Preconstruction Submittals														
			Environmental Protection Plan	1.6	G DO												
			Water Quality Monitoring Plan	1.7.4	G DO												
			Draft Water Quality Sampling Map	1.7.4	G DO												
			Testing Equipment And Procedure	3.1.4.1	G DO												
			Temporary Manatee Awareness Sign Plan	3.1.5.1	G DO												
			SD-06 Test Reports														
			Protected Listed Species Sighting Reports	3.1.5.2	G DO												
			Water Quality Monitoring Reports	3.1.4.3	G DO												
			Water Quality Exceedance Report	3.1.4.3	G DO												
			SD-07 Certificates														
			Bird Monitoring Qualifications	1.7.1	G DO												
			Marine Animal Observer Qualifications	1.7.2	G DO												
			(Clamshell/Mechanical Only)														
			Water Quality Monitor Qualifications	1.7.3	G DO												
			SD-11 Closeout Submittals														
			Protected Species Summary Report	3.1.5.3	G DO												

SUBMITTAL REGISTER

CONTRACT NO.
GROUP1-26-R-J003

TITLE AND LOCATION

Naval Submarine Base Kings Bay MD

CONTRACTOR

[illegible]

SECTION TABLE OF CONTENTS

DIVISION 01 - GENERAL REQUIREMENTS

SECTION 01 50 02

TEMPORARY CONSTRUCTION FACILITIES AND CONTROLS

PART 1 GENERAL

- 1.1 SUMMARY
- 1.2 REFERENCES
- 1.3 SUBMITTALS
- 1.4 PRECONSTRUCTION REQUIREMENTS
 - 1.4.1 Construction Site Plan
 - 1.4.2 Mobilization/Demobilization Plan
 - 1.4.3 Security Plan
 - 1.4.4 Vegetation Protection and Restoration Plan
 - 1.4.5 Documentation of Existing Conditions
- 1.5 EMERGENCY PLANNING
- 1.6 EXISTING UTILITIES
 - 1.6.1 Water
 - 1.6.2 Electricity
- 1.7 WORK AND ACCESS DATA
 - 1.7.1 Staging and Access Areas
 - 1.7.2 Contractor Responsibilities
 - 1.7.3 Transport of Government Personnel
- 1.8 ADJACENT PROPERTY AND STRUCTURES

PART 2 PRODUCTS

- 2.1 TEMPORARY SIGNAGE
 - 2.1.1 Bulletin Board
 - 2.1.2 Project Identification and Safety Signs
 - 2.1.3 Construction Forms and Details
 - 2.1.4 Warning Signs
 - 2.1.5 Haul Road Traffic and Construction Warning Signs
- 2.2 TEMPORARY TRAFFIC CONTROL
 - 2.2.1 Haul Roads
 - 2.2.2 Barricades
- 2.3 TEMPORARY FENCING
 - 2.3.1 Polyethylene Mesh Safety Fencing
 - 2.3.2 Chain Link Panel Fencing
 - 2.3.3 Post-Driven Chain Link Fencing
- 2.4 TEMPORARY WIRING
- 2.5 STORAGE CONTAINERS

PART 3 EXECUTION

- 3.1 GENERAL REQUIREMENTS
 - 3.1.1 Identification of Employees
 - 3.1.2 Employee Parking
 - 3.1.3 Onsite Information
 - 3.1.4 Janitorial and Other Services

- 3.2 AVAILABILITY AND USE OF UTILITY SERVICES
 - 3.2.1 Lighting
 - 3.2.2 Heating and Cooling
 - 3.2.3 Water
 - 3.2.4 Fire Extinguisher
 - 3.2.5 Utility Lines
 - 3.2.6 Electric Power
- 3.3 TRAFFIC PROVISIONS
 - 3.3.1 Maintenance of Traffic
 - 3.3.2 Protection of Traffic
- 3.4 MAINTENANCE OF HAUL AND ACCESS ROADS
- 3.5 CONTRACTOR'S TEMPORARY FACILITIES
 - 3.5.1 Contractor Field Office
 - 3.5.1.1 Office Space for Government Personnel
 - 3.5.2 Appearance of Trailer(s)
 - 3.5.3 Storage Area
 - 3.5.3.1 Maintenance of Storage Area
 - 3.5.4 Waste Storage
 - 3.5.5 Fuel Storage and Fueling Operations
- 3.6 SITE SECURITY
 - 3.6.1 Visitors
- 3.7 ACCOMMODATIONS AND MEALS FOR INSPECTORS
- 3.8 CLEANUP
- 3.9 RESTORATION OF STORAGE AREA
- 3.10 RESTORATION OF STAGING AND ACCESS AREAS
 - 3.10.1 Documentation of Post Construction Restoration

-- End of Section Table of Contents --

SECTION 01 50 02

TEMPORARY CONSTRUCTION FACILITIES AND CONTROLS

PART 1 GENERAL

1.1 SUMMARY

In addition to Construction Facilities this Section covers:

Temporary Utilities
Construction Aids
Vehicular Access and Parking
Project Identification

See Section 01 57 20 ENVIRONMENTAL PROTECTION for requirements including silt control, trailer placement, fueling restrictions, dust control, solid waste, and cleanup. Upon completion of project, clean up and restore area in accordance with Clause CLEANING UP.

a. Construction Facilities include, but are not limited to, the following:

- (1) Contractor Offices
- (2) Information Bulletin Board
- (3) Material and Equipment Storage Area
- (4) Fueling Area
- (5) Secured Storage Area
- (6) Employee Parking Area
- (7) Debris Container (dumpster)
- (8) Construction Signage to include Project Sign; Safety Sign; and, Construction Warning Signs

b. Temporary Utilities include, but are not limited to, the following:

- (1) Water
- (2) Electric
- (3) Sewage
- (4) Communications
 - (a) Telephone
 - (b) Internet (10 Mbps or higher speed)
- (5) Lighting

1.2 REFERENCES

The publications listed below form a part of this specification to extent referenced. The publications are referred to in text by basic designation only.

FLORIDA DEPARTMENT OF TRANSPORTATION (FDOT)

FDOT Specifications

(2025-26) Standard Specifications for Road
and Bridge Construction

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE C2 (2023) National Electrical Safety Code

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70 (2026) National Electrical Code

NFPA 241 (2022) Standard for Safeguarding
Construction, Alteration, and Demolition
Operations

U.S. ARMY CORPS OF ENGINEERS (USACE)

EM 385-1-1 (2024) Safety and Occupational Health
(SOH) Requirements

1.3 SUBMITTALS

Government approval is required for submittals with a "G" classification. Submittals not having a "G" classification are for information only. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Construction Site Plan; G, R0

Mobilization/Demobilization Plan; G, R0

Security Plan; G, R0

Vegetation Protection and Restoration Plan; G, R0

Documentation Of Existing Conditions; G, R0

Haul Road Plan; G, R0

SD-02 Shop Drawings

Temporary Electric Drawings

SD-03 Product Data

Project Identification And Safety Signs; G, R0

SD-11 Closeout Submittals

Documentation Of Post Construction Restoration; G, R0

1.4 PRECONSTRUCTION REQUIREMENTS

Submit the following preconstruction submittal items no later than 30 calendar days after Notice to Proceed.

1.4.1 Construction Site Plan

Prior to the start of work, submit for Government approval a site plan

showing the locations and dimensions of temporary facilities (including layouts and details, equipment and material storage area (onsite and offsite), and access and haul routes, avenues of ingress/egress to the fenced area and details of the fence installation. Identify any areas which may have to be graveled to prevent the tracking of mud. Indicate if the use of a supplemental or other staging area is desired. Show locations of safety and construction fences, site trailers, construction entrances, trash dumpsters, temporary sanitary facilities, and worker parking areas.

1.4.2 Mobilization/Demobilization Plan

Plan must include, but not be limited to, the following:

a. Mobilization Requirements:

- (1) Methods, equipment and materials
- (2) Connection of utilities
- (3) Placement of site facilities and temporary controls
- (4) Construction of facilities

b. Demobilization Requirements (methods, equipment and materials required to clean-up and restore site at project conclusion):

- (1) Collection, recycle and disposal of solid waste
- (2) Contract-generated material
- (3) Utility disconnection
- (4) Removal of Contractor facilities
- (5) Repair and restoration of site (i.e., fences, roads, or permanent facilities)

1.4.3 Security Plan

Prepare a Security Plan for Contracting Officer describing site security as follows:

- a. Day and night security
- b. Weekend and holiday security
- c. General security duties

1.4.4 Vegetation Protection and Restoration Plan

Prior to clearing for access, submit a Vegetation Protection and Restoration Plan describing the methods to be used for protection of vegetation that is not to be disturbed or otherwise impacted. Include restoration measures for vegetation cleared from access areas and in the event of the accidental damage to, or destruction of, said vegetation.

1.4.5 Documentation of Existing Conditions

Before beginning any mobilization or work, survey the site and photo-document the work area including all staging areas, haul routes, parking areas, and vegetation to show existing limits that could potentially be impacted. Include in the record a description of each picture taken as well as the conditions of roadways, utilities, and other site features, and the location and extent of existing damage prior to starting work. It is the Contractor's responsibility to document all pertinent existing conditions that may affect the subject property.

1.5 EMERGENCY PLANNING

Based on the weather forecast for sustained winds 50 knots (93 km/hr 58 mph) or greater. Contact the Contracting Officer for the current Emergency Action Plan. Monitor weather conditions a minimum of twice a day and take appropriate actions according to the approved Emergency Plan in the accepted Accident Prevention Plan, [EM 385-1-1](#) Emergency Plan requirements and the instructions below. Unless otherwise directed by the Contracting Officer, comply with:

- a. Condition FOUR (Sustained winds of 93 km/hr 58 mph or greater expected within 72 hours): Normal daily jobsite cleanup and good housekeeping practices. Collect and store in piles or containers scrap lumber, waste material, and rubbish for removal and disposal at the close of each work day. Maintain the construction site including storage areas, free of accumulation of debris. Stack form lumber in neat piles less than one m 3.3 feet high. Remove all debris, trash, or objects that could become missile hazards. Review requirements pertaining to "Condition THREE" and continue action as necessary to attain "Condition FOUR" readiness. Contact Contracting Officer for weather and COR updates and completion of required actions.
- b. Condition THREE (Sustained winds of 93 km/hr 58 mph or greater expected within 48 hours): Maintain "Condition FOUR" requirements and commence securing operations necessary for "Condition ONE" which cannot be completed within 18 hours. Cease all routine activities which might interfere with securing operations. Commence securing and stow all gear and portable equipment. Make preparations for securing buildings. Reinforce or remove formwork and scaffolding. Secure machinery, tools, equipment, materials, or remove from the jobsite. Expend every effort to clear all missile hazards and loose equipment from general base areas. Contact Contracting Officer for weather and COR updates and completion of required actions. Review requirements pertaining to "Condition TWO" and continue action as necessary to attain "Condition THREE" readiness.
- c. Condition TWO (Sustained winds of 93 km/hr 58 mph or greater expected within 24 hours): Secure the jobsite, and leave Government premises.
- d. Condition ONE. (Sustained winds of 93 km/hr 58 mph or greater expected within 12 hours): Contractor access to the jobsite and Government premises is prohibited.

1.6 EXISTING UTILITIES

Investigate the availability of utilities at the project site. Provide potable water, sanitary sewer, electricity, communications and optional utilities require at the project site. Provide internet services with 10 Mbps minimum speed and wireless capabilities to the Contractor's Field Office complex to include Government office space.

1.6.1 Water

In addition to the above, provide and maintain an adequate supply of water for construction use at no additional cost to the Government. Install and maintain necessary supply connections and piping for same, but only at such locations and in such manner as may be approved by the Contracting Officer. Provide and maintain temporary toilet and washing facilities. Install and maintain toilet and washing facilities in a location approved

by the Contracting Officer. Refer to paragraph AVAILABILITY AND USE OF UTILITY SERVICES below.

1.6.2 Electricity

In addition to the above, furnish all electric current at no additional cost to the Government. Install, connect, and maintain all temporary lines in a workmanlike manner satisfactory to the Contracting Officer. Remove temporary lines in like manner at no additional cost to the Government prior to completion of the construction. Refer to paragraph AVAILABILITY AND USE OF UTILITY SERVICES below.

1.7 WORK AND ACCESS DATA

1.7.1 Staging and Access Areas

Obtain and coordinate staging areas and submit for Contracting Officer's approval. Access areas are shown on the contract drawings for the Contractor's use. The Contracting Officer will field-determine the final limits of the access areas indicated on the drawings in coordination with the Local Sponsor and the Contractor. Investigate and obtain any additional areas which may be necessary for construction operations at the Contractor's expense. The additional areas will be subject to the approval of the Contracting Officer.

1.7.2 Contractor Responsibilities

Exclude the public from the work area in the immediate vicinity of Contractor operations including but not limited to fill placement, grading, and transport. Minimize areas closed to the public. Install warning signs to warn the public and all commercial recreational boats of all construction activities. Provide and maintain all water and land access routes necessary for his equipment and plant to and from the work sites. Ascertain the environmental conditions which can affect access, such as climate, terrain, and winds.

1.7.3 Transport of Government Personnel

Provide safe access for the Contracting Officer's personnel and dedicated government personnel at the project site, to all points ashore and afloat, as required by the [EM 385-1-1](#). Provide a dedicated four passenger UTV with an operator dedicated for Government personnel project access which meets the requirements of the [EM 385-1-1](#).

1.8 ADJACENT PROPERTY AND STRUCTURES

Immediately repair any damage to private or public property within the project boundaries, including staging site(s) and work and access areas/roads. Repair any damage as a result of the Contractor's operations at no cost to the Government.

PART 2 PRODUCTS

2.1 TEMPORARY SIGNAGE

2.1.1 Bulletin Board

Prior to commencement of work activities, provide a clear weatherproof covered bulletin board not less than 915 by 1220 mm (36 by 48 inches) in

size for displaying the Equal Employment Opportunity poster, a copy of the wage decision contained in the contract, Wage Rate Information poster, WH1090 Paid Sick Leave for Contractors poster (<https://www.dol.gov/whd/regs/compliance/wh1090.pdf>), Safety and Health Information as required by EM 385-1-1 and other information approved by the Contracting Officer. Display legible copies of the aforementioned data until work is completed. Remove the bulletin board upon completion of work. The bulletin board will remain the property of the Contractor. Coordinate requirements herein with Section 01 35 26 GOVERNMENTAL SAFETY REQUIREMENTS.

2.1.2 Project Identification and Safety Signs

Provide signs, their content, and location as indicated on the web site provided in paragraph "Construction Forms and Details" below. Erect the signs within 15 days after receipt of the Notice to Proceed. Correct the data required by the safety sign, with light colored metallic or non-metallic numerals. Upon completion of the project, remove the signs from the site.

2.1.3 Construction Forms and Details

See the CONSTRUCTION FORMS & DETAILS module at the following web address: <https://www.saj.usace.army.mil/About/Divisions-Offices/Engineering/Design-Branch/Specifications-Section/>

2.1.4 Warning Signs

Post temporary signs, tags, and labels to give workers and the public adequate warning and caution of construction hazards according to the EM 385-1-1 Chapter 4. Attach signs to the perimeter fencing every 150 feet or as determined by the Contracting Officer warning the public of the presence of construction hazards. Install signs requiring unauthorized persons to keep out of the construction site. Update the data required by the safety signs daily. Post signs at all points of entry designating the construction site as a hard hat area.

2.1.5 Haul Road Traffic and Construction Warning Signs

Use 1/2 inch HDO plywood, or aluminum sheet, conforming to FDOT Specifications Section 700 Uniform Traffic Manual Standard Signs, non-standard signage high visibility orange with black lettering. Orange fabric mesh is acceptable for temporary survey crew use.

2.2 TEMPORARY TRAFFIC CONTROL

During construction, provide access and temporary relocated roads as necessary to maintain traffic. Maintain and protect traffic on all affected roads during the construction period except as otherwise approved by the Contracting Officer. Install measures for the protection and diversion of traffic, including the provision of watchmen and flagmen, erection of barricades, placing of lights around and in front of equipment and the work, and the erection and maintenance of adequate warning, danger, and direction signs, as required by the State and local authorities having jurisdiction. Protect the traveling public from damage to person and property. Limit the interface between the Contractor's traffic on roads selected for hauling material to and from the site with public traffic. Investigate the adequacy of existing roads and the allowable load limit on these roads. Repair any damage to roads caused by

construction operations.

2.2.1 Haul Roads

Construct access and haul roads necessary for proper prosecution of the work under this contract in accordance with EM 385-1-1 Chapter 4. Construct with suitable grades and widths; sharp curves, blind corners, and dangerous cross traffic are to be avoided. Submit haul road plan for approval. Provide necessary lighting, signs, barricades, and distinctive markings for the safe movement of traffic. Provide a method of dust control to ensure safe operation at all times. Location, grade, width, and alignment of construction, and hauling roads area subject to approval by the Contracting Officer. Provide adequate lighting to assure full and clear visibility for full width of haul road and work areas during any night work operations.

2.2.2 Barricades

Erect and maintain temporary barricades to limit public access to hazardous areas. Whenever safe public access to paved areas such as roads, parking areas or sidewalks is prevented by construction activities or as otherwise necessary to ensure the safety of both pedestrian and vehicular traffic barricades will be required. Securely place barricades clearly visible with adequate illumination to provide sufficient visual warning of the hazard during both day and night.

2.3 TEMPORARY FENCING

Provide fencing along the construction site and at all open excavations and tunnels as indicated in the Contractor's Temporary Facilities shop drawings to control access by unauthorized personnel. Provide highly visible safety fencing to be seen by pedestrians and vehicular traffic. Specific fencing requirements are as described herein. All fencing will meet the requirements of EM 385-1-1.

2.3.1 Polyethylene Mesh Safety Fencing

Temporary safety fencing must be a high visibility orange colored, high density polyethylene grid, a minimum of 48 inches high and maximum mesh size of 2 inches. Extend fencing from the grade to a minimum of 48 inches above the grade and be tightly secured to T-posts spaced as necessary to maintain a rigid and taut fence.

2.3.2 Chain Link Panel Fencing

Temporary panel fencing must be galvanized steel chain link panels 6 feet high. Multiple fencing panels may be linked together at the bases to form long spans as needed. Weight down each panel base using sand bags or other suitable materials in order for the fencing to withstand anticipated winds while remaining upright. Fencing must remain rigid and taut with a minimum of 200 pounds of force exerted on it from any direction with less than 4 inches of deflection.

2.3.3 Post-Driven Chain Link Fencing

Temporary post-driven fencing must be galvanized chain link fencing 6 feet high supported by a tightly secured to galvanized steel posts driven below grade. Locate fence posts on minimum 10 foot centers. Posts may be set in various surfaces such as sand, soil, asphalt or concrete as necessary.

Chain link fencing must remain rigid and taut with a minimum of 200 pounds of force exerted on it from any direction with less than 4 inches of deflection. Completely remove fencing and posts at the completion of construction. Restore any surfaces disturbed or damaged to its original condition. Locate and identify underground utilities prior to setting fence posts. Equip fence with a lockable gate. Gate must remain locked when construction personnel are not present.

2.4 TEMPORARY WIRING

Provide temporary wiring in accordance with EM 385-1-1 Chapter 11, NFPA 241 and NFPA 70. Include monthly inspection and testing of all equipment and apparatus.

2.5 STORAGE CONTAINERS

Welded steel construction, locking, shipping containers or equal.

PART 3 EXECUTION

3.1 GENERAL REQUIREMENTS

3.1.1 Identification of Employees

Furnish identification as approved by the Contracting Officer to each employee and require each employee engaged on the work to display them. Immediately deliver prescribed identification to the Contracting Officer for cancellation upon release of any employee. When required, obtain and provide fingerprints of persons employed on the project. Wear identifying markings on hard hats clearly identifying the company for whom the employee works.

3.1.2 Employee Parking

- a. Park employee's vehicles in areas designated by Contractor, away from construction traffic, within reasonable walking distance of site. Maintain area free of ruts, mud holes and puddles. Place gravel where required by deteriorated conditions.
- b. Protect unattended equipment as it may be subject to vandalism.
- c. Storage trailers and storage area with Government material will be locking type with lighting.

3.1.3 Onsite Information

Keep copy of contract drawings, specifications, and other contract documents at Contractor's Office onsite, available for use at all times.

3.1.4 Janitorial and Other Services

- a. Daily -- Sweep and mop floors; empty wastebaskets; service and sanitize bathrooms and other common areas; restock cleaning supplies and toiletries such as, but not limited to, hand soap, hand sanitizer, paper towels, and toilet paper.
- b. Weekly -- Wash floors, windows (inside and out).
- c. Cut grass as needed to keep below 3 inches high.
- d. Pest control for all field offices.

3.2 AVAILABILITY AND USE OF UTILITY SERVICES

Install temporary facilities and utilities in accordance with [IEEE C2](#), [EM 385-1-1](#), [NFPA 70](#). Obtain necessary construction, building, zoning, or soil erosion and sediment control approvals required by local authorities and utility companies. Equip trailer(s) with wind tie downs in accordance with local wind and building code requirements.

3.2.1 Lighting

Electric light, non-glare type luminaries to provide a minimum illumination, level of 30-foot candles at desk height level. Comply with temporary lighting, wiring and Ground Fault Circuit Interrupter (GFCI) requirements found in [EM 385-1-1](#).

3.2.2 Heating and Cooling

Adequate equipment to maintain internal ambient air temperature of 75 degrees F in 105 degrees F and 70 degrees F in 30 degrees F. Equip trailer(s) with smoke alarms. If gas is used to heat, equip trailer(s) with carbon monoxide alarms.

3.2.3 Water

Non-potable well water may be used to flush toilets, and for dish and hand washing. Provide bulk potable water in storage tanks or bottled water for drinking.

3.2.4 Fire Extinguisher

Refer to [EM 385-1-1](#). Non-toxic, dry chemical, fire extinguisher meeting Underwriters Laboratories, Inc., approval for Class A, Class B, and Class C fires with a minimum rating of 2A; 10B; and 10C.

3.2.5 Utility Lines

Install, connect and modify temporary lines as coordinated with owning utility. Conform requirements in accordance with [IEEE C2](#) and [NFPA 70](#) for Temporary Electric Lines. Remove temporary line at completion of project.

3.2.6 Electric Power

Submit [temporary electric drawings](#) including electricity supply and lighting signed by licensed electrician- from electrical source to layout locations, fixtures, and materials, to include outdoor lighting. Provide uninterrupted electrical service sufficient to operate office systems. Directly purchase electrical power.

3.3 TRAFFIC PROVISIONS

3.3.1 Maintenance of Traffic

- a. Conduct operations in a manner that will not close a thoroughfare or interfere with traffic on railways or highways except with written permission of the Contracting Officer at least 15 calendar days prior to the proposed modification date, and provide a Traffic Control Plan for Government approval detailing the proposed controls to traffic movement for approval. The plan must be in accordance with State and local regulations and the MUTCD, Part VI. Contractor may move

oversized and slow-moving vehicles to the worksite provided requirements of the highway authority have been met.

- b. Conduct work so as to minimize obstruction of traffic, and maintain traffic on at least half of the roadway width at all times. Obtain approval from the Contracting Officer prior to starting any activity that will obstruct traffic.
- c. Provide, erect, and maintain, at Contractor's expense, lights, barriers, signals, passageways, detours, Life Safety Signage, overhead protection, and other items that may be required by the authority having jurisdiction.
- d. Provide cones, signs, barricades, lights, or other traffic control devices and personnel required to control traffic. Do not use foil-backed material for temporary pavement marking because of its potential to conduct electricity during accidents involving downed power lines.

3.3.2 Protection of Traffic

Maintain and protect traffic on all affected roads during the construction period except as otherwise specifically directed by the Contracting Officer. Measures for the protection and diversion of traffic, including the provision of watchmen and flagmen, erection of barricades, placing of lights around and in front of equipment the work, and the erection and maintenance of adequate warning, danger, and direction signs, will be as required by the State and local authorities having jurisdiction. Provide self-illuminated (lighted) barricades during hours of darkness. All personnel working in roadways will wear brightly-colored vests or other high visibility apparel in accordance with [EM 385-1-1](#). Protect the traveling public from damage to person and property. Minimize the interference with public traffic on roads selected for hauling material to and from the site. Investigate the adequacy of existing roads and their allowable load limit. Contractor is responsible for the repair of damage to roads caused by construction operations.

3.4 MAINTENANCE OF HAUL AND ACCESS ROADS

Providing and maintain safe and passable means of ingress and egress to the site and to all project features on the site for Contractor, Government, and third party entities. Requirements herein are applicable to both new and existing haul and access roads. Repair and re-grade haul and access roads as necessary. Maintain roadway drainage, including maintaining roadway crown and profile and keeping drainage ditches clear. Repair potholes, mud holes, ruts, and/or depressions of 6 inches deep or more within 24 hours of discovery. Check condition of haul and access roads at least weekly and after any severe weather event. All requirements of [EM 385-1-1](#) concerning access and haul roads also apply.

3.5 CONTRACTOR'S TEMPORARY FACILITIES

If suitable office space cannot be furnished on board the dredge or other water craft, furnish accommodations ashore as indicated in paragraph ACCOMMODATIONS AND MEALS FOR INSPECTORS below. Staging and storage may also be either on board the dredge or other water craft, or on shore at the Contractor's discretion. For accommodations or staging ashore, Place the field offices, staging areas, stockpile storage, and temporary buildings in areas as approved by the Contracting Officer and in

accordance with Section 01 57 20 ENVIRONMENTAL PROTECTION. Make temporary movement or relocation of Contractor facilities when approved by the Contracting Officer. Provide a general layout sketch of temporary site facilities including, but not limited to, the following:

- a. Trailer locations
- b. Parking areas
- c. Material storage
- d. Equipment lay down area
- e. Areas for gravel
- f. Fuel areas
- g. Supplemental or other staging area
- h. Temporary well, water supply
- i. Septic field or holding tanks, port-a-lets
- j. Contaminated water handling
- k. Concrete cleaning area and methods of disposal
- l. Fences -- location and dimensions, entrance and exit points, and details of installation
- m. Utilities (poles, connections and services)
- n. Explosives storage

3.5.1 Contractor Field Office

Provide on-site field office of sufficient size and staff capability to manage project activities. Provide communications and computer capabilities to manage the work, including implementing RMS, facsimile, electronic mail, reproduction, to track schedule and cost. Include a conference area with table and chairs to accommodate a minimum of 8 people. Provide handicap access with a 1 on 12 ramp and gravel parking spot marked with handicap parking sign. Provide high-speed internet services (250 Mbps or higher speed rate) and wireless capabilities to the field office facilities/compound to include Government office space to facilitate RMS, SharePoint (file transfer) and visitor usage.

3.5.1.1 Office Space for Government Personnel

Provide a minimum of 80 square feet air conditioned office space (with locking door) for exclusive use by Government personnel with the following:

- a. Two office desks with lockable drawers (60 inches by 30 inches, laminated top) and two swivel office chairs.
- b. Five drawer, legal size, lockable filing cabinet.
- c. A 1.5 cf microwave oven and 7 cf refrigerator.
- d. A minimum of two designated Government parking spaces per each active staging/access area.
- e. Temporary toilet and washing facilities, for Government personnel, either in or outside of the Government office space. Toilet and washing facilities are not considered part of the minimum 80 square feet office space.

3.5.2 Appearance of Trailer(s)

Maintain trailer(s) used for both office and material storage purposes in clean, neat exterior appearance and in good repair. Trailer(s) requiring exterior painting or maintenance will not be allowed on site until

determined satisfactory by Contracting Officer.

3.5.3 Storage Area

Construct a temporary 6 foot high chain link fence around trailers and materials. Fence posts may be driven, in lieu of concrete bases, where soil conditions permit. Do not place or store trailers, materials, or equipment outside the fenced area unless such trailers, materials, or equipment are assigned a separate and distinct storage area by the Contracting Officer away from the vicinity of the construction site but within the installation boundaries. Do not stockpile materials outside the fence in preparation for the next day's work. Park mobile equipment, such as tractors, wheeled lifting equipment, cranes, trucks, and like equipment within the fenced area at the end of each work day.

3.5.3.1 Maintenance of Storage Area

Keep fencing in a state of good repair and proper alignment. Should the Contractor elect to traverse with construction equipment or other vehicles, cover grassed or unpaved areas which are not established roadways, with a layer of gravel as necessary to prevent rutting and the tracking of mud onto paved or established roadways; gravel gradation will be at the Contractor's discretion. Mow grass located within the boundaries of the construction site for the duration of the project. Edge or trim neatly, grass and vegetation along fences, buildings, under trailers, and in areas not accessible to mowers.

3.5.4 Waste Storage

Provide dumpsters or suitable debris containers. Prevent windblown trash; cover as needed. Dispose of offsite when needed. Refer to Section 01 57 20 ENVIRONMENTAL PROTECTION.

3.5.5 Fuel Storage and Fueling Operations

Refer to Section 01 57 20 ENVIRONMENTAL PROTECTION. Provide light when fueling at night.

3.6 SITE SECURITY

Site Security is the Contractor's responsibility. Provide site security person(s) at all times, even when there is not on-site activities. Maintain 24-hour security. Site security must include, but not be limited, to:

- a. Limit vehicular access to authorized vehicles and personnel only.
- b. Limit public access to travel along access road only. Keep access road closed at all times except for passage of authorized personnel and vehicles.
- c. Maintain a list of authorized personnel and subcontractors available at site offices.
- d. Maintain a sign-in log documenting visitors, deliveries, and security incidents. Include date, name, address, company, time in and time out for each employee and visitor.
- e. Check fenced areas, equipment, trailers on a daily basis. If damage

is observed or vandalism is found report to Contracting Officer.

3.6.1 Visitors

No visitors will be allowed on site without knowledge of Contractor and permission of Contracting Officer. Direct visitors to report upon arrival to Contractor's Field Office for site safety and accident prevention briefing. Provide visitors appropriate protective equipment (i.e., ear plugs, safety glasses, etc.).

3.7 ACCOMMODATIONS AND MEALS FOR INSPECTORS

- a. Furnish regularly to inspectors, for office purposes, a suitable separate room on board the dredge or other craft upon which they are employed or, if not available thereon. Furnish suitable alternate accommodations ashore at a location approved by the Contracting Officer, suitable transportation between the alternate accommodations and the dredge or other craft upon which they are employed.
- b. If the Contractor maintains on this work an establishment for the subsistence of the Contractor's own employees, furnish to inspectors employed on the work, and to all Government agents who may visit the work on official business, meals of a quality satisfactory to the Contracting Officer. The meals furnished will be paid for by the Government employees at a rate no greater than the JTR meal rate per person for the county in which work is performed.

3.8 CLEANUP

Remove construction debris, temporary fencing, waste materials, packaging material and the like from the work site daily. Clean away any dirt or mud tracked onto paved or surfaced roadways. Store materials resulting from demolition activities which are salvageable within the fenced area described above or at the supplemental storage area. Neatly stack stored material not in trailers, whether new or salvaged, when stored. Refer to Section 01 57 20 ENVIRONMENTAL PROTECTION for solid waste and post construction cleanup.

3.9 RESTORATION OF STORAGE AREA

Remove the fence upon completion of the project. After removal of trailers, materials, and equipment from within the fenced area, the area will become the property of the Contractor. Restore areas used by the Contractor for the storage of equipment or material, or other use, to the original or better condition. Remove gravel used to traverse grassed areas and restore the area to its original condition, including top soil and seeding as necessary.

3.10 RESTORATION OF STAGING AND ACCESS AREAS

Restore areas used for staging or access to the original or better condition. Replace any fencing, signage, curbing, or any other structural features disturbed by the Contractor's activities. Restore and revegetate the access route with native dune plants to the preexisting conditions, subject to the approval of the Contracting Officer. Provide revegetation of access and staging areas with sod or seeding (non-dune areas) or viable plant units (dune areas) at 18-inch maximum spacing with species and diversity equivalent to preexisting conditions. Include a survival warranty of 90 percent of the plant material for 90 days for

revegetation. Install vegetation with fertilization and irrigation, or with initial irrigation, fertilization and approved water-absorbent polymeric gels, at no additional expense to the Government. Replace shrubs and trees to preexisting conditions in accordance with the requirements of Section 01 57 20 ENVIRONMENTAL PROTECTION.

3.10.1 Documentation of Post Construction Restoration

Following the end of work and demobilization, survey the site and photo-document the post-construction condition of all areas surveyed for the Documentation of Existing Conditions. Include in the record conditions of roadways, utilities, and other site features, and the location and extent of any changes observed since documentation of pre-construction conditions. It is the Contractor's responsibility to document all pertinent post-construction conditions that may affect the subject property.

-- End of Section --

SECTION TABLE OF CONTENTS

DIVISION 01 - GENERAL REQUIREMENTS

SECTION 01 57 20

ENVIRONMENTAL PROTECTION

PART 1 GENERAL

- 1.1 SCOPE
- 1.2 ENVIRONMENTAL LAWS, REGULATIONS AND DOCUMENTS
 - 1.2.1 Miscellaneous Environmental Laws And Regulations
- 1.3 QUALITY CONTROL
- 1.4 PERMITS AND AUTHORIZATIONS
- 1.5 SUBMITTALS
- 1.6 ENVIRONMENTAL PROTECTION PLAN
- 1.7 QUALIFICATIONS
 - 1.7.1 Bird Monitoring Qualifications
 - 1.7.2 Marine Animal Observer Qualifications (Clamshell/Mechanical Only)
 - 1.7.3 Water Quality Monitor Qualifications
 - 1.7.4 Water Quality Monitoring Plan
- 1.8 NOTIFICATION
- 1.9 CONTRACTOR PERSONNEL QUALIFICATIONS IN POLLUTION CONTROL

PART 2 PRODUCTS

PART 3 EXECUTION

- 3.1 PROTECTION OF ENVIRONMENTAL RESOURCES
 - 3.1.1 General Project Environmental Design and Installation Criteria
 - 3.1.1.1 Sewage-Based Systems Environmental Design and Installation Criteria
 - 3.1.2 Protection of Land Resources
 - 3.1.2.1 Work Area Limits
 - 3.1.2.2 Contractor Facilities and Other Work Areas
 - 3.1.2.3 Solid Wastes
 - 3.1.2.4 Fuel, Oil, and Lubricants
 - 3.1.2.5 Hazardous Waste
 - 3.1.2.6 Hazardous Materials
 - 3.1.2.7 Disposal of Other Materials
 - 3.1.3 Preservation and Recovery of Historic, Archeological, and Cultural Resources
 - 3.1.3.1 Applicable Law
 - 3.1.3.2 Known Resources
 - 3.1.3.3 Inadvertent Discoveries
 - 3.1.3.4 Claims for Downtime due to Inadvertent Discoveries
 - 3.1.4 Protection of Water Resources
 - 3.1.4.1 Water Quality Monitoring Equipment
 - 3.1.4.2 Monitoring of Water Areas
 - 3.1.4.3 Water Quality
 - 3.1.4.4 Oil, Fuel, and Hazardous Substance Spill Prevention and

- Mitigation
 - 3.1.4.5 Wetlands Protection
- 3.1.5 Protection of Fish and Wildlife Resources
 - 3.1.5.1 Listed Species Protection
 - 3.1.5.2 Protected Listed Species Sighting Reports
 - 3.1.5.3 Protected Species Summary Report
 - 3.1.5.4 Protection of Migratory Bird Species
 - 3.1.5.5 Protection of Gopher Tortoise (GT) Populations (Gopherus polyphemus)
- 3.1.6 Protection of Air Resources
 - 3.1.6.1 Particulates
 - 3.1.6.2 Odors
- 3.1.7 Protection of Sound Intrusions
- 3.2 POSTCONSTRUCTION CLEANUP
- 3.3 PRESERVATION AND RESTORATION OF LANDSCAPE AND AQUATIC VEGETATION DAMAGES
- 3.4 INVASIVE AND NUISANCE SPECIES
 - 3.4.1 Prevention of Invasive and Nuisance Species Transfer
 - 3.4.2 Invasive and Nuisance Species Reporting
 - 3.4.2.1 Invasive And Nuisance Species Report
- 3.5 MAINTENANCE OF POLLUTION CONTROL FACILITIES
- 3.6 CONSTRUCTION FORMS AND DETAILS

ATTACHMENTS:

Appendix A

-- End of Section Table of Contents --

SECTION 01 57 20

ENVIRONMENTAL PROTECTION

PART 1 GENERAL

1.1 SCOPE

This Section covers prevention of environmental damage as the result of construction operations under this contract and for those measures set forth in other Technical Requirements of these specifications. For the purpose of this specification, environmental damage is defined as the presence of hazardous, physical, chemical, or biological elements or agents which adversely affect human health or welfare; unfavorably alter ecological balances; affect other species, biological communities, or ecosystems; or degrade the quality of the environment for aesthetic, cultural, and/or historical purposes. The control of environmental damage requires consideration of land, water, and air, and includes management of visual aesthetics, noise, solid waste, radiant energy and radioactive materials, as well as other pollutants.

1.2 ENVIRONMENTAL LAWS, REGULATIONS AND DOCUMENTS

1.2.1 Miscellaneous Environmental Laws And Regulations

There are numerous environmental laws and regulations. At the Federal level, the applicable laws and regulations include compliance with the Clean Water Act (CWA); Clean Air Act (CAA); Coastal Zone Management Act (CZMA); Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA); Endangered Species Act (ESA); Fish and Wildlife Coordination Act (FWCA); Marine Protection, Research, and Sanctuaries Act (MPRSA); Magnuson-Stevens Fishery Conservation and Management Act (MSFCMA); National Environmental Policy Act (NEPA); National Historic Preservation Act (NHPA); National Pollutant Discharge Elimination System (NPDES); Research and Sanctuaries Act (RSA); Native American Graves Protection and Repatriation Act (NAGPRA); Resource Conservation and Recovery Act (RCRA); Rivers and Harbors Act (R&H); Safe Drinking Water Act (SDWA); Toxic Substance Control Act (TSCA); Wild and Scenic Rivers Act (WSRA); Federal Insecticide, Fungicide, and Rodenticide Act (FIFRA); Marine Mammal Protection Act (MMPA); Migratory Bird Treaty Act (MBTA); Code of Federal Regulations (CFRs); Executive Orders (EO); and, Environmental Protection Agency (EPA) requirements.

1.3 QUALITY CONTROL

Establish and maintain quality control for environmental protection of items set forth herein. Record on daily quality control reports or attachments thereto, problems in complying with laws, regulations and ordinances, and corrective action taken.

1.4 PERMITS AND AUTHORIZATIONS

Comply with all requirements under the terms and conditions set out in the following permit(s) and authorization(s) obtained by the Corps of Engineers listed below.

- a. Department of the Army Permit No. 200501790; Effective Date: 5 April 2024; Expiration Date: 5 April 2034.
- b. Georgia Department of Natural Resources Water Quality Certification; Effective 29 February 2024.
- c. Georgia Department of Natural Resources Federal Consistency Certification; Effective 5 March 2024.
- d. NMFS South Atlantic Regional Biological Opinion (SARBO), see <https://www.fisheries.noaa.gov/content/endangered-species-act-section-7-biological-opinions-southeast>

The above permits indicate issuing agency approval of work required by this contract. Permits are available at the following web address: <https://www.saj.usace.army.mil/About/Divisions-Offices/Planning/Environmental-Branch/Environmental-Compliance/>

Obtain and comply with the requirements of all other permits or licenses required for construction of this project in accordance with the Clause PERMITS AND RESPONSIBILITIES.

1.5 SUBMITTALS

Government approval is required for submittals with a "G" classification; submittals not having a "G" classification are for information only. When used, a designation following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES.

SD-01 Preconstruction Submittals

Environmental Protection Plan; G, D0
Water Quality Monitoring Plan; G, D0
Draft Water Quality Sampling Map; G, D0
Testing Equipment And Procedure; G, D0
Temporary Manatee Awareness Sign Plan; G, D0

SD-06 Test Reports

Protected Listed Species Sighting Reports; G, D0
Water Quality Monitoring Reports; G, D0
Water Quality Exceedance Report; G, D0

SD-07 Certificates

Bird Monitoring Qualifications; G, D0
Marine Animal Observer Qualifications (Clamshell/Mechanical Only); G, D0
Water Quality Monitor Qualifications; G, D0

SD-11 Closeout Submittals

Protected Species Summary Report; G, D0

Logs/Summary Of Bird Nesting Monitoring Report; G, D0

Invasive And Nuisance Species Report; G, D0

Project Environmental Summary Sheet; G, D0

1.6 ENVIRONMENTAL PROTECTION PLAN

Submit a draft [Environmental Protection Plan](#) no later than 5 calendar days after Notice to Proceed for review and acceptance by the Contracting Officer and carbon copy the Environmental Compliance POC. The Government will consider an interim plan for the first 30 days of operations. However, submit an acceptable final plan no later than 30 calendar days after receipt of Notice to Proceed. Acceptance of the plan will not relieve the Contractor of their responsibility for adequate and continuing control of pollutants and other environmental protection measures. Acceptance of the plan is conditional and predicated on satisfactory performance during construction. The Government reserves the right to require changes to the Environmental Protection Plan (EPP) or operations if the Contracting Officer determines that environmental protection requirements are not being met. Do not begin physical work at the site prior to acceptance of the plan or an interim plan covering the work to be performed.

Include a Table of Contents in the EPP. Number pages of the EPP, including appendices. Index sections of the plan and all appendices in the table of contents. At minimum, include the following in the EPP:

- a. A list of Federal, State, and local laws, regulations, and permits concerning environmental protection, pollution control, and abatement that are applicable to the proposed operations and the requirements imposed by those laws, regulations, and permits.
- b. Methods for protection of features to be preserved within authorized work areas. Prepare a listing of methods to protect resources needing protection, i.e., trees, shrubs, vines, grasses and ground cover, landscape features, air and water quality, fish and wildlife, soil, historical, archeological, and cultural resources.
- c. Procedures to be implemented to provide the required environmental protection and to comply with the applicable laws and regulations. Provide written assurance that immediate corrective action will be taken to correct pollution of the environment due to accident, natural causes, or failure to follow the procedures set out in accordance with the environmental protection plan.
- d. A permit or license for and the location of the solid waste disposal area.
- e. Drawings showing locations of proposed temporary excavations or embankments for haul roads, stream crossing, material storage areas, structures, sanitary facilities, and stockpiles of excess or spoil materials.

- f. Environmental monitoring plans for the job site, including land, water, air, and noise monitoring.
- g. Traffic control plan.
- h. Methods of protecting surface and ground water during construction activities.
- i. Spill prevention. Specify all potentially hazardous substances to be used on the job site and intended actions to prevent accidental or intentional introduction of such materials into the air, ground, water, wetlands, or drainage areas. Specify the provisions to be taken to meet Federal, State, and local laws and regulations regarding labeling, storage, removal, transport, and disposal of potentially hazardous substances. List the Corps environmental POC's with phone numbers and email addresses. Specify the requirement to notify the Corps Environmental Branch POC's by phone the same day spill or no later than the morning of the next day (to include weekends).
- j. Spill contingency plan for hazardous, toxic, or petroleum material. Provide a secondary containment (110% of full tank capacity) for fuel storage tanks (including pumps/generators). Provide fuel storage tanks with over head cover to prevent rainwater from entering the secondary containment. Provide sufficient spill response material quantity to absorb/contain the maximum expected fuel storage.
- k. Work area plan showing the proposed activity in each portion of the area and identifying the areas of limited use or nonuse. Include measures for marking the limits of use areas.
- l. State who is responsible for implementation of the Environmental Protection Plan. The personnel responsible must report directly to the Contractor's top management and have the authority to act for the Contractor in environmental protection matters.
- m. Recycling and Waste Management Plan. Executive Order 12873 of 20 October 1993 requires a number of considerations in planning a project. Do not burn or bury fallen trees. Consider mulching, composting, and other uses for trees. Also, consider the recovery of metals at the job site, including aluminum cans, with proceeds to be retained by the Contractor. Incorporate non-federal recycling and waste minimization efforts into this plan.
- n. Endangered Species Watch Plan detailing how the requirements to minimize the risk of a North Atlantic right whale/dredge vessel interaction will be accomplished.
- o. Migratory Bird Protection Plan. Conduct construction activities in a manner as not to impact migratory birds or induce their nesting.
- p. Steps to be taken to construct the project in such a manner as not to impact gopher tortoises.
- q. Invasive and Nuisance Species Transfer Prevention Plan. The invasive and nuisance species transfer prevention plan is to identify specific transfer prevention procedures and designated cleaning sites/locations. Provide a report with photographs verifying that equipment brought on the site was cleaned. Submit the prevention plan and report to the Invasive Species Management Branch, Operations

Division.

1.7 QUALIFICATIONS

A combination of education and experience that demonstrates knowledge and background to identify the species of concern and able to fulfill the requirements of the environmental specification. Resume/qualification submittals must specifically address the knowledge/experience with the species of concern. Address specific requirements for an environmental observer/monitor called out in environmental coordination or authorization documents (such as agency coordination letters, biological opinions, or permits) regarding the project area in the submittals.

1.7.1 Bird Monitoring Qualifications

No later than 5 calendar days after Notice to Proceed, submit to the Contracting Officer for approval, the qualifications of the bird monitor/observer. Demonstrate the qualifications of the bird monitor's prior experience and ability to identify bird species, general and nesting behavior characteristics, nests and eggs, and a knowledge of habitat requirements. In addition, provide references to verify non-educational experience. Consult with and coordinate all monitoring plans and activities with the Contracting Officer and the Project Biologist.

1.7.2 Marine Animal Observer Qualifications (Clamshell/Mechanical Only)

Submit to the Contracting Officer for approval, the qualifications of the marine animal observer no later than 5 calendar days after Notice to Proceed. A resume of demonstrated experience monitoring manatees and marine turtles and their behaviors in association with in-water construction projects is required. Specifically, include a table with the names and locations of specific in-water construction projects that observers have worked on. Also, include for each in-water construction project the permit number(s), the estimated amount of time (hours) spent observing, the estimated number of manatees and marine turtles seen, and whether the work was ever halted due to manatees or marine turtles in the area. Complete the FWC Protected Marine Species Observer Information Form (see CONSTRUCTION FORMS AND DETAILS) for each marine animal observer to document their experience.

1.7.3 Water Quality Monitor Qualifications

No later than 30 calendar days after NTP, submit to the Contracting Officer for approval, the names and qualifications, in resume format, of each individuals performing water quality monitoring. Personnel conducting water quality monitor must be familiar with the dredging techniques being utilized and possess professional experience monitoring water quality on similar projects without a record of permit violations. In addition to professional qualification, include the names and locations of dredging projects worked on, permit number (if known), and dates spent monitoring.

1.7.4 Water Quality Monitoring Plan

Submit, no later than 30 calendar days after NTP, the following:

- a. Names of qualified persons who are responsible for water quality monitoring and reporting to be performed.

- b. Method of water quality monitoring and reporting that will be performed.
- c. A [Draft Water Quality Sampling Map](#) must have a georeferenced map, overlaid on an aerial photograph, indicating the location of the current construction activity, the sampling locations (background and compliance), the visible plume pattern of the applicable mixing zone, and the direction of flow. Also include on the map the boundaries of any benthic resources or location of nearby designated Georgia Wild or Scenic Waters, if applicable.
- d. The water quality monitoring requirements of any special areas such as designated Georgia Wild or Scenic Waters waters.
- e. Documentation that the person(s) who will be conducting the water quality monitoring meet(s) the following requirements:
 - (1) Is independent of the Contractor;
 - (2) has formal training in water quality monitoring; and
 - (3) has professional experience in monitoring water quality for coastal construction projects; and submit a scope of work for the water quality monitoring to ensure that the appropriate equipment is available to conduct the monitoring correctly at any location, and under any safe conditions.

1.8 NOTIFICATION

The Contracting Officer will notify the Contractor in writing of observed noncompliance with the aforementioned Federal, State, or local laws or regulations, permits and other elements of the environmental protection specifications. After receipt of such notice, inform the Contracting Officer of proposed corrective action and take such action as may be approved. If the Contractor fails to comply promptly, the Contracting Officer may issue an order stopping all or part of the work until satisfactory corrective action has been taken. No time extensions, costs or damages will be granted for such suspension.

Within 30 calendar days following project completion, submit to the Contracting Officer and carbon copy the Environmental Compliance POC the [Project Environmental Summary Sheet](#). Provide absence or occurrence of environmental incidents, as indicated in paragraph CONSTRUCTION FORMS AND DETAILS.

1.9 CONTRACTOR PERSONNEL QUALIFICATIONS IN POLLUTION CONTROL

Provide qualified personnel to perform all phases of environmental protection, including methods of detecting and avoiding pollution, familiarization with pollution standards, both statutory and contractual, and careful installation and monitoring of the project to ensure adequate and continuous environmental pollution control. Quality Control and supervisory personnel must be thoroughly knowledgeable of Federal, State, and local laws, regulations, and permits as listed in the Environmental Protection Plan. Identify the Quality Control personnel in the Quality Control Plan submitted in accordance with Section [01 45 05 DREDGING/BEACH FILL PLACEMENT - CONTRACTOR QUALITY CONTROL](#).

PART 2 PRODUCTS

Not used.

PART 3 EXECUTION

3.1 PROTECTION OF ENVIRONMENTAL RESOURCES

For contract work, comply with applicable Federal, State, or local laws and regulations. Protect the environmental resources within the project boundaries and those affected outside the limits of permanent work under this Contract at least during the entire period of this Contract. Confine activities to areas defined by the drawings and specifications. State environmental protection in the following subparagraphs.

3.1.1 General Project Environmental Design and Installation Criteria

Some project sites have features that cannot be impacted, including cultural, historic, or archeological features. At all sites, minimize disturbance to existing features at the site to the extent possible, including vegetative, topographic, and drainage pattern features. Avoid wetland, seagrass or hardbottoms impacts (temporary access, detours, staging areas, and other work area impacts) to project sites and may require separate permitting action. Restore soil of wetlands temporarily impacted upon project completion. Expansion of previously permitted project footprints may likewise require separate permitting action.

Install temporary systems to aid construction and provide protection of the environment during handling, installing, storing, utilizing, transporting, servicing, testing, refilling, transferring, pumping, processing, removing waste products, repairing and maintaining systems and their components. Provide necessary protection to prevent contamination of the environment from impacts to the systems caused by storm water runoff and flooding. Provide retrofit of temporary systems on project sites to modern environmental protection design standards.

In the event environmental protection measures fail, implement procedures to control and correct environmental damage. Coordinate with the Contracting Officer if environmental protection measures fail.

3.1.1.1 Sewage-Based Systems Environmental Design and Installation Criteria

In general, do not discharge waste or debris for a project unless authorized by the Contracting Officer. This includes providing sufficient temporary sanitary equipment and facilities for the project. Provide the design and installation of temporary or permanent sewage systems and ensure that waters are free of effects of sewage discharges. Adhere to Federal, State, or local codes and requirements regarding sewage in the design, such as those of the EPA and, in the case of the State, Chapter 62-620 (Wastewater Facilities) of the FAC. Adhere to Best Management Practices from the applicable agencies in the design.

3.1.2 Protection of Land Resources

Prior to the beginning of construction, identify all land resources to be preserved or avoided within the work area. Remove materials displaced into uncleared areas. Do not remove, cut, deface, injure, or destroy land resources including trees, shrubs, vines, grasses, topsoil, and land forms without special permission from the Contracting Officer. Engage a

qualified tree surgeon to perform all tree surgery. Repair injuries to bark, trunk, branches, and roots of protected trees by dressing, cutting, and painting as specified for Class I Fine Pruning, of the National Arborist Association Pruning Standards for Shade Tree or as per State's Agricultural Extension Agency Guidelines, immediately as occurrences arise. Do not fasten or attach ropes, cables, or guys to trees for anchorage unless specifically authorized. Where such special emergency use is permitted, provide effective protection for land and vegetation resources at all times as defined in the following subparagraphs.

3.1.2.1 Work Area Limits

Prior to construction, mark the areas that are not required to accomplish all work to be performed under this Contract. Mark or fence isolated areas within the general work area to be saved and protected. Protect existing trees designated to remain. Provide protection of tree roots against noxious materials in solution caused by run-off or spillage. Locate fires outside the canopy of protected trees. Do not store materials, trailers, or equipment within the drip line of protected tree. Protect monuments and markers before construction operations commence. Provide visible markers where construction operations are conducted during darkness. Convey to personnel the purpose of marking and/or protection of all necessary objects.

3.1.2.2 Contractor Facilities and Other Work Areas

Locate facilities, staging and other work areas as indicated in Section 01 50 02 TEMPORARY CONSTRUCTION FACILITIES AND CONTROLS, and in compliance with permits listed in the paragraph PERMITS AND AUTHORIZATIONS above and obtained for performance of work. Manage borrow or dredge material management (DMMA) areas to minimize erosion and to prevent sediment from entering nearby watercourses, wetlands, or lakes. Manage and control dredged material areas to limit spoil intrusion into areas designated on the drawings and to prevent erosion of soil or sediment from entering nearby watercourses, wetlands, or lakes. Develop dredged material areas in accordance with the grading plan indicated on the drawings. Control temporary excavation and embankments for plant and/or work areas to protect adjacent areas from despoilment. If there is suspicion that sediment may be unsuitable for disposal at a specified location, immediately take measures to contain the suspect sediment and notify the Contracting Officer.

3.1.2.3 Solid Wastes

The Contracting Officer will approve the type of solid waste containers, staging areas on land for these containers, the roads to haul the solid waste, and the final solid waste disposal site. In addition, comply with Federal, State and local regulations pertaining to the use of the solid waste disposal site.

3.1.2.4 Fuel, Oil, and Lubricants

Manage fuel, oil, and lubricants in order to prevent spills and evaporation. Provide a 4-foot square, 16-gauge metal pan with borders banded up and welded at corners right below the bibb for fuel dispensers to prevent spills. Edges of the pans must be 8-inch minimum in depth to ascertain that no contamination of the ground takes place. Clean pans by an approved method immediately after every dispensing of fuel and wastes disposed of offsite in an approved area. If spilling of fuel occurs,

immediately recover the contaminated ground and dispose of it offsite in an approved area. Store petroleum waste generated in marked corrosion-resistant containers and recycled or disposed of in accordance with 40 CFR 279, State, and local regulations. Conduct fueling operation such that accidental spills will be prevented from entering surface waters or wetlands.

3.1.2.5 Hazardous Waste

Hazardous wastes are defined in 40 CFR 261. Ensure that hazardous wastes are stored and disposed of in accordance with 40 CFR 261 and State and local regulations. Ensure that hazardous wastes are packed, labeled, and transported in accordance with 49 CFR 173 and State and local regulations.

3.1.2.6 Hazardous Materials

Ensure that hazardous materials are labeled, stored, and transported in accordance with 49 CFR 173, State and local regulations.

3.1.2.7 Disposal of Other Materials

Handle other materials than previously discussed (Construction and Demolition, vegetative waste, etc.) as directed by the Contracting Officer.

3.1.3 Preservation and Recovery of Historic, Archeological, and Cultural Resources

3.1.3.1 Applicable Law

A number of Federal laws require protection of cultural resources. Two laws, in particular, can be potentially involved with construction activities: (1) the National Historic Preservation Act, as amended; and, (2) the Abandoned Shipwreck Act.

3.1.3.2 Known Resources

If known historic, archeological, and cultural resources within the Contractor's work area(s) are present, it will be designated as an avoidance area on the contract drawings or other documents. If so designated, install protection for these resources and preserve during the Contract's duration. Do not dredge, spud, or anchor within the designated avoidance area. Do not distribute maps or other information on these resource locations except for distribution among the Contractor's staff with a need to know technical responsibility for protecting the resources.

3.1.3.3 Inadvertent Discoveries

If, during construction activities, items that may have historic or archaeological origin are observed, report such observations immediately to the Contracting Officer so that the USACE Project Archaeologist is notified. Cease all activities adjacent to the discovery that may result in the destruction of these resources and prevent employees from further removing, or otherwise damaging, such resources. Once reported, USACE staff will initiate coordination with the appropriate federal, tribal and state agencies to determine if archaeological investigation is required. Additional work in the area of the discovery will be suspended at the site until all federal and state regulations have been successfully completed and the USACE staff members provide further directive. Do not resume project activities in the vicinity of the discovery until the Contracting

Officer approves work to proceed.

The possibility of encountering submerged cultural resources is inherent in dredging and snagging operations. Such findings could include shipwrecks, shipwreck debris fields (such as steam engine parts, or wood planks and beams), anchors, ballast rock, concreted iron objects, concentrations of coal, prehistoric watercraft (such as log dugouts), and other structural features intact or displaced. The materials may be deeply buried in sediment, resting in shallow sediments or above them, or protruding into water. Keep suspected cultural materials inadvertently gathered from a water-saturated context moist by re-immersion, spraying, or some other expedient means of wetting until the Contracting Officer provide further directives. Do not conduct interviews or correspond with the media or federal, tribal or state agencies without clear authorization from the Contracting Officer.

In the unlikely event that unmarked human remains are identified, treat in accordance with Georgia Statutes 36-72-1 et. seq. Immediately cease all work and ground disturbing activities within a 50-meter diameter of the unmarked human remains and notify the Contracting Officer or the USACE representative. The Contracting Officer will notify the local medical examiner, and the appropriate State Historic Preservation Office (SHPO) and Tribal Historic Preservation Office(s) (THPO). Based on the circumstances of the discovery, equity to all parties, and considerations of the public interest, the Contracting Officer may modify, suspend, or terminate work activities. Do not resume such activity without written authorization from the Contracting Officer.

3.1.3.4 Claims for Downtime due to Inadvertent Discoveries

Upon discovery and subsequent reporting of a possible inadvertent discovery of cultural resources, continue work well away from, or otherwise protectively avoiding, the area of interest, or in some other manner that strives to continue productive activities in keeping with the Contract. If an inadvertent discovery substantially impact(s) the work schedule, coordinate such delays with the Contracting Officer. Determine contract adjustments resulting from compliance with this paragraph in accordance with Clause DIFFERING SITE CONDITIONS.

3.1.4 Protection of Water Resources

Keep construction activities under surveillance, management, and control to avoid pollution of surface, ground waters, and wetlands. Implement special management techniques as set out below to control water pollution by the listed construction activities which are included in this Contract. Use construction methods that protect wetland and surface water areas from damage due to mechanical grading, erosion, sedimentation and turbid discharges. Do not storage or stockpile equipment, tools, or materials within wetlands or along the shoreline within the littoral zone unless specifically authorized.

3.1.4.1 Water Quality Monitoring Equipment

Submit a certification, attesting to the accuracy of [Testing Equipment And Procedure](#) no later than 10 calendar days after NTP.

3.1.4.2 Monitoring of Water Areas

Monitor all water areas affected by construction activities.

3.1.4.3 Water Quality

Conduct operations in a manner to minimize turbidity and Total Suspended Solids (TSS) discharges. Conform to all water quality standards as prescribed by Section 303 State of Georgia Department of Natural Resources. In accordance with 01 45 05 DREDGING/BEACH FILL PLACEMENT - CONTRACTOR QUALITY CONTROL, provide for surveillance and sampling of water quality of effluent from the disposal area.

- a. Testing: Conduct weekly sampling at the discharge from the end of each operating weir outfall pipe. If the end of the discharge pipe is not safely accessible, then samples may be collected at the weir overflow with the approval of the Contracting Officer. Analyze each sample without undue delay after the sample is taken, for turbidity (ntu), salinity(ppt), pH, dissolved oxygen (mg/L and salinity corrected), total suspended solids (TSS) (mg/L) date, time, and flow. If any effluent exceeding 1 cubic foot per second appear to violate a state standard, conduct resampling at the end of the mixing zone in the receiving water (generally 100 feet downcurrent from the point at which the effluent enters the receiving water). Water Quality Standards are as follows:
 - (1) -- Total Suspended Solids (TSS) less than 500 mg/L.
 - (2) -- Dissolved Oxygen greater than 3.0 mg/L (June - October).
 - (3) -- Dissolved Oxygen greater than 3.5 mg/L (May - November).
 - (4) -- Dissolved Oxygen greater than 4.0 mg/L (December - April).
 - (5) -- pH greater than 6.0 and less than 8.5.
- b. Record of Results: Record the following information on the Contractor Quality Control Report for each sampling:
 - (1) Date, time and location of sample (Include this information on the sample label also).
 - (2) Depth of flow over each weir crest.
 - (3) Ponding depth at each weir.
 - (4) Crest elevation of each weir.
 - (5) Report all results to the Contracting Officer.
 - (6) Record all results in the daily Quality Control reports.
 - (7) Report all results monthly to Georgia EPD (EPD.WQC@dnr.ga.gov, dewey.richardson@dnr.ga.gov, david.hedeen@dnr.ga.gov); CESAJ-PD-E POC (michael.j.hollingsworth@usace.army.mil); and the Contracting Officer.
- c. Submit all [Water Quality Monitoring Reports](#) electronically to the Contracting Officer within 24 hours after completion of each test and submitted weekly to the Environmental Branch (CESAJ-PD-E) within 7 days of collection.
- d. Submit a [Water Quality Exceedance Report](#) to the Contracting Officer within 24 hours of the time when the Contractor first becomes aware of the discharge (email acceptable).

3.1.4.4 Oil, Fuel, and Hazardous Substance Spill Prevention and Mitigation

Prevent oil, fuel, or other hazardous substances from entering the air, ground, drainage, local bodies of water, or wetlands. Accomplish this by design and procedural controls. In the event that a spill occurs despite the design and procedural controls, conduct the following:

- (1) Take immediate action to contain and cleanup spill of oil, fuel or other hazardous substance.
 - (2) Immediately report spills to the Contracting Officer and any spills to surface water or wetlands to the National Response Center (NRC) at 1-800-424-8802. Report any spills above 25 gallons to soils to the NRC.
 - (3) Spill contingency planning must comply with the criteria of 40 CFR, Part 109.
 - (4) To control the spread of potential spill, absorbent materials must be readily available and capable of absorbing the contents of the single largest tank.
 - (5) To control the spread of potential spill, provide a written certification of commitment of manpower, equipment, and materials required to expeditiously cleanup and dispose of spill materials.
- a. Spill Preventive Systems: System design and installation requirements have been discussed at the beginning of this Section. Temporary or portable tanks must conform to applicable Federal, State and local codes and requirements and must not be placed where they may be affected by storm, flooding, or washout. Put diversionary structures for spills in place in advance where practical. Provide fuel storage locations to include pumps and generators in place with features such as earthen berms, to prevent fuel spills to surface water or wetlands. Obtain approval for both spill preventive systems and deviations from associated requirements from the Contracting Officer prior to implementation.
 - b. Liabilities: Liable in the amounts established in 40 CFR, Part 113 when it can be shown that oil was discharged as a result of willful negligence or willful misconduct. The penalty for failure to report the discharge of oil will be in accordance with the provision of 33 CFR, Part 153.

3.1.4.5 Wetlands Protection

- a. Determine the location of wetlands within the project area and adjacent to the project area from the information provided in the contract documents. Instruct all personnel associated with the project of the presence of wetlands if the wetlands are located within 1,000 feet of staging areas, access roads or other areas used during construction activities.
- b. Advise construction personnel that there are civil and criminal penalties for harming or destroying wetlands beyond actions specifically identified, anticipated, and authorized in these specifications and associated plans and environmental documents. Erect a silt fence at least 30 feet upland and along the entire length of all wetland delineation lines adjacent to the work site and staging

areas, prohibit all access into the wetland, and ensure compliance with the paragraph PROTECTION OF WATER RESOURCES above.

- c. Do not anchor, place pipelines, or stage equipment in a manner that will cause damage to wetlands beyond those specifically identified, anticipated, and authorized in these specifications and associated drawings and environmental documents. Avoid anchoring, placing pipeline, or staging equipment in these sensitive wetland areas. If such activities cannot be done without affecting sensitive areas outside the construction area identified in the Contract, cease the activities notify the Contracting Officer and Project Biologist immediately (no later than the morning following the working day if the incident occurs after normal working hours). Report actual incident involving damage to, or disturbance of wetlands.

3.1.5 Protection of Fish and Wildlife Resources

Keep construction activities under surveillance, management, and control to minimize interference with, disturbance to, and damage of fish and wildlife. List species that require specific attention along with measures for their protection in the Environmental Protection Plan prior to the beginning of construction operation.

In the event that a threatened, endangered, or Marine Mammal Protection Act (MMPA) species is harmed as a result of construction activities, cease all work and notify the Contracting Officer. Follow the order of contact within the Corps of Engineers:

TABLE 1 - Order of Contact of Corps Personnel

TITLE	TELEPHONE NUMBER
Corps, Inspector	Onsite/After hours to be provided
Corps, Project Engineer	Onsite/After hours to be provided
Contracting Officer	To be provided
Administrative Contracting Officer	To be provided
Area Engineer for Area Office	To be provided

Information provided above will be updated during the pre-construction meeting.

In the event of injury to or mortality of a manatee in the project area, immediately notify the Georgia Department of Natural Resources (Georgia DNR) at 912-264-7218 or 1-800-272-8363 on weekdays between 8:00 a.m. to 4:30 p.m., or 1-800-241-4113 on nights and weekends. Within one hour of a manatee injury or mortality, notify the Corps of Engineers (SAS Regulatory Division) at 1-800-448-2402 and the US Fish and Wildlife Service, Georgia Ecological Services Field Office at 912-832-8739. Secure any dead manatee found in the project area to a stable object to prevent the carcass from moving with the current. In the event of a manatee injury or mortality, cease all open water construction activity pending completion of consultation between the Corps of Engineers and the USFWS, pursuant to Section 7 of the ESA.

3.1.5.1 Listed Species Protection

Endangered and Threatened Species and MMPA species that may be in the project area are listed in Table 2.

TABLE 2 - Listed Species

Common Name	Scientific Name	ESA Status
Florida manatee	<i>Trichechus manatus latirostris</i>	Threatened
North Atlantic Right whale	<i>Eubalaena glacialis</i>	Endangered
Sperm whale	<i>Physeter macrocephalus</i>	Endangered
Humpback whale	<i>Megaptera novaeangliae</i>	MMPA protected
Common Bottlenose Dolphin	<i>Tursiops truncatus</i>	Marine Mammal Protection Act Protected
Shortnose sturgeon	<i>Acipenser brevirostrum</i>	Endangered
Atlantic sturgeon	<i>Acipenser oxyrinchus oxyrinchus</i>	Endangered
Green sea turtle	<i>Chelonia mydas</i>	Threatened
Loggerhead sea turtle	<i>Caretta caretta</i>	Threatened
Kemp's ridley sea turtle	<i>Lepidochelys kempii</i>	Endangered
Leatherback sea turtle	<i>Dermochelys coriacea</i>	Endangered
Hawksbill sea turtle	<i>Eretmochelys imbricata</i>	Endangered
Smalltooth sawfish	<i>Pristis pectinata</i>	Endangered
Giant Manta Ray	<i>Manta birostris</i>	Threatened
Eastern Indigo snake	<i>Drymarchon couperi</i>	Threatened
Scalloped hammerhead	<i>Sphyrna lewini</i>	Threatened
Oceanic Whitetip	<i>Carcharhinus longimanus</i>	Threatened
Piping plover	<i>Charadrius melodus</i>	Threatened
Red knot	<i>Calidris canutus rufa</i>	Threatened
Bald eagle	<i>Haliaeetus leucocephalus</i>	Bald and Golden Eagle Act protected
Wood Stork	<i>Mycteria americana</i>	Threatened

Instruct personnel associated with the project of the potential presence of listed species as noted in the Table 2 in the area and the need to avoid collisions with and/or harming these animals. Advise construction personnel that there are civil and criminal penalties for harming, harassing, or killing, or attempting to harm, harass or kill the listed species as noted in the Table 2 in the area which are protected under the Marine Turtle Protection Act, Marine Mammal Protection Act of 1972, and the Endangered Species Act of 1973. The Contractor will be held responsible for listed species as noted in the Table 2 in the area harmed, harassed, or killed as a result of construction activities.

- a. Siltation Barriers: Do not use siltation barriers in waters of the United States, below the high tide line, in association with the authorized work.
- b. Special Operating Conditions:
 - (1) Operate all vessels associated with the project at no wake/idle speeds at all times while in the project area, and follow routes of deep water whenever possible. Boats used to transport personnel must be shallow-draft vessels, preferably of the

light-displacement category, where navigational safety permits. Mooring bumpers must be placed on all barges, tugs, and similar large vessels wherever and whenever there is a potential for manatees to be crushed between two moored vessels. The bumpers must provide a minimum stand-off distance of four feet under maximum designed compression.

- (2) Manatee or Marine Turtle Sighting: If a manatee(s) or marine turtle(s) are sighted within 100 yards of the project area, implement appropriate precautions to ensure protection of the manatee or marine turtle. These precautions include the operation of all moving equipment, including vessels, no closer than 50 feet of a manatee or marine turtle. If a manatee or marine turtle are closer than 50 feet to moving equipment or the project area, shutdown the equipment and cease construction activities within the waterway to ensure protection of the manatee or marine turtle. For unanchored vessels, operators must disengage the propeller and drift out of the potential impact zone. If drifting would jeopardize the safety of the vessel, then idle speed may be used to leave the potential impact zone. Do not resume construction activities until animal(s) has moved beyond the 50-foot radius of the project operation, or until 30 minutes elapses if the animal(s) has not reappeared within 50 feet of the operation. Do not herd away or harass animals into leaving. Notify the Contracting Officer if construction activity ceases.

- c. Marine Animal Monitoring (Clamshell/Mechanical Only): During clamshell dredging operations, monitor for the presence of manatees and marine turtles. The dedicated observer must be in a location with direct line of sight for all in-water construction activity (i.e. direct line of sight of clamshell bucket or excavator arm entering water). The dedicated observer must have experience in manatee and marine turtle observation and be equipped with polarized sunglasses to aid in observing. Nighttime lighting of waters within and adjacent to the work area must be illuminated, using shielded or low-pressure sodium-type lights, to a degree that allows the dedicated observer to sight manatee or marine turtle on the surface within 200 feet of the operation. The dredge operator must gravity-release the clamshell bucket only at the water surface, and only after confirmation that there are no manatees or marine turtles within the safety distance identified in the standard construction conditions.
- d. Manatee Signs: Prior to initiating authorized construction activities, contact Georgia DNR at 912-264-7218 for assistance with development of the [Temporary Manatee Awareness Sign Plan](#) for the project area. Include the types and number of signs; and locations where signs will be installed to be prominently visible to those entering the project area from uplands and from the water. Submit the approved plan upon completion. Install temporary manatee awareness signs in accordance with the Georgia DNR approved plan. See attached Appendix A for information about the size and appearance of temporary manatee awareness signs. Within 30 days of project completion, remove all temporary manatee signs.

3.1.5.2 [Protected Listed Species Sighting Reports](#)

Report take concerning listed species in the Table 2; or sighting of injured or incapacitated of listed species to the Contracting Officer and

notify the personnel indicated in the Table 1 ORDER OF CONTACT OF CORPS PERSONNEL.

Provide a copy of the incidental take report in PDF format with photographs to the Contracting Officer within 24 hours of the incident.

3.1.5.3 Protected Species Summary Report

Maintain a log detailing all incidents, including sightings, collisions with, injuries, or killing of Listed Species occurring during the contract period. Record the data on forms provided by the Contracting Officer (sample forms are on the web site indicated in paragraph CONSTRUCTION FORMS AND DETAILS). Within 30 calendar days following project completion, submit a [Protected Species Summary Report](#) summarizing the above incidents and sightings to the Contracting Officer and carbon copy the Environmental Compliance POC.

3.1.5.4 Protection of Migratory Bird Species

Keep construction activities under surveillance, management, and control to prevent impacts to migratory birds and their nests. Advise construction personnel that migratory birds are protected by the Florida Endangered and Threatened Species Act of 1977, Title XXVIII, Chapter 372.072, and the U.S. Fish and Wildlife Service pursuant to the Migratory Bird Treaty Act of 1918 and the Endangered Species Act of 1973, as amended. Do not harm or harass the birds, eggs or nests.

- a. **Monitoring of Construction Area:** Conduct monitoring of the construction area beginning 1 April or 10 days prior to commencement of construction, whichever is later through 31 August, if construction activities occur during that period. Conduct daily monitoring using the Daily Bird Monitoring Report during the dawn or dusk time frames by a bird monitor approved by the Contracting Officer. Take caution to avoid disturbance to the nesting birds. Maintain a daily log detailing monitoring and nesting activity (not all bird species are listed). Sample monitoring report are on paragraph CONSTRUCTION FORMS AND DETAILS. Within 30 days after completion of construction, submit a [Logs/Summary of Bird Nesting Monitoring Report](#) to the Contracting Officer detailing nesting and nesting success/failure including species, number of nests created, location, number of eggs, number of offspring generated during the project and reasons for nesting success or failure, if known.
- b. **Nesting Activity Notification:** Report nesting activity observed to the Contracting Officer. The Contracting Officer has sole authority for work stoppages, creation of the buffer area, or restart of construction activities. Notify the personnel indicated in Table 1 ORDER OF CONTACT OF CORPS PERSONNEL.
- c. **Nesting Within Construction Area:**
 - (1) If nesting begin within the construction area, create a temporary, 300-foot buffer around the nests and mark with signs to avoid entry. Leave the area undisturbed until nesting is completed or terminated, and the chicks fledge. The decision to allow construction in a former nesting site will be determined by the Contracting Officer in consultation with the U.S. Fish and Wildlife Service and the FF&WCC. Access to the nesting sites by humans (except limited access when accompanied by the bird

monitor or Contracting Officer), equipment or pets under control of the Contractor is prohibited.

- (2) If nesting occurs within the construction area, place and maintain a bulletin board and maintained in the contracting shed with the location map of the construction site showing the bird nesting areas and a warning, clearly visible, stating that BIRD NESTING AREAS ARE PROTECTED BY THE FLORIDA THREATENED AND ENDANGERED SPECIES ACT AND THE FEDERAL MIGRATORY BIRD TREATY ACT.
- (3) Birds will find the top of the dike or the flat interior desirable nesting habitat. Stoppage of construction activity could induce nesting, subsequently, construction could be altered or stopped to avoid impacting the birds. Areas which are potentially suitable for nesting can be altered to make the area undesirable. One approved method is the placement of stakes at 10- to 15-foot intervals and tie flagging between the stakes in a web fashion. This may dissuade bird nesting until construction can be resumed. In addition, the disposal area basin can be flooded prior to the beginning of nesting season to the elevation required for displacement from the disposal of dredged material in order to make the basin undesirable for bird nesting.

- d. Work Delay: Delays in work due to the fault of negligence of the Contractor or the Contractor's failure to comply with this specification is not compensable. Adjustments to the contract performance period or price that are required as a result of compliance with this section will be made in accordance with the Clause SUSPENSION OF WORK.

3.1.5.5 Protection of Gopher Tortoise (GT) Populations (Gopherus polyphemus)

Keep construction activities under surveillance, management, and control to prevent impacts to GTs and their burrows. Stay at least 25 feet from the entrance of individual burrows. Advise all construction personnel that GTs are listed by the State of Georgia as a Threatened Species and protected by the Georgia Code, Title 50, Chapter 3, Section 50-3-63. Do not take, harm, or harass the tortoises, their eggs or their burrows during the construction. The destruction of GT burrows constitutes taking under this law. If a burrow cannot be avoided, contact the Contracting Officer and Project Biologist prior to any construction activity within 25 feet of the burrow. In addition, if a burrow cannot be avoided, coordinate with Georgia DNR at 912-314-0128 to arrange for tortoises to be relocated.

Taking: If the construction work kills tortoises, obtain an emergency take permit from Georgia DNR and pay the fine associated with the permit. Taking includes the entombment or killing of gopher tortoises as a result of bulldozing, grading, paving, or building construction. If such occurs, notify the Project Biologist.

3.1.6 Protection of Air Resources

Keep construction activities under surveillance, management, and control to minimize pollution of air resources. Activities, equipment, processes and work operated or performed by the Contractor in accomplishing the specified construction must be in strict accordance with the applicable air pollution standards of the Federal emission and performance laws and

standards, including the U.S. Environmental Protection Agency's Ambient Air Quality Standards.

3.1.6.1 Particulates

Control particulates, such as dust, during construction activities, including weekends, holidays, and hours when work is not in progress. Maintain excavations, stockpiles, haul roads, permanent and temporary access roads, plant sites, spoil areas, borrow areas, and work areas within or outside the project boundaries free from particulates that cause air pollution standards to be exceeded or cause a hazard or nuisance. Provide equipment and approved methods to control particulates as the work proceeds and before a problem develops.

3.1.6.2 Odors

Control odors during construction activities.

3.1.7 Protection of Sound Intrusions

Keep construction activities under surveillance and control to minimize damage to the environment by noise.

3.2 POSTCONSTRUCTION CLEANUP

Clean up area(s) used for construction.

3.3 PRESERVATION AND RESTORATION OF LANDSCAPE AND AQUATIC VEGETATION DAMAGES

Restore landscape features and aquatic vegetation damaged or destroyed during construction operations outside the limits of the approved work areas. Include such restoration as part of the Environmental Protection Plan as defined in subparagraph ENVIRONMENTAL PROTECTION PLAN of paragraph SUBMITTALS.

3.4 INVASIVE AND NUISANCE SPECIES

3.4.1 Prevention of Invasive and Nuisance Species Transfer

Thoroughly clean equipment prior to and following work on the project site to ensure that items/materials including, but not limited to, soil, vegetative debris, eggs, mollusk larvae, seeds, and vegetative propagules are not transported from a previous work location to this project site, nor transported from this project site to another location. Prevention protocols require cleaning equipment surfaces, including but not limited to, undercarriages, tires, and sheet metal. Clean equipment, including but not limited to, heavy equipment, vehicles, trailers, ATV's, and chippers. Clean and inspect smaller equipment, including, but not limited to, chainsaws, loppers, shovels, and backpack sprayers to ensure they are free of eggs, vegetative debris, and vegetative propagules. Utilize method accepted by the Government; common accepted methods include pressure washing and steam cleaning/washing equipment. Provide prevention protocols to also address clothing and personal protective equipment.

Prior to the commencement of work, complete and submit an invasive and nuisance species transfer prevention plan. Include this plan as part of the Environmental Protection Plan as defined in subparagraph ENVIRONMENTAL PROTECTION PLAN. The invasive and nuisance species transfer prevention

plan must identify specific transfer prevention procedures and designated cleaning sites/locations. Prevention protocols may vary depending upon the nature of the project site. Ensure equipment coming onto and leaving the project site is inspected and not harboring materials that would spread, or potentially spread, invasive and nuisance species onto or off the project site. Provide a report with photographs, verifying equipment brought on site was cleaned and provide a report verifying equipment was cleaned prior to removal from the project site.

Work delays due to the fault and/or negligence or failure to comply with this specification is not compensable.

3.4.2 Invasive and Nuisance Species Reporting

Report sightings of invasive and nuisance species not identified and documented in the pre-construction condition within 24 hours. Report the date, time, location (latitude and longitude preferred), environmental conditions, circumstances surrounding the sighting, disposition/behavior of the species, and other notable observations. Include pictures of the reported species. Report to the Jacksonville District Corps of Engineers Planning Division, Environmental Branch and Operations Division, Invasive Species Management Branch, InvasivePreventionPlan@usace.army.mil. Points of contact will be provided in the Preconstruction Conference.

3.4.2.1 Invasive And Nuisance Species Report

Within 30 calendar days following completion of work, submit a report with photographs verifying equipment brought on site was cleaned to the Contracting Office and carbon copy Environmental Compliance POC. Provide a report with photographs verifying equipment was cleaned prior to removal from the project site.

3.5 MAINTENANCE OF POLLUTION CONTROL FACILITIES

Maintain all constructed facilities and pollution control facilities and devices for the duration of the contract or for that length of time construction activities create the particular pollutant.

3.6 CONSTRUCTION FORMS AND DETAILS

See the Construction Forms & Details module at the following web address:
<https://www.saj.usace.army.mil/About/Divisions-Offices/Engineering/Design-Branch/Specifications-Section/>

-- End of Section --

**PRIVATE COMMUNITY DOCK AND COMMERCIAL MARINAS
MANATEE SIGNS
PLACEMENT PROCEDURES**



The West Indian manatee (*Trichechus manatus*) is an endangered species protected at the Federal level by the Endangered Species Act of 1973, as amended and the Marine Mammal Protection Act of 1972, as amended. In Georgia they inhabit coastal estuaries and rivers primarily from March through November. Increasing coastal development and associated watercraft facilities are expected to increase boat traffic and the probability of collisions between manatees and watercraft. Raising boater awareness of this threat and educating the public about manatees in general are important components of manatee conservation within Georgia waters. Signage has and will continue to play a key role in informing the boating community and general public about the species and how best to protect it from adverse impacts .

Manatee signage may be temporary or permanent. Temporary signs are most often associated with the construction phase of in-water structures and facilities. They are intended to remind those involved with the construction of the potential presence of manatees within the project area. Although the project permit usually mandates their use, they are informative and non-regulatory in nature. Two examples of such signage are included in this Appendix under the “Temporary Construction Sign” section. Permanent signs are intended to provide long-term boater awareness and public education about manatees in Georgia waters. Examples of permanent signage include, "Manatee Basics for Boaters" and waterway display sign, “Protect Georgia’s Manatees”, and are included in this Appendix under the “Permanent Signs” section. Both “Manatee Basics for Boaters” and “Protect Georgia’s Manatees” permanent signs are required for all private community docks and commercial marinas. Private single or dual family docks are not required to have manatee signs.

Procedure for Approval of Sign Installation:

1. The applicant should forward a project site plan, including the proposed location for the permanent signs to: Manatee Sign Approval, Nongame Conservation Section, Department of Natural Resources, One Conservation Way, Brunswick, GA 31520. The applicant should also

include a chart indicating the location of the facility in relation to waterways, location within a given county (specify county name), Contact person with phone number, and the Permit and/or Lease number associated with the project

2. The Nongame Conservation Section of the Georgia Department of Natural Resources (GDNR) will review the proposed sign placement site plan and will respond to the applicant within 30 days. If the proposed location is unacceptable, guidance on an alternate site will be provided. The contact person should notify the Nongame Conservation Section when sign placement has been completed (912-264-7218). A photograph(s) of the posted manatee signage at your facility must be submitted with the required permit compliance form to the Marsh and Shore Regulatory Program of the Coastal Resources Division/GA Department of Natural Resources.

3. If during a site visit, approved signs and their locations are found not to be in compliance with the instructions given in this document, relocation or addition of signs will be required. Annual site visits will be conducted to document sign placement and condition. All signs locations will be recorded in the GDNR manatee database.

Approved Suppliers of Manatee Signs: Signs are available through the companies listed below and may also be available from other local suppliers throughout the state. Permit/lease holders, marinas, and boat docking/launching facilities should contact sign companies directly to obtain pricing information and arrange for shipping and billing.

Grafix, Inc.
455 Montgomery Street
P.O. Box 1028
Savannah, GA 31402
912-691-1117

Image Sign Company
785 King George Blvd., Bldg. 3
Savannah, GA 31419
912-961-1444

Doug Bean Signs, Inc.
160 Dean Forest Rd
Savannah, GA 31408
912-964-1900

Fendig Signs
411 Arnold Rd
St. Simons Island, GA 31522

Good & Associates
St. Simons Island, GA
(912) 638-7664


Temporary Construction Signs



Permanent Signs



“Protect Georgia’s Manatees” sign – At least one sign will be required to face the waterway for each facility. This is dependent upon the size of the facility and the number of docks/piers present. The number and placement of signs will be determined on a site-by-site basis by GDNR biologists. Each approach to the marina from the waterway to the facility will need a visible sign. This sign is intended to alert any passing boater that may or may not be associated with the facility that manatees may be present and again raise awareness of this endangered species.

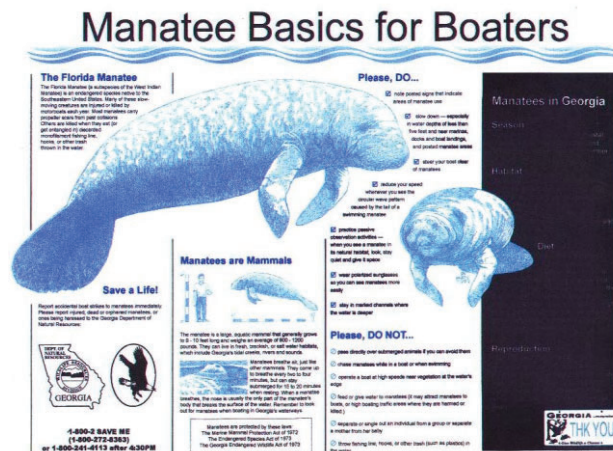

“Manatee Basics for Boater” sign – One sign is required for each entry point to any dock /pier space. It should be placed where anyone boarding or launching a boat will easily see the sign. This sign is intended to provide detailed information about manatees, how to avoid negative impacts to manatees, and to raise awareness of their presence in Georgia to any person using the facility. Sign placement approval by the Nongame Conservation Section is required.

SECTION TABLE OF CONTENTS

DIVISION 35 - WATERWAY AND MARINE CONSTRUCTION

SECTION 35 20 23

DREDGING

PART 1 GENERAL

- 1.1 SCOPE
- 1.2 REFERENCES
- 1.3 SUBMITTALS
- 1.4 NOTICE OF INTENT TO DREDGE
- 1.5 DREDGING RESTRICTIONS
 - 1.5.1 Order of Work
 - 1.5.2 Hopper Restriction
 - 1.5.3 Rehandling Facility
- 1.6 SPECIAL INSTRUCTIONS
- 1.7 DREDGING AND DISPOSAL PLAN
- 1.8 ORDER OF WORK
- 1.9 PUMPING OF BILGES
- 1.10 HISTORICAL PERIOD SHIPWRECK SITES
- 1.11 UTILITY CROSSINGS
 - 1.11.1 General
- 1.12 PERMITS
- 1.13 FUEL OIL TRANSFER OPERATIONS
- 1.14 SIGNAL LIGHTS
- 1.15 NOTICE TO MARINERS -- DREDGING CONTRACTS
- 1.16 FINAL CLEANUP
- 1.17 WORK VIOLATIONS
- 1.18 EQUIPMENT AND PERFORMANCE DATA
- 1.19 NATIONAL DREDGING QUALITY MANAGEMENT PROGRAM SYSTEM (DREDGES AND DUMP SCOWS)
 - 1.19.1 System Requirements

PART 2 PRODUCTS

- 2.1 WEIR RISER BOARDS

PART 3 EXECUTION

- 3.1 DAILY REPORT OF OPERATIONS
- 3.2 NOTIFICATION OF COAST GUARD
 - 3.2.1 Relocation of Navigation Aids
 - 3.2.2 Dredging Aids
- 3.3 WORK AREA
 - 3.3.1 Access
 - 3.3.2 Protection of Existing Waterways
 - 3.3.3 Adjacent Property and Structures
 - 3.3.3.1 Magnetic Silencing Facility (MSF)
 - 3.3.3.2 Explosive Handling Wharves (EHW)
 - 3.3.3.3 Refit Wharves
 - 3.3.3.4 Drydock Caisson Gate Sill and Mooring Facility

Naval Submarine Base Kings Bay MD
Camden County, Georgia

- 3.3.4 Subaqueous Cable Crossings
- 3.3.5 Port Operations Small Boat Basin
- 3.3.6 Port Security Barrier Mooring Area
- 3.4 CHARACTER OF MATERIALS
- 3.5 DISPOSAL OF EXCAVATED MATERIAL
 - 3.5.1 General
 - 3.5.1.1 Disposal Area Details
 - 3.5.2 Location of Pipeline Discharge Area
 - 3.5.3 Maximum Height of Dredged Materials
 - 3.5.4 Upland Disposal Area Management
 - 3.5.4.1 Exterior Disposal Area Drainage
 - 3.5.4.2 Operation of Weirs
 - 3.5.5 Placing of Dredged Material
 - 3.5.6 Dredge Pipelines
 - 3.5.6.1 Dredge Discharge Pipeline
 - 3.5.6.1.1 Existing Dredge Pipe Installed by the Navy
 - 3.5.6.1.2 Existing Dredge Pipe Isolation Box
 - 3.5.6.2 Submerged Pipeline
 - 3.5.6.3 Floating Pipeline
 - 3.5.7 Booster Pumps
 - 3.5.8 Misplaced Material
- 3.6 REQUIRED DEPTH, ALLOWABLE OVERDEPTH, AND SIDE SLOPES
 - 3.6.1 Acceptance Sections
 - 3.6.2 Required Depth
 - 3.6.3 Allowable Overdepth
 - 3.6.4 Side Slopes
 - 3.6.5 Excessive Dredging
 - 3.6.6 Areas to be Dredged
- 3.7 SURVEYS
 - 3.7.1 General
 - 3.7.2 Contractor Representative
 - 3.7.3 Survey Certification
 - 3.7.4 Positioning - Horizontal Location and Vertical/Tidal Determination
 - 3.7.4.1 Real Time Kinematic (RTK) GPS
 - 3.7.4.2 Kinematic Tidal Datum (KTD)
- 3.8 ENCOUNTER OF MUNITIONS AND EXPLOSIVES OF CONCERN (MEC) IN PROJECT AREA
 - 3.8.1 Munitions and Explosives of Concern (MEC)
 - 3.8.2 Procedure Upon MEC Encounter
 - 3.8.3 Formerly Used Defense Sites (FUDS)
- 3.9 INSPECTION
 - 3.9.1 Quality Assurance Representative (QAR)
 - 3.9.2 Failure to Comply
- 3.10 FINAL EXAMINATION AND ACCEPTANCE
 - 3.10.1 Final Examination of Work
 - 3.10.2 Bed Leveling
 - 3.10.3 Bed Leveling - Reporting and Documenting
 - 3.10.4 Final Acceptance
- 3.11 SHOALING
- 3.12 CONTINUITY OF WORK
- 3.13 NOISE CONTROL
- 3.14 GENERAL DREDGING SAFETY REQUIREMENTS
 - 3.14.1 Certification of Attendant and Auxiliary Plant
 - 3.14.2 Minimum Tow-Boat Requirements
- 3.15 CONSTRUCTION FORMS AND DETAILS

-- End of Section Table of Contents --

SECTION 35 20 23

DREDGING

PART 1 GENERAL

1.1 SCOPE

The work covered by this section consists of providing labor, materials, and equipment, and performing excavation and disposal of material as specified herein and indicated on the drawings. This scope also includes necessary measures for protection of the environment. Environmental protection requirements under this Contract are as important to overall completion of the work as other technical aspects. Failure to meet the requirements of these specifications for environmental protection may result in work stoppages or termination for default. No part of the time lost due to such work stoppages can be made the subject of claims for extensions of time or for excess costs or damages by the Contractor. If the Contractor fails or refuses to promptly repair any damage caused by violation of the provisions of these specifications, the Contracting Officer may have the necessary work performed and charge the cost thereof to the Contractor.

1.2 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN WOOD PROTECTION ASSOCIATION (AWPA)

AWPA C2	(2003) Lumber, Timber, Bridge Ties and Mine Ties - Preservative Treatment by Pressure Processes
AWPA M4	(2023) Standard for the Care of Preservative-Treated Wood Products

U.S. ARMY CORPS OF ENGINEERS (USACE)

EM 385-1-1	(2024) Safety and Occupational Health (SOH) Requirements
EM 1110-1-1000	(2015) Photogrammetric and LiDAR Mapping
EM 1110-1-1002	(2012) Survey Markers and Monumentations
EM 1110-1-1003	(2013) NAVSTAR Global Positioning System Surveying
EM 1110-1-1005	(2007) Control and Topographic Surveying
EM 1110-1-2909	(2012) Geospatial Data and Systems
EM 1110-2-1003	(2013) Hydrographic Surveying

ERDC/ITL TR-19-7

(2021) A/E/C CAD Standard - Release 6.1

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

33 CFR 81

72 COLREGS: Implementing Rules

33 CFR 84

Annex I: Positioning and Technical Details
of Lights and Shapes

33 CFR 89

Inland Navigation Rules: Implementing Rules

33 CFR 156.120

Requirements for transfer

FLORIDA BOARD OF PROFESSIONAL SURVEYORS AND MAPPERS (FBPSM)

FBPSM

Minimum Technical Standards, Chapters 177,
472, 61G17

Code of Federal Regulations (CFR) indicated herein may be found at
<https://www.govinfo.gov/app/collection/cfr>.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for information only. When used, a designation following the "G" designation identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Notice of Intent to Dredge

Relocation of Navigation Aids

Marine Survey Inspection Certificates

SD-02 Shop Drawings

Drag Bar

Acceptance Sections Plan; G, D0

Dredging and Disposal Plan; G, R0

SD-07 Certificates

Equipment and Performance Data

Historical Period Shipwreck Sites

Surveys

Daily Report of Operations

Misplaced Material

Declaration of Inspection

1.4 NOTICE OF INTENT TO DREDGE

Prior to commencement of work on this contract, notify the Commander, Seventh Coast Guard District of intended operations to dredge and request that it be published in the Local Notice to Mariners. This notification must be given in enough time so that it appears in the Notice to Mariners at least two weeks prior to the commencement of this dredging operation. Provide a copy of the notification to the Contracting Officer.

1.5 DREDGING RESTRICTIONS

1.5.1 Order of Work

The Order of Work for Base dredging will be directed insofar as practicable to provide for efficient operation of the dredging equipment. Dredging operations at piers and facilities may require moving a dredge outside of a security zone to work an adjacent area until the security zone becomes available to dredge again. Every effort will be made to keep the moves local so as not to require the relocation of the head section to the floating pipe. These moves are normally planned at least 24 hours ahead of time. The channel between station 40+500 of Range-G to station 44+250 of Range-H requires the most coordination due to the frequency and size of the security arcs. Orders to the Contractor's Representative at the site of the work will be in writing by the Contracting Officer.

1.5.2 Hopper Restriction

The use of hopper dredges is prohibited.

1.5.3 Rehandling Facility

Due to the environmental sensitivity of dredging in the Kings Bay and Cumberland Sound area, no material rehandling is or will be available. No agitation dredging is permitted.

1.6 SPECIAL INSTRUCTIONS

Dredging of insitu rock is not required; but if encountered, report the location and extent of any insitu rock above grade or required depth to the Contracting Officer. All anchors and wires need to be clear of the channel. In the past dredging projects, there were high spots encountered at several locations the dredge could not reach the required depth because they were hitting hard bottom. Those areas were near the non-open end of the Explosive Handling Wharf-2 at approximately station 41+300, at the edge of the security arc next to the Explosive Handling Wharf 1 (outside the finger pier) at approximately station 42+700, and at the North end of Refit Wharf-1 at approximately station 48+800. All debris encountered during the dredging process will become property of the Contractor and be removed and disposed in an offsite landfill selected by the Contractor and approved by the Contracting Officer.

1.7 DREDGING AND DISPOSAL PLAN

For Base work, submit a dredging and disposal plan 30 days prior to commencement of dredging, to be approved by the Contracting Officer prior to the commencement of dredging. For work required in options, submit a dredging and disposal plan 30 days prior to commencement of dredging, to be approved by the Contracting Officer prior to the commencement of

dredging. The dredging and disposal plan will include the dredging plant the Contractor intends to use on each bid item and a schedule indicating starting and completion dates for each dredging section. The Contractor's dredging and disposal plan, as well as operations plan, will ensure the following:

- a. Sufficient ponding depth within the disposal area(s) for proper effluent water quality.
- b. Dredge size and production rates suitable to the disposal area(s) size and proper effluent discharge rates.
- c. The dredging plan will also include (but is not limited to) the following:
 - (1) A description and schedule of all operations that will be performed in connection with the removal and transport of material. Describe the operations in the sequence in which they will be performed.
 - (2) A description of all plant (including names of dredges) and equipment that will be utilized in connection with the removal and transport material.
 - (3) Plant to be used in each section.
 - (4) A description of the plan of operation of the weir, including which weirs will be used during dredging operations.
- d. The operations plan must be approved prior to mobilization. Any operation plan modifications must be approved prior to implementation. The operations plan will be explicit and must include, but is not limited to the following:
 - (1) Shifts and crew sizes.
 - (2) Communications.
 - (3) Procedure for dredging the area within the EHWS. The operations will be described in the sequence in which they will be performed.
 - (4) How the depth and horizontal positioning of the dredge head will be monitored and how the depth measurement will be calibrated.

1.8 ORDER OF WORK

There is no order of work specified relative to performance of the dredging.

1.9 PUMPING OF BILGES

Contractors are warned that pumping oil or bilge water containing oil into navigable waters, or into areas which would permit the oil to flow into such waters, is prohibited by Section 13 of the River and Harbor Act of 1899, approved 3 March 1899 (30 Stat. 1152; 33 U.S.C. 407). Violation of this prohibition is subject to the penalties under the referenced Acts.

1.10 HISTORICAL PERIOD SHIPWRECK SITES

If any shipwreck, artifact, or other objects of antiquity that have scientific or historical value, or are of interest to the public, are discovered, located, and/or recovered, the Contractor acknowledges:

- a. The site(s), articles, or other materials are the property of the State of Georgia.
- b. To immediately notify the Contracting Officer.

1.11 UTILITY CROSSINGS

1.11.1 General

Investigate the location of utility crossings. Take precautions against damages which might result from operations in the vicinity of the utility crossings. Suspend dredging until the damage is repaired and approved by the Contracting Officer if damage occurs as a result of dredging operations. Costs of such repairs and downtime of the dredge and attendant plant is part of the Contract.

1.12 PERMITS

Refer to the Clause PERMITS AND RESPONSIBILITIES and the paragraph PERMITS AND AUTHORIZATIONS of Section 01 57 20 ENVIRONMENTAL PROTECTION.

1.13 FUEL OIL TRANSFER OPERATIONS

In accordance with U.S. Coast Guard regulations (33 CFR 156.120), couplings used in fuel oil transfer operations on any vessel with a capacity of 250 or more barrels of oil must be either a bolted or full-threaded connection; or a quick-connect coupling approved by the Commandant; or an automatic back-pressure shutoff nozzle used to fuel the vessel. Submit an executed fuel oil transfer (Declaration) form signed by the tanker operator to the Contracting Officer for each refueling operation. Notify the U.S. Coast Guard prior to any refueling. A copy of the Declaration of Inspection for Refueling is on the web site indicated in the paragraph CONSTRUCTION FORMS AND DETAILS.

1.14 SIGNAL LIGHTS

Display signal lights and conduct operations in accordance with the General Regulations of the Department of the Army and of the Coast Guard governing lights and day signals to be displayed by towing vessels with tows on which no signals can be displayed, vessels working on wrecks, dredges, and vessels engaged in laying cables or pipe or in submarine or bank protection operations, lights to be displayed on dredge pipe lines, and day signals to be displayed by vessels of more than 65 feet in length moored or anchored in a fairway or channel, and the passing by other vessels of floating plant working in navigable channels, as set forth in Commandant U.S. Coast Guard Instruction M16672.2, Navigation Rules: International-Inland (COMDTINST M16672.2), or 33 CFR 81 Appendix A (International) and 33 CFR 84 through 33 CFR 89 (Inland) as applicable.

1.15 NOTICE TO MARINERS -- DREDGING CONTRACTS

If objects are encountered on the channel bottom which could be a hazard to navigation during dredging operations, immediately notify the

Contracting Officer of the location of said object and provide other pertinent information necessary for the Contracting Officer to prepare and issue a Notice to Mariners.

1.16 FINAL CLEANUP

Final cleanup, as stated in the paragraph COMMENCEMENT, PROSECUTION, AND COMPLETION OF WORK, includes the removal of the Contractor's plant and equipment either for disposal or reuse. Dispose of plant, equipment, and materials in a manner and at locations approved by the Contracting Officer. Unless otherwise approved by the Contracting Officer, do not abandon equipment in the disposal area or other areas adjacent to the worksite. The Government considers failure to promptly remove plant, pipeline, equipment, and materials upon completion of the dredging a delay in the completion of the final cleanup and demobilization work. In such case, the Government will exercise its right as stated in Clause DEFAULT (FIXED-PRICE CONSTRUCTION) to remove plant, equipment, and materials at the Contractor's expense.

1.17 WORK VIOLATIONS

Work done in violation of these specifications or a verbal or written stop order of the Contracting Officer will be considered as unsatisfactory progress for purposes of progress payments in accordance with Clause PAYMENTS UNDER FIXED-PRICE CONSTRUCTION CONTRACTS.

1.18 EQUIPMENT AND PERFORMANCE DATA

If electronic positioning equipment is used, submit documentation of compliance with manufacturer recommendations for calibration to the Contracting Officer. Documentation may include a calibration report or some other documentation showing positioning equipment maintenance or verification results.

1.19 NATIONAL DREDGING QUALITY MANAGEMENT PROGRAM SYSTEM (DREDGES AND DUMP SCOWS)

1.19.1 System Requirements

See Section 35 20 27 NATIONAL DREDGING QUALITY MANAGEMENT PROGRAM - PIPELINE HYDRAULIC DREDGE. However, in the event of NDQMP System failure (not fully operational), notify the Contracting Officer. If the NDQMP System cannot be used within 48 hours of failure, cease all dredging operations for the vessel until the NDQMP System is fully operational. Delays resulting from NDQMP System failure will be at the Contractor's expense.

PART 2 PRODUCTS

2.1 WEIR RISER BOARDS

If Option A is awarded, supply additional Weir Riser Boards to augment the existing riser boards on site. The number of riser boards to be supplied will be determined by the Contracting Officer's Representative. The supplied riser boards will be made of No. 2 grade or better Southern Pine lumber to the following dimensions: 3 inches x 6 inches x 4.25 feet +/- 0.5 foot'. They will be pressure preservative treated with 2.5 lbs/cf CCA in accordance with AWPAC2. Field fit the riser boards and fit well with no binding or excessive looseness. All raw wood exposed by cutting the

riser boards to fit will receive field-applied preservative treatment in accordance with [AWPA M4](#).

PART 3 EXECUTION

3.1 DAILY REPORT OF OPERATIONS

Prepare in RMS and submit the [Daily Report of Operations](#), using either ENG Form No. 27A or ENG Form No. 4267, for each dredge and unloader working. Submit report daily and not in groups (groups = multi-days reports packaged together at one time).

3.2 NOTIFICATION OF COAST GUARD

3.2.1 [Relocation of Navigation Aids](#)

Navigation aids located within or near the areas required to be dredged will be relocated, if necessary, by the U.S. Coast Guard (USCG). Within 7 calendar days following receipt of Notice to Proceed, contact the USCG D7 Command Center via telephone at 305-415-6800, to acquire the appropriate USCG Sector ATON Officer contact information (name, number, and email). Notify the USCG Sector ATON Officer of plans to dredge adjacent to aids which require relocation. USCG requires 45 days notice prior to movement of ATONs to schedule buoys tender availability. Submit a formal written request to the USCG Sector ATON Officer within 3 calendar days after the telephone notification and provide a copy to the Contracting Officer. Do not remove, change the location of, obstruct, willfully damage, make fast to, or interfere with aid of navigation.

3.2.2 Dredging Aids

Obtain approval from the U.S. Coast Guard for buoys, dredging aid markers to be placed in the water, and dredging aid markers affixed with a light prior to the installation. Do not color or place dredging aid markers and lights in a manner that they will obstruct or be confused with navigation aids.

3.3 WORK AREA

Exclude the public from the work areas in the immediate vicinity of dredging, transporting, and disposal operations. Enforcement is part of the Contract and at no additional cost to the Government. Coordinate enforcement with local enforcement agencies and will be subject to approval of the Contracting Officer.

3.3.1 Access

Provide and maintain access for equipment and plant to and from the work site, mooring area, and disposal area. Ascertain the environmental conditions which can affect the access such as climate, winds, currents, waves, depths, shoaling, and scouring tendencies.

3.3.2 Protection of Existing Waterways

Conduct operations in such a manner that material or other debris are not pushed outside of dredging limits or otherwise deposited in existing side channels, basins, docking areas, or other areas being utilized by vessels. Change the method of operations as may be required to comply with the above requirements. Should any bottom material or other debris

be pushed into areas described above, as a result of the Contractor's operations, the same must be promptly removed by and at the expense of the Contractor to the satisfaction of the Contracting Officer.

3.3.3 Adjacent Property and Structures

Material is required to be removed adjacent to waterfront structures. Controlled dredging will be required in these areas to prevent damage to the structures. Assure that there is no dredging within 15 feet offset distance of any pier, dock faces, buoys and their chains, anchor chains, or other waterfront structures in order to prevent damage to fender pilings and any other part of these structures unless otherwise indicated on the drawings or directed by the Contracting Officer. However, there is no offset from the Drydock Caisson Gate Sill and Drydock Caisson Gate Mooring Facility as indicated on the drawings, unless otherwise directed by the Contracting Officer. Do not use wire rope on bollards and cleats. Use only manila or nylon line. Any damage to private or public property or structures resulting from the Contractor's negligence will result in suspension of dredging and require prompt repair at the Contractor's expense as a prerequisite to the resumption of dredging. The approximate location of the offset is indicated on the drawings. Verify the location of all structures prior to dredging, and adjust the dredging limits as necessary to ensure the offset distance.

3.3.3.1 Magnetic Silencing Facility (MSF)

The Magnetic Silencing Facility (MSF) slip has limited accessibility and accurate positioning will be required for dredging near the MSF slip. Expensive underwater sensors and bundled cables are located directly beneath and in the vicinity of the slip. No dredging is allowed within the Dredging Exclusion Zone shown on the drawings.

3.3.3.2 Explosive Handling Wharves (EHW)

EHW berthing areas are covered by buildings with a clear opening of approximately 86 feet 6 inches wide by 55 feet high at Mean High Water (MHW). Inside the EHW buildings, the vertical clearance is approximately 115 feet at MHW. There is a warping wharf between the two buildings approximately 1,000 feet long, along which dredging is required. Immediately make repairs to or replace and return to original condition all damaged lumber and concrete after completion of work within this area. It is possible that debris may be encountered within the limits of EHW Buildings #1 and #2. The debris could potentially consist of tools and other small items, steel cable, and sheeting material. See paragraph SPECIAL INSTRUCTIONS above.

3.3.3.3 Refit Wharves

The shoreline underneath the refit wharves has been riprapped. A riprap keyway was constructed at the toe of the slope as shown on the cross-sections of the drawings. Do not remove this riprap keyway. When working in this area, do not use wire rope on bollards and cleats. Use only manila or nylon line. Immediately make repairs to or replace and return to original condition all damaged lumber and concrete after completion of work within this area.

3.3.3.4 Drydock Caisson Gate Sill and Mooring Facility

The Drydock Caisson Gate Sill area is from the end of the navigation

channel (Range-I) to the steel caisson gate. The Drydock Caisson Gate Mooring Facility is adjacent to the caisson gate mooring dolphins and caisson gate. If a cutter suction dredge is to be used, remove the cutter head for the removal of the material from the concrete sill and mooring facility grillage without damaging the concrete sill and metal grillage. The dredging location at the Drydock Caisson Gate Sill and the Drydock Caisson Gate Mooring Facility is shown on the drawings or as directed by the Contracting Officer.

3.3.4 Subaqueous Cable Crossings

Verify the locations and depths of utility crossings and take precautions against damages which might result from the operations, especially the sinking of dredge spuds and anchors into the channel bottom, in the vicinity of utility crossings. If damage occurs as a result of the operations, suspend dredging until the damage is repaired and approved by the Contracting Officer. Costs of such repairs and downtime of the dredge and attendant plant is part of the Contract.

3.3.5 Port Operations Small Boat Basin

The Small Boat Basin area is located in Range-H. There is a T-shaped pier and other structures within this area therefore no dredging will be allowed within 15 feet of the structures. The northwest corner of the North side is truncated by 25 feet because of complications with the shore rip rap. Additionally, the landside edge of the south portion should have no dredging within 25 feet of the shore rip rap.

3.3.6 Port Security Barrier Mooring Area

Hurricane mooring anchors (ST-1 through ST-4) have been placed about 100 feet east of the Upper Turning Basin next to Big Crab Island in 13 to 30 feet of water. Use of these anchors by the Contractor is not permitted. These buoys are located within the Port Security Barrier Mooring Dredge Area. Buoys within the project area are fixed by a chain and driven plate anchors to the sea bed. With these conditions, the mooring buoys must be positioned during dredging activities where the material to be dredged can be collected sufficiently without impediment to the buoys and their chains as well as to the cutter head dredge equipment. This shall be accomplished by positioning the mooring buoys to allow for proper alignment of chain and other attaching components during dredging activities and assuring that there is no dredging within 15 feet of the buoys and their chain structures. See as-built records of the mooring anchors in Appendix E at the end of this section.

3.4 CHARACTER OF MATERIALS

- a. Materials to be removed under this Contract are described in the GEOTECHNICAL DATA REPORT as referred to in Section 01 11 00 SUMMARY OF WORK.
- b. Due to typical harbor activities, debris such as trash, rope, chain, cable, tires, miscellaneous scrap metal, woody debris, etc., may be encountered in the channel. Bring such materials to the surface and dispose of in a disposal area obtained by the Contractor in a manner approved by the Contracting Officer.

3.5 DISPOSAL OF EXCAVATED MATERIAL

3.5.1 General

Transport and deposit material excavated in the disposal areas designated on the drawings. The placement area for dredged material will be at Disposal Area 1 (D/A-1) and Disposal Area (D/A-2). The approximate maximum and average distances to which the material will have to be transported are as follows:

Disposal Area	Maximum Distance	Average Distanc
D/A-1	2.4 miles	1.8 miles
D/A-2	2.3 miles	1.5 miles

3.5.1.1 Disposal Area Details

Place dredged material in the D/A-1 and D/A-2 at the locations shown on the drawings and as indicated in Section 01 11 00 SUMMARY OF WORK.

3.5.2 Location of Pipeline Discharge Area

Place the pipeline discharge area at the location shown on the project drawings as agreed to by the Contracting Officer. Any deviation from the approximate pipeline discharge area shown on the drawings must be approved by the Contracting Officer prior to placement of the dredge pipe in the disposal area. The Contracting Officer may direct periodic movement of the pipeline discharge area as necessary to efficiently maintain the disposal area.

3.5.3 Maximum Height of Dredged Materials

Do not place dredged materials and/or water higher than 4 feet below the lowest point on the dike crest. Constantly monitor the water height while pumping to ensure that this clearance is maintained. Materials deposited in the disposal area above the maximum height or outside the disposal area will result in suspension of dredging operations and require the removal of such materials as a prerequisite to the resumption of dredging.

3.5.4 Upland Disposal Area Management

Operate, maintain and monitor continuously the disposal area in use. Make necessary minor repairs to the weirs and outfall pipes in order to contain the dredged material and maintain water quality of the effluent. Patrol, maintain and repair any damage to existing weirs and outfall pipes under the dikes. The Contractor is required to provide a vehicle capable of transporting the dike surveillance crews during disposal area operations. Vehicle access must be provided along the top of all of the dikes at all times. Adequately ramp all pipelines over to provide crossover access. Any damage caused to the dike and erosion control systems by the Contractor will be repaired at the expense of the Contractor.

3.5.4.1 Exterior Disposal Area Drainage

Do not block or impair drainage of areas adjacent to the diked disposal area in any manner by the Contractor's operations. Excavate and maintain ditches necessary to prevent blocking or impairing drainage. The ditches

will be of adequate number and size to eliminate all blockage or impairment of drainage adjacent to the diked disposal area.

3.5.4.2 Operation of Weirs

Weir riser boards are stored in an on base facility outside the waterfront restricted area. Coordinate with the Contracting Officer to obtain access to these boards to operate disposal facilities. Return any boards not required to be left in the weir stacks to the same storage location upon completion of work. Additional weir boards may be required to fully execute the work under this contract. Return any additional boards provided, that are not required to be left in the weir stacks, to the same location upon completion of work.

Use reasonable care in the use of the disposal area, and for the operation and control of the weirs. From commencement of dredging, the operation of the weir system needs to be managed to minimize the return of suspended solids and associated turbidity to the receiving water body to meet contract and permit requirements. Monitor and manage, with oversight provided by the Contractor's quality control manager and the Corps' quality assurance representative, the dredge output and the weirs to control water elevation, ponding depth, dredge inflow rate, and other parameters to maintain effluent discharge from the DMMA at or below required turbidity standards. Adjust weir crest elevations to facilitate drainage while maintaining proper turbidity levels in the effluent. Remove weir riser boards one row at a time, ensuring the water level is no more than one inch above the crest before removing the next row. The drainage effluent must comply with Section 01 57 20 ENVIRONMENTAL PROTECTION. Manage flows so that all release of effluent can be stopped if required by the Contracting Officer. Correct any damage caused by the Contractor's operations to disposal area outfalls, riprap and erosion control works must be repaired.

3.5.5 Placing of Dredged Material

During placement of dredged material in the designated disposal areas, the Contractor will be required to provide constant radio contact between the dredge and the disposal areas and conduct a minimum of two inspections per day of pipeline and dike. Additionally, place a fill crew member at the discharge end of the disposal pipeline. The fill crew member will be present at all times during discharge operations and maintain radio communication between the dredge and the disposal operation. This will enable the Contractor's personnel at the disposal areas to immediately notify the dredge in the event of dike or pipeline failure. In the event of dike or pipeline failure, the dredging operations will be immediately suspended and require prompt repair of the dike or pipeline as a prerequisite to the resumption of dredging. Do not resume dredging until the necessary dike repair or pipeline repairs have been completed. Inform the Contracting Officer daily of conditions of any problems associated with the dikes, pipeline, and disposal area discharge. Inform the Contracting Officer at what time the problems were found and time when action was taken to correct the problems. Plant down time to meet the water quality standards or to make dike or pipeline repairs will be at no added cost to the Government or a basis for time extension.

3.5.6 Dredge Pipelines

3.5.6.1 Dredge Discharge Pipeline

Plainly mark the pipeline access routes with conspicuous stakes, targets and/or buoys to be maintained throughout the contract operations. Maintain a tight dredge discharge pipeline to prevent spilling of dredged material or dredge water outside of the disposal area. Provide and maintain radio communication between the dredge and the disposal areas and the dredge and the Contracting Officer. Inspect the pipeline at least twice daily for leaks. Failure to immediately repair leaks in the discharge pipeline will result in suspension of dredging operations and require prompt repair of pipeline as a prerequisite to the resumption of dredging. Repair any damage to private or public property resulting from the Contractor's operations at the Contractor's expense.

3.5.6.1.1 Existing Dredge Pipe Installed by the Navy

The Navy has constructed a segment of permanent pipeline into Disposal Area 2 (D/A-2) as shown on the drawings. Connect to the end structures of this pipeline at the approximate locations shown on the drawings. The exact location of the end structures will be shown to the Contractor in the field by the Contracting Officer. Prior to connecting to the end structures, coordinate the work with base security through the Contracting Officer.

The type of pipe the Contractor shall connect to is 24-inch Ductile Iron Pipe Size (DIPS) Polyethylene (PE) 4710 material with a Dimension Ratio (DR) of 11, pressure rating of 200 psi, and a weight of 75.78 pounds per foot. The average Outside Diameter (OD) is 25.80 inches and the Inside Diameter (ID) is 20.829 inches. The minimum wall thickness is 2.345 inches. See the pipe connection information appended after the end of this section (Appendix A). A copy of the hydrostatic pressure testing of the dredge pipeline are also included in Appendix B. The pre-flanged pipeline at D/A-2 to extend to the designated pipeline discharge areas will be located at the site. Provide flange fasteners for connecting these sections.

3.5.6.1.2 Existing Dredge Pipe Isolation Box

Install the spool pieces supplied by the Navy in the isolation box. Supply flange gaskets and fasteners. Prior to installing the spool pieces, coordinate the work with base security through the Contracting Officer.

3.5.6.2 Submerged Pipeline

In the event the Contractor elects to submerge the pipeline, rest the pipeline on the bottom, and the top of the submerged pipeline and any anchor securing the submerged pipeline cannot be higher than the required project depth for the channel in which the submerged pipeline is placed. If a pipeline material which is buoyant or semi-buoyant, such as PVC pipe or similar low-density materials is used, securely anchor the pipeline to prevent the pipeline from lifting off the bottom under any conditions. Conduct daily inspections of the submerged pipeline to ensure buoyancy has not loosened the anchors. Remove all anchors when the submerged pipeline is removed. Mark the location of the entire length of submerged pipeline with signs, buoys, lights, and flags conforming to U.S. Coast Guard regulations.

3.5.6.3 Floating Pipeline

Should the Contractor's pipeline not rest on the bottom, it will be considered a floating pipeline and will be visible on the surface and clearly marked. In no case will the Contractor's pipeline be allowed to fluctuate between the surface and the bottom or lie partly submerged. Install lights on the floating pipeline as required in paragraph SIGNAL LIGHTS above. Support the lights either by buoys or by temporary piling, provided by the Contractor and approved by the Contracting Officer. Where the pipeline does not cross a navigable channel, space the flashing yellow all-around lights not over 200 feet apart, unless closer spacing is required by U.S. Coast Guard personnel, in which case the requirements of the U.S. Coast Guard will govern, at no additional cost to the Government.

3.5.7 Booster Pumps

Install booster pumps at least 300 feet from any residential-type building or house. Provide booster pumps, their prime movers, and any auxiliary equipment fitted or equipped with mufflers, noise control enclosures, or other engineering noise control methods, measures, and features such that steady noise emanating from this equipment does not exceed 85 decibels on the A scale at slow response, and impulsive noise does not exceed 140 decibels. Maintain such items throughout the course of the work.

3.5.8 Misplaced Material

Materials deposited outside of the designated disposal area(s) will be classified as misplaced material and will result in a suspension of dredging operations. Redredging of such materials will be required as a prerequisite to the resumption of dredging unless the Contracting Officer, at their discretion, determines that redredging of such material is not practical. If redredging of such material is not required, then the quantity of such misplaced material will be deducted from the Contractor's pay quantity.

3.6 REQUIRED DEPTH, ALLOWABLE OVERDEPTH, AND SIDE SLOPES

3.6.1 Acceptance Sections

For purposes of payment, divide the work to be done into acceptance sections. Prior to dredging, prepare and provide a proposed [Acceptance Sections Plan](#) for approval by the Contracting Officer. Generally, divide the work into areas that equate to approximately 30 days of dredging or that constitute separable or definable features of work.

3.6.2 Required Depth

The material actually removed from the designated areas to be dredged, to a depth of not more than the required depth shown on the drawings, will be estimated and paid for in accordance with the provisions contained in the subparagraphs EXCAVATION, UNCLASSIFIED of Section [01 20 00](#) PRICE AND PAYMENT PROCEDURES.

3.6.3 Allowable Overdepth

To cover the inaccuracies of the dredging process, material actually removed from the designated areas to be dredged, to a depth below the required depth of not more than the allowable overdepth shown on the drawings, will be measured and paid for in accordance with the provisions

contained in the subparagraph EXCAVATION UNCLASSIFIED of Section 01 20 00 PRICE AND PAYMENT PROCEDURES.

3.6.4 Side Slopes

Although dredging of side slope material may be required to provide the required project channel dimensions (depth and width), the side slopes shown on the drawings are provided for payment purposes only. Side slopes may be formed by box cutting, step cutting, or dredging along the side slope. Material actually removed, within the limits approved by the Contracting Officer, to provide for final side slopes not flatter than that shown on the contract drawings, but not in excess of the amount originally lying above this limiting side slope, will be measured and paid for in accordance with the provisions contained in subparagraphs EXCAVATION UNCLASSIFIED of Section 01 20 00 PRICE AND PAYMENT PROCEDURES. Such amount will be estimated and paid for whether dredged in original position or by box cut dredging whereby a space is dredged below the allowable side slope plane on the bottom of the slope for upslope material capable of falling into the cut. End slopes and transition slopes will not be estimated or paid for under this contract. In such cases, a 0 horizontal on 1 vertical will be used with no upslope allowance provision applied outside the required prism.

3.6.5 Excessive Dredging

It is recognized that the limits of dredging need to extend beyond the pay prism in order to remove material from within the pay prism. Therefore, the limits of active dredging may exceed the limits of the pay prism in vertical dimension as well as horizontal dimension to the extent required to remove material from the pay prism. Indirect impacts (sideslope sloughing, etc.) may extend even beyond the limits of active dredging. Nevertheless, material taken from beyond the limits of the pay prism as described in subparagraphs ALLOWABLE OVERDEPTH and SIDE SLOPES above will be deducted from the total amount dredged as excessive overdepth dredging, or excessive sideslope dredging, for which payment will not be made. Nothing herein will be construed to prevent payment for the removal of shoals performed in accordance with the applicable provisions of the paragraphs FINAL EXAMINATION AND ACCEPTANCE or SHOALING of this Section.

3.6.6 Areas to be Dredged

Based on information currently available to the Government, areas known to require dredging are depicted on the drawings as shaded areas. The actual areas to be dredged may vary from the shaded areas shown in the drawings. In order to provide the required project dimensions within and throughout the project limits shown on the drawings, remove material located within the project limits as directed by the Contracting Officer, regardless of whether the material is in a shaded area or not. Payment for all dredged material dredged from a shaded area will be made at the applicable contract unit price. Payment for all material dredged from a non-shaded area may be made at the applicable contract unit price; however, the Contractor may request an adjustment to the contract unit price in accordance with DFAR Clause 252.243-7002 REQUESTS FOR EQUITABLE ADJUSTMENT and/or FAR Clause 52.243-4 CHANGES.

3.7 SURVEYS

3.7.1 General

Provide 10 days advance notice, in writing, to the Contracting Officer of the need for a pre-dredging survey or after-dredging survey for final acceptance for each acceptance section. Surveys will be performed in accordance with the paragraph QUANTITY SURVEYS; paragraph LAYOUT OF WORK of Section 01 11 00 SUMMARY OF WORK; Section 01 45 05 DREDGING/BEACH FILL PLACEMENT - QUALITY CONTROL; EM 1110-1-1000, EM 1110-1-1002, EM 1110-1-1003, EM 1110-1-1005, EM 1110-1-2909, and EM 1110-2-1003; FBPSM; and, ERDC/ITL TR-19-7. A copy of the EM's can be downloaded from the following web site:
<http://www.publications.usace.army.mil/USACEPublications/EngineerManuals.aspx>.
A copy of the ERDC/ITL TR-19-7 can be downloaded from the following web site: <https://cadbimcenter.erd.dren.mil/default.aspx?p=a&t=1&i=2>.

3.7.2 Contractor Representative

The Government will provide notification when soundings and sweepings are conducted and will be offered the opportunity to be on board the Government survey vessel, but may decline the offer. In-place measurement surveys and final acceptance sweep surveys will be performed by the Government. The Contractor's representative must be fully knowledgeable in offshore construction subsurface surveying procedures, techniques, equipment, and horizontal and vertical calibration methods, and state-of-the-art horizontal and vertical accuracy limitations. The Contractor's representative may observe and review, in progress, the adequacy and accuracy of the survey for in-place payment purposes, and for the potential existence of collusion, fraud, or obvious error in the data.

3.7.3 Survey Certification

- a. Immediately upon completion of any survey, the Contractor's representative, based on their on-site review of the survey execution, determine that the survey contains no evidence of collusion, fraud, obvious error, and that subsequent horizontal and vertical corrections are accurately annotated on the subsurface record.
- b. The Contractor's authorized representative must bring aboard the survey vessel a blank copy of the Certification Statement and attest to an acceptable survey by signing the Certification Statement before leaving the vessel. Sample copy of the Certification Statement is on the web site indicated in paragraph CONSTRUCTION FORMS AND DETAILS below.
- c. If the Contractor's authorized representative observes (and quantifies) specific documentary evidence of either fraud, collusion, or obvious error, the survey will be immediately rerun. Resurveys will totally supersede any previously run survey and will be run over the full reach of any Acceptance Section.
- d. If acceptability is not acquired after performing one resurvey of an Acceptance Section, a meeting will be held between the Contractor and the Contracting Officer to expeditiously resolve the issue causing rejection of the survey. Contractor equipment and personnel standby time to resolve acceptability of the survey will be at the Contractor's expense.

- e. In no case will a previously unacceptable survey be later judged acceptable by the Contractor; unless such a reassessment/reevaluation is performed within 24 hours after the original survey, and prior to initiating any resurvey action based upon identifiable collusion, fraud, or obvious error.
- f. Should the Contractor or their authorized representative refuse to certify to the acceptability of a survey for contract payment without identifiable collusion, fraud, or obvious error, then the following actions will follow:
 - (1) Preconstruction (pre-dredging) Survey: Do not commence excavation until representatives of the Contractor and Contracting Officer have met and resolved the basis for refusal of certification. Should the Contractor commence excavation prior to obtaining an acceptable survey, the Contractor will be liable for any excavation performed. If a resurvey is performed, and accepted, prior excavation will not be measured, estimated, or paid for.
 - (2) Post-Construction (after-dredging) Survey: The 2-week survey window allowed under subparagraph EXCAVATION, UNCLASSIFIED of Section 01 20 00 PRICE AND PAYMENT PROCEDURES will be indefinitely extended until a final survey is accepted. Any material accretion which might occur due to such a time extension will neither be measured, estimated, or paid for.
 - (3) Refusal to Certify: Contractor equipment and personnel standby time to resolve refusal to certify to the acceptability of a survey when there is no identifiable collusion, fraud, or obvious error will be at the Contractor's expense and resultant delays will not be the basis for time extensions of the contract.
- g. Intermediate surveys taken between the pre-dredging and post-dredging surveys will not be considered for the purposes of determining quantities for final payment and acceptance of the area dredged.

3.7.4 Positioning - Horizontal Location and Vertical/Tidal Determination

3.7.4.1 Real Time Kinematic (RTK) GPS

The Government will use RTK GPS for horizontal positioning and the determination of Real Time water levels (tide corrections) for measurement and payment purposes. All data will be collected relative to the mapping datums and horizontal coordinate system(s) as noted within the survey notes on the accompanying plan sheets. All surveying and mapping will be exclusively tied, either by occupation or calibration, to the Project Survey Control Points as identified by tabulation and called for by individual survey notes on the plan sheets. The Kinematic Tidal Datum (KTD) model file (next section) employed for the design surveys/site investigations contributing to the design of this project will be the sole method to relate GPS surveyed heights (NAVD88) to the chart datum, be it Mean Lower Low Water (MLLW) or pool datum. The Contractor is responsible for providing all applicable RTK equipment for their surveying and dredging operations.

3.7.4.2 Kinematic Tidal Datum (KTD)

A file listing the separations between the North American Vertical Datum

of 1988 (NAVD88) and the Chart Datum (MLLW or Pool) will be provided to the Contractor for entry into the hydrographic survey software. Obtain the Kinematic Tidal Datum file from the Contracting Officer prior to commencing surveying and dredging operations.

3.8 ENCOUNTER OF MUNITIONS AND EXPLOSIVES OF CONCERN (MEC) IN PROJECT AREA

See the "Naval Submarine Base Kings Bay, Probability Assessment for Munitions and Explosives of Concern, Camden County, GA" in Appendix D after the end of this section.

3.8.1 Munitions and Explosives of Concern (MEC)

Munition and Explosives of Concern (MEC) are military munitions that may pose unique explosives safety risks and include Unexploded Ordnance (UXO), Discarded Military Munitions (DMM), and Munitions Constituents (MC) present in high enough concentrations to pose an explosive hazard.

3.8.2 Procedure Upon MEC Encounter

Use due caution when working in coastal areas. In the event a suspect MEC is encountered, follow the 3Rs of explosive safety: Recognize, Retreat, Report. Recognize that munitions are dangerous; Retreat - do not approach, touch, move or disturb it, but carefully leave the area; and Report immediately what you saw and where you saw it to local law enforcement - call 911 and then inform the Contracting Officer. Cease all work efforts until the suspect MEC has been evaluated by emergency response personnel. In the event that the suspect MEC is positively identified as MEC, cease further work efforts until a new MEC probability assessment has been conducted.

3.8.3 Formerly Used Defense Sites (FUDS)

More information on the FUDS program and sites throughout Georgia and NorthFlorida can be found at the below web address.
<https://www.usace.army.mil/Missions/Environmental/Formerly-Used-Defense-Sites/FUDS-GIS>
FUDS are not the only source of MEC along the coast. MEC may be found along the entire coastline, both on land and in State and Federal waters. The militaries of the U.S. and other countries have conducted live-fire training and combat operations at sea for centuries, and commonly disposed of excess, obsolete, and unserviceable munitions in coastal waters.

3.9 INSPECTION

3.9.1 Quality Assurance Representative (QAR)

The QAR will be notified prior to the establishment of horizontal control work (baseline layout, ranges, station flags, shore-based control for EPS/RPS, etc.) and vertical control work (tide staff(s), upland cross sections, construction elevations top/invert, maximum/minimum elevations of dredged materials within disposal area(s), etc.), but the presence or absence of the QAR will not relieve the Contractor of their responsibility for proper execution of the work in accordance with the specifications. The Contractor will be required:

- a. To furnish, on the request of the Contracting Officer or any QAR, the use of such boats, boatmen, laborers, and material forming a part of the ordinary and usual equipment and crew of the dredging plant as may be reasonably required in inspecting and supervising the work.

- b. To furnish, on the request of the Contracting Officer or any QAR, suitable transportation from all points on shore designated by the Contracting Officer to and from the various pieces of plant, and to and from the disposal area.

3.9.2 Failure to Comply

In conjunction with the Clause INSPECTION OF CONSTRUCTION, should the Contractor refuse, neglect, or delay compliance with these requirements, the specific facilities may be furnished and maintained by the Contracting Officer and the cost thereof will be deducted from any amounts due or to become due the Contractor.

3.10 FINAL EXAMINATION AND ACCEPTANCE

3.10.1 Final Examination of Work

As soon as practicable and no later than two weeks after the completion of the entire work or any section thereof (if the work is divided into sections) as in the opinion of the Contracting Officer will not be subject to damage by further operations under the contract, such work will be thoroughly examined at the cost and expense of the Government by sounding or by sweeping, or both, as determined by the Contracting Officer. Should any shoals, lumps, or other lack of contract depth be disclosed by this examination, the Contractor will be required to remove the same by dragging the bottom in accordance with the subparagraph BED LEVELING below or by dredging at the contract rate of dredging.

The Contractor or authorized representative will be notified when soundings and/or sweepings are to be made and will be permitted to accompany the survey party, but may decline. When the area is found to be in a satisfactory condition, it will be accepted finally. Should more than two sounding or sweeping operations by the Government over an area be necessary by reason of work for the removal of shoals disclosed at a prior sounding or sweeping, the cost of such third and any subsequent soundings or sweeping operations will be charged against the Contractor at the rate of \$11,600 for each day in which the Government plant is engaged in sounding or sweeping and/or is in route to or from the site or held at or near the said site for such operation.

3.10.2 Bed Leveling

Bed leveling by dragging the bottom with a drag bar or other apparatus will be allowed only in the designated dredging areas shown on the drawings. Dragging in areas outside of the designated dredging areas shown on the drawings is specifically prohibited without written approval of the Contracting Officer. Submit drawings and one photograph showing [drag bar](#) equipment used for final leveling work. See Appendix C after the end of this section.

3.10.3 Bed Leveling - Reporting and Documenting

Fully document all bed leveling activity including date and time for initiation and completion of bed leveling in the Contractor's Quality Control Report (QCR).

3.10.4 Final Acceptance

Final acceptance of the whole or a part of the work and the deductions or corrections of deductions made thereon will not be reopened after having once been made, except on evidence of collusion, fraud or obvious error, and the acceptance of a completed section will not change the time of payment of the retained percentages of the whole or any part of the work.

3.11 SHOALING

If, before the Contract is completed, shoaling occurs in any section previously accepted, including shoaling in the finished channel because of the natural lowering of the side slopes, redredging at contract price, within the limits of available funds may be done if agreeable to both the Contractor and the Contracting Officer.

3.12 CONTINUITY OF WORK

Full payment for, and formal acceptance of acceptance sections, will not be rendered until the acceptance section is excavated to the full depth and extent required by this contract, except by decision of the Contracting Officer. The Contracting Officer reserves the right to withhold the invoiced amounts necessary to protect the Government's interests until acceptance of an acceptance section is achieved.

3.13 NOISE CONTROL

Equip all hauling and excavating equipment and dredge/barges, boats, and tugs used on this work with satisfactory mufflers or other noise abatement devices. Conduct the operations to comply with all Federal, State and local laws pertaining to noise. Limit the use of horns and whistle signals to the minimum necessary in order to ensure as quiet an operation as possible.

3.14 GENERAL DREDGING SAFETY REQUIREMENTS

3.14.1 Certification of Attendant and Auxiliary Plant

In addition to the requirements of [EM 385-1-1](#), all supporting floating plant for dredging operations (to include, but not limited to, anchor barges, deck barges, deck/work barges, tug boats, tenders, workboats, pump-out barges, derrick barges, and spider barges) must have a current marine survey inspection certificate. The only exceptions to this requirement include pipeline support pontoons or floats and outboard skiffs under 16 feet in length. The certification must be issued by a licensed and accredited marine surveyor within the previous 12 months. The marine surveyor must be accredited by either the National Association of Marine Surveyors or the Society of Accredited Marine Surveyors. No attendant plant that does not have a valid certification will be used on this Contract. The certifications and inspection must be appropriate for the intended use of the plant in all locations specified in this Contract. Prior to commencement of work, submit [marine survey inspection certificates](#) of all floating plant and equipment.

3.14.2 Minimum Tow-Boat Requirements

In addition to the requirements of [EM 385-1-1](#), when dredging with non-self-propelled dredges seaward of the CRL-L or CRL-C, provide the following.

- a. One primary towboat of adequate size and horsepower to move all attendant and support plant against prevailing tides, currents, and winds during normal and severe weather conditions. Always make the towboat available within the project work area.
- b. A towboat(s) of adequate size and horsepower to move the dredge(s) against prevailing tides, currents, and winds during normal and severe weather conditions must be able to mobilize to the work site, and move the dredge(s) to safe harbor with 4 to 6 hours of first notification.

3.15 CONSTRUCTION FORMS AND DETAILS



See the CONSTRUCTION FORMS & DETAILS module at the following web address:
<https://www.saj.usace.army.mil/About/Divisions-Offices/Engineering/Design-Branch/Specifications-Section/>

-- End of Section --

INDEPENDENT PIPE PRODUCTS



"BETTER BY DESIGN"®



DIPS Flange Adapters

Ductile Iron Pipe Sizes

Pressure Rated for DR Ordered

(Dimensions in Inches)

Nominal Size	H (OAL)	T	Face Diameter	R (Radius)	Style	DR	Weight (lbs)
3"	6.0	0.45	5.000	7/16	A	11-32.5	2
4"	6.0	0.55	6.625	7/16	A	11-32.5	3
6"	8.0	0.78	8.625	7/16	A	11-32.5	4
8"	9.0	1.03	10.750	7/16	A	11-32.5	6
10"	9.0	1.26	12.750	7/16	A	11-32.5	10
12"	11.0	1.50	15.000	7/16	A	11-32.5	17
14"	11.0	1.74	17.500	7/16	A	11-32.5	28
16"	12.0	1.60	20.000	7/16	A	11-32.5	35
18"	12.0	2.22	21.500	7/16	A	11-32.5	46
20"	12.0	2.46	23.600	7/16	A	11-32.5	55
24"	14.0	2.93	27.800	7/16	A	11-32.5	81
30"	14.0	3.64	34.300	7/16	A	11-32.5	114

Other sizes, styles, and DR's not listed are available - Call For Quick Quote

Sizes 24" and smaller meet AWWA C906 fitting requirements, sizes 26" and larger are quoted per fitting.


25

INDEPENDENT PIPE PRODUCTS



"BETTER BY DESIGN"®

DIPS Ductile Iron Back-Up Rings Ductile Iron Pipe Sizes (Dimensions in Inches)

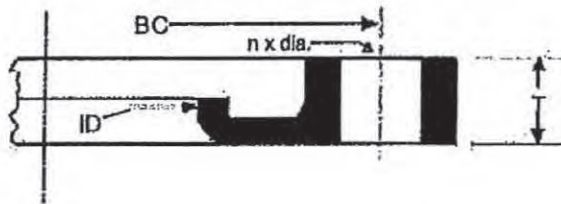

For other pressure ratings, stainless steel,
or epoxy coated - Call For Quick Quote

Nominal Size	OD	ID	BC	# dia x holes	T	WPR (psi)	Weight (lbs)
4"	9.00	4.90	7.50	8 x 3/4	0.94	267	5
6"	11.00	7.00	9.50	8 x 7/8	1.00	267	7
8"	13.50	9.13	11.75	8 x 7/8	1.12	267	11
10"	16.00	11.25	14.25	12 x 1	1.19	267	15
12"	19.00	13.37	17.00	12 x 1	1.50	267	25
14"	21.00	15.48	18.75	12 x 1-1/8	1.63	267	36
16"	23.50	17.59	21.25	16 x 1-1/8	1.88	267	48
18"	26.00	19.70	22.75	16 x 1-1/4	1.75	200	48
20"	27.50	21.85	25.00	20 x 1-1/4	2.06	200	61
24"	32.00	26.05	29.50	20 x 1-3/8	2.13	200	91
30"	38.75	32.25	36.00	28 x 1-3/8	2.65	128	145

WPR (working pressure rating) is for free-floating rings on HDPE flange adapters and includes a 2:1 safety factor. These are cast convoluted ductile-iron metal back up rings with 150# bolt-hole pattern; coated w/Blue-Oxide primer; the material is in compliance with ASTM A536 GR 65/45/12.

The sealing-face surface area of "DIPS" flange adapters is less than "IPS" flange adapters. While "IPS" flanges seldom use gaskets, a higher level of performance is being required from the "DIPS" flanges. Independent Pipe Product flanges are designed with a thicker flange face to compensate; but GASKETS are strongly recommended for long-term, leakproof service. (See the GASKET page of this section)

INDEPENDENT PIPE PRODUCTS




"BETTER BY DESIGN"®

IPS and DIPS "Full-Face" Gaskets for Flange Adapters

(For Potable-Water, Fire-Water, and Sewer Force-Main Pipelines)

Note: Larger sizes are
multiple piece

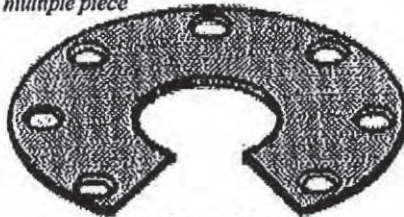

Full Face Gasket

Good capable gaskets are required on DIPS HDPE flanges and on IPS HDPE flanges bolted to other pipe materials. IPS PE to PE flange sets may or may not require gaskets depending on the operating pressure and diameter. Lower pressure PE to PE flanges have sealed well without gaskets; however, today's higher working-pressure-ratings on large diameter IPS pipe flanges need gaskets to provide the best long-term seal. These gaskets work best at 1/16" thick. The "Full-Face" design gives the best opportunity to hold, seat and seal the flange.

Nominal Size	OD	BC	# dia x holes holes	Garlock # 3000	Klinger # C-4401
2"	6.00	4.75	4 x 3/4	--Call For Quote--	
3"	7.60	6.00	4 x 3/4		
4"	9.00	7.50	8 x 3/4		
6"	11.00	9.50	8 x 7/8		
8"	13.50	11.75	8 x 7/8		
10"	16.00	14.25	12 x 1		
12"	19.00	17.00	12 x 1		
14"	21.00	18.75	12 x 1-1/8		
16"	23.50	21.25	16 x 1-1/8		
18"	25.00	22.75	16 x 1-1/4		
20"	27.50	25.00	20 x 1-1/4		
22"	29.50	27.25	20 x 1-3/8		
24"	32.00	29.50	20 x 1-3/8		
26"	34.25	31.75	24 x 1-3/8		
28"	36.50	34.00	28 x 1-3/8		
30"	38.75	36.00	28 x 1-3/8		
32"	41.75	38.50	28 x 1-5/8		
34"	43.75	40.50	32 x 1-5/8		
36"	46.00	42.75	32 x 1-5/8		
42"	53.00	49.50	36 x 1-5/8		
48"	59.50	56.00	44 x 1-5/8		
64"	66.25	62.75	44 x 1-7/8	--Call For Quote--	

Due to gaskets being cut per
order, gaskets are priced
per each inquiry.

These gaskets are cut per order. No "returns" or cancellations accepted once the gaskets are cut.
(FOB Grand Prairie, TX)

Call Toll FREE (800) 499-6927

Page 2 - 10

Fax (800) 499-7124

Issued January 1, 2005

SECTION 35 20 23 APPENDIX A PAGE 3

Version 1.3.1


SD03

2.2.1

INDEPENDENT PIPE PRODUCTS



"BETTER BY DESIGN"®



High Pressure Steel Blind Flanges IPS and DIPS AWWA C207 Class D

(Dimensions In Inches)

Nominal Size	OD	BC	# dia x holes holes	T	WPR (psi)	Weight (lbs)
2"	6.00	4.75	4 x 3/4	0.625	175	5
3"	7.50	6.00	4 x 3/4	0.625	175	8
4"	9.00	7.50	8 x 3/4	0.625	175	12
6"	11.00	9.50	8 x 7/8	0.688	175	18
8"	13.50	11.75	8 x 7/8	0.688	175	27
10"	16.00	14.25	12 x 1	0.688	175	38
12"	19.00	17.00	12 x 1	0.812	175	63
14"	21.00	18.75	12 x 1-1/8	0.938	150	89
16"	23.50	21.25	16 x 1-1/8	1.000	150	118
18"	25.00	22.75	16 x 1-1/4	1.062	150	140
20"	27.50	25.00	20 x 1-1/4	1.125	150	181
22"	29.50	27.25	20 x 1-3/8	1.188	150	213
24"	32.00	29.50	20 x 1-3/8	1.250	150	275
30"	38.75	36.00	28 x 1-3/8	1.375	150	444
36"	46.00	42.75	32 x 1-5/8	1.625	150	735
42"	53.00	49.50	36 x 1-5/8	1.750	150	1085
48"	59.50	56.00	44 x 1-5/8	1.750	150	1369

For other sizes not listed or pressure ratings, call for a Quick-Quote.

Description: An AWWA C207 cross-section, A36 steel plate, with Red-Oxide primer, to match ANSI B16.5 150# bolt-hole pattern.



Ductile Iron Pipe Size (DIPS) and Dimension Data

DriscoPlex® Pipe for Municipal Applications

PE4710 (PE3408)

Pressure Ratings are calculated using 0.63 design factor for HDS at 73°F as listed in PPI TR-4 for PE 4710 materials. HDPE can accommodate up to 1.5 times the pipe pressure rating for a recurring surge and up to 2.0 times the pipe pressure rating for an occasional surge. Temperature, Chemical, and Environmental use considerations may require use of additional design factors.

Pressure Rating		335 psi DR 7.0			200 psi DR 9.0			160 psi DR 13.5		
Nominal Pipe Size	DIPS OD (in)	Minimum Wall (in)	Average ID (in)	Weight (lbs/ft)	Minimum Wall (in)	Average ID (in)	Weight (lbs/ft)	Minimum Wall (in)	Average ID (in)	Weight (lbs/ft)
4"	4.800	0.686	3.346	3.87	0.533	3.670	3.13	0.436	3.876	2.62
6"	6.900	0.986	4.810	8.00	0.767	5.274	6.47	0.627	5.571	5.42
8"	9.050	1.293	6.309	13.76	1.006	6.917	11.13	0.823	7.305	9.32
10"	11.100	1.586	7.738	20.70	1.233	8.486	16.74	1.009	8.961	14.03
12"	13.200	1.886	9.202	29.27	1.467	10.090	23.67	1.200	10.656	19.84
14"	15.300	2.186	10.666	39.33	1.700	11.696	31.80	1.391	12.351	26.65
16"	17.400	2.486	12.130	50.87	1.933	13.302	41.13	1.582	14.046	34.47
18"	19.500	2.786	13.594	63.89	2.167	14.906	51.66	1.773	15.741	43.29
20"	21.600				2.400	16.512	63.38	1.964	17.436	53.12
24"	25.800				2.867	19.722	90.43	2.345	20.829	75.78
30"	32.000							2.909	25.833	116.58
36"	38.300							3.482	30.918	167.01
42"	44.500									

Pressure Rating		125 psi DR 17.0			100 psi DR 21.0			80 psi DR 26.0			63 psi DR 32.5		
Nominal Pipe Size	DIPS OD (in)	Minimum Wall (in)	Average ID (in)	Weight (lbs/ft)	Minimum Wall (in)	Average ID (in)	Weight (lbs/ft)	Minimum Wall (in)	Average ID (in)	Weight (lbs/ft)	Minimum Wall (in)	Average ID (in)	Weight (lbs/ft)
4"	4.800	0.282	4.202	1.76	0.229	4.315	1.45						
6"	6.900	0.406	6.039	3.64	0.329	6.203	2.99	0.265	6.338	2.43	0.212	6.451	1.96
8"	9.050	0.532	7.922	6.26	0.431	8.136	5.13	0.348	8.312	4.19	0.278	8.461	3.37
10"	11.100	0.653	9.716	9.42	0.529	9.979	7.73	0.427	10.195	6.30	0.342	10.375	5.09
12"	13.200	0.776	11.555	13.31	0.629	11.867	10.93	0.508	12.123	8.91	0.406	12.339	7.19
14"	15.300	0.900	13.392	17.89	0.729	13.755	14.68	0.588	14.053	11.96	0.471	14.301	9.66
16"	17.400	1.024	15.229	23.15	0.829	15.643	18.98	0.669	15.982	15.48	0.535	16.266	12.48
18"	19.500	1.147	17.068	29.07	0.929	17.531	23.84	0.750	17.910	19.44	0.600	18.228	15.69
20"	21.600	1.271	18.905	35.68	1.029	19.419	29.25	0.831	19.838	23.86	0.665	20.190	19.26
24"	25.800	1.518	22.582	50.89	1.229	23.195	41.73	0.992	23.697	34.03	0.794	24.117	27.46
30"	32.000	1.882	28.010	78.26	1.524	28.769	64.18	1.231	29.390	52.37	0.985	29.912	42.26
36"	38.300	2.253	33.524	112.13	1.824	34.433	91.93	1.473	35.177	75.00	1.178	35.803	60.49
42"	44.500	2.618	38.950	151.39	2.119	40.008	124.09	1.712	40.871	101.28	1.369	41.598	81.68

This size and dimension chart is intended for reference purposes. It should not be used in place of the advice from a licensed Professional Engineer. Pipe weights are calculated in accordance with PPI TR-7. Average inside diameter is calculated using DIPS OD and Minimum wall plus 6% for use in estimating fluid flows. Actual ID will vary. When designing components to fit the pipe ID, refer to pipe dimension and tolerances in the applicable pipe manufacturing specification.

Bulletin: PP 153-4710

February 2015 Supersedes all previous publications
© 2001-2015 Chevron Phillips Chemical Company LP

Quality Inspection / Testing Report

P-658 Nuclear Regional Maintenance Facility Sub Base Kings Bay, GA

Subcontractor:	CA Murren	Superintendent:	D'Mytri Wiggs
Discipline:	Dredge Material Disposal Pipe (24" Dia Pipe)	Specification Section Being Tested:	33 34 99 / 3.2
Location of Test:	West Side of Project	Date / Time of Test:	01 May 2025 / 0953 – 1504 Hours
Weather:	Mostly Clear / Warm	Report Date:	01 May 2025

Comments:

Specification Section 33 34 39 Dredge Material Disposal Pipe – Paragraph 3.2.1 – Pressure Test requires pressure testing on the new HDPE DR 11 DIPS pipe after the pipe is installed, joints completed, thrust blocks in place and trench partially backfilled leaving the joints exposed for examination then the new pipe section is to be tested.

C.A. Murren's planned means and methods for the hydrostatic testing of the HDPE DR11 DIPS pipe vary from paragraph 3.2.1 requirement as follows:

CA Murren has utilized the testing procedures recommended by the pipe manufacturer " Performance Pipe, Technical Note 802 Leak Testing of Polyethylene Pipe For Municipal and Industrial Applications".

RFI #161 has been submitted and approved for this variation in testing procedures.

Under these procedures, two test phases will be conducted; 1) an Expansion Phase of 4 hours at 160 PSI followed by a 2) Test Phase of 1 hour at 150 PSI.

Equipment; Testing gauge to be used is a Baker, model # AHNC-300P. A copy of the Test Gauge Calibration Certificate is included with this report.

On 01 May, a Retest was performed on the 24" diameter pipe. This pipe was re-pressurized to 160 PSI to begin the test phase(s). The Expansion Phase began at 0953 hours. At 1404 hours the test gauge was reviewed and noted to have maintained the 160 PSI level. The pressure was then reduced to 150.5 PSI and the Test Phase began at 1404 hours. At 1504 hours the test gauge was noted at 150.5 PSI. This concluded the hydrostatic (Re)testing phases, indicating passing.

Present to witness this testing;

Manuel Escamilla; BLHI QCM

Although NAVFAC personnel did not witness the retest, NAVFAC was notified of the scheduling / conducting of this activity.

BL Harbert Intl. Quality Control Manager:	
Manuel Escamilla: 	



C.A.Murren & Sons
Heavy Civil LLC

Pressure Test Report for HDPE

Created: February 19, 2015

Revised: January 6, 2025

Project Name & No.: P658 NRMF - 24HCL006	
Location	Southwest Connection Point
Date	5-1-2025
Pipe Diameter	24 inch

Start Time	9:53 am
------------	---------

Expansion Phase	
Start Pressure (160 psi) - expansion phase	160
End Pressure (160 psi) after 4 hours of expansion - note add water as required to expand pipe.	160

Test Phase	
Start Pressure (150 psi)	204 151 PSI
End pressure after 1 hour	150.4 MRS 150.5 PSI

Was test successful? Yes if no visible leaking and end pressure was within 5% of test pressure (143 psi).	Yes
---	-----

Contractor signature	
Inspector signature	
Water Maintenance signature	
Notes/Sketches	



GLOBAL TEST SUPPLY

The Test, Measurement & Supply Co!

312 Raleigh Street, Suite 9, Wilmington, NC 28412
332 N. Fries Avenue, Wilmington, CA 90744
536 Stone Rd, Suite A, Benicia, CA 94510

www.GlobalTestSupply.com • sales@GlobalTestSupply.com • 1-888-610-7664

Calibration Certificate

Customer: *CA Murren*

Certificate: U468205-00-01

Unit Identification

Manufacturer: **Baker**
Model: **AHNC-300P**
Description: **Pressure Gauge**

Serial: **N/A**
Unit ID: **N/A**

Calibration Date

Calibration Date: **7-Mar-2024**
Due Date: **7-Mar-2025**

Calibration Conditions

Temperature: **24.34°C**
Humidity: **51.6 %**
Barometric Pressure: **N/A**

General Information

Remark: **N/A**

Standards Used

<u>Unit ID</u>	<u>Manufacturer</u>	<u>Model</u>	<u>Cal Date</u>	<u>Due Date</u>
GTS014	Fluke	P3031	15-Apr-2022	15-Apr-2025

The calibration was performed using measurement standards traceable to the National Measurement Institute Standards (NMIS) part of the National Research Council of Canada (NRC) or the National Institute of Standards and Technology (NIST), or to accepted intrinsic standards or measurement, or is derived by ratio type self-calibration techniques. Measurement uncertainties given in this report are based on a coverage factor of $k=2$ corresponding to a confidence level of approximately 95%.

Calibrated by: *Carlton James*

Approved by:

Test Results
Procedure: Pressure Gauge 300psi 1.6% Res5/P3031 Rev: 1.0
Data Type: As Found / As Left Results: Pass

<u>Test Description</u>	<u>True Value</u>	<u>Reading</u>	<u>Lower Limit</u>	<u>Upper Limit</u>	<u>Test Status</u>	<u>Exp Uncert</u>
Tolerance used (additive if more than one listed): +/-1.6% of full scale						
60 psi		60 psi	55 psi	65 psi	Pass	2.9e+000 psi
120 psi		120 psi	115 psi	125 psi	Pass	2.9e+000 psi
180 psi		180 psi	175 psi	185 psi	Pass	2.9e+000 psi
240 psi		240 psi	235 psi	245 psi	Pass	2.9e+000 psi
300 psi		300 psi	295 psi	305 psi	Pass	2.9e+000 psi

RFI detail

#161 Hydrostatic Testing Variation



Status	Open In Review
Created on	Jan 9, 2025 by Banks Entwistle (BL HARBERT INTERNATIONAL, LLC)
RFI type	P658 RFI Workflow Test
Ball in court	Marcello Lovreglio (AECOM TECHNICAL SERVICES, INC.) Sherri Eriksen (AECOM TECHNICAL SERVICES, INC.) Roy Cobo (AECOM TECHNICAL SERVICES, INC.)
Due date	Jan 23, 2025

Question

Please see CA Murren's attached Variation Request to spec section 33 34 99 - Dredge Material Disposal Pipe.

References and Attachments

Files (1)

Variation Request-Hydrostatic Testing HDPE Dredge Pipe.pdf

Impact

Cost impact	-
Schedule impact	-

Other attributes

Priority	Normal
Discipline	-
Category	-
Location	-

Location details	-
External id	-
Co-reviewer(s)	

Activities	By	At
Chris Willner changed the status from  Open In Review to  Open In Review set Ball in court to Marcello Lovreglio (AECOM TECHNICAL SERVICES, INC.), Roy Cobo (AECOM TECHNICAL SERVICES, INC.), Sherri Eriksen (AECOM TECHNICAL SERVICES, INC.)	Chris Willner	Jan 9, 2025, 7:58 AM CST
Banks Entwistle added a reference to a File Variation Request-Hydrostatic Testing HDPE Dredge Pipe.pdf	Banks Entwistle	Jan 9, 2025, 7:09 AM CST
Banks Entwistle (BL HARBERT INTERNATIONAL, LLC) created this RFI in  Open In Review status and set Ball in court to Chris Willner (NAVFAC).	Banks Entwistle	Jan 9, 2025, 7:09 AM CST

RESPONSE:
The Government takes no exceptions to the proposed pipe testing procedures recommended by the pipe manufacturer.



C.A. MURREN & SONS HEAVY CIVIL, LLC.

"What gets measured gets done."
Safety. Quality. Production.

Wednesday, January 8, 2025

Request For Variation – Hydrostatic Testing

33 34 99 – Dredge Material Disposal Pipe

Section: 3.2 – Hydrostatic Testing

The requirements defined in paragraphs 3.2.1 Pressure Test and 3.2.2 Leakage Test are not applicable to the 24" DR11 DIPS pipe manufactured by Performance Pipe, Division of Chevron Phillips Chemical Company LP according to Performance Pipe Technical Note 802 (PP 802-TN) – "Leak Testing of Polyethylene Pipe for Municipal and Industrial Applications" (attached).

According to paragraph 3.2.2 "the manufacturer shall be consulted prior to testing for special considerations." As such C.A. Murren request the variation to follow "Part 1 – Pre-Test Considerations" and "Part 2 - Hydrostatic Leak Testing Procedure" outlined in PP 802-TN thereby replacing the requirements as applicable in Section 3.2.

The pipe will be subjected to a test pressure of 160 psi during the "Initial Expansion Phase" (4 hour period). The "Test Phase" will start immediately following the Initial Expansion Phase. The test pressure will be reduced by 10 psi and the addition of make-up water will stop. If no leakage is observed and test pressure remains steady (within 5% of the target value) for one (1) hour then no leakage is indicated and the test will be considered passing.

Technical Note 802 – Leak Testing of Polyethylene Pipe For Municipal and Industrial Applications

Part 1 – Pre-Test Considerations

Leak testing may be used to find leaks in a newly constructed or newly modified piping system or in an established system where an apparent loss of integrity has been experienced. If they exist, leaks typically occur at joints or connections in the system.

Leak testing does not verify pressure rating or potential long-term performance, nor is it intended to supplement or replace product standard test requirements. The system design and the pressure ratings of the installed components are the sole determinants of system pressure rating and long-term performance.

For M&I applications, leak testing of pressure piping systems is done by filling the piping system or a section of the piping system with a liquid and applying a pressure. Pneumatic (air) testing of pressure piping systems is not within the scope of this technical note. Information on testing with a compressible fluid such as air is discussed in ASTM F2786.

The common hydrostatic leak test used for polyethylene pipe is a “modified pressure rebound method.” In this testing method, the test section is filled with water and pressurized to a specified test pressure. The pressure is maintained for a certain duration, then slightly reduced and observed for one hour to assure the pressure remains essentially constant (within 5% variation) to achieve an acceptable test. Slightly reducing the test pressure suspends expansion of the PE piping, allowing a leak-free PE system to maintain a steady test pressure. This leak testing method and procedure is described in ASTM F2164, “Standard Practice for

Field Leak Testing of Polyethylene (PE) and Crosslinked Polyethylene (PEX) Pressure Piping Systems Using Hydrostatic Pressure.” Additional information on leak testing can be found in PPI TN-46 “Guidance for Field Hydrostatic Testing of High Density Polyethylene Pressure Pipelines: Owner’s Considerations, Planning, Procedures, and Checklists.”

Safety

Safety is of paramount importance when performing leak tests. Leak tests can apply high stress to untried joints and parts in the system. Failure can occur by leaking or by catastrophic rupture that can cause sudden, violent movement. In some cases, leakage may immediately precede catastrophic rupture.

WARNING – Death or serious injury and property damage can result from failure at a joint or connection during pressure leak testing. Keep all persons a safe distance away during testing. The test section is to be supervised at all times during the test.

Ensure that all piping is restrained against possible movement from catastrophic failure at a joint or connection. When pressurized, faulty joints or connections may separate suddenly, causing violent and dangerous movement of piping or parts. Correctly made joints do not leak. Leakage at a joint or connection may immediately precede catastrophic failure. Never approach or attempt to repair or stop leaks while the test section is pressurized. Always depressurize the test section before making repairs.

Restrain Against Movement

Before applying pressure, all piping and all components in the test section must be restrained. This means that if piping or parts move or separate during the test, any movement of components or parts is sufficiently constrained such that it will not result in damage or injury. Common restraints include backfill, anchors, external clamps and tie rods, pipe guides, etc. ***Never conduct leak tests on unrestrained piping.***

Additional guidance for preparing connections and joints for leak tests include:

- Heat fusion joints must be properly cooled before testing.
- Mechanical connections must be completely installed and tightened per manufacturer's instructions.
- If backfill provides restraint, it must be properly placed and compacted. Joints and connections may be exposed for inspection.
- End closures must be suitable for pressure service and pressure-rated for the test pressure.
- Ensure that all connections to test equipment are secure. Disconnect or isolate all low-pressure filling lines and all other parts that are not to be subjected to test pressure. Restrain, isolate or remove expansion joints before leak testing.
- Testing against closed valves is not recommended due to the potential for leakage and/or trapped air. Best practice is to blind-flange before the closed valve.

Test Section

Testing may be conducted on the full piping system or in sections. Test section length is generally limited by the capacity of the testing equipment. Lower capacity pressurizing or filling equipment may not be

capable of completing the test within permissible time limits. In addition, the test section should be filled at a slow rate (typically less than 10-feet per minute) to minimize air entrapment. Considering test time limits and fill rate, pipelines longer than 3000 feet may need to be tested in several sections (see PPI TN-46).

Before applying test pressure, allow time for the test fluid and the test section to equalize to a common temperature.

Test Pressure

The maximum test pressure should be measured at the lowest elevation in the test section. For pressure piping systems that include polyethylene pipe or fittings, the maximum permissible test pressure is the lower of:

- a) 150% of the PE pipe system's design pressure rating for the application and application service temperature, provided that all components in the test section are rated for the test pressure.
- b) The pressure rating of the lowest pressure rated component in the test section. Lower pressure-rated components or devices may include pipe or fittings made from other plastics or metals, appurtenances such as valves, hydrants, regulators, and pressure relief devices, or some types of mechanical connections such as lower pressure-rated compression couplings or flanges with lower pressure-rated back-up rings.

Do not subject lower pressure rated, non-polyethylene parts or devices to pressures above their pressure rating. Lower pressure rated parts may be removed or isolated from the test section to avoid damage or failure. Vent isolated parts or equipment to atmosphere.

Test Temperature

The pipe should be allowed to thermally stabilize and equalize before pressurizing the pipe to test pressure. All thermoplastic pipes have reduced strength at elevated temperature. Test pressure must

be reduced when the test section is at elevated temperature either from service conditions or from environmental conditions such as being warmed by the sun. Multiply the test pressure by the Table 1 multiplier to determine the allowable elevated temperature test pressure.

Table 1 Elevated Temperature Multiplier

Test Section Temperature °F (°C)	≤ 80 (≤ 27)†	≤ 90 (≤ 32)	≤ 100 (≤ 38)	≤ 110 (≤ 43)	≤ 120 (≤ 49)	≤ 130 (≤ 54)	≤ 140 (≤ 60)‡
Multiplier	1.0	0.9	0.8	0.8	0.7	0.7	0.6
† Use the 80°F (27°C) multiplier for 80°F (27°C) and lower temperatures. ‡ The maximum service temperature for Performance Pipe PE pressure piping is 140°F (60°C).							

Test Duration

When testing at pressures above the system design pressure up to 150% of the system design pressure, the maximum test duration is eight (8) hours including time to pressurize, time for initial expansion, time at test pressure, and time to depressurize the test section. If the test is not completed due to leakage, equipment failure, or for any other reason, depressurize the test section completely, and allow it to relax for at least eight (8) hours before pressurizing the test section again. *CAUTION – Testing at excessive pressure or for excessive time may damage the piping system.*

When testing at the system design pressure or less, test duration including time to pressurize, time for initial expansion, time at test pressure, and time to depressurize should be limited to a practical time period (72 hours or less is suggested) given that the test section is not to be left unsupervised at any time during leak testing.

Test Fluid

Hydrostatic Testing

The test liquid should meet appropriate industry standards for safety and quality so that the environment, system, test equipment and disposal (if necessary) are not adversely affected. The recommended test liquid is water.

Pneumatic Testing

WARNING – Failure during a pneumatic (compressed gas) leak test can be explosive and result in death or serious bodily injury.

If failure occurs when using compressed gas as the test fluid, both the pressure stress on the system and the energy used to compress the gas are released. Such failure can be explosive and dangerous. Compared to hydrostatic testing, pneumatic testing can be more dangerous because failure during pneumatic testing releases more energy. For safety reasons, pneumatic testing is not within the scope of this technical note. Refer to ASTM F2786.

Part 2 – Hydrostatic Leak Testing Procedure

Read all of this publication and observe all safety precautions before conducting any leak test.

Hydrostatic Leak Testing

This hydrostatic leak test procedure consists of filling, an initial expansion phase, a test phase, and depressurizing.

Filling

Fill the restrained test section completely with test liquid. The test section is usually filled from the lowest point of the pipeline and at a slow fill rate to minimize air entrainment. A fill rate of 10-feet per minute axial velocity or less is suggested in PPI TN-46. After filling, allow time for the system to reach thermal equilibrium and allow for any dissolved air to exit the system air vents.

WARNING – Ensure that there is no air trapped in the test section. Failure with entrapped air can result in explosive release and result in death or serious bodily injury. Use equipment vents at high points to remove air. A firm urethane foam pig or swap, pushed by the fill water, may be used to assist in air removal.

Initial Expansion Phase

Gradually pressurize the test section to test pressure, and add make-up water as necessary to maintain maximum test pressure for four (4) hours. During the initial expansion phase, polyethylene pipe will expand slightly due to elasticity and Poisson effects. Additional test liquid will be required to maintain pressure. The amount of additional test liquid will vary because expansion in the PE pipe is not linear.

It is not necessary to monitor the amount of water added during the initial expansion phase.

If test pressure cannot be attained, or if it takes an unreasonably long time to reach test pressure, there may be faults such as excessive leakage, entrapped air, or open valving, or the pressurizing equipment may be inadequate for the size of the test section. If such faults exist, discontinue pressurizing and correct them before continuing.

Test Phase

Immediately following the initial expansion phase, reduce test pressure by 10 psi and stop adding test liquid. Monitor the pressure for 1 hour.

If no visual leakage is observed and test pressure remains steady (within 5% of the target value) for one (1) hour, no leakage is indicated.

Depressurization

Depressurize the test section by reducing pressure or releasing test liquid at a controlled rate. Sudden depressurization can cause water hammer.

Part 3 – Additional Leak Testing Procedures

Low Pressure Air Testing of Gravity Flow Systems

For gravity flow and low or intermittent pressure applications such as sewer and odor control, leak testing in accordance with ASTM F1417 is recommended.

High Pressure Air Testing

For applications requiring high pressure air (pneumatic) testing, leak testing in accordance with ASTM F2786 is recommended.

Initial Service Leak Testing

An initial service leak test may be acceptable when other types of tests are not practical, when leak tightness can be demonstrated by normal service, or when an opportunity is afforded by performing initial service tests of other equipment. An initial service leak test may apply to systems where isolation or temporary closures are impractical, or where checking out pumps and other equipment allows the system to be examined for leakage prior to full-scale operations.

The piping system should be gradually brought up to normal operating pressure, and held at normal operating pressure for at least ten (10) minutes. During this time, joints and connections may be examined for leakage.

At the conclusion of the test, depressurize the test section by the controlled release of fluid from the test section. Controlled release avoids the potential for pressure surge.

Systems that are Not Suitable for Pressure Leak Testing

Some systems may not be suitable for pressure leak testing. These systems may not be designed or intended for internal pressure such as vacuum systems, or they may contain parts that cannot be isolated, or temporary closures to isolate the test section may not be practical.

Systems that are not suitable for pressure leak testing should not be pressure tested, but should be carefully inspected during and after installation. Inspections such as visual examination of joint appearance, mechanical checks of bolts and joint tightness, and other relevant examinations should be performed.

NOTICE. This publication is for informational purposes and is intended for use as a reference guide. It should not be used in place of the advice of a professional engineer. This publication does not contain or confer any warranty or guarantee of any kind. Performance Pipe has made every reasonable effort towards the accuracy of the information contained in this publication, but it may not provide all necessary information, particularly with respect to special or unusual applications. This publication may be changed from time to time without notice. Contact Performance Pipe to ensure that you have the most current edition.

Drag Bar Design and Operation Criteria

for

U.S. Naval Station Kings Bay

Camden County, Georgia and Nassau County, Florida

Drag Bar Design and Operation Criteria for Bed Leveling Activities

1. The contractor shall notify the Contracting Officer of location and start and stop dates of any bed leveling activities.
2. Bed levelers shall be constructed of a smooth steel blade with no teeth and a bottom length angling forward approximately 45° forward of the blade face, or other similar design that shall produce a sand wave in front of the leading face of the beam to disturb sea turtles off the sea floor bottom.
3. All support structures are to be welded to the back of the blade with no primary or secondary attachment points extending beyond the width of the blade face which could serve as impingement or "pinch" points for passing sea turtles.
4. The bed-leveler shall be slowly lowered to the sea bottom and the depth of the bed leveler adjusted constantly to meet required depth and to compensate for tidal fluctuations.
5. The bed-leveler shall be towed/pushed along the bottom no faster than approximately 1-2 knots.
6. The contractor shall submit drawings and photographs to the Contracting Officer of the bed leveler and record when and where the bed leveler was used in the channel.


Examples of a Bed Leveling Device Meeting Drag Bar Criteria



Bed leveler design used in 2013 Bed Leveler Evaluation



Personnel welding metal extensions to bed leveler blade face to avoid impingement (Criteria 3)

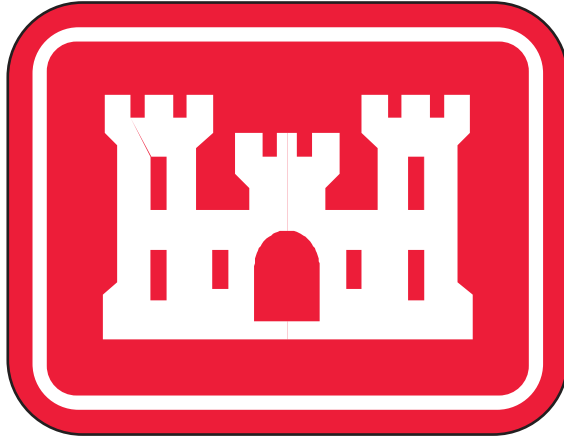

Naval Submarine Base Kings Bay Probability Assessment For Munitions and Explosives of Concern

Camden County, GA

25 March 2024

Prepared by
**Environmental and Munitions Design Center
Baltimore District
U.S. Army Corps of Engineers**

TABLE OF CONTENTS

Section	Page
1.0 INTRODUCTION.....	1
2.0 ASSESSMENT AREA BACKGROUND.....	1
3.0 EVALUATION FOR POTENTIAL MEC.....	1
4.0 SUMMARY AND CONCLUSION.....	1
5.0 RECOMMENDATIONS.....	2

APPENDIX A.....FIGURES

1.0 Introductions

U.S. Army Corps of Engineers (USACE) Jacksonville District (CESAJ) Coastal Storm Risk Management (CSR), Navigation, Operations & Maintenance has projects that requires an assessment for the potential of munitions and explosives of concern (MEC) to be encountered during dredging and beach replenishment operations.

USACE Baltimore District (CENAB) in support of CESAJ's mission, is tasked to conduct Munitions and Explosives of Concern (MEC) Probability Assessments. This assessment documents the findings and recommendations for Naval Base Kings Bay Maintenance Dredging, See **Figure's**.

2.0 Assessment Area Background

This project is an ongoing Navigational Maintenance Project, dredging of the navigable channel In Kings Bay Submarine Base. All dredged material will be deposited in upland Dredged Material Management Area. Dredging has been conducted from FY13 – FY22 with no MEC has been encountered.

Historical records reviewed.

- Formerly Used Defense Sites (FUDS)
- USACE Archives
- Joint Explosive Ordnance Disposal (JEOD) Portal – EOD Incident reports

3.0 Evaluation for Potential Munitions

3.1 FUDS search

A review of FUDS records found no results for military munitions use/activity.

3.2 USACE Archives

A review of USACE archives found no results or reports of MEC or munitions debris (MD) indicative of MEC were made during any past operations.

3.3 EOD Incident Reports

A search of the JEO Portal found no records of EOD incident reports for the Naval Base Kings Bay area.

There are no known military munitions use, range fans or dump sites within the boundaries of this project.

4.0 Summary and Conclusion

After reviewing all historical documents and conducting records search for military munitions use, there is no evidence indicative of MEC to be present within the construction footprint of this site.

5.0 Recommendations

It is the recommendation of CENAB Military Munitions Design Center that **Naval Submarine Base Kings Bay** Navigational dredging project be classified as “**No Probability**” of encountering MEC. In accordance with DESR 6055-09 Edition 1.

It is further recommended that 3R’s awareness be provided to all site workers that are involved with soil disturbance. The following website is a good resource for the 3 R’s briefing, <https://www.denix.osd.mil/uxo/>.

If MEC is encountered, it should be reported by calling 911 and all work must stop until a MEC re-assessment is completed.

Point of contact for this MEC Probability Assessment is David Holland, Ordnance & Explosives Safety Specialist, U.S. Army Corps of Engineers, Baltimore District.

Signature: HOLLAND.DAVID.L.1096450296 Digitally signed by
HOLLAND.DAVID.L.1096450296
Date: 2024.04.06 10:25:06 -04'00'

Ordnance and Explosive Safety Specialist, David Holland

Signature: WHITTINGTON.ALBERT.J.1163137425 Digitally signed by
WHITTINGTON.ALBERT.J.1163137425
Date: 2024.04.06 10:23:04 -04'00'

Ordnance and Explosive Safety Technical Lead, Albert Whittington


USACE CESAJ Commander or Designee

Name: Milan A. Mora

Signature: MORA.MILLAN.A.1367741470 Digitally signed by MORA.MILLAN.A.1367741470
Date: 2024.11.01 14:49:55 -04'00'


APPENDIX A

Area of Dredging

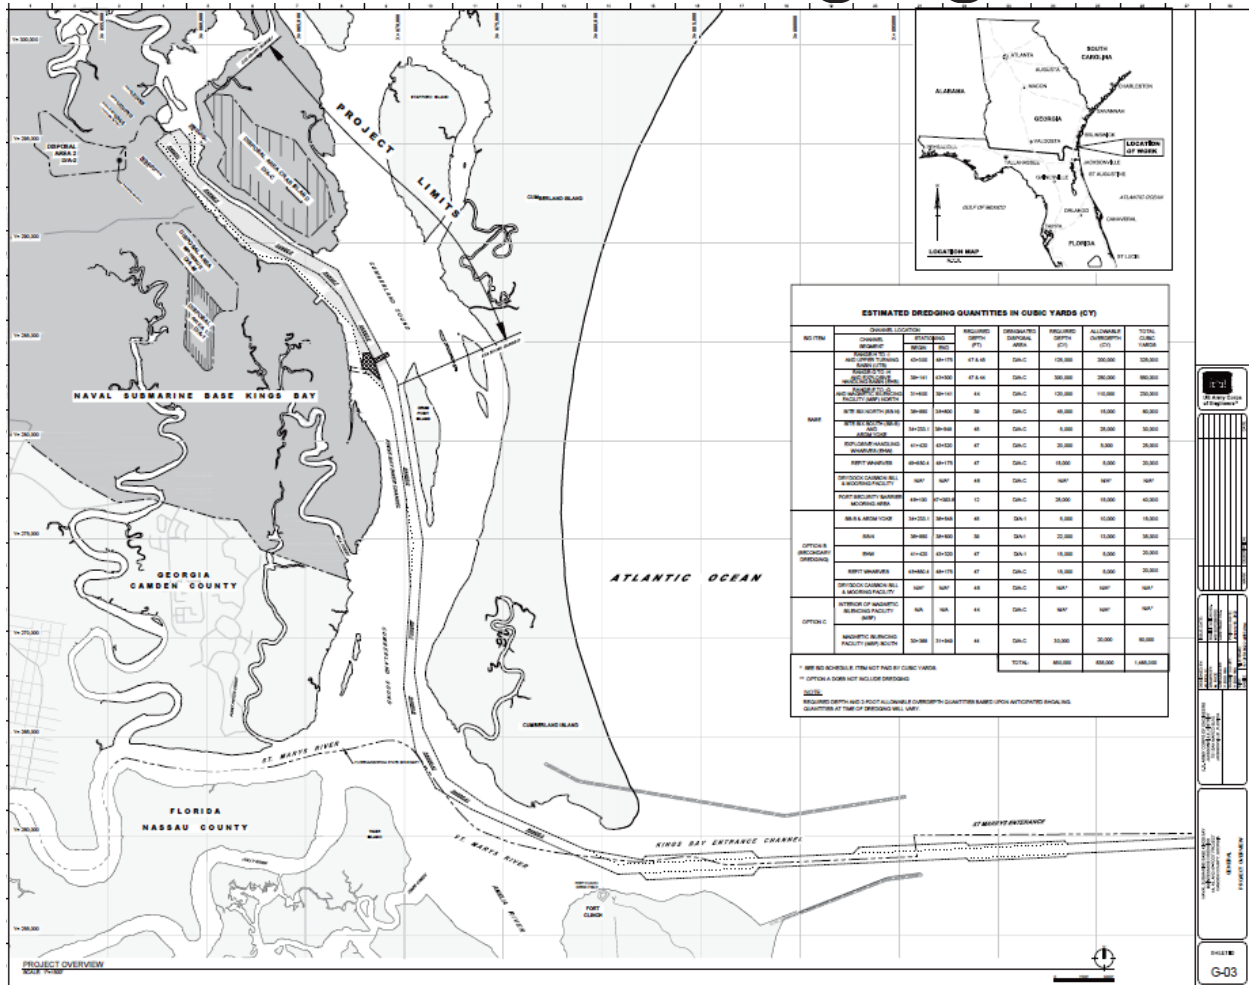

Kings Bay


Figure 1

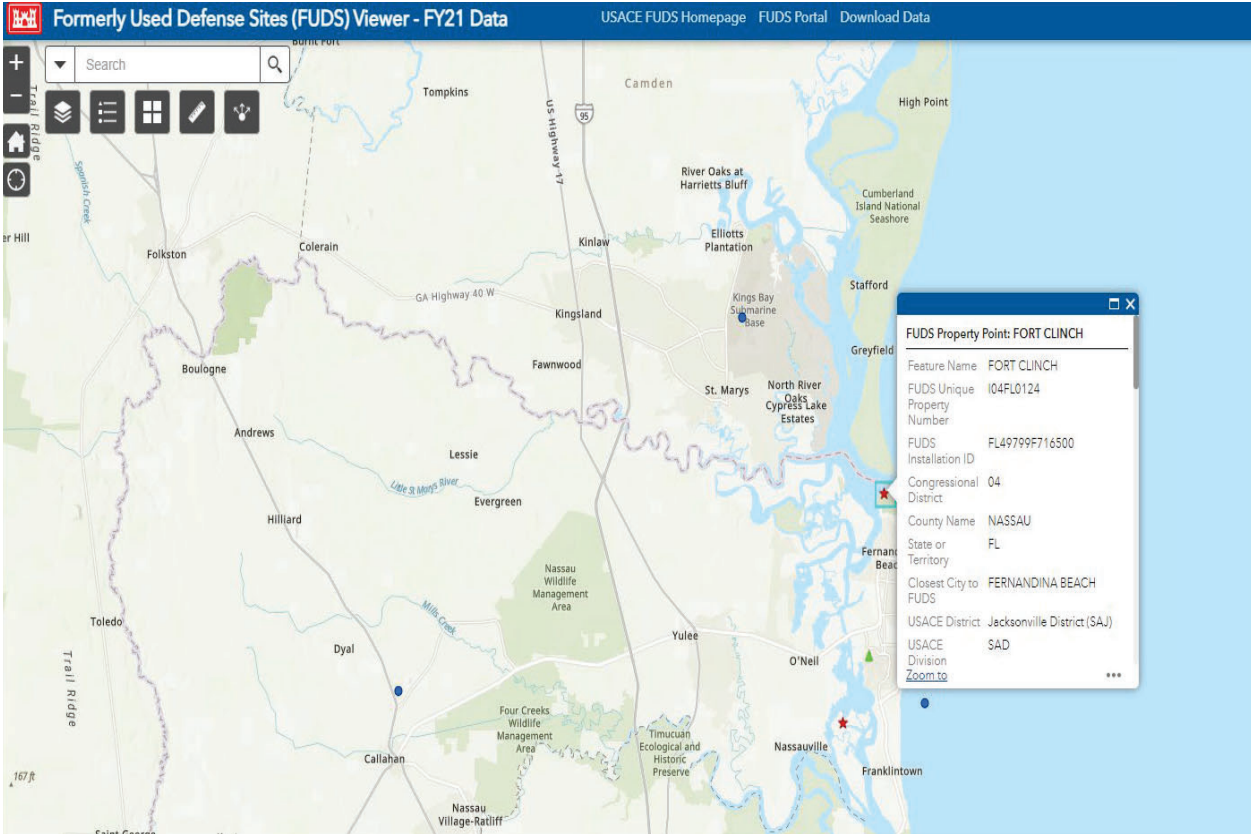

Fort Clinch

Figure 2

**US Army Corps
of Engineers**
Jacksonville District



FILE NAME: 6425369-2.DWG
PLOT SCALE: NONE

IF SHEET IS LESS THAN
24" X 22" USE GRAPHIC SCALE

- 1) BUOY ANCHORS WERE DRIVEN APPROXIMATELY 40 FT BELOW THE MUD LINE.
- 2) THE LENGTH OF CHAIN ABOVE THE MUD LINE IS APPROXIMATELY 30 FT (1,880 LBS).
- 3) THE BUOY WEIGHT IS APPROXIMATELY 6,000 LBS.
- 4) THE APPROXIMATE TOTAL MAXIMUM WEIGHT OF EACH BUOY, ITS CHAIN ABOVE THE MUD LINE, AND MARINE GROWTH IS 4 TONS (8,000 LBS).
- 5) SEE SPECIFICATION DREDGING SECTION 35 20 23 PARAGRAPH TITLE "KBC ADJACENT PROPERTY AND WATERFRONT STRUCTURES" FOR INSTRUCTIONS REGARDING DREDGING ADJACENT STRUCTURES AND THE "KBC ADJACENT PORT SECURITY BARRIER MOORING AREA" FOR INSTRUCTIONS REGARDING DREDGING ADJACENT TO MOORING BUOYS AND THEIR CHAINS WHICH INCLUDE A 15 FOOT NO DREDGE BUFFER.

AR-01