

BID DOCUMENTS

SPECIFICATIONS

VOLUME I

DIV 00 – DIV 09

RENOVATE SURGICAL SUITE – PHASE II

Project No. 658-19-103



Salem VA Medical Center
Salem, VA

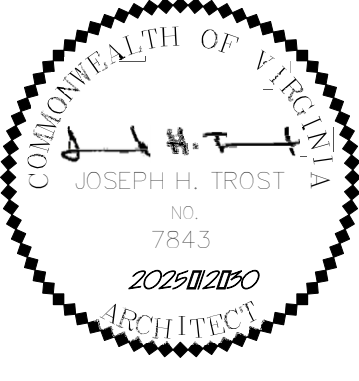


1040 Kings Highway North
Suite 700
Cherry Hill, New Jersey 08034
(856) 429-4000

December 30, 2025

PROFESSIONAL REGISTRATIONS & ACCREDITATIONS

		
ENGINEER OF RECORD / MECHANICAL ENGINEERING	ELECTRICAL ENGINEERING	STRUCTURAL ENGINEERING

		
CIVIL ENGINEERING	ARCHITECTURE	FIRE SUPPRESSION / FIRE ALARM

08-01-21

**DEPARTMENT OF VETERANS AFFAIRS
VHA MASTER SPECIFICATIONS**

**TABLE OF CONTENTS
Section 00 01 10**

SECTION NO.	DIVISION AND SECTION TITLES	DATE
	DIVISION 00 - SPECIAL SECTIONS	
00 01 15	List of Drawing Sheets	05-20
	DIVISION 01 - GENERAL REQUIREMENTS	
01 00 00	General Requirements	05-21
01 32 16.15	Project Schedules (Small Projects - Design/Bid/Build	03-20
01 33 23	Shop Drawings, Product Data, and Samples	06-21
01 33 23.10	Submittal Register	
01 35 26	Safety Requirements	07-20
01 42 19	Reference Standards	11-20
01 45 00	Quality Control	02-21
01 45 00.10	QCR Example Form	
01 45 29	Testing Laboratory Services	11-18
01 57 19	Temporary Environmental Controls	01-21
01 74 19	Construction Waste Management	01-21
	DIVISION 02 - EXISTING CONDITIONS	
02 21 13	Site Surveys	01-21
02 41 00	Demolition	08-17
02 65 00	Underground Storage Tank Removal	01-21
	DIVISION 03 - CONCRETE	
03 30 53	(Short-Form) Cast-in-Place Concrete	01-21
	DIVISION 04 - MASONRY	
04 01 00	Maintenance of Masonry	01-21
	DIVISION 05 - METALS	
05 12 00	Structural Steel Framing	11-18
05 40 00	Cold-Formed Metal Framing	01-21
05 50 00	Metal Fabrications	08-18
	DIVISION 06 - WOOD, PLASTICS AND COMPOSITES	
06 10 00	Rough Carpentry	10-17
06 20 00	Finish Carpentry	01-21

08-01-21

SECTION NO.	DIVISION AND SECTION TITLES	DATE
06 65 00	Plastic Simulated Wood Trim	
	DIVISION 07 - THERMAL AND MOISTURE PROTECTION	
07 21 13	Thermal Insulation	01-21
07 21 19	Spray Foam Insulation	
07 27 26	Fluid-Applied Membrane Air Barrier, Vapor Permeable	01-21
07 31 13	Asphalt Shingles	02-21
07 32 00	Composite Roof Tiles	
07 40 00	Roofing and Siding Panels	01-21
07 42 43	Composite Wall Panels	
07 53 23	Ethylene-Propylene-Diene-Monomer Roofing	01-21
07 60 00	Flashing and Sheet Metal	01-21
07 71 00	Roof Specialties	01-21
07 81 00	Applied Fireproofing	10-17
07 84 00	Firestopping	01-21
07 92 00	Joint Sealants	10-17
	DIVISION 08 - OPENINGS	
08 11 13	Hollow Metal Doors and Frames	01-21
08 14 00	Interior Wood Doors	01-21
08 17 10	Integrated Door Assemblies	01-21
08 31 13	Access Doors and Frames	01-21
08 32 13	ICU Sliding Glass Doors	01-21
08 41 13	Aluminum-Framed Entrances and Storefronts	01-21
08 56 59	Service and Teller Window Units	01-21
08 71 00	Door Hardware	01-21
08 71 13	Automatic Door Operators	01-21
08 80 00	Glazing	01-21
	DIVISION 09 - FINISHES	
09 05 16	Subsurface Preparation for Floor Finishes	01-21
09 06 00	Schedule for Finishes	01-21
09 22 16	Non-Structural Metal Framing	06-18
09 29 00	Gypsum Board	04-20
09 30 13	Ceramic/Porcelain Tiling	01-21
09 51 00	Acoustical Ceilings	12-18
09 65 13	Resilient Base and Accessories	01-21
09 65 16	Resilient Sheet Flooring	05-18
09 65 19	Resilient Tile Flooring	05-18
09.67.23.40	Resinous Poured In Place Resilient Flooring (RES-4)	01-21
09 68 00	Carpeting	01-21
09 91 00	Painting	01-21
09 96 59	Resinous Specialty Glazed Coating Systems for Walls, Ceilings, Wallboard, and Block CMU (RES-W1, RES-W2)	01-21

08-01-21

SECTION NO.	DIVISION AND SECTION TITLES	DATE
	DIVISION 10 - SPECIALTIES	
10 21 23	Cubicle Curtain Tracks	01-21
10 25 13	Patient Bed Service Walls	01-20
10 26 00	Wall and Door Protection	01-21
10 28 00	Toilet, Bath, and Laundry Accessories	01-21
10 44 13	Fire Extinguisher Cabinets	08-18
	DIVISION 12 - FURNISHINGS	
12 24 00	Window Shades	08-17
12 32 00	Manufactured Wood Casework	09-15
12 36 00	Countertops	12-18
	DIVISION 13 - SPECIAL CONSTRUCTION	
13 05 41	Seismic Restraint Requirements for Non-Structural Components	01-14
13 49 00	Radiation Protection	02-16
	DIVISION 21- FIRE SUPPRESSION	
21 08 00	Commissioning of Fire Suppression System	11-16
21 13 13	Wet-Pipe Sprinkler Systems	06-15
	DIVISION 22 - PLUMBING	
22 05 11	Common Work Results for Plumbing	09-20
22 05 23	General-Duty Valves for Plumbing Piping	09-20
22 07 11	Plumbing Insulation	09-19
22 08 00	Commissioning of Plumbing Systems	11-16
22 11 00	Facility Water Distribution	05-21
22 13 00	Facility Sanitary and Vent Piping	09-20
22 40 00	Plumbing Fixtures	09-15
22 62 00	Vacuum Systems for Laboratory and Healthcare Facilities	09-15
22 63 00	Gas Systems for Laboratory and Healthcare Facilities	09-15
22 67 19.16	Reverse-Osmosis Water Equipment	09-15
	DIVISION 23 - HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)	
23 05 11	Common Work Results for HVAC	02-20
23 05 12	General Motor Requirements for HVAC and Steam Generation Equipment	02-20
23 05 41	Noise and Vibration Control for HVAC Piping and Equipment	02-20
23 05 93	Testing, Adjusting, and Balancing for HVAC	02-20
23 07 11	HVAC and Boiler Plant Insulation	02-20

08-01-21

SECTION NO.	DIVISION AND SECTION TITLES	DATE
23 08 00	Commissioning of HVAC Systems	02-20
23 09 23	Direct-Digital Control System for HVAC	09-11
23 21 13	Hydronic Piping	02-20
23 21 23	Hydronic Pumps	02-20
23 22 13	Steam and Condensate Heating Piping	02-20
23 22 23	Steam Condensate Pumps	04-20
23 31 00	HVAC Ducts and Casings	02-20
23 34 00	HVAC Fans	02-20
23 36 00	Air Terminal Units	02-20
23 37 00	Air Outlets and Inlets	02-20
23 40 00	HVAC Air Cleaning Devices	03-20
23 64 00	Packaged Water Chillers	03-20
23 73 00	Indoor Central-Station Air-Handling Units	03-20
23 74 13	Packaged, Outdoor, Central-Station Air-Handling Units	03-20
23 82 16	Air Coils	03-20
	DIVISION 26 - ELECTRICAL	
26 05 11	Requirements for Electrical Installations	01-16
26 05 13	Medium-Voltage Cables	01-17
26 05 19	Low-Voltage Electrical Power Conductors and Cables	01-17
26 05 26	Grounding and Bonding for Electrical Systems	01-17
26 05 33	Raceway and Boxes for Electrical Systems	01-18
26 05 41	Underground Electrical Construction	01-17
26 05 73	Overcurrent Protective Device Coordination Study	01-18
26 08 00	Commissioning of Electrical Systems	11-16
26 09 23	Lighting Controls	01-18
26 12 19	Pad-Mounted, Liquid-Filled, Medium-Voltage Transformers	01-18
26 13 16	Medium-Voltage Fusible Interrupter Switches	01-17
26 20 11	Isolated Power Systems	01-18
26 22 00	Low-Voltage Transformers	01-18
26 24 16	Panelboards	01-18
26 27 26	Wiring Devices	01-18
26 29 11	Motor Controllers	01-18
26 29 21	Enclosed Switches and Circuit Breakers	01-17
26 32 13	Engine Generators	01-18
26 36 23	Automatic Transfer Switches	01-17
26 51 00	Interior Lighting	01-18
	DIVISION 27 - COMMUNICATIONS	
27 05 11	Requirements for Communications Installations	09-19
27 05 26	Grounding and Bonding for Communications Systems	06-15
27 05 33	Raceways and Boxes for Communications Systems	10-18
27 08 00	Commissioning of Communications Systems	11-16
27 10 00	Control, Communication and Signal Wiring	06-15
27 11 00	Communications Equipment Room Fittings	06-15
27 15 00	Communications Structured Cabling	01-16

08-01-21

SECTION NO.	DIVISION AND SECTION TITLES	DATE
27 31 31	Voice Communications Switching and Routing Equipment - Extension	06-15
27 51 16	Public Address and Mass Notification Systems	10-18
27 51 23	Intercommunications and Program Systems	06-15
27 52 23	Nurse Call and Code Blue Systems	10-18
	DIVISION 28 - ELECTRONIC SAFETY AND SECURITY	
28 05 00	Common Work Results for Electronic Safety and Security	04-18
28 05 13	Conductors and Cables for Electronic Safety and Security	10-18
28 05 26	Grounding and Bonding for Electronic Safety and Security	09-11
28 05 28.33	Conduits and Backboxes for Electronic Safety and Security	09-11
28 13 00	Physical Access Control System	10-11
28 23 00	Video Surveillance	09-11
28 31 00	Fire Detection and Alarm	10-11
	DIVISION 31 - EARTHWORK	
31 20 11	Earthwork (Short Form)	10-12

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

08-01-21

Page Intentionally Left Blank

05-01-20

SECTION 00 01 15
LIST OF DRAWINGS

The drawings listed below accompanying this specification form a part of the contract.

DRAWING NO.	TITLE
GENERAL	
GI001	COVER SHEET
GI002	BUILDING REGULATION DATA & ICRA NOTES
GI003	LIFE SAFETY PLAN - FIRST FLOOR - OVERALL
GI004	LIFE SAFETY PLAN - BID DEDUCT
GI005	SMOKE COMPARTMENT & SUITE PLANS - FIRST FLOOR
GI006	OCCUPANT LOAD PLAN - FIRST FLOOR
CIVIL	
C-100	EXISTING CONDITIONS
C-110	DEMOLITION & EROSION CONTROL PLANS
C-200	SITE LAYOUT & WATERLINE PROFILE
C-400	EROSION & SEDIMENT CONTROL NOTES
C-401	EROSION & SEDIMENT CONTROL DETAILS
C-402	EROSION & SEDIMENT CONTROL DETAILS
C-500	CONSTRUCTION DETAILS
C-501	CONSTRUCTION DETAILS
STRUCTURAL	
S-001	ABBREVIATIONS & NOTES
S-002	NOTES
SS101	SITE PLAN
SS501	SECTIONS & DETAILS
P1-SF101	BASEMENT PLAN - PHASE 1
P1-SF111	FRAMING PLAN - 1ST FLOOR, PHASE 1
P1-SF121	FRAMING PLAN - ROOF, PHASE 1
P1-SF123	DUNNAGE FRAMING PLAN - ROOF, PHASE 1
P2-SF122	FRAMING PLAN - 2ND FLOOR, PHASE 2

05-01-20

SF151	FRAMING PLAN - 5TH FLOOR ROOF
S-501	SECTIONS & DETAILS
S-502	SECTIONS & DETAILS
S-503	SECTIONS & DETAILS
S-504	SECTIONS & DETAILS
S-505	SECTIONS & DETAILS

ARCHITECTURAL

A-001	ABBREVIATIONS, SYMBOLS, LEGENDS, NOTES & WALL TYPE SCHEDULE
A-010	PHASING PLANS - FIRST FLOOR - OVERALL
A-011	ICRA PLAN - FIRST FLOOR - PHASE 1
A-012	ICRA PLAN - FIRST FLOOR - PHASE 2
A-013	ICRA PLAN - FIRST FLOOR - PHASE 3
A-014	ICRA PLAN - FIRST FLOOR - PHASE 4
AD100	DEMOLITION PLAN - BASEMENT
AE100	NEW WORK PLAN - FIRST FLOOR - OVERALL
AC100	REFLECTED CEILING PLAN - FIRST FLOOR - OVERALL
AI100	FINISH PLAN - FIRST FLOOR - OVERALL
AE110	DEMOLITION, NEW WORK, & REFLECTED CEILING PLANS - FIRST FLOOR - BID DEDUCT
AE111	FINISH PLAN & SCHEDULE - FIRST FLOOR - BID DEDUCT
P1-AD100	DEMOLITION PLANS - FIRST FLOOR - PHASE 1
P1-AE100	NEW WORK PLAN - FIRST FLOOR - PHASE 1
P1-AC100	REFLECTED CEILING PLAN - FIRST FLOOR - PHASE 1
P1-AQ100	EQUIPMENT PLAN - FIRST FLOOR - PHASE 1
P1-AI100	FINISH PLAN - FIRST FLOOR - PHASE 1
P2-AD100	DEMOLITION PLANS - FIRST FLOOR - PHASE 2
P2-AE100	NEW WORK PLAN - FIRST FLOOR - PHASE 2
P2-AE101	NEW WORK PLAN - FIRST FLOOR - PHASE 2 (NORTH)
P2-AC100	REFLECTED CEILING PLAN - FIRST FLOOR - PHASE 2
P2-AC101	REFLECTED CEILING PLAN - FIRST FLOOR - PHASE 2 (NORTH)
P2-AQ100	EQUIPMENT PLAN - FIRST FLOOR - PHASE 2

05-01-20

P2-AQ101	EQUIPMENT PLAN - FIRST FLOOR - PHASE 2 (NORTH)
P2-AI100	FINISH PLAN - FIRST FLOOR - PHASE 2
P2-AI101	FINISH PLAN - FIRST FLOOR - PHASE 2 (NORTH)
P3-AD100	DEMOLITION PLAN - FIRST FLOOR - PHASE 3
P3-AE100	NEW WORK PLAN - FIRST FLOOR - PHASE 3
P3-AC100	REFLECTED CEILING PLAN - FIRST FLOOR - PHASE 3
P3-AQ100	EQUIPMENT PLAN - FIRST FLOOR - PHASE 3
P3-AI100	FINISH PLAN - FIRST FLOOR - PHASE 3
P4-AD100	DEMOLITION PLAN - FIRST FLOOR - PHASE 4
P4-AE100	NEW WORK PLAN - FIRST FLOOR - PHASE 4
P4-AC100	REFLECTED CEILING PLAN - FIRST FLOOR - PHASE 4
P4-AQ100	EQUIPMENT PLAN - FIRST FLOOR - PHASE 4
P4-AI100	FINISH PLAN - FIRST FLOOR - PHASE 4
AE300	NEW WORK / ROOF PLAN - SECOND FLOOR
AE301	OVERALL ROOF & PENTHOUSE FLOOR PLAN
AE400	ELEVATIONS
AE500	BULDING SECTION & CEILING DETAILS
AE510	SECTIONS & DETAILS
AE600	DOOR & WINDOW ELEVATIONS, DOOR SCHEDULES & DETAILS
AE610	FINISH LEGEND & INTERIOR DETAILS
AI800	INTERIOR ELEVATIONS
AI801	INTERIOR ELEVATIONS
AI810	CASEWORK DETAILS
AI811	CASEWORK DETAILS

FIRE SUPPRESSION

FX001	COVER SHEET
FX101	NEW WORK PLAN - GENERATOR BUILDING
P1-FK101	DEMOLITION PLAN - FIRST FLOOR - PHASE 1
P1-FX101	NEW WORK PLAN - FIRST FLOOR - PHASE 1
P2-FK101	DEMOLITION PLAN - FIRST FLOOR - PHASE 2
P2-FX101	NEW WORK PLAN - FIRST FLOOR - PHASE 2
P3-FK101	DEMOLITION PLAN - FIRST FLOOR - PHASE 3
P3-FX101	NEW WORK PLAN - FIRST FLOOR - PHASE 3

05-01-20

P4-FK101	DEMOLITION PLAN - FIRST FLOOR - PHASE 4
P4-FX101	NEW WORK PLAN - FIRST FLOOR - PHASE 4
FX501	DETAILS

PLUMBING

P-001	ABBREVIATIONS, NOTES & SYMBOLS
P1-PD111	DEMOLITION PLAN - 1ST FLOOR, PHASE 1
P1-P-111	NEW WORK PLAN - 1ST FLOOR, PHASE 1
P1-P-112	NEW WORK PLAN - 1ST FLOOR, PHASE 1
P1-P-113	NEW WORK PLAN - MECHANICAL ROOM, PHASE 1
P2-PD111	DEMOLITION PLAN - 1ST FLOOR, PHASE 2 (SOUTH)
P2-PD112	DEMOLITION PLAN - 1ST FLOOR, PHASE 2 (NORTH)
P2-P-111	NEW WORK PLAN - 1ST FLOOR, PHASE 2 (SOUTH)
P2-P-112	NEW WORK PLAN - 1ST FLOOR, PHASE 2 (NORTH)
P3-PD111	DEMOLITION PLAN - 1ST FLOOR, PHASE 3
P3-P-111	NEW WORK PLAN - 1ST FLOOR, PHASE 3
P4-PD111	DEMOLITION PLAN - 1ST FLOOR, PHASE 4
P4-P-111	NEW WORK PLAN - 1ST FLOOR, PHASE 4
P-501	DETAILS
P-502	DETAILS
P-601	ISOMETRIC DIAGRAM MEDICAL GAS
P-602	ISOMETRIC DIAGRAM DOMESTIC WATER
P-603	ISOMETRIC DIAGRAM SANITARY & VENT
P-701	SCHEDULES

MECHANICAL

M-001	ABBREVIATIONS, NOTES & SYMBOLS
MD601	DEMOLITION - CHILLED WATER FLOW DIAGRAM
P1-MD100	PIPING DEMOLITION PLAN - SUB BASEMENT, PHASE 1
P1-MD101	DEMOLITION PLAN - BASEMENT, PHASE 1
P1-MD102	DEMOLITION PLAN - BASEMENT GENERATOR, PHASE 1
P1-MD103	DEMOLITION PLAN - BASEMENT, PHASE 1
P1-MD111	DEMOLITION DUCTWORK PLAN - 1ST FLOOR, PHASE 1
P1-MD112	DEMOLITION PLAN - MECHANICAL ROOM, PHASE 1
P1-MD121	DEMOLITION ROOF PLAN, PHASE 1

05-01-20

P1-MH101	DUCTWORK PLAN - BASEMENT, PHASE 1
P1-MH111	DUCTWORK PLAN - 1ST FLOOR, PHASE 1
P1-MH112	DUCTWORK PLAN - MECHANICAL ROOM, PHASE 1
P1-MH121	DUCTWORK PLAN - ROOF, PHASE 1
P1-MP100	PIPING PLAN - SUB-BASEMENT
P1-MP102	PIPING PLAN - BASEMENT GENERATOR, PHASE 1
P1-MP103	PIPING PLAN - BASEMENT CHILLER, PHASE 1
P1-MP111	PIPING PLAN - 1ST FLOOR, PHASE 1
P1-MP112	PIPING PLAN - MECHANICAL ROOM, PHASE 1
P2-MD111	DEMOLITION DUCTWORK PLAN - 1ST FLOOR, PHASE 2
P2-MD112	DEMOLITION DUCKWORK PLAN - 1ST FLOOR, PHASE 2 (NORTH)
P2-MD113	DEMOLITION PLAN - MECHANICAL ROOM, PHASE 2
P2-MH111	DUCTWORK PLAN - 1ST FLOOR, PHASE 2 (SOUTH)
P2-MH112	DUCTWORK PLAN - 1ST FLOOR, PHASE 2 (NORTH)
P2-MH113	DUCTWORK PLAN - MECHANICAL ROOM, PHASE 2
P2-MH121	DUCTWORK PLAN - ROOF, PHASE 2
P2-MP111	PIPING PLAN - 1ST FLOOR, PHASE 2 (SOUTH)
P2-MP112	PIPING PLAN - 1ST FLOOR, PHASE 2 (NORTH)
P2-MP113	PIPING PLAN - MECHANICAL ROOM, PHASE 2
P3-MD111	DEMOLITION DUCTWORK PLAN - 1ST FLOOR, PHASE 3
P3-MH111	DUCTWORK PLAN - 1ST FLOOR, PHASE 3
P3-MH112	DUCTWORK PLAN - MECHANICAL ROOM, PHASE 3
P3-MH121	DUCTWORK PLAN - ROOF, PHASE 3
P3-MP111	PIPING PLAN - 1ST FLOOR, PHASE 3
P3-MP112	PIPING PLAN - MECHANICAL ROOM, PHASE 3
P4-MD111	DEMOLITION DUCTWORK PLAN - 1ST FLOOR, PHASE 4
P4-MD112	DEMOLITION PLAN - MECHANICAL ROOM, PHASE 4
P4-MH111	DUCTWORK PLAN - 1ST FLOOR, PHASE 4
P4-MH121	DUCTWORK PLAN - ROOF, PHASE 4
P4-MP111	PIPING PLAN - 1ST FLOOR, PHASE 4
M-301	SECTIONS
M-501	DETAILS
M-502	DETAILS
M-503	DETAILS

05-01-20

M-504	DETAILS
M-601	AIR FLOW DIAGRAM - PHASE 1
M-602	AIR FLOW DIAGRAM - PHASES 2 & 3
M-603	AIR FLOW DIAGRAM - PHASE 4
M-604	CHILLED WATER FLOW DIAGRAM
M-605	CHILLED WATER FLOW DIAGRAM
M-606	NO. 2 FUEL OIL FLOW DIAGRAM - GENERATORS
M-701	SCHEDULES
M-702	SCHEDULES
M-703	SCHEDULES
M-704	SCHEDULES
M-801	CONTROLS
M-802	AHU FOR SURGICAL SUITE (VAV) DIAGRAM
M-803	AHU FOR SURGICAL SUITE (VAV) POINTS SUMMARY
M-804	CONTROLS DIAGRAMS
M-805	ISOLATION PATIENT ROOM & EXHAUST FAN CONTROL DIAGRAM
M-806	AIR COOLED CHILLER & CHILLED WATER CONTROL DIAGRAM
M-807	AIR TERMINAL UNIT CONTROL DIAGRAM

ELECTRICAL

E-001	ABBREVIATIONS & SYMBOLS
E-002	NOTES
ES101	SITE PLAN
ED111	DEMOLITION PLAN - MECHANICAL ROOM
EP111	POWER PLAN - MECHANICAL ROOM
EP121	POWER PLAN - ROOF
P1-ED101	DEMOLITION PLAN - BASEMENT, PHASE 1
P1-ED111	DEMOLITION PLAN - 1ST FLOOR, PHASE 1
P1-EL111	LIGHTING PLAN - 1ST FLOOR, PHASE 1
P1-EP100	POWER PLAN - SUB-BASEMENT, PHASE 1
P1-EP101	POWER PLAN - BASEMENT, PHASE 1
P1-EP102	POWER PLAN - BASEMENT, PHASE 1
P1-EP111	POWER PLAN - 1ST FLOOR, PHASE 1

05-01-20

P1-EY111	SYSTEMS PLAN - 1ST FLOOR, PHASE 1
P2-ED111	DEMOLITION PLAN - 1ST FLOOR, PHASE 2 (SOUTH)
P2-ED112	DEMOLITION PLAN - 1ST FLOOR, PHASE 2 (NORTH)
P2-EL111	LIGHTING PLAN - 1ST FLOOR, PHASE 2 (SOUTH)
P2-EL112	LIGHTING PLAN - 1ST FLOOR, PHASE 2 (NORTH)
P2-EP111	POWER PLAN - 1ST FLOOR, PHASE 2 (SOUTH)
P2-EP112	POWER PLAN - 1ST FLOOR, PHASE 2 (NORTH)
P2-EY111	SYSTEMS PLAN - 1ST FLOOR, PHASE 2 (SOUTH)
P2-EY112	SYSTEMS PLAN - 1ST FLOOR, PHASE 2 (NORTH)
P3-ED111	DEMOLITION PLAN - 1ST FLOOR, PHASE 3
P3-EL111	LIGHTING PLAN - 1ST FLOOR, PHASE 3
P3-EP111	POWER PLAN - 1ST FLOOR, PHASE 3
P3-EY111	SYSTEMS PLAN - 1ST FLOOR, PHASE 3
P4-ED111	DEMOLITION PLAN - 1ST FLOOR, PHASE 4
P4-EL111	LIGHTING PLAN - 1ST FLOOR, PHASE 4
P4-EP111	POWER PLAN - 1ST FLOOR, PHASE 4
P4-EY111	SYSTEMS PLAN - 1ST FLOOR, PHASE 4
E-501	DETAILS
E-502	DETAILS
E-503	O.R. DETAILS
E-504	HYBRID O.R. DETAILS
E-505	HYBRID O.R. DETAILS
E-506	HYBRID O.R. DETAILS
E-507	HYBRID O.R. DETAILS
E-601	DEMOLITION - SINGLE LINE DIAGRAM
E-602	NEW WORK - SINGLE LINE DIAGRAM
E-603	TELE/DATA RISER DIAGRAM
E-701	PANEL SCHEDULES
E-702	PANEL SCHEDULES
E-703	ISOLATION PANEL SCHEDULES
E-704	SCHEDULES & LIGHTING CONTROL RISER DIAGRAM
E-705	RELAY PANEL SCHEDULES

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

05-01-20

FIRE ALARM

FA001	COVER SHEET
FA101	NEW WORK PLAN - GENERATOR BUILDING
P1-FD101	DEMOLITION PLAN - FIRST FLOOR - PHASE 1
P1-FA101	NEW WORK PLAN - FIRST FLOOR - PHASE 1
P2-FD101	DEMOLITION PLAN - FIRST FLOOR - PHASE 2
P2-FA101	NEW WORK PLAN - FIRST FLOOR - PHASE 2
P3-FD101	DEMOLITION PLAN - FIRST FLOOR - PHASE 3
P3-FA101	NEW WORK PLAN - FIRST FLOOR - PHASE 3
P4-FD101	DEMOLITION PLAN - FIRST FLOOR - PHASE 4
P4-FA101	NEW WORK PLAN - FIRST FLOOR - PHASE 4
FA501	DETAILS

- - - E N D - - -

01-01-21

SECTION 01 00 00
GENERAL REQUIREMENTS

GENERAL

1.1 SAFETY REQUIREMENTS

- A. Refer to section 01 35 26, SAFETY REQUIREMENTS for safety and infection control requirements.

1.2 GENERAL INTENTION

- A. Contractor shall completely prepare site for building operations, including demolition and removal of existing structures, and furnish labor and materials and perform work for VA Project No. 658-10-103 Renovate Surgical Suite - Phase II, renovating the surgical floor along with upgrades to the HVAC and replacement of the emergency generator and all associated systems as required by drawings and specifications.
- B. Visits to the site by Bidders may be made only by appointment with the Contracting Officer.
- C. Offices of Miller-Remick, LLC as Architect-Engineers, will render certain technical services during construction. Such services shall be considered as advisory to the Government and shall not be construed as expressing or implying a contractual act of the Government without affirmations by Contracting Officer or his duly authorized representative.
- D. All employees of general contractor and subcontractors shall comply with VA security management program and obtain permission of the VA police, be identified by project and employer, and restricted from unauthorized access.

1.3 STATEMENT OF BID ITEM(S)

- A. ITEM I, GENERAL CONSTRUCTION: Work includes civil, general, HVAC, plumbing mechanical, electrical, structural, fire protection fire alarm, security demolition, construction and alterations for the renovation of the OR Suite and adjacent associated Pre-Op, PACU, Clean Core, etc and certain other items as indicated in the Contract Documents.
- B. ALTERNATE NO. 1: BASE BID except delete all work associated with Construction Phase 4.

01-01-21

1.4 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR

- A. Drawings and contract documents may be obtained from the website where the solicitation is posted. Additional copies will be at Contractor's expense.

1.5 CONSTRUCTION SECURITY REQUIREMENTS

A. Security Plan:

1. The security plan defines both physical and administrative security procedures that will remain effective for the entire duration of the project.
2. The General Contractor is responsible for assuring that all sub-contractors working on the project and their employees also comply with VA and Medical Center Policies and Procedures.

B. Security Procedures:

1. General Contractor's employees shall not enter the project site without appropriate badge. They may also be subject to inspection of their personal effects when entering or leaving the project site.
2. Before starting work the General Contractor shall give one week's notice to the Contracting Officer so that security arrangements can be provided for the employees. This notice is separate from any notices required for utility shutdown described later in this section.
3. No photography of VA premises is allowed without written permission of the Contracting Officer or COR. Patients and staff are not to be photographed at any time.
4. VA reserves the right to close down or shut down the project site and order General Contractor's employees off the premises in the event of a national emergency. The General Contractor may return to the site only with the written approval of the Contracting Officer.

C. Guards: (NOT USED)

D. Key Control:

1. The General Contractor shall provide duplicate keys and lock combinations to the Contracting officers representative (COR) for the purpose of security inspections of every area of project

01-01-21

including tool boxes and parked machines and take any emergency action.

2. The General Contractor shall install all permanent cores at completion of the work. See Section 08 71 00, DOOR HARDWARE and coordinate.

E. Document Control:

1. Before starting any work, the General Contractor/Sub Contractors shall submit an electronic security memorandum describing the approach to following goals and maintaining confidentiality of "sensitive information".
2. The General Contractor is responsible for safekeeping of all drawings, project manual and other project information. This information shall be shared only with those with a specific need to accomplish the project.
3. Certain documents, sketches, videos or photographs and drawings may be marked "Law Enforcement Sensitive" or "Sensitive Unclassified". Secure such information in separate containers and limit the access to only those who will need it for the project. Return the information to the Contracting Officer upon request.
4. These security documents shall not be removed or transmitted from the project site without the written approval of Contracting Officer.
5. All paper waste or electronic media such as CD's and diskettes shall be shredded and destroyed in a manner acceptable to the VA.
6. Notify Contracting Officer and Site Security Officer immediately when there is a loss or compromise of "sensitive information".
7. All electronic information shall be stored in specified location following VA standards and procedures using an Engineering Document Management Software (EDMS).
 - a) Security, access and maintenance of all project drawings, both scanned and electronic shall be performed and tracked through the EDMS system.
 - b) "Sensitive information" including drawings and other documents may be attached to e-mail provided all VA encryption procedures are followed.

F. Motor Vehicle Restrictions

01-01-21

1. Vehicle authorization request shall be required for any vehicle entering the site and such request shall be submitted 24 hours before the date and time of access. Access shall be restricted to picking up and dropping off materials and supplies.
2. A limited number of permits shall be issued for General Contractor and its employees for parking in designated areas only. Contractor to coordinate with VA Medical Center Facility Manager.
3. Contractor shall comply with MCP 658-07-01 "Vehicle Registration Parking and Transportation".
4. Contractor shall maintain the areas they use, including mowing, trash pick-up, etc.

1.6 OPERATIONS AND STORAGE AREAS (FAR 52.236-10)

- A. The Contractor shall confine all operations (including storage of materials) on Government premises to areas authorized or approved by the Contracting Officer. The Contractor shall hold and save the Government, its officers and agents, free and harmless from liability of any nature occasioned by the Contractor's performance.
- B. Temporary buildings (e.g., storage sheds, shops, offices) and utilities may be erected by the Contractor only with the approval of the Contracting Officer and shall be built with labor and materials furnished by the Contractor without expense to the Government. The temporary buildings and utilities shall remain the property of the Contractor and shall be removed by the Contractor at its expense upon completion of the work. With the written consent of the Contracting Officer, the buildings and utilities may be abandoned and need not be removed.
- C. The Contractor shall, under regulations prescribed by the Contracting Officer, use only established roadways, or use temporary roadways constructed by the Contractor when and as authorized by the Contracting Officer. When materials are transported in prosecuting the work, vehicles shall not be loaded beyond the loading capacity recommended by the manufacturer of the vehicle or prescribed by any Federal, State, or local law or regulation. When it is necessary to cross curbs or sidewalks, the Contractor shall protect them from damage. The Contractor shall repair or pay for the repair of any damaged curbs, sidewalks, or roads.

01-01-21

- D. Working space and space available for storing materials shall be as shown on the drawings, and as determined by the COR. Contractors are to provide layout plan for buildings, etc., to be approved by the COR.
- E. Workers are subject to rules of Medical Center applicable to their conduct.
- F. Execute work in such a manner as to interfere as little as possible with work being done by others. Keep roads clear of construction materials, debris, standing construction equipment and vehicles at all times.
- G. Execute work so as to interfere as little as possible with normal functioning of Medical Center as a whole, including operations of utility services, fire protection systems and any existing equipment, and with work being done by others. Use of equipment and tools that transmit vibrations and noises through the building structure, are not permitted in buildings that are occupied, during construction, jointly by patients or medical personnel, and Contractor's personnel, except as permitted by COR where required by limited working space.
 - 1. Do not store materials and equipment in other than assigned areas.
 - 2. Schedule delivery of materials and equipment to immediate construction working areas within buildings in use by Department of Veterans Affairs in quantities sufficient for not more than two work days. Provide unobstructed access to Medical Center areas required to remain in operation.
 - 3. Where access by Medical Center personnel to vacated portions of buildings is not required, storage of Contractor's materials and equipment will be permitted subject to fire and safety requirements.
- H. Utilities Services: Where necessary to cut existing pipes, electrical wires, conduits, cables, etc., of utility services, or of fire protection systems or communications systems (except telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by COR. All such actions shall be coordinated with the COR and Utility Company as necessary:
- I. Phasing:
 - 1. The Medical Center must maintain its operation 24 hours a day 7 days a week. Therefore, any interruption in service must be scheduled and coordinated with the COR to ensure that no lapses in operation occur.

01-01-21

2. It is the CONTRACTOR'S responsibility to develop a work plan and schedule detailing, at a minimum, the procedures to be employed, the equipment and materials to be used, the interim life safety measure to be used during the work, and a schedule defining the duration of the work with milestone subtasks.
3. To ensure such executions, Contractor shall furnish the COR with a schedule of approximate phasing dates on which the Contractor intends to accomplish work in each specific area of site, building or portion thereof. In addition, Contractor shall notify the COR two weeks in advance of the proposed date of starting work in each specific area of site, building or portion thereof. Arrange such phasing dates to ensure accomplishment of this work in successive phases mutually agreeable to COR and Contractor, as follows (Refer to drawings for phase limitations):

Phase I - DEMOLISH AREAS IN EXISTING PATIENT WING AS INDICATED TO BUILD 3 NEW OPERATING ROOMS CORRIDORS AND PART OF CLEAN CORE.

EXISTING OPERATING ROOMS AND CLEAN CORE TO REMAIN IN OPERATION THE ENTIRE TIME. THE EXISTING LOUNGE AND BATHROOMS ARE TO BE DEMOLISHED SO THAT THE NEW CORRIDOR CAN BE CONSTRUCTED TO ALLOW CLEAN SUPPLIES TO REACH THE NEWLY CONSTRUCTED OPERATING ROOMS IN PHASE 2.

Phase II - AT THE BEGINING OF THE PHASE A NEW TEMPORARY CORRIDOR FROM THE CLEAN ELEVATOR THRU THE CLEAN CORE, TO THE NEW CORRIDOR CREATED IN PHASE 1, SHALL BE CONSTRUCTED PRIOR TO ANY DEMOLITION. ONCE THE CORRIDOR IS COMPLETE DEMOLISION OF EXISTING OPERATING ROOMS 2, 3, 4, 5, 6 AND REMAINING PORTIONS OF THE CLEAN CORE CAN PROCEED. THE HYBRID OR AND THE TWO NEW OR'S BECOME OPERATIONAL. NEW OR'S 4, 5, 6, THE REMANING CLEAN CORE, AND SUPPORT ROOMS ARE BUILT OUT.

Phase III - WORK IN EXISTING OR PREP TAKES PLACE. EXISTING PACU IS USED FOR PRE OP PREP AND RECOVERY DURING THIS PHASE. NEW OFFICES AND STORAGE ROOM ARE BUILT OUT. EXISTING OFFICES ARE RENOVATED.

Phase IV - WORK IN EXISTING PACU TAKES PLACE. NEW OR PREP AREA IS USED FOR PRE OP PREP AND PACU DURING THIS PHASE. OFFICES ARE BUILT OUT AT THIS TIME.

- J. Part of Bldg. 143 will be vacated by Government in accordance with above phasing beginning immediately after date of receipt of Notice to

01-01-21

Proceed 2 weeks after approval of all preconstruction submittals listed in submittal register and turned over to Contractor.

- K. Building No. 143 will be occupied during performance of work; but immediate areas of alterations will be vacated.
1. Contractor shall take all measures and provide all material necessary for protecting existing equipment and property in affected areas of construction against dust and debris, so that equipment and affected areas to be used in the Medical Centers operations will not be hindered. Contractor shall permit access to Department of Veterans Affairs personnel and patients through other construction areas which serve as routes of access to such affected areas and equipment. These routes whether access or egress shall be isolated from the construction area by temporary partitions and have walking surfaces, lighting etc. to facilitate patient and staff access. Coordinate alteration work in areas occupied by Department of Veterans Affairs so that Medical Center operations will continue during the construction period.
 2. Immediate areas of alterations not mentioned in preceding Subparagraph 1 will be temporarily vacated while alterations are performed.
- L. Construction Fence: Before construction operations begin, Contractor shall provide a chain link construction fence, 1.83m (six feet) minimum height, around the construction area indicated on the drawings. Provide gates as required for access with necessary hardware, including hasps and padlocks. Fasten fence fabric to terminal posts with tension bands and to line posts and top and bottom rails with tie wires spaced at maximum 375mm (15 inches). Bottom of fences shall extend to 25mm (one inch) above grade. Remove the fence when directed by COR.
- M. When a building and/or construction site is turned over to Contractor, Contractor shall accept entire responsibility including upkeep and maintenance therefore:
1. Contractor shall maintain a minimum temperature of 4 degrees C (40 degrees F) at all times, except as otherwise specified.
 2. Contractor shall maintain in operating condition existing fire protection and alarm equipment. In connection with fire alarm

01-01-21

equipment, Contractor shall make arrangements for pre-inspection of site with department of VA personnel.

- N. Utilities Services: Maintain existing utility services for Medical Center at all times. Provide temporary facilities, labor, materials, equipment, connections, and utilities to assure uninterrupted services. Where necessary to cut existing water, steam, gases, sewer or air pipes, or conduits, wires, cables, etc. of utility services or of fire protection systems and communications systems (including telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by COR.
1. No utility service such as water, gas, steam, sewers or electricity, or fire protection systems and communications systems may be interrupted without prior approval of COR . Electrical work shall be accomplished with all affected circuits or equipment de-energized. When an electrical outage cannot be accomplished, work on any energized circuits or equipment shall not commence without a detailed work plan, the Medical Center Director's prior knowledge and written approval. Refer to specification Sections 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, 27 05 11 REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS and 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY for additional requirements.
 2. Contractor shall submit a request to interrupt any such services to COR, in writing, 30 days in advance of proposed interruption. Request shall state reason, date, exact time of, and approximate duration of such interruption.
 3. Contractor will be advised (in writing) of approval of request, or of which other date and/or time such interruption will cause least inconvenience to operations of Medical Center interruption time approved by Medical Center may occur at other than Contractor's normal working hours.
 4. Major interruptions of any system must be requested, in writing, at least 60 calendar days prior to the desired time and shall be performed as directed by the COR. Contractor shall submit a "Shutdown Schedule" identifying major shut downs required to be completed during construction.

01-01-21

5. In case of a contract construction emergency, service will be interrupted on approval of COR. Such approval will be confirmed in writing as soon as practical.
6. Whenever it is required that a connection fee be paid to a public utility provider for new permanent service to the construction project, for such items as water, sewer, electricity, gas or steam, payment of such fee shall be the responsibility of the Government and not the Contractor.
- O. Abandoned Lines: All service lines such as wires, cables, conduits, ducts, pipes and the like, and their hangers or supports, shall be removed back to their source. Those which are indicated to be abandoned but are not required to be entirely removed, shall be sealed, capped or plugged at the main, branch or panel they originate from. The lines shall not be capped in finished areas, but shall be removed and sealed, capped or plugged in ceilings, within furred spaces, in unfinished areas, or within walls or partitions; so that they are completely behind the finished surfaces.
- P. To minimize interference of construction activities with flow of Medical Center traffic, comply with the following:
 1. Keep roads, walks and entrances to grounds, to parking and to occupied areas of buildings clear of construction materials, debris and standing construction equipment and vehicles.
 2. Method and scheduling of required cutting, altering and removal of existing roads, walks and entrances must be approved by the COR.
- Q. Coordinate the work for this contract with other construction operations as directed by COR. This includes the scheduling of traffic and the use of roadways, as specified in Article, USE OF ROADWAYS.

1.7 ALTERATIONS

- A. Survey: Before any work is started, the Contractor shall make a thorough survey with the COR and a representative of VA Supply Service, areas of buildings in which alterations occur and areas which are anticipated routes of access, and furnish a report, signed by both, to the Contracting Officer. This report shall list by rooms and spaces:
 1. Existing condition and types of resilient flooring, doors, windows, walls and other surfaces not required to be altered throughout affected areas of building.

01-01-21

2. Existence and conditions of items such as plumbing fixtures and accessories, electrical fixtures, equipment, venetian blinds, shades, etc., required by drawings to be either reused or relocated, or both.
 3. Shall note any discrepancies between drawings and existing conditions at site.
 4. Shall designate areas for working space, materials storage and routes of access to areas within buildings where alterations occur and which have been agreed upon by Contractor and COR.
- B. Any items required by drawings to be either reused or relocated or both, found during this survey to be nonexistent, or in opinion of COR to be in such condition that their use is impossible or impractical, shall be furnished and/or replaced by Contractor with new items in accordance with specifications which will be furnished by Government. Provided the contract work is changed by reason of this subparagraph B, the contract will be modified accordingly, under provisions of clause entitled "DIFFERING SITE CONDITIONS" (FAR 52.236-2) and "CHANGES" (FAR 52.243-4).
- C. Re-Survey: Thirty days before expected partial or final inspection date, the Contractor and COR together shall make a thorough re-survey of the areas of buildings involved. They shall furnish a report on conditions then existing, of resilient flooring, doors, windows, walls and other surfaces as compared with conditions of same as noted in first condition survey report:
1. Re-survey report shall also list any damage caused by Contractor to such flooring and other surfaces, despite protection measures; and, will form basis for determining extent of repair work required of Contractor to restore damage caused by Contractor's workers in executing work of this contract.
- D. Protection: Provide the following protective measures:
1. Wherever existing roof surfaces are disturbed they shall be protected against water infiltration. In case of leaks, they shall be repaired immediately upon discovery.
 2. Temporary protection against damage for portions of existing structures and grounds where work is to be done, materials handled and equipment moved and/or relocated.

01-01-21

3. Protection of interior of existing structures at all times, from damage, dust and weather inclemency. Wherever work is performed, floor surfaces that are to remain in place shall be adequately protected prior to starting work, and this protection shall be maintained intact until all work in the area is completed.

1.8 DISPOSAL AND RETENTION

- A. Materials and equipment accruing from work removed and from demolition of buildings or structures, or parts thereof, shall be disposed of as follows:
 1. Reserved items which are to remain property of the Government are identified by attached tags as items to be stored. Items that remain property of the Government shall be removed or dislodged from present locations in such a manner as to prevent damage which would be detrimental to re-installation and reuse. Store such items where directed by COR.
 2. Items not reserved shall become property of the Contractor and be removed by Contractor from Medical Center.
 3. Items of portable equipment and furnishings located in rooms and spaces in which work is to be done under this contract shall remain the property of the Government. When rooms and spaces are vacated by the Department of Veterans Affairs during the alteration period, such items which are NOT required by drawings and specifications to be either relocated or reused will be removed by the Government in advance of work to avoid interfering with Contractor's operation.
 - a) Copies of the following listed CFR titles may be obtained from the Government Printing Office:
 - 40 CFR 261.....Identification and Listing of Hazardous Waste
 - 40 CFR 262.....Standards Applicable to Generators of Hazardous Waste
 - 40 CFR 263.....Standards Applicable to Transporters of Hazardous Waste
 - 40 CFR 761.....PCB Manufacturing, Processing, Distribution in Commerce, and use Prohibitions
 - 49 CFR 172.....Hazardous Material tables and Hazardous Material Communications Regulations

01-01-21

49 CFR 173.....Shippers - General Requirements for Shipments
and Packaging

49 CRR 173.....Subpart A General

49 CFR 173.....Subpart B Preparation of Hazardous Material for
Transportation

49 CFR 173.....Subpart J Other Regulated Material; Definitions
and Preparation

TSCA.....Compliance Program Policy Nos. 6-PCB-6 and 6-
PCB-7

**1.9 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND
IMPROVEMENTS (FAR 52.236-9)**

- A. The Contractor shall preserve and protect all structures, equipment, and vegetation (such as trees, shrubs, and grass) on or adjacent to the work site, which are not to be removed and which do not unreasonably interfere with the work required under this contract. The Contractor shall only remove trees when specifically authorized to do so, and shall avoid damaging vegetation that will remain in place. If any limbs or branches of trees are broken during contract performance, or by the careless operation of equipment, or by workers, the Contractor shall trim those limbs or branches with a clean cut and paint the cut with a tree-pruning compound as directed by the Contracting Officer.
- B. The Contractor shall protect from damage all existing improvements and utilities at or near the work site and on adjacent property of a third party, the locations of which are made known to or should be known by the Contractor. The Contractor shall repair any damage to those facilities, including those that are the property of a third party, resulting from failure to comply with the requirements of this contract or failure to exercise reasonable care in performing the work. If the Contractor fails or refuses to repair the damage promptly, the Contracting Officer may have the necessary work performed and charge the cost to the Contractor.
- C. Refer to Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS, for additional requirements on protecting vegetation, soils and the environment. Refer to Articles, "Alterations", "Restoration", and "Operations and Storage Areas" for additional instructions concerning repair of damage to structures and site improvements.

01-01-21

D. Refer to FAR clause 52.236-7, "Permits and Responsibilities," which is included in General Conditions. A National Pollutant Discharge Elimination System (NPDES) permit is required for this project. The Contractor is considered an "operator" under the permit and has extensive responsibility for compliance with permit requirements. VA will make the permit application available at the (appropriate medical center) office. The apparent low bidder, contractor and affected subcontractors shall furnish all information and certifications that are required to comply with the permit process and permit requirements. Many of the permit requirements will be satisfied by completing construction as shown and specified. Some requirements involve the Contractor's method of operations and operations planning and the Contractor is responsible for employing best management practices. The affected activities often include, but are not limited to the following:

1. Designating areas for equipment maintenance and repair;
2. Providing waste receptacles at convenient locations and provide regular collection of wastes;
3. Locating equipment wash down areas on site, and provide appropriate control of wash-waters;
4. Providing protected storage areas for chemicals, paints, solvents, fertilizers, and other potentially toxic materials; and
5. Providing adequately maintained sanitary facilities.

1.10 RESTORATION

- A. Remove, cut, alter, replace, patch and repair existing work as necessary to install new work. Except as otherwise shown or specified, do not cut, alter or remove any structural work, and do not disturb any ducts, plumbing, steam, gas, or electric work without approval of the COR. Existing work to be altered or extended and that is found to be defective in any way, shall be reported to the COR before it is disturbed. Materials and workmanship used in restoring work, shall conform in type and quality to that of original existing construction, except as otherwise shown or specified.
- B. Upon completion of contract, deliver work complete and undamaged. Existing work (walls, ceilings, partitions, floors, mechanical and electrical work, lawns, paving, roads, walks, etc.) disturbed or

01-01-21

removed as a result of performing required new work, shall be patched, repaired, reinstalled, or replaced with new work, and refinished and left in as good condition as existed before commencing work.

- C. At Contractor's own expense, Contractor shall immediately restore to service and repair any damage caused by Contractor's workers to existing piping and conduits, wires, cables, etc., of utility services or of fire protection systems and communications systems (including telephone) which are not scheduled for discontinuance or abandonment.
- D. Expense of repairs to such utilities and systems not shown on drawings or locations of which are unknown will be covered by adjustment to contract time and price in accordance with clause entitled "CHANGES" (FAR 52.243-4) and "DIFFERING SITE CONDITIONS" (FAR 52.236-2).

1.11 PHYSICAL DATA - SOIL CONDITIONS (NOT USED)

1.12 PROFESSIONAL SURVEYING SERVICES

- A. A registered professional land surveyor or registered civil engineer whose services are retained and paid for by the Contractor shall perform services specified herein and in other specification sections. The Contractor shall certify that the land surveyor or civil engineer is not one who is a regular employee of the Contractor, and that the land surveyor or civil engineer has no financial interest in this contract.

1.13 LAYOUT OF WORK

- A. The Contractor shall lay out the work from Government established base lines and bench marks, indicated on the drawings, and shall be responsible for all measurements in connection with the layout. The Contractor shall furnish, at Contractor's own expense, all stakes, templates, platforms, equipment, tools, materials, and labor required to lay out any part of the work. The Contractor shall be responsible for executing the work to the lines and grades that may be established or indicated by the Contracting Officer. The Contractor shall also be responsible for maintaining and preserving all stakes and other marks established by the Contracting Officer until authorized to remove them. If such marks are destroyed by the Contractor or through Contractor's negligence before their removal is authorized, the Contracting Officer may replace them and deduct the expense of the replacement from any amounts due or to become due to the Contractor.

01-01-21

(FAR 52.236-17)

- B. Establish and plainly mark such other lines and grades that are reasonably necessary to properly assure that location, orientation, and elevations established for each such structure and/or addition, are in accordance with lines and elevations shown on contract drawings.
- C. Following completion of general mass excavation and before any other permanent work is performed, establish and plainly mark (through use of appropriate batter boards or other means) sufficient additional survey control points or system of points as may be necessary to assure proper alignment, orientation, and grade of all major features of work. Survey shall include, but not be limited to, location of lines and grades of footings, exterior walls, center lines of columns in both directions, major utilities and elevations of floor slabs:
 - 1. Such additional survey control points or system of points thus established shall be checked and certified by a registered land surveyor or registered civil engineer. Furnish such certification to the COR before any work (such as footings, floor slabs, columns, walls, utilities and other major controlling features) is placed.
- D. Whenever changes from contract drawings are made in line or grading requiring certificates, record such changes on a reproducible drawing bearing the registered land surveyor or registered civil engineer seal, and forward these drawings upon completion of work to COR.
- E. Upon completion of the work, the Contractor shall furnish the COR one electronic copy and reproducible drawings at the scale of the contract drawings, showing the finished grade on the grid developed for constructing the work, including burial monuments and fifty foot stationing along new road centerlines. These drawings shall bear the seal of the registered land surveyor or registered civil engineer.
- F. The Contractor shall perform the surveying and layout work of this and other articles and specifications in accordance with the provisions of Article "Professional Surveying Services".

1.14 AS-BUILT DRAWINGS

- A. The contractor shall maintain two full size sets of as-built drawings which will be kept current during construction of the project, to include all contract changes, modifications and clarifications.

01-01-21

- B. All variations shall be shown in the same general detail as used in the contract drawings. To ensure compliance, as-built drawings shall be submitted for COR review with pencil copy of payment application.
- C. Contractor shall deliver two approved completed sets of as-built drawings in the electronic version (scanned PDF) to the COR within 15 calendar days after each completed phase and after the acceptance of the project by the COR.
- D. Paragraphs A, B, & C shall also apply to all shop drawings.

1.15 WARRANTY MANAGEMENT

- A. Warranty Management Plan: Develop a warranty management plan which contains information relevant to FAR 52.246-21 Warranty of Construction in at least 30 days before the planned pre-warranty conference, submit one set of the warranty management plan. Include within the warranty management plan all required actions and documents to assure that the Government receives all warranties to which it is entitled. The plan must be in narrative form and contain sufficient detail to render it suitable for use by future maintenance and repair personnel, whether tradesman, or of engineering background, not necessarily familiar with this contract. The term "status" as indicated below must include due date and whether item has been submitted or was approved. Warranty information made available during the construction phase must be submitted to the Contracting Officer for approval prior to each monthly invoice for payment. Assemble approved information in a binder and turn over to the Government upon acceptance of the work. The construction warranty period will begin on the date of the project acceptance and continue for the product warranty period. A joint 4 month and 9 month warranty inspection will be conducted, measured from time of acceptance, by the Contractor and the Contracting Officer. Include in the warranty management plan, but not limited to, the following:
 - 1. Roles and responsibilities of all personnel associated with the warranty process, including points of contact and telephone numbers within the company of the Contractor, subcontractors, manufacturers or suppliers involved.
 - 2. Furnish with each warranty the name, address and telephone number of each of the guarantor's representatives nearest project location.

01-01-21

3. Listing and status of delivery of all Certificates of Warranty for extended warranty items, to include roofs, HVAC balancing, pumps, motors, transformers and for all commissioned systems such as fire protection and alarm systems, sprinkler systems and lightning protection systems, etc.
 4. A list for each warranted equipment item, feature of construction or system indicating:
 - a. Name of item.
 - b. Model and serial numbers.
 - c. Location where installed.
 - d. Name and phone numbers of manufacturers and suppliers.
 - e. Name and phone numbers of manufacturers or suppliers.
 - f. Names, addresses and phone numbers of sources of spare parts.
 - g. Warranties and terms of warranty. Include one-year overall warranty of construction, including the starting date of warranty of construction. Items which have extended warranties must be indicated with separate warranty expiration dates.
 - h. Starting point and duration of warranty period.
 - i. Summary of maintenance procedures required to continue the warranty in force.
 - j. Cross-reference to specific pertinent Operation and Maintenance manuals.
 - k. Organizations, names and phone numbers of persons to call for warranty service.
 - l. Typical response time and repair time expected for various warranted equipment.
 5. The plans for attendance at the 4 and 9-month post construction warranty inspections conducted by the government.
 6. Procedure and status of tagging of all equipment covered by extended warranties.
 7. Copies of instructions to be posted near selected pieces of equipment where operation is critical for warranty and/or safety reasons.
- B. Performance & Payment Bonds: The Performance & Payment Bonds must remain effective throughout the construction period.

01-01-21

1. In the event the Contractor fails to commence and diligently pursue any construction warranty work required, the Contracting Officer will have the work performed by others, and after completion of the work, will charge the remaining construction warranty funds of expenses incurred by the Government while performing the work, including, but not limited to administrative expenses.
 2. In the event sufficient funds are not available to cover the construction warranty work performed by the Government at the contractor's expenses, the Contracting Officer will have the right to recoup expenses from the bonding company.
 3. Following oral or written notification of required construction warranty repair work, the Contractor shall respond in a timely manner. Written verification will follow oral instructions. Failure to respond will be cause for the Contracting Officer to proceed against the Contractor.
- C. Pre-Warranty Conference: Prior to contract completion, and at a time designated by the Contracting Officer, the Contractor shall meet with the Contracting Officer to develop a mutual understanding with respect to the requirements of this section. Communication procedures for Contractor notification of construction warranty defects, priorities with respect to the type of defect, reasonable time required for Contractor response, and other details deemed necessary by the Contracting Officer for the execution of the construction warranty will be established/ reviewed at this meeting. In connection with these requirements and at the time of the Contractor's quality control completion inspection, furnish the name, telephone number and address of a licensed and bonded company which is authorized to initiate and pursue construction warranty work action on behalf of the Contractor. This point of contact will be located within the local service area of the warranted construction, be continuously available and be responsive to Government inquiry on warranty work action and status. This requirement does not relieve the Contractor of any of its responsibilities in conjunction with other portions of this provision.
- D. Contractor's Response to Construction Warranty Service Requirements:
- E. Following oral or written notification by the Contracting Officer, the Contractor shall respond to construction warranty service requirements

01-01-21

in accordance with the "Construction Warranty Service Priority List" and the three categories of priorities listed below. Submit a report on any warranty item that has been repaired during the warranty period. Include within the report the cause of the problem, date reported, corrective action taken, and when the repair was completed. If the Contractor does not perform the construction warranty within the timeframe specified, the Government will perform the work and back charge the construction warranty payment item established.

1. First Priority Code 1. Perform onsite inspection to evaluate situation, and determine course of action within 4 hours, initiate work within 6 hours and work continuously to completion or relief.
2. Second Priority Code 2. Perform onsite inspection to evaluate situation, and determine course of action within 8 hours, initiate work within 24 hours and work continuously to completion or relief.
3. Third Priority Code 3. All other work to be initiated within 3 work days and work continuously to completion or relief.
4. The "Construction Warranty Service Priority List" is as follows:
 - a) Code 1-Life Safety Systems
 - 1) Fire suppression systems.
 - 2) Fire alarm system(s).
 - b) Code 1-Air Conditioning Systems
 - 1) Air conditioning leak in part of the building, if causing damage.
 - 2) Air conditioning system not cooling properly.
 - c) Code 1 Doors
 - 1) Overhead doors not operational, causing a security, fire or safety problem.
 - 1) Interior, exterior personnel doors or hardware, not functioning properly, causing security, fire or safety problem.
 - d) Code 3-Doors
 - 1) Overhead doors not operational.
 - 2) Interior/exterior personnel doors or hardware not functioning properly.
 - e) Code 1-Electrical

01-01-21

- 1) Power failure (entire area or any building operational after 1600 hours).
 - 2) Security lights.
 - 3) Smoke detectors.
- f) Code 2-Electrical
- 1) Power failure (no power to a room or part of building).
Receptacle and lights not operational (in a room or part of building).
- g) Code 3-Electrical
- 1) Exterior lights not operational.
- h) Code 1-Gas
- 1) Leaks and pipeline breaks.
- i) Code 1-Heat
- 1) Power failure affecting heat.
- j) Code 1-Plumbing
- 1) Hot water heater failure.
 - 2) Leaking water supply pipes
- k) Code 2-Plumbing
- 1) Flush valves not operating properly
 - 2) Fixture drain, supply line or any water pipe leaking.
 - 3) Toilet leaking at base.
- l) Code 3- Plumbing
- 1) Leaky faucets.
- m) Code 3-Interior
- 1) Floors damaged.
 - 2) Paint chipping or peeling.
 - 3) Casework damaged.
- n) Code 1-Roof Leaks
- 1) Damage to property is occurring.
- o) Code 2-Water (Exterior)
- 1) No water to facility.
- p) Code 2-Water (Hot)
- 1) No hot water in portion of building listed.
- q) Code 3
- 1) All work not listed above.

01-01-21

F. Warranty Tags: At the time of installation, tag each warranted item with a durable, oil and water-resistant tag approved by the Contracting Officer. Attach each tag with a copper wire and spray with a silicone waterproof coating. Also submit two record copies of the warranty tags showing the layout and design. The date of acceptance and the QC signature must remain blank until the project is accepted for beneficial occupancy. Show the following information on the tag.

Warranty Tags
Type of product/material
Model number
Serial number
Contract number
Warranty period from/to
Inspector's signature
Construction Contractor
Address
Telephone number
Warranty Contact
Address
Telephone number
Warranty response time priority code

1.16 USE OF ROADWAYS

A. For hauling, use only established public roads and roads on Medical Center property and, when authorized by the COR, such temporary roads which are necessary in the performance of contract work. Temporary roads shall be constructed and restoration performed by the Contractor at Contractor's expense. When necessary to cross curbing, sidewalks, or similar construction, they must be protected by well-constructed bridges.

1.17 RESIDENT ENGINEER'S FIELD OFFICE (NOT USED)

1.18 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT

A. Use of new installed mechanical and electrical equipment to provide heat, ventilation, plumbing, light and power will be permitted subject to written approval and compliance with the following provisions:

01-01-21

1. Permission to use each unit or system must be given by COR in writing. If the equipment is not installed and maintained in accordance with the written agreement and following provisions, the COR will withdraw permission for use of the equipment.
 2. Electrical installations used by the equipment shall be completed in accordance with the drawings and specifications to prevent damage to the equipment and the electrical systems, i.e. transformers, relays, circuit breakers, fuses, conductors, motor controllers and their overload elements shall be properly sized, coordinated and adjusted. Installation of temporary electrical equipment or devices shall be in accordance with NFPA 70, National Electrical Code, (2014 Edition), Article 590, *Temporary Installations*. Voltage supplied to each item of equipment shall be verified to be correct and it shall be determined that motors are not overloaded. The electrical equipment shall be thoroughly cleaned before using it and again immediately before final inspection including vacuum cleaning and wiping clean interior and exterior surfaces.
 3. Units shall be properly lubricated, balanced, and aligned. Vibrations must be eliminated.
 4. Automatic temperature control systems for preheat coils shall function properly and all safety controls shall function to prevent coil freeze-up damage.
 5. The air filtering system utilized shall be that which is designed for the system when complete, and all filter elements shall be replaced at completion of construction and prior to testing and balancing of system.
 6. All components of heat production and distribution system, metering equipment, condensate returns, and other auxiliary facilities used in temporary service shall be cleaned prior to use; maintained to prevent corrosion internally and externally during use; and cleaned, maintained and inspected prior to acceptance by the Government.
- B. Prior to final inspection, the equipment or parts used which show wear and tear beyond normal, shall be replaced with identical replacements, at no additional cost to the Government.
- C. This paragraph shall not reduce the requirements of the mechanical and electrical specifications sections.

01-01-21

- D. Any damage to the equipment or excessive wear due to prolonged use will be repaired replaced by the contractor at the contractor's expense.

1.19 TEMPORARY USE OF EXISTING ELEVATORS

- A. Use of existing elevators for handling building materials and Contractor's personnel will be permitted subject to following provisions:

1. Contractor makes all arrangements with the COR for use of elevators. The COR will ascertain that elevators are in proper condition. Contractor may use elevators Nos. S1, S2, S3 in Building Nos. 143 for exclusive use for daily and for special nonrecurring time intervals when permission is granted. Personnel for operating elevators will not be provided by the Department of Veterans Affairs.
2. Contractor covers and provides maximum protection of following elevator components:
 - a) Entrance jambs, heads soffits and threshold plates.
 - b) Entrance columns, canopy, return panels and inside surfaces of car enclosure walls.
 - c) Finish flooring.
3. Government will accept hoisting ropes of elevator and rope of each speed governor if they are worn under normal operation. However, if these ropes are damaged by action of foreign matter such as sand, lime, grit, stones, etc., during temporary use, they shall be removed and replaced by new hoisting ropes at the contractors expense.
4. If brake lining of elevators are excessively worn or damaged during temporary use, they shall be removed and replaced by new brake lining at the contractors expense.
5. All parts of main controller, starter, relay panel, selector, etc., worn or damaged during temporary use shall be removed and replaced with new parts at the contractors expense, if recommended by elevator inspector after elevator is released by Contractor.
6. Place elevator in condition equal, less normal wear, to that existing at time it was placed in service of Contractor as approved by Contracting Officer.

01-01-21

1.20 TEMPORARY USE OF NEW ELEVATORS (NOT USED)

1.21 TEMPORARY TOILETS

- A. Provide where directed, (for use of all Contractor's workers) ample temporary sanitary toilet accommodation with suitable sewer and water connections; or, when approved by COR, provide suitable dry closets where directed. Keep such places clean and free from flies and all connections and appliances connected therewith are to be removed prior to completion of contract, and premises left perfectly clean.

1.22 AVAILABILITY AND USE OF UTILITY SERVICES

- A. The Government shall make all reasonably required amounts of utilities available to the Contractor from existing outlets and supplies, as specified in the contract. The amount to be paid by the Contractor for chargeable electrical services shall be the prevailing rates charged to the Government. The Contractor shall carefully conserve any utilities furnished without charge.
- B. The Contractor, at Contractor's expense and in a workmanlike manner, in compliance with code and as satisfactory to the Contracting Officer, shall install and maintain all necessary temporary connections and distribution lines, and all meters required to measure the amount of electricity used for the purpose of determining charges. Before final acceptance of the work by the Government, the Contractor shall remove all the temporary connections, distribution lines, meters, and associated paraphernalia and repair restore the infrastructure as required.
- C. Contractor shall install meters at Contractor's expense and furnish the Medical Center a monthly record of the Contractor's usage of electricity as hereinafter specified.
- D. Heat: Furnish temporary heat necessary to prevent injury to work and materials through dampness and cold. Use of open salamanders or any temporary heating devices which may be fire hazards or may smoke and damage finished work, will not be permitted. Maintain minimum temperatures as specified for various materials:
 - 1. Obtain heat by connecting to Medical Center heating distribution system.
 - a) Steam is available at no cost to Contractor.

01-01-21

E. Electricity (for Construction and Testing): Furnish all temporary electric services.

1. Obtain electricity by connecting to the Medical Center electrical distribution system. The Contractor shall meter and pay for electricity required for electric cranes and hoisting devices, electrical welding devices and any electrical heating devices providing temporary heat. Electricity for all other uses is available at no cost to the Contractor.

F. Water (for Construction and Testing): Furnish temporary water service.

1. Obtain water by connecting to the Medical Center water distribution system. Provide reduced pressure backflow preventer at each connection as per code. Water is available at no cost to the Contractor.
2. Maintain connections, pipe, fittings and fixtures and conserve water-use so none is wasted. Failure to stop leakage or other wastes will be cause for revocation (at COR discretion) of use of water from Medical Center's system.

G. Fuel: Natural and LP gas and burner fuel oil required for boiler cleaning, normal initial boiler-burner setup and adjusting, and for performing the specified boiler tests will be furnished by the Government. Fuel required for prolonged boiler-burner setup, adjustments, or modifications due to improper design or operation of boiler, burner, or control devices shall be furnished and paid by the Contractor at Contractor's expense.

1.23 NEW TELEPHONE EQUIPMENT

- A. The contractor shall coordinate with the work of installation of telephone equipment by others. This work shall be completed before the building is turned over to VA.

1.24 TESTS

- A. As per specification section 23 05 93 the contractor shall provide a written testing plan complete with component level, equipment level, sub-system level and system level breakdowns. The plan will provide a schedule and a written sequence of what will be tested, how and what the expected outcome will be. This document will be submitted for approval prior to commencing work. The contractor shall document the

01-01-21

results of the approved plan and submit for approval with the as built documentation.

- B. Pre-test mechanical and electrical equipment and systems and make corrections required for proper operation of such systems before requesting final tests. Final test will not be conducted unless pre-tested.
- C. Conduct final tests required in various sections of specifications in presence of an authorized representative of the Contracting Officer. Contractor shall furnish all labor, materials, equipment, instruments, and forms, to conduct and record such tests.
- D. Mechanical and electrical systems shall be balanced, controlled and coordinated. A system is defined as the entire system which must be coordinated to work together during normal operation to produce results for which the system is designed. For example, air conditioning supply air is only one part of entire system which provides comfort conditions for a building. Other related components are return air, exhaust air, steam, chilled water, refrigerant, hot water, controls and electricity, etc. Another example of a system which involves several components of different disciplines is a boiler installation. Efficient and acceptable boiler operation depends upon the coordination and proper operation of fuel, combustion air, controls, steam, feedwater, condensate and other related components.
- E. All related components as defined above shall be functioning when any system component is tested. Tests shall be completed within a reasonably period of time during which operating and environmental conditions remain reasonably constant and are typical of the design conditions.
- F. Individual test result of any component, where required, will only be accepted when submitted with the test results of related components and of the entire system.

1.25 INSTRUCTIONS

- A. Contractor shall furnish Maintenance and Operating manuals (hard copies and electronic) and verbal instructions when required by the various sections of the specifications and as hereinafter specified.
- B. Manuals: Maintenance and operating manuals and one compact disc (four hard copies and one electronic copy each) for each separate piece of

01-01-21

equipment shall be delivered to the COR coincidental with the delivery of the equipment to the job site. Manuals shall be complete, detailed guides for the maintenance and operation of equipment. They shall include complete information necessary for starting, adjusting, maintaining in continuous operation for long periods of time and dismantling and reassembling of the complete units and sub-assembly components. Manuals shall include an index covering all component parts clearly cross-referenced to diagrams and illustrations. Illustrations shall include "exploded" views showing and identifying each separate item. Emphasis shall be placed on the use of special tools and instruments. The function of each piece of equipment, component, accessory and control shall be clearly and thoroughly explained. All necessary precautions for the operation of the equipment and the reason for each precaution shall be clearly set forth. Manuals must reference the exact model, style and size of the piece of equipment and system being furnished. Manuals referencing equipment similar to but of a different model, style, and size than that furnished will not be accepted.

- C. Instructions: Contractor shall provide qualified, factory-trained manufacturers' representatives to give detailed training to assigned Department of Veterans Affairs personnel in the operation and complete maintenance for each piece of equipment. All such training will be at the job site. These requirements are more specifically detailed in the various technical sections. Instructions for different items of equipment that are component parts of a complete system, shall be given in an integrated, progressive manner. All instructors for every piece of component equipment in a system shall be available until instructions for all items included in the system have been completed. This is to assure proper instruction in the operation of inter-related systems. All instruction periods shall be at such times as scheduled by the COR and shall be considered concluded only when the COR is satisfied in regard to complete and thorough coverage. The contractor shall submit a course outline with associated material to the COR for review and approval prior to scheduling training to ensure the subject matter covers the expectations of the VA and the contractual requirements. The Department of Veterans Affairs reserves the right to

01-01-21

request the removal of, and substitution for, any instructor who, in the opinion of the COR, does not demonstrate sufficient qualifications in accordance with requirements for instructors above.

1.26 GOVERNMENT-FURNISHED PROPERTY

- A. The Government shall deliver to the Contractor, the Government-furnished property shown on the drawings.
- B. Equipment furnished by Government to be installed by Contractor will be furnished to Contractor at the Medical Center .
- C. Contractor shall be prepared to receive this equipment from Government and store or place such equipment not less than 90 days before Completion Date of project.
 - 1. *Storage space for equipment will be provided by the Government and the Contractor shall be prepared to unload and store such equipment therein upon its receipt at the Medical Center.
- D. Notify Contracting Officer in writing, 60 days in advance, of date on which Contractor will be prepared to receive equipment furnished by Government. Arrangements will then be made by the Government for delivery of equipment.
 - 1. Immediately upon delivery of equipment, Contractor shall arrange for a joint inspection thereof with a representative of the Government. At such time the Contractor shall acknowledge receipt of equipment described, make notations, and immediately furnish the Government representative with a written statement as to its condition or shortages.
 - 2. Contractor thereafter is responsible for such equipment until such time as acceptance of contract work is made by the Government.
- E. Equipment furnished by the Government will be delivered in a partially assembled (knock down) condition in accordance with existing standard commercial practices, complete with all fittings, fastenings, and appliances necessary for connections to respective services installed under contract. All fittings and appliances (i.e., couplings, ells, tees, nipples, piping, conduits, cables, and the like) necessary to make the connection between the Government furnished equipment item and the utility stub-up shall be furnished and installed by the contractor at no additional cost to the Government.

01-01-21

- F. Completely assemble and install the Government furnished equipment in place ready for proper operation in accordance with specifications and drawings.
- G. Furnish supervision of installation of equipment at construction site by qualified factory trained technicians regularly employed by the equipment manufacturer.

1.27 RELOCATED EQUIPMENT AND ITEMS

- A. Contractor shall disconnect, dismantle as necessary, remove and reinstall in new location, all existing equipment and items indicated by symbol "R" or otherwise shown to be relocated by the Contractor.
- B. Perform relocation of such equipment or items at such times and in such a manner as directed by the COR.
- C. Suitably cap existing service lines, such as steam, condensate return, water, drain, gas, air, vacuum and/or electrical, at the main whenever such lines are disconnected from equipment to be relocated. Remove abandoned lines in finished areas and cap as specified herein before under paragraph "Abandoned Lines".
- D. Provide all mechanical and electrical service connections, fittings, fastenings and any other materials necessary for assembly and installation of relocated equipment; and leave such equipment in proper operating condition.
- E. All service lines such as noted above for relocated equipment shall be in place at point of relocation ready for use before any existing equipment is disconnected. Make relocated existing equipment ready for operation or use immediately after reinstallation.

1.28 STORAGE SPACE FOR DEPARTMENT OF VETERANS AFFAIRS EQUIPMENT (NOT USED)

1.29 CONSTRUCTION SIGN

- A. Provide a Construction Sign where directed by the COR. All wood members shall be of framing lumber. Cover sign frame with 0.7 mm (24 gage) galvanized sheet steel nailed securely around edges and on all bearings. Provide three 100 by 100 mm (4 inch by 4 inch) posts (or equivalent round posts) set 1200 mm (four feet) into ground. Set bottom of sign level at 900 mm (three feet) above ground and secure to posts with through bolts. Make posts full height of sign. Brace posts with 50 x 100 mm (two by four inch) material as directed.

01-01-21

- B. Paint all surfaces of sign and posts two coats of white gloss paint. Border and letters shall be of black gloss paint, except project title which shall be blue gloss paint.
- C. Maintain sign and remove it when directed by the COR.
- D. Detail Drawing of construction sign showing required legend and other characteristics of sign is attached hereto and made a part of this specification.

1.30 SAFETY SIGN

- A. Provide a Safety Sign where directed by COR. Face of sign shall be 19 mm (3/4 inch) thick exterior grade plywood. Provide two 100 mm by 100 mm (four by four inch) posts extending full height of sign and 900 mm (three feet) into ground. Set bottom of sign level at 1200 mm (four feet) above ground.
- B. Paint all surfaces of Safety Sign and posts with one prime coat and two coats of white gloss paint. Letters and design shall be painted with gloss paint of colors noted.
- C. Maintain sign and remove it when directed by COR.
- D. Standard Detail Drawing Number SD10000-02 (Found on VA TIL) of safety sign showing required legend and other characteristics of sign and are attached hereto and is made a part of this specification.
- E. Post the number of accident-free days on a daily basis.

1.31 PHOTOGRAPHIC DOCUMENTATION

- A. During the construction period through completion, provide photographic documentation of construction progress and at selected milestones including electronic indexing, navigation, storage and remote access to the documentation, as per these specifications. The commercial photographer or the subcontractor used for this work shall meet the following qualifications:
 - 1. Demonstrable minimum experience of three (3) years in operation providing documentation and advanced indexing/navigation systems including a representative portfolio of construction projects of similar type, size, duration and complexity as the Project.
 - 2. Demonstrable ability to service projects throughout North America, which shall be demonstrated by a representative portfolio of active projects of similar type, size, duration and complexity as the Project.

01-01-21

B. Photographic documentation elements:

1. Each digital image shall be taken with a professional grade camera with minimum size of 6 megapixels (MP) capable of producing 200x250mm (8 x 10 inch) prints with a minimum of 2272 x 1704 pixels and 400x500mm (16 x 20 inch) prints with a minimum 2592 x 1944 pixels.
2. Indexing and navigation system shall utilize actual AUTOCAD construction drawings, making such drawings interactive on an on-line interface. For all documentation referenced herein, indexing and navigation must be organized by both time (date-stamped) and location throughout the project.
3. Documentation shall combine indexing and navigation system with inspection-grade digital photography designed to capture actual conditions throughout construction and at critical milestones. Documentation shall be accessible on-line through use of an internet connection. Documentation shall allow for secure multiple-user access, simultaneously, on-line.
4. Before construction, the building pad, adjacent streets, roadways, parkways, driveways, curbs, sidewalks, landscaping, adjacent utilities and adjacent structures surrounding the building pad and site shall be documented. Overlapping photographic techniques shall be used to ensure maximum coverage. Indexing and navigation accomplished through interactive architectural drawings. If site work or pad preparation is extensive, this documentation may be required immediately before construction and at several pre-determined intervals before building work commences.
5. Construction progress for all trades shall be tracked at pre-determined intervals, but not less than once every thirty (30) calendar days ("Progressions"). Progression documentation shall track both the exterior and interior construction of the building. Exterior Progressions shall track 360 degrees around the site and each building. Interior Progressions shall track interior improvements beginning when stud work commences and continuing until Project completion.
6. As-built condition of pre-foundation utilities and site utilities shall be documented prior to pouring footers, placing concrete

01-01-21

- and/or backfilling. This process shall include all underground and in-slab utilities within the building(s) envelope(s) and utility runs in the immediate vicinity of the building(s) envelope(s). This may also include utilities enclosed in slab-on-deck in multi-story buildings. Overlapping photographic techniques shall be used to ensure maximum coverage. Indexing and navigation accomplished through interactive site utility plans.
7. As-built conditions of mechanical, electrical, plumbing and all other systems shall be documented post-inspection and pre-insulation, sheet rock or dry wall installation. This process shall include all finished systems located in the walls and ceilings of all buildings at the Project. Overlapping photographic techniques shall be used to ensure maximum coverage. Indexing and navigation accomplished through interactive architectural drawings.
 8. As-built conditions of exterior skin and elevations shall be documented with an increased concentration of digital photographs as directed by the COR in order to capture pre-determined focal points, such as waterproofing, window flashing, radiused steel work, architectural or Exterior Insulation and Finish Systems (EIFS) detailing. Overlapping photographic techniques shall be used to ensure maximum coverage. Indexing and navigation accomplished through interactive elevations or elevation details.
 9. As-built finished conditions of the interior of each building including floors, ceilings and walls shall be documented at certificate of occupancy or equivalent, or just prior to occupancy, or both, as directed by the COR. Overlapping photographic techniques shall be used to ensure maximum coverage. Indexing and navigation accomplished through interactive architectural drawings.
 10. Miscellaneous events that occur during any Contractor site visit, or events captured by the Department of Veterans Affairs independently, shall be dated, labeled and inserted into a Section in the navigation structure entitled "Slideshows," allowing this information to be stored in the same "place" as the formal scope.
 11. Customizable project-specific digital photographic documentation of other details or milestones. Indexing and navigation accomplished through interactive architectural plans.

01-01-21

12. Monthly (29 max) exterior progressions (360 degrees around the project) and slideshows (all elevations and building envelope). The slideshows allow for the inclusion of Department of Veterans Affairs pictures, aerial photographs, and timely images which do not fit into any regular monthly photopath.
 13. Weekly (21 Max) Site Progressions - Photographic documentation capturing the project at different stages of construction. These progressions shall capture underground utilities, excavation, grading, backfill, landscaping and road construction throughout the duration of the project.
 14. Regular (8 max) interior progressions of all walls of the entire project to begin at time of substantial framed or as directed by the COR through to completion.
 15. Detailed Exact-Built of all Slabs for all project slab pours just prior to placing concrete or as directed by the COR.
 16. Detailed Interior exact built overlapping photos of the entire building to include documentation of all mechanical, electrical and plumbing systems in every wall and ceiling, to be conducted after rough-ins are complete, just prior to insulation and or drywall, or as directed by COR.
 17. Finished detailed Interior exact built overlapping photos of all walls, ceilings, and floors to be scheduled by COR prior to occupancy.
 18. In event a greater or lesser number of images than specified above are required by the COR, adjustment in contract price will be made in accordance with clause entitled "CHANGES" (FAR 52.243-4).
- C. Images shall be taken by a commercial photographer and must show distinctly, at as large a scale as possible, all parts of work embraced in the picture.
- D. Coordination of photo shoots is accomplished through COR. Contractor shall also attend construction team meetings as necessary. Contractor's operations team shall provide regular updates regarding the status of the documentation, including photo shoots concluded, the availability of new Progressions or Exact-Built's viewable on-line and anticipated future shoot dates.

01-01-21

- E. Contractor shall provide all on-line domain/web hosting, security measures, and redundant server back-up of the documentation.
- F. Contractor shall provide technical support related to using the system or service.
- G. Upon completion of the project, final copies of the documentation (the "Permanent Record") with the indexing and navigation system embedded (and active) shall be provided in an electronic media format, typically a DVD or external hard-drive. Permanent Record shall have Building Information Modeling (BIM) interface capabilities. On-line access terminates upon delivery of the Permanent Record.

1.32 FINAL ELEVATION DIGITAL IMAGES (NOT USED)

1.33 HISTORIC PRESERVATION (NOT USED)

1.34 VA TRIRIGA CPMS (NOT USED)

- - - E N D - - -

03-01-20

SECTION 01 32 16.15
PROJECT SCHEDULES
(SMALL PROJECTS - DESIGN/BID/BUILD)

PART 1- GENERAL

1.1 DESCRIPTION:

- A. The Contractor shall develop a Critical Path Method (CPM) plan and schedule demonstrating fulfillment of the contract requirements (Project Schedule), and shall keep the Project Schedule up-to-date in accordance with the requirements of this section and shall utilize the plan for scheduling, coordinating and monitoring work under this contract (including all activities of subcontractors, equipment vendors and suppliers). Conventional Critical Path Method (CPM) technique shall be utilized to satisfy both time and cost applications.

1.2 CONTRACTOR'S REPRESENTATIVE:

- A. The Contractor shall designate an authorized representative responsible for the Project Schedule including preparation, review and progress reporting with and to the Contracting Officer's Representative (COR).
- B. The Contractor's representative shall have direct project control and complete authority to act on behalf of the Contractor in fulfilling the requirements of this specification section.
- C. The Contractor's representative shall have the option of developing the project schedule within their organization or to engage the services of an outside consultant. If an outside scheduling consultant is utilized, Section 1.3 of this specification will apply.

1.3 CONTRACTOR'S CONSULTANT:

- A. The Contractor shall submit a qualification proposal to the COR, within 10 days of bid acceptance. The qualification proposal shall include:
1. The name and address of the proposed consultant.
 2. Information to show that the proposed consultant has the qualifications to meet the requirements specified in the preceding paragraph.
 3. A representative sample of prior construction projects, which the proposed consultant has performed complete project scheduling services. These representative samples shall be of similar size and scope.

03-01-20

- B. The Contracting Officer has the right to approve or disapprove the proposed consultant, and will notify the Contractor of the VA decision within seven calendar days from receipt of the qualification proposal. In case of disapproval, the Contractor shall resubmit another consultant within 10 calendar days for renewed consideration. The Contractor shall have their scheduling consultant approved prior to submitting any schedule for approval.

1.4 COMPUTER PRODUCED SCHEDULES

- A. The contractor shall provide monthly, to the Department of Veterans Affairs (VA), all computer-produced time/cost schedules and reports generated from monthly project updates. This monthly computer service will include: three copies of up to five different reports (inclusive of all pages) available within the user defined reports of the scheduling software approved by the Contracting Officer; a hard copy listing of all project schedule changes, and associated data, made at the update and an electronic file of this data; and the resulting monthly updated schedule in PDM format. These must be submitted with and substantively support the contractor's monthly payment request and the signed look ahead report. The COR shall identify the five different report formats that the contractor shall provide.
- B. The contractor shall be responsible for the correctness and timeliness of the computer-produced reports. The Contractor shall also responsible for the accurate and timely submittal of the updated project schedule and all CPM data necessary to produce the computer reports and payment request that is specified.
- C. The VA will report errors in computer-produced reports to the Contractor's representative within ten calendar days from receipt of reports. The Contractor shall reprocess the computer-produced reports and associated diskette(s), when requested by the Contracting Officer's representative, to correct errors which affect the payment and schedule for the project.

1.5 THE COMPLETE PROJECT SCHEDULE SUBMITTAL

- A. Within 45 calendar days after receipt of Notice to Proceed, the Contractor shall submit for the Contracting Officer's review; three blue line copies of the interim schedule on sheets of paper 765 x 1070 mm (30 x 42 inches) and an electronic file in the previously approved

03-01-20

CPM schedule program. The submittal shall also include three copies of a computer-produced activity/event ID schedule showing project duration; phase completion dates; and other data, including event cost. Each activity/event on the computer-produced schedule shall contain as a minimum, but not limited to, activity/event ID, activity/event description, duration, budget amount, early start date, early finish date, late start date, late finish date and total float. Work activity/event relationships shall be restricted to finish-to-start or start-to-start without lead or lag constraints. Activity/event date constraints, not required by the contract, will not be accepted unless submitted to and approved by the Contracting Officer. The contractor shall make a separate written detailed request to the Contracting Officer identifying these date constraints and secure the Contracting Officer's written approval before incorporating them into the network diagram. The Contracting Officer's separate approval of the Project Schedule shall not excuse the contractor of this requirement. Logic events (non-work) will be permitted where necessary to reflect proper logic among work events, but must have zero duration. The complete working schedule shall reflect the Contractor's approach to scheduling the complete project. **The final Project Schedule in its original form shall contain no contract changes or delays which may have been incurred during the final network diagram development period and shall reflect the entire contract duration as defined in the bid documents.** These changes/delays shall be entered at the first update after the final Project Schedule has been approved. The Contractor should provide their requests for time and supporting time extension analysis for contract time as a result of contract changes/delays, after this update, and in accordance with Article, ADJUSTMENT OF CONTRACT COMPLETION.

- B. Within 30 calendar days after receipt of the complete project interim Project Schedule and the complete final Project Schedule, the Contracting Officer or his representative, will do one or both of the following:
1. Notify the Contractor concerning his actions, opinions, and objections.

03-01-20

2. A meeting with the Contractor at or near the job site for joint review, correction or adjustment of the proposed plan will be scheduled if required. Within 14 calendar days after the joint review, the Contractor shall revise and shall submit three blue line copies of the revised Project Schedule, three copies of the revised computer-produced activity/event ID schedule and a revised electronic file as specified by the Contracting Officer. The revised submission will be reviewed by the Contracting Officer and, if found to be as previously agreed upon, will be approved.
- C. The approved baseline schedule and the computer-produced schedule(s) generated there from shall constitute the approved baseline schedule until subsequently revised in accordance with the requirements of this section.
- D. The Complete Project Schedule shall contain approximately 400 work activities/events.

1.6 WORK ACTIVITY/EVENT COST DATA

- A. The Contractor shall cost load all work activities/events except procurement activities. The cumulative amount of all cost loaded work activities/events (including alternates) shall equal the total contract price. Prorate overhead, profit and general conditions on all work activities/events for the entire project length. The contractor shall generate from this information cash flow curves indicating graphically the total percentage of work activity/event dollar value scheduled to be in place on early finish, late finish. These cash flow curves will be used by the Contracting Officer to assist him in determining approval or disapproval of the cost loading. Negative work activity/event cost data will not be acceptable, except on VA issued contract changes.
- B. The Contractor shall cost load work activities/events for guarantee period services, test, balance and adjust various systems in accordance with the provisions in Article, FAR 52.232 - 5 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS) and VAAR 852.232 -Article 71 Including NAS-CPM for (PAYMENTS UNDER FIXED PRICE CONSTRUCTION).
- C. In accordance with FAR 52.236 - 1 (PERFORMANCE OF WORK BY THE CONTRACTOR) and VAAR 852.236 - 72 (PERFORMANCE OF WORK BY THE CONTRACTOR), the Contractor shall submit, simultaneously with the cost

03-01-20

per work activity/event of the construction schedule required by this Section, a responsibility code for all activities/events of the project for which the Contractor's forces will perform the work.

- D. The Contractor shall cost load work activities/events for all BID ITEMS including ASBESTOS ABATEMENT. The sum of each BID ITEM work shall equal the value of the bid item in the Contractors' bid.

1.7 PROJECT SCHEDULE REQUIREMENTS

- A. Show on the project schedule the sequence of work activities/events required for complete performance of all items of work. The Contractor Shall:

1. Show activities/events as:
 - a. Contractor's time required for submittal of shop drawings, templates, fabrication, delivery and similar pre-construction work.
 - b. Contracting Officer's and Architect-Engineer's review and approval of shop drawings, equipment schedules, samples, template, or similar items.
 - c. Interruption of VA Facilities utilities, delivery of Government furnished equipment, and rough-in drawings, project phasing and any other specification requirements.
 - d. Test, balance and adjust various systems and pieces of equipment, maintenance and operation manuals, instructions and preventive maintenance tasks.
 - e. VA inspection and acceptance activity/event with a minimum duration of five work days at the end of each phase and immediately preceding any VA move activity/event required by the contract phasing for that phase.
2. Show not only the activities/events for actual construction work for each trade category of the project, but also trade relationships to indicate the movement of trades from one area, floor, or building, to another area, floor, or building, for at least five trades who are performing major work under this contract.
3. Break up the work into activities/events of a duration no longer than 20 work days each or one reporting period, except as to non-construction activities/events (i.e., procurement of materials, delivery of equipment, concrete and asphalt curing) and any other

03-01-20

activities/events for which the COR may approve the showing of a longer duration. The duration for VA approval of any required submittal, shop drawing, or other submittals will not be less than 20 work days.

4. Describe work activities/events clearly, so the work is readily identifiable for assessment of completion. Activities/events labeled "start," "continue," or "completion," are not specific and will not be allowed. Lead and lag time activities will not be acceptable.
5. The schedule shall be generally numbered in such a way to reflect either discipline, phase or location of the work.

B. The Contractor shall submit the following supporting data in addition to the project schedule:

1. The appropriate project calendar including working days and holidays.
2. The planned number of shifts per day.
3. The number of hours per shift.

Failure of the Contractor to include this data shall delay the review of the submittal until the Contracting Officer is in receipt of the missing data.

C. To the extent that the Project Schedule or any revised Project Schedule shows anything not jointly agreed upon, it shall not be deemed to have been approved by the COR. Failure to include any element of work required for the performance of this contract shall not excuse the Contractor from completing all work required within any applicable completion date of each phase regardless of the COR's approval of the Project Schedule.

D. Compact Disk Requirements and CPM Activity/Event Record Specifications: Submit to the VA an electronic file(s) containing one file of the data required to produce a schedule, reflecting all the activities/events of the complete project schedule being submitted.

1.8 PAYMENT TO THE CONTRACTOR:

A. Monthly, the contractor shall submit an application and certificate for payment using VA Form 10-6001a or the AIA application and certificate for payment documents G702 & G703 reflecting updated schedule activities and cost data in accordance with the provisions of the following Article, PAYMENT AND PROGRESS REPORTING, as the basis upon

03-01-20

which progress payments will be made pursuant to Article, FAR 52.232 - 5 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS) and VAAR 852.232 - Article 71 Including NAS-CPM for (PAYMENTS UNDER FIXED PRICE CONSTRUCTION). The Contractor shall be entitled to a monthly progress payment upon approval of estimates as determined from the currently approved updated project schedule. Monthly payment requests shall include: a listing of all agreed upon project schedule changes and associated data; and an electronic file (s) of the resulting monthly updated schedule.

- B. Approval of the Contractor's monthly Application for Payment shall be contingent, among other factors, on the submittal of a satisfactory monthly update of the project schedule.

1.9 PAYMENT AND PROGRESS REPORTING

- A. Monthly schedule update meetings will be held on dates mutually agreed to by the COR and the Contractor. Contractor and their CPM consultant (if applicable) shall attend all monthly schedule update meetings. The Contractor shall accurately update the Project Schedule and all other data required and provide this information to the COR three work days in advance of the schedule update meeting. Job progress will be reviewed to verify:
1. Actual start and/or finish dates for updated/completed activities/events.
 2. Remaining duration for each activity/event started, or scheduled to start, but not completed.
 3. Logic, time and cost data for change orders, and supplemental agreements that are to be incorporated into the Project Schedule.
 4. Changes in activity/event sequence and/or duration which have been made, pursuant to the provisions of following Article, ADJUSTMENT OF CONTRACT COMPLETION.
 5. Completion percentage for all completed and partially completed activities/events.
 6. Logic and duration revisions required by this section of the specifications.
 7. Activity/event duration and percent complete shall be updated independently.

03-01-20

- B. After completion of the joint review, the contractor shall generate an updated computer-produced calendar-dated schedule and supply the Contracting Officer's representative with reports in accordance with the Article, COMPUTER PRODUCED SCHEDULES, specified.
- C. After completing the monthly schedule update, the contractor's representative or scheduling consultant shall rerun all current period contract change(s) against the prior approved monthly project schedule. The analysis shall only include original workday durations and schedule logic agreed upon by the contractor and COR for the contract change(s). When there is a disagreement on logic and/or durations, the Contractor shall use the schedule logic and/or durations provided and approved by the COR. After each rerun update, the resulting electronic project schedule data file shall be appropriately identified and submitted to the VA in accordance to the requirements listed in articles 1.4 and 1.7. This electronic submission is separate from the regular monthly project schedule update requirements and shall be submitted to the COR within fourteen (14) calendar days of completing the regular schedule update. **Before inserting the contract changes durations, care must be taken to ensure that only the original durations will be used for the analysis, not the reported durations after progress. In addition, once the final network diagram is approved, the contractor must recreate all manual progress payment updates on this approved network diagram and associated reruns for contract changes in each of these update periods as outlined above for regular update periods. This will require detailed record keeping for each of the manual progress payment updates.**
- D. Following approval of the CPM schedule, the VA, the General Contractor, its approved CPM Consultant, RE office representatives, and all subcontractors needed, as determined by the SRE, shall meet to discuss the monthly updated schedule. The main emphasis shall be to address work activities to avoid slippage of project schedule and to identify any necessary actions required to maintain project schedule during the reporting period. The Government representatives and the Contractor should conclude the meeting with a clear understanding of those work and administrative actions necessary to maintain project schedule status during the reporting period. This schedule coordination meeting

03-01-20

will occur after each monthly project schedule update meeting utilizing the resulting schedule reports from that schedule update. If the project is behind schedule, discussions should include ways to prevent further slippage as well as ways to improve the project schedule status, when appropriate.

1.10 RESPONSIBILITY FOR COMPLETION

- A. If it becomes apparent from the current revised monthly progress schedule that phasing or contract completion dates will not be met, the Contractor shall execute some or all of the following remedial actions:
 - 1. Increase construction manpower in such quantities and crafts as necessary to eliminate the backlog of work.
 - 2. Increase the number of working hours per shift, shifts per working day, working days per week, the amount of construction equipment, or any combination of the foregoing to eliminate the backlog of work.
 - 3. Reschedule the work in conformance with the specification requirements.
- B. Prior to proceeding with any of the above actions, the Contractor shall notify and obtain approval from the COR for the proposed schedule changes. If such actions are approved, the representative schedule revisions shall be incorporated by the Contractor into the Project Schedule before the next update, at no additional cost to the Government.

1.11 CHANGES TO THE SCHEDULE

- A. Within 30 calendar days after VA acceptance and approval of any updated project schedule, the Contractor shall submit a revised electronic file (s) and a list of any activity/event changes including predecessors and successors for any of the following reasons:
 - 1. Delay in completion of any activity/event or group of activities/events, which may be involved with contract changes, strikes, unusual weather, and other delays will not relieve the Contractor from the requirements specified unless the conditions are shown on the CPM as the direct cause for delaying the project beyond the acceptable limits.
 - 2. Delays in submittals, or deliveries, or work stoppage are encountered which make rescheduling of the work necessary.

03-01-20

3. The schedule does not represent the actual prosecution and progress of the project.
 4. When there is, or has been, a substantial revision to the activity/event costs regardless of the cause for these revisions.
- B. CPM revisions made under this paragraph which affect the previously approved computer-produced schedules for Government furnished equipment, vacating of areas by the VA Facility, contract phase(s) and sub phase(s), utilities furnished by the Government to the Contractor, or any other previously contracted item, shall be furnished in writing to the Contracting Officer for approval.
- C. Contracting Officer's approval for the revised project schedule and all relevant data is contingent upon compliance with all other paragraphs of this section and any other previous agreements by the Contracting Officer or the VA representative.
- D. The cost of revisions to the project schedule resulting from contract changes will be included in the proposal for changes in work as specified in FAR 52.243 - 4 (Changes, and will be based on the complexity of the revision or contract change, man hours expended in analyzing the change, and the total cost of the change.
- E. The cost of revisions to the Project Schedule not resulting from contract changes is the responsibility of the Contractor.

1.12 ADJUSTMENT OF CONTRACT COMPLETION

- A. The contract completion time will be adjusted only for causes specified in this contract. Request for an extension of the contract completion date by the Contractor shall be supported with a justification, CPM data and supporting evidence as the COR may deem necessary for determination as to whether or not the Contractor is entitled to an extension of time under the provisions of the contract. Submission of proof based on revised activity/event logic, durations (in work days) and costs is obligatory to any approvals. The schedule must clearly display that the Contractor has used, in full, all the float time available for the work involved in this request. The Contracting Officer's determination as to the total number of days of contract extension will be based upon the current computer-produced calendar-dated schedule for the time period in question and all other relevant information.

03-01-20

- B. Actual delays in activities/events which, according to the computer- produced calendar-dated schedule, do not affect the extended and predicted contract completion dates shown by the critical path in the network, will not be the basis for a change to the contract completion date. The Contracting Officer will within a reasonable time after receipt of such justification and supporting evidence, review the facts and advise the Contractor in writing of the Contracting Officer's decision.
- C. The Contractor shall submit each request for a change in the contract completion date to the Contracting Officer in accordance with the provisions specified under FAR 52.243 - 4 (Changes). The Contractor shall include, as a part of each change order proposal, a sketch showing all CPM logic revisions, duration (in work days) changes, and cost changes, for work in question and its relationship to other activities on the approved network diagram.
- D. All delays due to non-work activities/events such as RFI's, WEATHER, STRIKES, and similar non-work activities/events shall be analyzed on a month by month basis.

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

03-01-20

PAGE INTENTIONALLY LEFT BLANK

SECTION 01 33 23

SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This specification defines the general requirements and procedures for submittals. A submittal is information submitted for VA review to establish compliance with the contract documents.
- B. Detailed submittal requirements are found in the technical sections of the contract specifications. The Contracting Officer may request submittals in addition to those specified when deemed necessary to adequately describe the work covered in the respective technical specifications at no additional cost to the government.
- C. VA approval of a submittal does not relieve the Contractor of the responsibility for any error which may exist. The Contractor is responsible for fully complying with all contract requirements and the satisfactory construction of all work, including the need to check, confirm, and coordinate the work of all subcontractors for the project. Non-compliant material incorporated in the work will be removed and replaced at the Contractor's expense.

1.2 DEFINITIONS

- A. Preconstruction Submittals: Submittals which are required prior to issuing contract notice to proceed or starting construction. For example, Certificates of insurance; Surety bonds; Site-specific safety plan; Construction progress schedule; Schedule of values; Submittal register; List of proposed subcontractors.
- B. Shop Drawings: Drawings, diagrams, and schedules specifically prepared to illustrate some portion of the work. Drawings prepared by or for the Contractor to show how multiple systems and interdisciplinary work will be integrated and coordinated.
- C. Product Data: Catalog cuts, illustrations, schedules, diagrams, performance charts, instructions, and brochures, which describe and illustrate size, physical appearance, and other characteristics of materials, systems, or equipment for some portion of the work. Samples of warranty language when the contract requires extended product warranties.

- D. Samples: Physical examples of materials, equipment, or workmanship that illustrate functional and aesthetic characteristics of a material or product and establish standards by which the work can be judged. Color samples from the manufacturer's standard line (or custom color samples if specified) to be used in selecting or approving colors for the project. Field samples and mock-ups constructed to establish standards by which the ensuing work can be judged.
- E. Design Data: Calculations, mix designs, analyses, or other data pertaining to a part of work.
- F. Test Reports: Report which includes findings of a test required to be performed by the Contractor on an actual portion of the work. Report which includes finding of a test made at the job site or on sample taken from the job site, on portion of work during or after installation.
- G. Certificates: Document required of Contractor, or of a manufacturer, supplier, installer, or subcontractor through Contractor. The purpose is to document procedures, acceptability of methods, or personnel qualifications for a portion of the work.
- H. Manufacturer's Instructions: Pre-printed material describing installation of a product, system, or material, including special notices and (MSDS) concerning impedances, hazards, and safety precautions.
- I. Manufacturer's Field Reports: Documentation of the testing and verification actions taken by manufacturer's representative at the job site on a portion of the work, during or after installation, to confirm compliance with manufacturer's standards or instructions. The documentation must indicate whether the material, product, or system has passed or failed the test.
- J. Operation and Maintenance Data: Manufacturer data that is required to operate, maintain, troubleshoot, and repair equipment, including manufacturer's help, parts list, and product line documentation. This data shall be incorporated in an operations and maintenance manual.
- K. Closeout Submittals: Documentation necessary to properly close out a construction contract. For example, Record Drawings and as-built drawings. Also, submittal requirements necessary to properly close out a phase of construction on a multi-phase contract.

1.3 SUBMITTAL REGISTER

- A. The submittal register will list items of equipment and materials for which submittals are required by the specifications. This list may not be all inclusive and additional submittals may be required by the specifications. The Contractor is not relieved from supplying submittals required by the contract documents but which have been omitted from the submittal register.
- B. The submittal register will serve as a scheduling document for submittals and will be used to control submittal actions throughout the contract period.
- C. The VA will provide the initial submittal register in electronic format. Thereafter, the Contractor shall track all submittals by maintaining a complete list, including completion of all data columns, including dates on which submittals are received and returned by the VA.
- D. The Contractor shall update the submittal register as submittal actions occur and maintain the submittal register at the project site until final acceptance of all work by Contracting Officer.
- E. The Contractor shall submit formal monthly updates to the submittal register in electronic format. Each monthly update shall document actual submission and approval dates for each submittal.

1.4 SUBMITTAL SCHEDULING

- A. Submittals are to be scheduled, submitted, reviewed, and approved prior to the acquisition of the material or equipment.
- B. Coordinate scheduling, sequencing, preparing, and processing of submittals with performance of work so that work will not be delayed by submittal processing. Allow time for potential resubmittal. Allow additional review and processing time if submitting more than 5 submittals in a day.
- C. No delay costs or time extensions will be allowed for time lost in late submittals or resubmittals.
- D. All submittals are required to be approved prior to the start of the specified work activity.

1.5 SUBMITTAL PREPARATION

- A. Each submittal is to be complete and in sufficient detail to allow ready determination of compliance with contract requirements.

- B. Collect required data for each specific material, product, unit of work, or system into a single submittal, in PDF (electronic) format, as a single file. Prominently mark choices, options, and portions applicable to the submittal. Partial submittals will not be accepted for expedition of construction effort. Submittal will be returned without review if incomplete.
- C. If available product data is incomplete, provide Contractor-prepared documentation to supplement product data and satisfy submittal requirements.
- D. All irrelevant or unnecessary data shall be removed from the submittal to facilitate accuracy and timely processing. Submittals that contain the excessive amount of irrelevant or unnecessary data will be returned with review.
- E. Provide a transmittal form for each submittal with the following information:
 - 1. Project title and location.
 - 2. Construction contract number.
 - 3. Date of the drawings and revisions.
 - 4. Name, address, and telephone number of subcontractor, supplier, manufacturer, and any other subcontractor associated with the submittal.
 - 5. List specification section with paragraph number and sheet number of the contract drawings by which the submittal is required.
 - 6. When a resubmission, add alphabetic suffix on submittal description. For example, submittal 18 would become 18-R1, to indicate the first resubmission.
 - 7. Product identification and location in project.
- F. The Contractor is responsible for reviewing and certifying that all submittals are in compliance with contract requirements before submitting for VA review. Proposed deviations from the contract requirements are to be clearly identified. All deviations submitted must include a side by side comparison of item being proposed against item specified. Failure to point out deviations will result in VA requiring removal and replacement of such work at the Contractor's expense.
- G. Stamp, sign, and date each submittal transmittal form indicating action taken.

H. Stamp used by the Contractor on submittal transmittal form to certify that submittal meets contract requirements is to be similar to:

CONTRACTOR
(Firm Name)
_____ Approved
_____ Approved with corrections as noted on submittal data and/or attached sheets(s)
SIGNATURE: _____
TITLE: _____
DATE: _____

1.6 SUBMITTAL FORMAT AND TRANSMISSION

- A. Provide submittals in PDF (electronic) format, with the exception of material samples.
- B. Compile the electronic submittal file as a single, complete document. Name the electronic submittal file specifically according to its contents.
- C. Electronic files must be of sufficient quality that all information is legible. Generate PDF files from original documents so that the text included in the PDF file is both searchable and can be copied. If documents are scanned, Optical Character Resolution (OCR) routines are required.
- D. Submit E-mail electronic submittal documents smaller than 5MB in size to e-mail addresses as directed by the Contracting Officer.
- E. Provide electronic documents over 5MB through an electronic FTP file sharing system. Confirm that the electronic FTP file sharing system can be accessed from the VA computer network. The Contractor is responsible for setting up, providing, and maintaining the electronic FTP file sharing system for the construction contract period of performance.

- F. Provide hard copies of submittals when requested by the Contracting Officer. Up to 3 additional hard copies of any submittal may be requested at the discretion of the Contracting Officer, at no additional cost to the VA.

1.7 SAMPLES

- A. Submit two sets of physical samples showing range of variation, for each required item.
- B. Where samples are specified for selection of color, finish, pattern, or texture, submit the full set of available choices for the material or product specified.
- C. When color, texture, or pattern is specified by naming a particular manufacturer and style, include one sample of that manufacturer and style, for comparison.
- D. Before submitting samples, the Contractor is to ensure that the materials or equipment will be available in quantities required in the project. No change or substitution will be permitted after a sample has been approved.
- E. The VA reserves the right to disapprove any material or equipment which previously has proven unsatisfactory in service.
- F. Physical samples supplied may be requested back for use in the project after reviewed and approved.

1.8 OPERATION AND MAINTENANCE DATA

- A. Submit data specified for a given item within 30 calendar days after the item is delivered to the contract site.
- B. In the event the Contractor fails to deliver O&M Data within the time limits specified, the Contracting Officer may withhold from progress payments 50 percent of the price of the item with which such O&M Data are applicable.

1.9 TEST REPORTS

- A. SRE may require specific test after work has been installed or completed which could require contractor to repair test area at no additional cost to contract.

1.10 VA REVIEW OF SUBMITTALS AND RFIS

- A. The VA will review all submittals for compliance with the technical requirements of the contract documents. The Architect-Engineer for this project will assist the VA in reviewing all submittals and determining

contractual compliance. Review will be only for conformance with the applicable codes, standards and contract requirements.

- B. Period of review for submittals begins when the VA COR receives submittal from the Contractor.
- C. Period of review for each resubmittal is the same as for initial submittal.
- D. VA review period is 15 working days for submittals, if less than 5 submittals are submitted in a day. VA review period is 20 working days for submittals if 5 or more submittals are submitted in a single day.
- E. VA review period is 10 working days for RFIs.
- F. The VA will return submittals to the Contractor with the following notations:
 - 1. "Approved": authorizes the Contractor to proceed with the work covered.
 - 2. "Approved as noted": authorizes the Contractor to proceed with the work covered provided the Contractor incorporates the noted comments and makes the noted corrections.
 - 3. "Disapproved, revise and resubmit": indicates noncompliance with the contract requirements or that submittal is incomplete. Resubmit with appropriate changes and corrections. No work shall proceed for this item until resubmittal is approved.
 - 4. "Not reviewed": indicates submittal does not have evidence of being reviewed and approved by Contractor or is not complete. A submittal marked "not reviewed" will be returned with an explanation of the reason it is not reviewed. Resubmit submittals after taking appropriate action.

1.11 APPROVED SUBMITTALS

- A. The VA approval of submittals is not to be construed as a complete check, and indicates only that the general method of construction, materials, detailing, and other information are satisfactory.
- B. VA approval of a submittal does not relieve the Contractor of the responsibility for any error which may exist. The Contractor is responsible for fully complying with all contract requirements and the satisfactory construction of all work, including the need to check, confirm, and coordinate the work of all subcontractors for the project. Non-compliant material incorporated in the work will be removed and replaced at the Contractor's expense.

- C. After submittals have been approved, no resubmittal for the purpose of substituting materials or equipment will be considered unless accompanied by an explanation of why a substitution is necessary.
- D. Retain a copy of all approved submittals at project site, including approved samples.

1.12 WITHHOLDING OF PAYMENT

- A. Payment for materials incorporated in the work will not be made if required approvals have not been obtained.

1.13 ELECTRONIC DOCUMENT SUBMITTAL SERVICE

- A. All documents transmitted for purposes of administration of the contract are to be electronic (PDF) format and transmitted via an Internet-based submittals service that receives , logs, and stores and documents, provides electronic stamping and signatures, and notifies addressees via email.
 - 1. Internet-based submittal service shall be used for transmittal of all submittals, request for information (RFI), progress documentation, contract modification documents (e.g. change proposals, change orders), certified payrolls, daily reports, test reports, and any other document the COR wishes to make part of the project record.
 - 2. Contractor and Architect are required to use this service.
 - 3. It is the contractors responsibility to submit documents in PDF format.
 - 4. Subcontractors, suppliers, and Architects consultants are to be permitted to use the service at no extra charge.
 - 5. Users of the service need an email address, Internet access, and PDF review software that include ability to mark up and apply electronic stamps (such as Adobe Acrobat, www.adobe.com, or Bluebeam PDF Revu, www.bluebeam.com), unless such software capability is provided by the service provider.
 - 6. Paper document transmittals will not ne reviewed; emailed PDF documents will not be reviewed.
 - 7. All other specified submittal and document transmission procedures apply, except the electronic document requirements do not apply to samples or color selection charts.
- B. Costs: The cost of the service is to be paid for by the contractor. Contractor shall include the cost of the service in the contract price.

- C. Ownership: Set up ownership of the electronic submittal service account such that the government is the sole owner and has full rights to the account. Coordinate with the Contracting Officer's Representative to fulfill this requirement.
- D. Submittal Service: The Selected Service is:
1. Submittal Exchange (tel: 1-800-714-0024):
www.submittalexchange.com.
- E. Training: Selected Service shall include web-based training sessions for Government, Contractor, and A/E personnel.
- F. Project Closeout: The Government shall determine when to terminate the service for the project. Selected Internet-based service shall provide archived copies of all files to the Government as part of closeout.

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

Page Intentionally Left Blank

OWNER: Dept of Veterans Affairs					SUBMITTAL REGISTER	
PROJECT TITLE: Renovate Surgical Suite - Phase II						
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
1	01 00 00	General Requirements	Pre-Construction	Construction Security Plan	1.5	GOVT
2	01 00 00	General Requirements	Pre-Construction	Electronic Security Memorandum	1.5	GOVT
3	01 32 16.15	Project Schedules	Pre-Construction	Project Schedule	1.5	GOVT
4	01 35 26	Safety Requirements	Pre-Construction	Accident Prevention Plan	1.4	GOVT
5	01 35 26	Safety Requirements	Pre-Construction	Activity Hazard Analysis	1.5	GOVT
6	01 35 26	Safety Requirements	Pre-Construction	Training Records	1.8	GOVT
7	01 35 26	Safety Requirements	Construction	Safety Inspections	1.9	GOVT
8	01 35 26	Safety Requirements	Construction	Accident Reports, OSHA-300 Logs, Man-Hour Reports	1.10	GOVT
9	01 35 26	Safety Requirements	Pre-Construction & Construction	ICRA & Permitting	1.12	GOVT
10	01 35 26	Safety Requirements	Pre-Construction	Tuberculosis Screening	1.13	GOVT
11	01 35 26	Safety Requirements	Pre-Construction	Fire Safety Plan	1.14	GOVT
12	01 35 26	Safety Requirements	Pre-Electrical Work	Activity Hazard Analysis	1.15	GOVT
13	01 35 26	Safety Requirements	Excavation and Trenching	Trenching and Excavation Permit	1.18	GOVT
14	01 35 26	Safety Requirements	Cranes	Crane - Lift Permit	1.19	GOVT
15	01 35 26	Safety Requirements	Confined Space Entry	Confined Space Entry Plan	1.21	GOVT
16	01 35 26	Safety Requirements	Welding and Cutting	Hot Work Permit	1.22	GOVT
17	01 45 00	Quality Control	Preconstruction Submittals	Preconstruction Submittals	1.3.1	A/E + GOVT
18	01 45 00	Quality Control	Design Data	Design Data	1.3.2	A/E + GOVT
19	01 45 00	Quality Control	Test Reports	Test Reports	1.3.3	A/E + GOVT
20	01 45 29	Testing Laboratory Services	Pre-Construction	Testing Lab Certificate of Accrediation	1 & 3	GOVT
21	01 45 29	Testing Laboratory Services	Pre-Construction	Written/Verbal Reports	1 & 3	GOVT
22	01 45 35	Special Inspections	Pre-Construction	Submittals	1.5	GOVT
23	01 57 19	Temporary Environmental Controls	Pre-Construction	Environmental Protection Plan	1.4	GOVT

OWNER: Dept of Veterans Affairs				SUBMITTAL REGISTER		
PROJECT TITLE: Renovate Surgical Suite - Phase II						
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
24	01 74 19	Construction Waste Management	Waste Management Plan	Waste Management Plan	1.5.B	A/E + GOVT
25	01 74 19	Construction Waste Management	Designated Manager	Designated Manager	1.5.C	A/E + GOVT
26	01 74 19	Construction Waste Management	Monthly Summary	Monthly Summary	1.5.D	A/E + GOVT
27	01 74 19	Construction Waste Management	Construction	Debris Disposal & Dispersion Report	3.3	GOVT
28	02 21 13	Site Surveys	Drawings	Survey Drawings	1.3	GOVT
29	02 41 00	Demolition	Various	As required by the COR		GOVT
30	02 65 00	Underground Storage Tank Removal	Data	Notice of intent to close UST	1.6.B	A/E + GOVT
31	02 65 00	Underground Storage Tank Removal	Reports	Test reports as required in 1.6.C	1.6.C	A/E
32	02 65 00	Underground Storage Tank Removal	Qualifications	As required in 1.6.D	1.6.D	A/E
33	02 65 00	Underground Storage Tank Removal	Plan	UST Removal Plan	1.6.E	A/E
34	02 65 00	Underground Storage Tank Removal	Documents	Record Documents as required in 1.6.F	1.6.F	A/E
35	03 30 53	Cast in Place Concrete Short Form	Shop Drawings	Reinforcing Steel	1.4.B	A/E
36	03 30 53	Cast in Place Concrete Short Form	Manufacturer's Literature & Data	Concrete Mix Design	1.4.C	A/E
37	03 30 53	Cast in Place Concrete Short Form	Manufacturer's Literature & Data	Admixtures and Curing Compounds	1.4.D	A/E
38	03 30 53	Cast in Place Concrete Short Form	Certificates	Each Ready Mix Batch	1.4.D	A/E
39	03 30 53	Cast in Place Concrete Short Form	Manufacturer's Literature & Data	Concrete anchors	1.4.E	A/E
40	04 01 00	Maintenance of Masonry	Manufacturer's Literature & Data	Each product/replacement unit	1.4	A/E
41	04 01 00	Maintenance of Masonry	Samples	Pointing mortar	1.4	A/E
42	04 01 00	Maintenance of Masonry	Reports	Pre-con test results	1.4	A/E
43	05 12 00	Structural Steel Framing	Drawings	Showing fabrication/installation	1.4	A/E
44	05 12 00	Structural Steel Framing	Sustainable Construction	Identify recycled content	1.4	A/E
45	05 12 00	Structural Steel Framing	Rtest Reports	Welding	1.4	A/E
46	05 12 00	Structural Steel Framing	Certificates	Steel, welding, paint compliance	1.4	A/E

OWNER: Dept of Veterans Affairs			SUBMITTAL REGISTER			
PROJECT TITLE: Renovate Surgical Suite - Phase II						
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
47	05 12 00	Structural Steel Framing	Qualifications	Fabricator, Installer, Welding	1.4	A/E
48	05 12 00	Structural Steel Framing	Calculations	Design and Connection calcs	1.4	A/E
149	05 40 00	Cold Formed Metal Framing	Drawings	Shop Drawings	1.4	A/E
150	05 40 00	Cold Formed Metal Framing	Manufacturer's Literature and Data	Steel Components	1.4	A/E
151	05 40 00	Cold Formed Metal Framing	Data	Structural Analysis Data	1.4	A/E
49	05 50 00	Metal Fabrications	Manufacturer's Literature and Data	Grating	1.3	GOVT
50	05 50 00	Metal Fabrications	Manufacturer's Literature and Data	Safety nosing	1.3	GOVT
51	05 50 00	Metal Fabrications	Shop Drawings	Each Item Specified	1.3	A/E
52	05 50 00	Metal Fabrications	Erection Drawings and Instructions	Erection Drawings and Instructions		
53	05 50 00	Metal Fabrications	Manufacturer's Certificates	Anodized finish	1.3	A/E
54	05 50 00	Metal Fabrications	Manufacturer's Certificates	Live load design		A/E
55	05 50 00	Metal Fabrications	Design Calculations	Live loads and dead loads		A/E
56	05 50 00	Metal Fabrications	Drawings	Furnish setting drawings & instruction s	1.4	A/E
57	06 10 00	Rough Carpentry	Shop Drawings	Framing connection details, fasteners, connections & dimensions	1.3	A/E
58	06 10 00	Rough Carpentry	Manufacturer's Literature & Data	Data for lumber, panels, hardware & adhesives	1.3	A/E
59	06 10 00	Rough Carpentry	Manufacturer's Literature & Data	Wood preservative treatment	1.3	A/E
60	06 10 00	Rough Carpentry	Manufacturer's Literature & Data	Fire retardant treament from chemical treatment and certification	1.3	A/E
61	06 10 00	Rough Carpentry	Manufacturer's Literature & Data	Waterborne treament statement	1.3	A/E
62	06 10 00	Rough Carpentry	Certificates	Manufacturer certificate for unmarked lumber	1.3	A/E
63	06 20 00	Finish Carpentry	Drawings	Shop Drawings	1.5.B	A/E
64	06 20 00	Finish Carpentry	Manufacturer's Literature & Data	Each product, Installation Instructions	1.5.C	A/E
65	06 20 00	Finish Carpentry	Samples	As required in 1.5.D	1.5.D	A/E
66	06 20 00	Finish Carpentry	Certificates	Product Compliance	1.5.E	A/E

OWNER: Dept of Veterans Affairs			SUBMITTAL REGISTER			
PROJECT TITLE: Renovate Surgical Suite - Phase II						
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
67	06 20 00	Finish Carpentry	Qualifications	Fabricator	1.5.F	A/E
68	06 65 00	Plastic Sumulated Wood Trim	Product Data	Manufacturer's Product Data	1.4	A/E
69	06 65 00	Plastic Sumulated Wood Trim	Samples	Verification Samples	1.4	A/E
70	06 65 00	Plastic Sumulated Wood Trim	Certificates	Manufacturer's certificates	1.4	A/E
71	07 21 13	Thermal Insulation	Drawings	Show insulation type, thickness & R-value ea. Location	1.4.B	A/E
72	07 21 13	Thermal Insulation	Manufacturer's Literature & Data	Each product	1.4.C	A/E
73	07 21 13	Thermal Insulation	Manufacturer's Literature and Data	Adhesive indicating manufacturer recommendation for each application	1.4.D	A/E
74	07 21 19	Spray Foam Insulation	Data	Product Data	1.4	A/E
75	07 21 19	Spray Foam Insulation	Reports	Code Research Reports	1.4	A/E
76	07 21 19	Spray Foam Insulation	Certifications	Manufacturer's published data sheets	1.4	A/E
77	07 27 26	Fluid-Applied Membrane Air Barrier, Vapor Permeable	Manufacturer's Literature & Data	Description of each product/Installation instructions	1.4.B	A/E
78	07 27 26	Fluid-Applied Membrane Air Barrier, Vapor Permeable	Certificates	Product compliance	1.4.C	A/E
79	07 27 26	Fluid-Applied Membrane Air Barrier, Vapor Permeable	Qualifications	Manufacturer/Installer	1.4.D	A/E
80	07 31 13	Ashphalt Shingles	Manufacturer's Literature and Data	Description each product, Install instructions, Warranty	1.4.B	A/E
81	07 31 13	Ashphalt Shingles	Samples	Full size shingle in color/texture	1.4.C	A/E
82	07 32 00	Composite Roof Tile Systems	Data	Product Data	1.4	A/E
83	07 32 00	Composite Roof Tile Systems	Drawings	Shop Drawings	1.4	A/E
84	07 32 00	Composite Roof Tile Systems	Warranty	Manufacturer's project number	1.4	A/E
85	07 32 00	Composite Roof Tile Systems	Samples	Selection samples	1.4	A/E
86	07 32 00	Composite Roof Tile Systems	Samples	Verification Samples	1.4	A/E
87	07 40 00	Roofing and Siding Panels	Samples	Metal panel	1.5	A/E
88	07 40 00	Roofing and Siding Panels	Submittal Drawings	Wall panels	1.5	A/E
89	07 40 00	Roofing and Siding Panels	Manufacturer's Literature & Data	Wall panels	1.5	A/E

OWNER: Dept of Veterans Affairs				SUBMITTAL REGISTER		
PROJECT TITLE: Renovate Surgical Suite - Phase II						
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
90	07 40 00	Roofing and Siding Panels	Test Reports	Fire Test	1.5	A/E
91	07 40 00	Roofing and Siding Panels	Certificates	Manufacturer Qualifications	1.5	A/E
92	07 40 00	Roofing and Siding Panels	Qualifications	Installer	1.5	A/E
93	07 40 00	Roofing and Siding Panels	Warranty	Manufacturer	1.5	A/E
94	07 42 43	Composite Wall Panels	Submittals	As listed in 1.6	1.6	A/E
95	07 53 23	EPDM Roofing	Shop Drawings	Roofing Membrane Layout	1.5	A/E
96	07 53 23	EPDM Roofing	Shop Drawings	Roofing Membrane adhesive pattern and spacing	1.5	A/E
97	07 53 23	EPDM Roofing	Shop Drawings	Roof membrane seaming & joint detail	1.5	A/E
98	07 53 23	EPDM Roofing	Shop Drawings	Roof membrane penetration details	1.5	A/E
99	07 53 23	EPDM Roofing	Shop Drawings	Base flashing and termination details	1.5	A/E
100	07 53 23	EPDM Roofing	Manufacturer Literature & Data	Description each product	1.4	A/E
101	07 53 23	EPDM Roofing	Manufacturer Literature & Data	Installation instructions	1.4	A/E
102	07 53 23	EPDM Roofing	Manufacturer Literature & Data	Warranty	1.5	A/E
103	07 53 23	EPDM Roofing	Samples	Roofing membrane	1.5	A/E
104	07 53 23	EPDM Roofing	Certificates	Fire and windstorm classification	1.5	A/E
105	07 53 23	EPDM Roofing	Certificates	High wind design requirements	1.5	A/E
106	07 53 23	EPDM Roofing	Certificates	Energy performance requirements	1.5	A/E
107	07 53 23	EPDM Roofing	Qualifications	Compliance with specifications	1.5	A/E
108	07 53 23	EPDM Roofing	Qualifications	Installer	1.5	A/E
109	07 53 23	EPDM Roofing	Qualifications	Manufacturer field rep. experience	1.5	A/E
110	07 53 23	EPDM Roofing	Reports	Field quality control reports	1.5	A/E
111	07 53 23	EPDM Roofing	Protection Plan	Proposed temporary materials	1.5	A/E
112	07 53 23	EPDM Roofing	O & M	Maintenance manuals	1.5	A/E

OWNER: Dept of Veterans Affairs				SUBMITTAL REGISTER		
PROJECT TITLE: Renovate Surgical Suite - Phase II						
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
113	07 60 00	Flashing and Sheet Metal	Shop Drawings	All specified items & flashings	1.4	A/E
114	07 60 00	Flashing and Sheet Metal	Manufacturer's Literature & Data	Two-piece counterflashing, thru-wall flashing	1.4	A/E
115	07 60 00	Flashing and Sheet Metal	Certificates	Compliance with specified finishing requirements	1.5	A/E
116	07 71 00	Roof Specialities	Sustainable Design Submittals	Post consumer recycled content	1.5	A/E
117	07 71 00	Roof Specialities	Samples	Color-anodized aluminum	1.5	A/E
118	07 71 00	Roof Specialities	Drawings	Shop Drawings	1.5	A/E
119	07 71 00	Roof Specialities	Manufacturer's Literature & Data	Each item specified	1.5	A/E
120	07 71 00	Roof Specialities	Certificates	Aluminum thickness	1.5	A/E
121	07 81 00	Applied Fireproofing	Sustainable Design Submittals	Volatile organic compounds	1.3	A/E
122	07 81 00	Applied Fireproofing	Qualifications	Installer	1.3	A/E
123	07 81 00	Applied Fireproofing	Accreditations	Testing Laboratory	1.3	A/E
124	07 81 00	Applied Fireproofing	Certificates	Testing Laboratory/Manufacturer's Certificate	1.3	A/E
125	07 81 00	Applied Fireproofing	Miscellaneous	Manufacturer's Written Approvals	1.3	A/E
126	07 84 00	Firestopping	Qualifications	Installer Qualifications	1.3	A/E
127	07 84 00	Firestopping	Qualifications	Inspector Qualifications	1.3	A/E
128	07 84 00	Firestopping	Manufacturer's Literature and Data	For Firestopping and Smoke Stopping Types	1.3.B	A/E
129	07 84 00	Firestopping	Manufacturer's Literature and Data	Product Data and Installation Instructions	1.3.C	A/E
130	07 84 00	Firestopping	List	FM, UL, or WH Classification Numbers of systems installed	1.3.D	A/E
131	07 84 00	Firestopping	Certified Laboratory Test Reports	For systems proposed for use that are not listed by FM, UL, or WH	1.3.E	A/E
132	07 84 00	Firestopping	Firestopping Material Certificates	Compliance with Specified Requirements	1.3.F	A/E
133	07 92 00	Joint Sealants	Qualifications	Installer Qualifications	1.3.B	A/E
134	07 92 00	Joint Sealants	Certification	Contractor Certification	1.3	A/E
135	07 92 00	Joint Sealants	Product Information	Installation Instructions	1.5.C	A/E

OWNER: Dept of Veterans Affairs			SUBMITTAL REGISTER			
PROJECT TITLE: Renovate Surgical Suite - Phase II						
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
136	07 92 00	Joint Sealants	Samples	Cured Samples of Each Sealant	1.5.D	A/E
137	07 92 00	Joint Sealants	Manufacturer's Literature and Data	Primers	1.5.E	A/E
138	07 92 00	Joint Sealants	Manufacturer's Literature and Data	Sealing Compound, Each Type	1.5	A/E
139	07 92 00	Joint Sealants	Closeout Submittal	Manufacturer Warranty	1.5.F	A/E
140	07 92 00	Joint Sealants	Warranty	Construction; manufacturer's	1.9	A/E
141	08 11 13	Hollow Metal Doors and Frames	Submittal Drawings	Size, Configuration, Fabrication, Installation Details	1.4	A/E
142	08 11 13	Hollow Metal Doors and Frames	Manufacturer's Literature & Data	Each product	1.4	A/E
143	08 11 13	Hollow Metal Doors and Frames	Manufacturer's Literature & Data	Schedule	1.4	A/E
144	08 11 13	Hollow Metal Doors and Frames	Manufacturer's Literature & Data	Installation Instructions	1.4	A/E
145	08 11 13	Hollow Metal Doors and Frames	Sustainable Construction	Recycled content	1.4	A/E
146	08 11 13	Hollow Metal Doors and Frames	Test Reports	Sound rated doors	1.4	A/E
147	08 11 13	Hollow Metal Doors and Frames	Qualifications	Manufacturer	1.4	A/E
148	08 11 13	Hollow Metal Doors and Frames	Warranty	Construction	1.8	A/E
149	08 14 00	Interior Wood Doors	Submittal Drawings	Size, Configuration, Fabrication, Installation Details	1.4	A/E
150	08 14 00	Interior Wood Doors	Submittal Drawings	Details of glazing	1.4	A/E
151	08 14 00	Interior Wood Doors	Submittal Drawings	Project specific requirements	1.4	A/E
152	08 17 10	Integrated Door Assemblies	Drawings	Submittal Drawings	1.5.B	A/E
153	08 17 10	Integrated Door Assemblies	Manufacturer's Literature & Data	Description & Installation Instructions	1.5.C	A/E
154	08 17 10	Integrated Door Assemblies	Suainable Submittals	Recycled content/Low Pollutant-Emitting materials	1.5.D	A/E
155	08 17 10	Integrated Door Assemblies	Cerificates	Door assembly	1.5.E	A/E
156	08 17 10	Integrated Door Assemblies	Qualifications	Installer	1.5.F	A/E
157	08 17 10	Integrated Door Assemblies	Operation & Maintenance Data	Instructions & Maintenance	1.5.G	A/E
158	08 31 13	Access Doors and Frames	Drawings	Size, Configuration, Fabrication, Installation Details	1.4	A/E

OWNER: Dept of Veterans Affairs				SUBMITTAL REGISTER		
PROJECT TITLE: Renovate Surgical Suite - Phase II						
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
159	08 31 13	Access Doors and Frames	Manufacturer's Literature and Data	Product Descriptions and Installation Instructions	1.4	A/E
160	08 31 13	Access Doors and Frames	Sustainable Construction	Recycled content	1.4.	A/E
161	08 31 13	Access Doors and Frames	Drawings	Size, Configuration, Fabrication, Installation Details	1.4	A/E
162	08 31 13	Access Doors and Frames	Manufacturer's Literature and Data	Product Descriptions and Installation Instructions	1.4	A/E
163	08 31 13	Access Doors and Frames	Sustainable Construction	Recycled content	1.4.	A/E
164	08 32 13	ICU Sliding Glass Doors	Submittal	Submittal Procedures	1.6	A/E
165	08 32 13	ICU Sliding Glass Doors	Submittal	Submittal Drawings	1.6	A/E
166	08 32 13	ICU Sliding Glass Doors	Manufacturer's Literature and Data	Product Descriptions and Installation Instructions	1.6	A/E
167	08 32 13	ICU Sliding Glass Doors	Samples	As specified in 1.6 D	1.6	A/E
168	08 32 13	ICU Sliding Glass Doors	Reports	Test Reports	1.6	A/E
169	08 32 13	ICU Sliding Glass Doors	Certificates	Product Certifications	1.6	A/E
170	08 32 13	ICU Sliding Glass Doors	Qualifications	Manufacturer and Installation and Welder Procedures	1.6	A/E
171	08 32 13	ICU Sliding Glass Doors	Design Drawings and Calculations	Location and magnitude Identify Deviations	1.6	A/E
172	08 32 13	ICU Sliding Glass Doors	Instructions	Operation & Maintenance Data		
173	08 41 13	Aluminum-Framed Entrances and Storefronts	Drawings	Submittal Drawings	1.5	A/E
174	08 41 13	Aluminum-Framed Entrances and Storefronts	Manufacturer's Literature and Data	As required in 1.5.C	1.5	A/E
175	08 41 13	Aluminum-Framed Entrances and Storefronts	Samples	Aluminum extrusions	1.5	A/E
176	08 41 13	Aluminum-Framed Entrances and Storefronts	Reports	Test Reports	1.5	A/E
177	08 41 13	Aluminum-Framed Entrances and Storefronts	Certificates	Product Compliance	1.5	A/E
178	08 41 13	Aluminum-Framed Entrances and Storefronts	Qualifications	Manufacturer, Installer	1.5	A/E
179	08 41 13	Aluminum-Framed Entrances and Storefronts	Data	Operation & Maintenance Data	1.5	A/E
180	08 56 59	Service and Teller Window Units	Drawings	Submittal Drawings	1.5.B	A/E
181	08 56 59	Service and Teller Window Units	Manufacturer's Literature & Data	Each product	1.4.C	A/E

OWNER: Dept of Veterans Affairs				SUBMITTAL REGISTER		
PROJECT TITLE: Renovate Surgical Suite - Phase II						
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
182	08 56 59	Service and Teller Window Units	Reports	Test Reports	1.4.D	A/E
183	08 56 59	Service and Teller Window Units	Certificates	Compliance with specs	1.4.E	A/E
184	08 71 00	Door Hardware	Hardware Schedule	As specified in table	1.6	GOVT
185	08 71 00	Door Hardware	Samples and Manufacturer's Literature	Items not previously approved	1.6	A/E
186	08 71 00	Door Hardware	Certificate of Compliance; Test Reports	As described	1.6	A/E
187	08 71 13	Automatic Door Operators	Drawings	Size, configuration, fabrication, installation details	1.4.B	A/E
188	08 71 13	Automatic Door Operators	Manufacturer's Literature & Data	Product description, Installation instructions, Warranty	1.4.C	A/E
189	08 71 13	Automatic Door Operators	Reports	Test reports	1.4.D	A/E
190	08 71 13	Automatic Door Operators	Qualifications	Manufacturer, Installer	1.4.E	A/E
191	08 71 13	Automatic Door Operators	Operation & Maintenance Data	Instructions: Care, Maint, Emerg Shut down	1.4.F	A/E
192	08 80 00	Glazing	Certificates	As required in 1.4.B	1.4	A/E
193	08 80 00	Glazing	Warranty	Manufactures Warranty	1.4	A/E
194	08 80 00	Glazing	Manufacturer's Literature & Data	As required in 1.4.D	1.4	A/E
195	08 80 00	Glazing	Pre-Construction Report	Adhesion and Compatibility Test Report	1.4	A/E
196	09 05 16	Subsurface Preparation for Floor Finishes	Written approval	Product Compatibility	1.3	A/E
197	09 05 16	Subsurface Preparation for Floor Finishes	Product Data	As required in 1.3.C	1.3	A/E
198	09 05 16	Subsurface Preparation for Floor Finishes	Test Data	Moisture / Ph	1.3	A/E
199	09 06 00	Schedule for Finishes	Samples	Materials and Finishes	1.3	GOVT
200	09 22 16	Non-Structural Metal Framing	Manufacturer's Literature and Data	Various items requested	1.4	A/E
201	09 22 16	Non-Structural Metal Framing	Shop Drawings	Various items requested	1.4	A/E
202	09 22 16	Non-Structural Metal Framing	Test Results	Fire rating, each assembly	1.4	A/E
203	09 29 00	Gypsum Board	Manufacturer's Literature and Data	Cornerbead and Edge Trim; Finishing materials; Laminating adhesive; Gypsum board, each type	1.4.	A/E
204	09 29 00	Gypsum Board	Samples	Cornerbead, Edge Trim, Control Joints	1.4	A/E

OWNER:	Dept of Veterans Affairs	SUBMITTAL REGISTER
PROJECT TITLE:	Renovate Surgical Suite - Phase II	
LOCATION:	Salem, VA	
CONTRACT NO:	658-19-103	
CONTRACTOR:	TBD	

Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
205	09 29 00	Gypsum Board	Test Results	Fire rating tests; sound rating test	1.4.	A/E
206	09 29 00	Gypsum Board	Certificates	Certification that products Do Not Contain Asbestos	1.4	A/E
207	09 30 13	Ceramic/Porcelain Tiling	Samples	Porcelain tile, each type, color, patterns and size.	1.3	A/E
208	09 30 13	Ceramic/Porcelain Tiling	Samples	Trim shapes, bullnose cap and cove including bullnose cap and base pieces at internal and external corners of vertical surfaces, each type, color and size	1.3	A/E
209	09 30 13	Ceramic/Porcelain Tiling	Product Data	Porcelain tile, marked to show each type, size, and shape required	1.3	A/E
210	09 30 13	Ceramic/Porcelain Tiling	Product Data	Leveling compound	1.3	A/E
211	09 30 13	Ceramic/Porcelain Tiling	Product Data	Latex-portland cement mortar and grout	1.3	A/E
212	09 30 13	Ceramic/Porcelain Tiling	Product Data	Fasteners	1.3	A/E
213	09 30 13	Ceramic/Porcelain Tiling	Product Data	Elastomeric waterproofing membrane	1.3	A/E
214	09 30 13	Ceramic/Porcelain Tiling	Certifications	Master grade certificate, ANSI A137.1	1.3	A/E
215	09 30 13	Ceramic/Porcelain Tiling	Certifications	Manufacturer's certificates	1.4	A/E
216	09 30 13	Ceramic/Porcelain Tiling	Installer qualifications	Installer experience	1.4	A/E
217	09 51 00	Acoustical Ceilings	Submittal Drawings	Drawings	1.5	A/E
218	09 51 00	Acoustical Ceilings	Manufacturer's Literature and Data	Descriptions of each product	1.5	A/E
219	09 51 00	Acoustical Ceilings	Manufacturer's Literature and Data	Ceiling Suspension System	1.5	A/E
220	09 51 00	Acoustical Ceilings	Manufacturer's Literature and Data	Installation instructions	1.5	A/E
221	09 51 00	Acoustical Ceilings	Manufacturer's Literature and Data	Warranty	1.5	A/E
222	09 51 00	Acoustical Ceilings	Samples	Acoustical Units, Each Type	1.5	A/E
223	09 51 00	Acoustical Ceilings	Samples	Suspension system, trim, molding	1.5	A/E
224	09 51 00	Acoustical Ceilings	Samples	Colored markers	1.5	A/E
225	09 51 00	Acoustical Ceilings	Sustainable Construction	Recycled content; biobased content	1.5	A/E
226	09 51 00	Acoustical Ceilings	Certificates	Acoustical Units, Each Type	1.5	A/E

OWNER: Dept of Veterans Affairs			SUBMITTAL REGISTER			
PROJECT TITLE: Renovate Surgical Suite - Phase II						
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
227	09 51 00	Acoustical Ceilings	Qualifications	Manufacturer	1.5	A/E
228	09 51 00	Acoustical Ceilings	Closeout Submittals	O&M Data	1.5	A/E
229	09 65 13	Resilient Base and Accessories	Manufacturer's Literature & Data	As required in 1.4.B	1.4	A/E
230	09 65 13	Resilient Base and Accessories	Samples	As required in 1.4.C	1.4	A/E
231	09 65 13	Resilient Base and Accessories	Sustainable Construction	Recycled content; biobased content	1.4	A/E
232	09 65 13	Resilient Base and Accessories	Operation & Maintenance Data	Care instructions	1.4	A/E
233	09 65 16	Resilient Sheet Flooring	Manufacturer's Literature & Data	Description, Instructions, Warranty	1.4	A/E
234	09 65 16	Resilient Sheet Flooring	Samples	As required in 1.4.C	1.4	A/E
235	09 65 16	Resilient Sheet Flooring	Sustainable Construction	Low Pollutant-Emitting Materials	1.4	A/E
236	09 65 16	Resilient Sheet Flooring	Certificates	Heat Welded seaming	1.4	A/E
237	09 65 16	Resilient Sheet Flooring	Qualifications	Manufacturer, Installer	1.4	A/E
238	09 65 19	Resilient Tile Flooring	Sustainable Design Submittals	Volatile organic compounds	1.3	A/E
239	09 65 19	Resilient Tile Flooring	Manufacturer's Literature & Data	Description, Manufacturer's Recommendations	1.3	A/E
240	09 65 19	Resilient Tile Flooring	Samples	As required in 1.3.D	1.3	A/E
241	09 65 19	Resilient Tile Flooring	Shop Drawings	Layout of patterns, Edge strip locations	1.3	A/E
242	09 65 19	Resilient Tile Flooring	Test Reports	As required in 1.3.F	1.3	A/E
243	09 67 23.40	Resinous Poured In Place Resilient Flooring (RES-4)	Manufacturer's Literature & Data	As required in 1.3.B	1.3.B	A/E
244	09 67 23.40	Resinous Poured In Place Resilient Flooring (RES-4)	Qualifications	Installer	1.3.C	A/E
245	09 67 23.40	Resinous Poured In Place Resilient Flooring (RES-4)	Data	As required in 1.3.D	1.3.D	A/E
246	09 67 23.40	Resinous Poured In Place Resilient Flooring (RES-4)	Samples	As required in 1.3.E	1.3.E	A/E
247	09 67 23.40	Resinous Poured In Place Resilient Flooring (RES-4)	Drawings	Shop Drawings	1.3.F	A/E
248	09 67 23.40	Resinous Poured In Place Resilient Flooring (RES-4)	Certifications	As required in 1.3.G	1.3.G	A/E
249	09 67 23.40	Resinous Poured In Place Resilient Flooring (RES-4)	Warranty	Warranty	1.3.H	A/E

OWNER: Dept of Veterans Affairs				SUBMITTAL REGISTER		
PROJECT TITLE: Renovate Surgical Suite - Phase II						
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
250	09 68 00	Carpeting	Sustainable Design Submittals	Volatile organic compounds	1.4	A/E
251	09 68 00	Carpeting	Product Data	As required in 1.4.C	1.4	A/E
252	09 68 00	Carpeting	Samples	Carpet/Floor Edge strip	1.4	A/E
253	09 68 00	Carpeting	Drawings	Shop Drawings	1.4	A/E
254	09 68 00	Carpeting	Maintenance Data	Carpet	1.4	A/E
255	09 68 00	Carpeting	Qualifications	Installer	1.4	A/E
256	09 68 00	Carpeting	Warranty	Manufacturer's	1.4	A/E
257	09 91 00	Painting	Qualifications	For Painter	1.3	A/E
258	09 91 00	Painting	Manufacturer's Literature & Data	For each type of coating	1.3	A/E
259	09 91 00	Painting	Manufacturer's Literature & Data	Current MPI "Approved Product List" for each type of coating	1.3	A/E
260	09 91 00	Painting	Samples	Identity Markers (if used)	1.3	A/E
261	09 91 00	Painting	Manufacturer's Certificates	Various requirements	1.3	A/E
262	09 96 59	High-Build Glazed Coatings	Data	Product Data	1.3	A/E
263	09 96 59	High-Build Glazed Coatings	Manufacturer's Literature & Data	Description each product, Application/ Install instructions, Maintenance Instructions	1.3	A/E
264	09 96 59	High-Build Glazed Coatings	Qualifications	Installer	1.3	A/E
265	09 96 59	High-Build Glazed Coatings	Sustainable submittals	Prodcut Data	1.3	A/E
266	09 96 59	High-Build Glazed Coatings	Samples	As listed in 1.3.E	1.3	A/E
267	09 96 59	High-Build Glazed Coatings	Shop Drawings	Shop Drawings	1.3	A/E
268	09 96 59	High-Build Glazed Coatings	Certifications	Manufacturer's / Installers / Contractors certificates & approval	1.3	A/E
269	09 96 59	High-Build Glazed Coatings	Warranty	As specified	1.3	A/E
270	10 21 23	Cubicle Curtain Tracks	Samples	As required in 1.3.B	1.3	A/E
271	10 21 23	Cubicle Curtain Tracks	Drawings	Submittal Drawings	1.3	A/E
272	10 21 23	Cubicle Curtain Tracks	Manufacturer's Literature & Data	As required in 1.3.D	1.3	A/E

OWNER: Dept of Veterans Affairs		PROJECT TITLE: Renovate Surgical Suite - Phase II		SUBMITTAL REGISTER		
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
273	10 21 23	Cubicle Curtain Tracks	Data	Closeout Material	1.3	A/E
274	10 25 13	Patient Bed Service Walls	Sustainable Design Submittals	Volatile organic compounds	1.3	A/E
275	10 25 13	Patient Bed Service Walls	Shop Drawings	Shop Drawings	1.3	A/E
276	10 25 13	Patient Bed Service Walls	Manufacturer's Literature & Data	Submit descriptive literature, catalog cuts, test reports, certifications, samples	1.3	A/E
277	10 25 13	Patient Bed Service Walls	Qualifications	Manufacturer's	1.3	A/E
278	10 25 13	Patient Bed Service Walls	Qualifications	Product	1.3	A/E
279	10 25 13	Patient Bed Service Walls	Qualifications	Service/Maintenatnce Manuals	1.3	A/E
280	10 25 13	Patient Bed Service Walls	Manuals	Operation and Maintenance Manuals	1.3	A/E
281	10 26 00	Wall and Door Protection	Sustainable Design Submittals	Volatile organic compounds	1.4	A/E
282	10 26 00	Wall and Door Protection	Shop Drawings	Shop Drawings	1.4	A/E
283	10 26 00	Wall and Door Protection	Manufacturer's Literature & Data	Corner Guards, Handrail, Wall Guard	1.4	A/E
284	10 26 00	Wall and Door Protection	Test Report	Tackboard / Frame	1.4	A/E
285	10 26 00	Wall and Door Protection	Qualifications	Manufacturer's	1.4	A/E
286	10 26 00	Wall and Door Protection	Qualifications	Installers	1.4	A/E
287	10 26 00	Wall and Door Protection	Warranty	Manufacturer's	1.4	A/E
288	10 28 00	Toilet, Bath, and Laundry Accessories	Drawings	Submittal Drawings	1.3	A/E
289	10 28 00	Toilet, Bath, and Laundry Accessories	Manufacturer's Literature & Data	Each product	1.3	A/E
290	10 28 00	Toilet, Bath, and Laundry Accessories	Samples	Each product	1.3	A/E
291	10 28 00	Toilet, Bath, and Laundry Accessories	Certificates	Product compliance	1.3	A/E
292	10 28 00	Toilet, Bath, and Laundry Accessories	Qualifications	Manufacturer	1.3	A/E
293	10 28 00	Toilet, Bath, and Laundry Accessories	Operation & Maintenance Data	Care instructions	1.3	A/E
294	10 44 13	Fire Extinguisher Cabinets	Manufacturer's Literature & Data	Fire Extinguisher Cabinet	1.2	A/E
295	12 24 00	Window Shades	Samples	As specified in 1.4	1.4	A/E

OWNER: Dept of Veterans Affairs					SUBMITTAL REGISTER	
PROJECT TITLE: Renovate Surgical Suite - Phase II						
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
296	12 24 00	Window Shades	Manufacturer's Literature & Data	Cloth and window shades	1.4	A/E
297	12 24 00	Window Shades	Shop Drawings	As specified in 1.4	1.4	A/E
298	12 24 00	Window Shades	Fire Testing	As specified in 1.4	1.4	A/E
299	12 24 00	Window Shades	Warranty	Manufacturer's	1.4	A/E
300	12 32 00	Manufactured Wood Casework	Manufacturer's Literature & Data	As specified in 1.3	1.3	A/E
301	12 32 00	Manufactured Wood Casework	Samples	As specified in 1.3	1.3	A/E
302	12 32 00	Manufactured Wood Casework	Shop Drawings	As specified in 1.3	1.3	A/E
303	12 32 00	Manufactured Wood Casework	Certification	As specified in 1.3	1.3	A/E
304	12 36 00	Countertops	Shop Drawings	Shop Drawings	1.4	A/E
305	12 36 00	Countertops	Samples	Countertop/Ends, edges, backsplash	1.4	A/E
306	13 05 41	Seismic Restraint Requirements for Non Structural Components	Drawings	Equipment Anchorage Drawings	1.3	A/E
307	13 05 41	Seismic Restraint Requirements for Non Structural Components	Drawings	Bracing Drawings	1.3	A/E
308	13 05 41	Seismic Restraint Requirements for Non Structural Components	Calculations	Signed/sealed design calculations	1.3	A/E
309	13 05 41	Seismic Restraint Requirements for Non Structural Components	Certification/Approval	Compliance verification for concrete anchors	1.3	A/E
310	13 49 00	Radiation Protection	Drawings	Shop Drawings	1.4.B	A/E
311	13 49 00	Radiation Protection	Manufacturer's Literature & Data	Description, Instructions, Warranty	1.4.C	A/E
312	13 49 00	Radiation Protection	Reports	Test Reports	1.4.D	A/E
313	13 49 00	Radiation Protection	Qualifications	Manufacturer	1.4.E	A/E
314	13 49 00	Radiation Protection	Data	Design Drawings & Calculations	1.4.F	A/E
315	13 49 00	Radiation Protection	Operation & Maintenance Data	Care/startup/maintenance, etc instructions	1.4.G	A/E
316	21 08 00	Commissioning of Fire Suppression System	List	Submittals to be reviewed by CxA	1.6	A/E
317	21 08 00	Commissioning of Fire Suppression System	Checklist	Pre-Functional Checklists	3.2	A/E
318	21 08 00	Commissioning of Fire Suppression System	Testing	Systems functional performance testing	3.4	A/E

OWNER: Dept of Veterans Affairs				SUBMITTAL REGISTER		
PROJECT TITLE: Renovate Surgical Suite - Phase II						
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
319	21 13 13	Wet-Pipe Sprinkler System	Certificates	Contractor Qualifications and License	1.4	A/E
320	21 13 13	Wet-Pipe Sprinkler System	Shop Drawings	Detail Drawings	1.4	A/E
321	21 13 13	Wet-Pipe Sprinkler System	Product Data	Manufacturer's Literature and Data	1.4	A/E
322	21 13 13	Wet-Pipe Sprinkler System	Shop Drawings	Hydraulic Calculations	1.4	A/E
323	21 13 13	Wet-Pipe Sprinkler System	Closeout Submittals	As Built Drawings	1.4	A/E
324	21 13 13	Wet-Pipe Sprinkler System	Closeout Submittals	Operation and Maintenance Manuals	1.4	A/E
325	21 13 13	Wet-Pipe Sprinkler System	Closeout Submittals	Maintenance Schedule	1.4	A/E
326	21 13 13	Wet-Pipe Sprinkler System	Certificates	Certified Test Data	1.4	A/E
327	22 05 11	Common Work Results for Plumbing	Certification	Contractor certification of coordination w/Mfg(s) of major equipment/items	1.4	A/E
328	22 05 11	Common Work Results for Plumbing	List	Installing contractor - List of previous installations/contacts	1.4	A/E
329	22 05 11	Common Work Results for Plumbing	Manufacturer's Literature & Data	Various requirements	1.4	A/E
330	22 05 11	Common Work Results for Plumbing	Submittals/Shop Drawings	Interdependent items	1.4	A/E
331	22 05 11	Common Work Results for Plumbing	Coordination Drawings	Drawings	1.4	A/E
332	22 05 11	Common Work Results for Plumbing	Maintenance & Operating Manuals	Manuals	1.4	A/E
333	22 05 11	Common Work Results for Plumbing	Maintenance & Operating Manuals	Manuals	1.4; 3.1	A/E
334	22 05 11	Common Work Results for Plumbing	Drawings	Arrangement and Installation of equipment and piping	3.1	A/E
335	22 05 23	General-Duty Valves for Plumbing	Manufacturer's Literature and Data	Valves and backflow preventers	1.4	A/E
336	22 05 23	General Duty Valves for Plumbing Piping	Maintenance & Operating Manuals	Manuals	1.4	A/E
337	22 07 11	Plumbing Insulation	Manufacturer's Literature and Data	Full description	1.4	A/E
338	22 07 11	Plumbing Insulation	Drawings	Shop Drawings	1.4	A/E
339	22 08 00	Commissioning of Plumbing Systems	Submittals	Submittals	1.4	A/E
340	22 11 00	Facility Water Distribution	Manufacturer's Literature and Data	Full description	1.4	A/E
341	22 13 00	Facility Sanitary and Vent Piping	Manufacturer's Literature and Data	Full description	1.4	A/E

OWNER: Dept of Veterans Affairs				SUBMITTAL REGISTER		
PROJECT TITLE: Renovate Surgical Suite - Phase II						
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
342	22 13 00	Facility Sanitary and Vent Piping	Drawings	Shop Drawings	1.4	A/E
343	22 40 00	Plumbing Fixtures	Manufacturer's Literature and Data	As specified in 1.4	1.4	A/E
344	22 40 00	Plumbing Fixtures	Instructions	Opersting Instructions	1.4	A/E
345	22 40 00	Plumbing Fixtures	Signed Checklist	Completed System Readiness Checklist	1.4	A/E
346	22 40 00	Plumbing Fixtures	Plans & Qualifications	Training Plans; Instructor Qualifications	1.4	A/E
347	22 62 00	Vacuum Systems for Laboratory and Healthcare Facilities	Manufacturer's Literature and Data	As specified in 1.4.C	1.4	A/E
348	22 62 00	Vacuum Systems for Laboratory and Healthcare Facilities	Manufacturer Letter	Station Inlets	1.4	A/E
349	22 62 00	Vacuum Systems for Laboratory and Healthcare Facilities	Certification	Vacuum Systems	1.4	A/E
350	22 62 00	Vacuum Systems for Laboratory and Healthcare Facilities	Affidavit	As required in 1.4.F	1.4	A/E
351	22 62 00	Vacuum Systems for Laboratory and Healthcare Facilities	Checklist	System Readiness Checklist	1.4	A/E
352	22 62 00	Vacuum Systems for Laboratory and Healthcare Facilities	Plans & Qualifications	Training Plans; Instructor Qualifications	1.4	A/E
353	22 63 00	Gas Systems for Laboratory and Healthcare Facilities	Manufacturer's Literature and Data	As specified in 1.4.C	1.4	A/E
354	22 63 00	Gas Systems for Laboratory and Healthcare Facilities	Manufacturer Letter	Station Inlets	1.4	A/E
355	22 63 00	Gas Systems for Laboratory and Healthcare Facilities	Certification	Gas Systems	1.4	A/E
356	22 63 00	Gas Systems for Laboratory and Healthcare Facilities	Checklist	System Readiness Checklist	1.4	A/E
357	22 63 00	Gas Systems for Laboratory and Healthcare Facilities	Plans & Qualifications	Training Plans; Instructor Qualifications	1.4	A/E
358	22 67 19.16	Reverse-Osmosis Water Equipment	Manufacturer's Literature and Data	As specified in 1.4.C	1.4.C	A/E
359	22 67 19.16	Reverse-Osmosis Water Equipment	Drawing	Complete detailed layout	1.4.D	A/E
360	22 67 19.16	Reverse-Osmosis Water Equipment	Checklist	System Readiness Checklist	1.4.E	A/E
361	22 67 19.16	Reverse-Osmosis Water Equipment	Plans & Qualifications	Training Plans; Instructor Qualifications	1.4.F	A/E
362	23 05 11	Common Work Results for HVAC	Certificates	Certification of Manufacturer's Coordination	1.4	A/E
363	23 05 11	Common Work Results for HVAC	Shop Drawings	Interdependent items	1.4	A/E
364	23 05 11	Common Work Results for HVAC	Shop Drawings	Coordinated Layout Drawings	1.4	A/E

OWNER: Dept of Veterans Affairs				SUBMITTAL REGISTER		
PROJECT TITLE: Renovate Surgical Suite - Phase II						
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
365	23 05 11	Common Work Results for HVAC	Manufacturer's Literature & Data	Various requirements	1.4	A/E
366	23 05 11	Common Work Results for HVAC	Rigging Plan	Rigging Plan	1.4	A/E
367	23 05 11	Common Work Results for HVAC	HVAC Maintenance Data	Various requirements	1.4	A/E
368	23 05 11	Common Work Results for HVAC	Approved submittals	HVAC Equipment submittals	1.4	A/E
369	23 05 11	Common Work Results for HVAC	Checklist	Completed Readiness Checklist	1.4	A/E
370	23 05 11	Common Work Results for HVAC	Traing Plans/Qualifications	Instructor Traing Plans/Qualifications	1.4	A/E
371	23 05 11	Common Work Results for HVAC	Tests	Operating & Performance Tests	1.4	A/E
372	23 05 11	Common Work Results for HVAC	Training	Demonstration & Training	1.4	A/E
373	23 05 12	General Motor Requirements for HVAC	Shop Drawings	Shop Drawings	1.4	A/E
374	23 05 12	General Motor Requirements for HVAC	Manuals	IOM Manuals	1.4	A/E
375	23 05 12	General Motor Requirements for HVAC	Certificates	Certification	1.4	A/E
376	23 05 12	General Motor Requirements for HVAC	Test Reports	System Readiness Checklist	1.4	A/E
377	23 05 41	Noise and Vibration Control for HVAC and Piping Equipment	Product Data	Manufacturer's Literature and Data	1.4	A/E
378	23 05 41	Noise and Vibration Control for HVAC and Piping Equipment	Product Data	Load Calculations	1.4	A/E
379	23 05 93	Testing, Adjusting, and Balancing for HVAC	Certificates	Names and Qualifications	1.3, 1.4	A/E
380	23 05 93	Testing, Adjusting, and Balancing for HVAC	Test Equipment Criteria	Calibration History	1.3	A/E
381	23 05 93	Testing, Adjusting, and Balancing for HVAC	Product Data	AABC or NEBB Publications	1.4	A/E
382	23 05 93	Testing, Adjusting, and Balancing for HVAC	Report	Various Reports	1.4	A/E
383	23 05 93	Testing, Adjusting, and Balancing for HVAC	Report	Test and Balance Reports	1.4	A/E
384	23 07 11	HVAC Insulation	Shop Drawings	Shop Drawings	1.4	A/E
385	23 07 11	HVAC Insulation	Samples	Samples	1.4	A/E
386	23 08 00	Commissioning of HVAC Systems	Closeout Submittals	List of Submittals	1.6	A/E
387	23 08 00	Commissioning of HVAC Systems	Pre-Functional Checklists	Pre-Functional Checklists	3.2	GOVT

OWNER: Dept of Veterans Affairs		PROJECT TITLE: Renovate Surgical Suite - Phase II		SUBMITTAL REGISTER		
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
388	23 08 00	Commissioning of HVAC Systems	Contractors Tests	As required by other sections	3.3	GOVT
389	23 08 00	Commissioning of HVAC Systems	Functional Tests	Signing of CxA produced and witnessed test	3.4	GOVT
390	23 08 00	Commissioning of HVAC Systems	Training	Training Plans	3.5	GOVT
391	23 09 23	Direct Digital Control System for HVAC	Contractor Qualifications	Letters	1.4	A/E
392	23 09 23	Direct Digital Control System for HVAC	Warranty	Warranty	1.6	A/E
393	23 09 23	Direct Digital Control System for HVAC	Product Data	Manufacturer's Literature and Data	1.7	A/E
394	23 09 23	Direct Digital Control System for HVAC	Certificates	Product Certificates	1.7	A/E
395	23 09 23	Direct Digital Control System for HVAC	Certificates	Product Licenses	1.7	A/E
396	23 09 23	Direct Digital Control System for HVAC	Closeout Submittals	As Built Control Drawings	1.7	A/E
397	23 09 23	Direct Digital Control System for HVAC	Closeout Submittals	Operation and Maintenance Manuals	1.7	A/E
398	23 09 23	Direct Digital Control System for HVAC	Closeout Submittals	Performance Report	1.7	GOVT
399	23 21 13	Hydronic Piping	Product Data	Manufacturer's Literature and Data	1.4	A/E
400	23 21 13	Hydronic Piping	Product Data	Manufacturer's Certified Data Report for Pressure Vessels	1.4	A/E
401	23 21 13	Hydronic Piping	Certificates	Welder's Qualifications	1.4	A/E
402	23 21 13	Hydronic Piping	Shop Drawings	Coordination Drawings	1.4	A/E
403	23 21 13	Hydronic Piping	Closeout Submittals	As Built Piping Diagrams	1.4	A/E
404	23 21 23	Hydronic Pumps	Manufacturer's Literature and Data	As specified in 1.4.C	1.4	A/E
405	23 21 23	Hydronic Pumps	Chascteristic Curves	As specified in 1.4.D	1.4	A/E
406	23 21 23	Hydronic Pumps	Maintenance & Operating Manuals	Manuals, as required in 1.4.E	1.4	A/E
407	23 21 23	Hydronic Pumps	Checklist	Completed Readiness Checklist	1.4	A/E
408	23 21 23	Hydronic Pumps	Traing Plans/Qualifications	Instructor Traing Plans/Qualifications	1.4	A/E
409	23 22 13	Steam and Condensate Heating Piping	Product Data	Manufacturer's Literature and Data	1.4	A/E
410	23 22 13	Steam and Condensate Heating Piping	Manufacturer's Certified Data Report	ASME Papers	1.4	A/E

OWNER: Dept of Veterans Affairs				SUBMITTAL REGISTER		
PROJECT TITLE: Renovate Surgical Suite - Phase II						
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
411	23 22 13	Steam and Condensate Heating Piping	Coordination Drawings	Coordination Drawings	1.4	A/E
412	23 22 13	Steam and Condensate Heating Piping	As-Built Drawings	As-Built Drawings	1.4	A/E
413	23 22 23	Steam Condensate Pumps	Product Data	Manufacturer's Literature and Data	1.4	A/E
414	23 22 23	Steam Condensate Pumps	Product Data	Pump Curves	1.4	A/E
415	23 22 23	Steam Condensate Pumps	O&M Data	Manuals	1.4	A/E
416	23 22 23	Steam Condensate Pumps	Checklist	Completed System Readiness Checklist	1.4	A/E
417	23 22 23	Steam Condensate Pumps	Training Plans/Qualifications	Instructor Traing Plans/Qualifications	1.4	A/E
418	23 31 00	HVAC Ducts and Casings	Product Data	Manufacturer's Literature and Data	1.4	A/E
419	23 31 00	HVAC Ducts and Casings	Shop Drawings	Coordination Drawings	1.4	A/E
420	23 31 00	HVAC Ducts and Casings	Duct Leakage Tests	Leak and Repair reports	3.2	GOVT
421	23 34 00	HVAC Fans	Product Data	Submittal	1.4	A/E
422	23 34 00	HVAC Fans	Sound Data	Submittal	1.4	A/E
423	23 34 00	HVAC Fans	Motor Data	Submittal	1.4	A/E
424	23 34 00	HVAC Fans	Roof Curbs	Submittal	1.4	A/E
425	23 34 00	HVAC Fans	Belt Guards	Submittal	1.4	A/E
426	23 34 00	HVAC Fans	Closeout Submittals	IO&M information	1.4	A/E
427	23 34 00	HVAC Fans	Certified curves	Submittal	1.4	A/E
428	23 36 00	Air Terminal Units	Product Data	Submittal	1.4	A/E
429	23 36 00	Air Terminal Units	Samples	Sample	1.4	GOVT
430	23 36 00	Air Terminal Units	Certificates	Product Qualifications	1.4	A/E
431	23 36 00	Air Terminal Units	Closeout Submittals	O&M information	1.4	A/E
432	23 37 00	Air Outlets and Inlets	Product Data	Manufacturer's Literature and Data	1.4	A/E
433	23 37 00	Air Outlets and Inlets	Shop Drawings	Coordination Drawings	1.4	A/E

OWNER: Dept of Veterans Affairs			SUBMITTAL REGISTER			
PROJECT TITLE: Renovate Surgical Suite - Phase II						
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
434	23 40 00	HVAC Air Cleaning Devices	Product Data	Submittal	1.4	A/E
435	23 40 00	HVAC Air Cleaning Devices	Performance Reports	Submittal	1.4; 1.3	A/E
436	23 40 00	HVAC Air Cleaning Devices	Certificates	Warranty	1.4; 1.3	A/E
437	23 40 00	HVAC Air Cleaning Devices	HEPA FilterTest Reports	Field Test Reports	1.4	A/E
438	23 64 00	Packaged Water Chillers	Product Data	Manufacturer's Literature and Data	1.6	A/E
439	23 64 00	Packaged Water Chillers	O&M Data	Manuals	1.6	A/E
440	23 64 00	Packaged Water Chillers	Tests	Chillers test report	1.6	A/E
441	23 64 00	Packaged Water Chillers	Certificates	Chiller Mfg compliance certification	1.6	A/E
442	23 64 00	Packaged Water Chillers	Seismic	Restraints for equipment	1.6	A/E
443	23 73 00	Indoor Central-Station Air-Handling Units	Certification	Manufacturer's Certification	1.3	A/E
444	23 73 00	Indoor Central-Station Air-Handling Units	AHU Certifications	AHRI	1.3	A/E
445	23 73 00	Indoor Central-Station Air-Handling Units	Proposal Requirements	Proposal	1.4	A/E
446	23 73 00	Indoor Central-Station Air-Handling Units	Shop Drawings	Submittal	1.4	A/E
447	23 73 00	Indoor Central-Station Air-Handling Units	Product Data	Manufacturer's Literature and Data	1.4	A/E
448	23 73 00	Indoor Central-Station Air-Handling Units	Calculations	Submittal	1.4	A/E
449	23 73 00	Indoor Central-Station Air-Handling Units	Certified AMCA ratings	Submittal	1.4	A/E
450	23 73 00	Indoor Central-Station Air-Handling Units	Test Procedures	Report	1.4	A/E
451	23 73 00	Indoor Central-Station Air-Handling Units	O&M Data	Manuals	1.4	A/E
452	23 73 00	Indoor Central-Station Air-Handling Units	Commissioning	System Readiness Checklist	3.3	GOVT
453	23 73 00	Indoor Central-Station Air-Handling Units	Shipping Information	As requested in 1.4	1.4	A/E
454	23 74 13	Custom, Outdoor, Central-Station Air-Conditioning Units	Product Data	Manufacturer's Literature and Data	1.4	A/E
455	23 74 13	Custom, Outdoor, Central-Station Air-Conditioning Units	O&M Data	Manuals	1.4	A/E
456	23 74 13	Custom, Outdoor, Central-Station Air-Conditioning Units	Test Procedures	Report	1.4	A/E

OWNER: Dept of Veterans Affairs				SUBMITTAL REGISTER		
PROJECT TITLE: Renovate Surgical Suite - Phase II						
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
457	23 74 13	Custom, Outdoor, Central-Station Air-Conditioning Units	Shipping Information	As Requested in 1.4	1.4	A/E
458	23 82 16	Air Coils	Product Data	Manufacturer's Literature and Data	1.4	A/E
459	23 82 16	Air Coils	Instructions	Installation, Operation and Maintenance Manuals	1.4	A/E
460	23 82 16	Air Coils	Certificates	Certification Compliance	1.4	A/E
461	23 82 16	Air Coils	Commissioning	System Readiness Checklist	1.4.F	GOVT
462	26 05 11	Requirements for Electrical Installations	Qualifications	Manufacturer, Products, and Services	1.4	A/E
463	26 05 11	Requirements for Electrical Installations	Submittals	Procedures	1.12	A/E
464	26 05 11	Requirements for Electrical Installations	O&M Manuals	O&M Manuals	1.12	A/E
465	26 05 11	Requirements for Electrical Installations	Acceptance Checks	Test Data and Report of Results,	1.14	A/E
466	26 05 11	Requirements for Electrical Installations	Warranty	Letter	1.15	A/E
467	26 05 11	Requirements for Electrical Installations	Instruction	Qualifications, Agendas, Schedules	1.16	A/E
468	26 05 13	Medium-Voltage Cables	Various Submittals	As specified in 1.5	1.5	A/E
469	26 05 19	Low Voltage Electrical Power Conductors and Cables	Product Data	Manufacturer's Literature and Data	1.5	A/E
470	26 05 19	Low Voltage Electrical Power Conductors and Cables	Certificates	Certifications	1.5	A/E
471	26 05 19	Low Voltage Electrical Power Conductors and Cables	Tests	Acceptance Checks and Tests	3.5	A/E
472	26 05 26	Grounding and Bonding for Electrical Systems	Product Data - Shop Drawings	Manufacturer's Literature and Data	1.4	A/E
473	26 05 26	Grounding and Bonding for Electrical Systems	Test Reports	Ground Resistance Test	1.4	A/E
474	26 05 26	Grounding and Bonding for Electrical Systems	Certificates	Certification of Installation	1.4	A/E
475	26 05 33	Raceway and Boxes for Electrical Systems	Product Data	Manufacturer's Literature and Data	1.4	A/E
476	26 05 33	Raceway and Boxes for Electrical Systems	Shop Drawings	Shop Drawings	1.4	A/E
477	26 05 33	Raceway and Boxes for Electrical Systems	Certificates	Certifications of Materials and Installation	1.4	A/E
478	26 05 41	Underground Electrical Construction	Various Submittals	As specified in 1.4	1.4	A/E
479	26 05 73	Overcurrent Protective Device Coordination Study	Product Data	Software program to be used for study.	1.4	A/E

OWNER: Dept of Veterans Affairs				SUBMITTAL REGISTER		
PROJECT TITLE: Renovate Surgical Suite - Phase II						
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
480	26 05 73	Overcurrent Protective Device Coordination Study	Results	Complete study results	1.4	A/E
481	26 05 73	Overcurrent Protective Device Coordination Study	Certifications	Certification of Installation	1.4	A/E
482	26 08 00	Commissioning of Electrical Systems	Pre-Functional Checklists	Pre-Functional Checklists	3.2	A/E
483	26 08 00	Commissioning of Electrical Systems	Contractors Tests	As required by other sections	3.3	A/E
484	26 08 00	Commissioning of Electrical Systems	Functional Tests	Signing of CA produced and witnessed test	3.4	A/E
485	26 08 00	Commissioning of Electrical Systems	Training	Training Plans	3.5	A/E
486	26 09 23	Lighting Controls	Shop Drawings	Shop Drawings	1.4	A/E
487	26 09 23	Lighting Controls	O&M Data	Manuals	1.4	A/E
488	26 09 23	Lighting Controls	Certifications	Lighting Control Systems	1.4	A/E
489	26 09 23	Lighting Controls	Instructions	Instructions	3.4	A/E
490	26 12 19	Pad-Mounted, Liquid-Filled, Medium Voltage Transformers	Shop Drawings	As specified in 1.5.A.1	1.5	A/E
491	26 12 19	Pad-Mounted, Liquid-Filled, Medium Voltage Transformers	Maintenance & Operating Manuals	As specified in 1.5.A.2	1.5	A/E
492	26 12 19	Pad-Mounted, Liquid-Filled, Medium Voltage Transformers	Certifications	As specified in 1.5.B	1.5	A/E
493	26 13 16	Medium-Voltage Fusable Interrupter Switches	Various Submittals	As specified in 1.5	1.5	A/E
494	26 20 11	Isolated Power Systems	Shop Drawings	Shop Drawings	1.4	A/E
495	26 20 11	Isolated Power Systems	Manuals	As required in 1.4.A.2	1.4	A/E
496	26 20 11	Isolated Power Systems	Reports	Test Reports	1.4	A/E
497	26 20 11	Isolated Power Systems	Certifications	As required in 1.4.A.4	1.4	A/E
498	26 24 16	Panelboards	Shop Drawings	Shop Drawings	1.4	A/E
499	26 24 16	Panelboards	Closeout Submittals	Operation and Maintenance Manuals	1.4	A/E
500	26 24 16	Panelboards	Certifications	Certifications of Installation	1.4	A/E
501	26 24 16	Panelboards	Tests	Acceptance Checks and Tests	3.2	A/E
502	26 27 26	Wiring Devices	Shop Drawings	Shop Drawings	1.4	A/E

OWNER: Dept of Veterans Affairs				SUBMITTAL REGISTER		
PROJECT TITLE: Renovate Surgical Suite - Phase II						
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
503	26 27 26	Wiring Devices	Closeout Submittals	Operation and Maintenance Manuals	1.4	A/E
504	26 27 26	Wiring Devices	Certificates	Certifications of Materials and Installation	1.4	A/E
505	26 27 26	Wiring Devices	Tests	Acceptance Checks and Tests	3.2	A/E
506	26 29 11	Motor Controllers	Shop Drawings	Shop Drawings	1.4	A/E
507	26 29 11	Motor Controllers	Closeout Submittals	Operation and Maintenance Manuals	1.4	A/E
508	26 29 11	Motor Controllers	Certificates	Certifications of Materials and Installation	1.4	A/E
509	26 29 11	Motor Controllers	Tests	Acceptance Checks and Tests	3.2	A/E
510	26 29 21	Enclosed Switches and Circuit Breakers	Shop Drawings	Shop Drawings	1.4	A/E
511	26 29 21	Enclosed Switches and Circuit Breakers	Closeout Submittals	Operation and Maintenance Manuals	1.4	A/E
512	26 29 21	Enclosed Switches and Circuit Breakers	Certificates	Certifications of Materials and Installation	1.4	A/E
513	26 29 21	Enclosed Switches and Circuit Breakers	Tests	Acceptance Checks and Tests	3.2	A/E
514	26 32 13	Engine Generators	Various Items	Drawings, Technical Data, Cals, Manuals, Reports, Certifications	1.5	A/E
515	26 36 23	Automatic Transfer Switches	Shop Drawings	Drawings, Manuals, Certifications	1.5	A/E
516	26 51 00	Interior Lighting	Shop Drawings	Shop Drawings	1.3	A/E
517	26 51 00	Interior Lighting	Closeout Submittals	Operation and Maintenance Manuals	1.3	A/E
518	26 51 00	Interior Lighting	Certificates	Certifications of Materials and Installation	1.3	A/E
519	26 51 00	Interior Lighting	Tests	Acceptance Checks and Tests	3.2	A/E
520	27 05 11	Requirements for Communications Installations	List	List of Parts	1.7	A/E
521	27 05 11	Requirements for Communications Installations	Information	Product Information	1.7	A/E
522	27 05 11	Requirements for Communications Installations	Source Quality Control Submittal	As required in 1.7.D	1.7	A/E
523	27 05 11	Requirements for Communications Installations	Qualifications	Installer	1.7	A/E
524	27 05 11	Requirements for Communications Installations	Submittals	Delagated Design submittals - seismic	1.7	A/E
525	27 05 11	Requirements for Communications Installations	Submittals	Anchors and supports	1.7	A/E

OWNER: Dept of Veterans Affairs				SUBMITTAL REGISTER		
PROJECT TITLE: Renovate Surgical Suite - Phase II						
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
526	27 05 11	Requirements for Communications Installations	Test Equipment List	As required in 1.7.H	1.7	A/E
527	27 05 11	Requirements for Communications Installations	Drawings	As required in 1.7.I	1.7	A/E
528	27 05 11	Requirements for Communications Installations	Submittals	Sustainable Design	1.7	A/E
529	27 05 11	Requirements for Communications Installations	Test Reports	Certified Test Reports	1.7	A/E
530	27 05 26	Grounding and Bonding for Communications Systems	Plans & Qualifications	Location /Routing	1.3	A/E
531	27 05 26	Grounding and Bonding for Communications Systems	Submittals	Closeout Submittals	1.3	A/E
532	27 05 33	Raceways and Boxes for Communications Systems	Submittals	As required in 1.3.A	1.3	A/E
533	27 05 33	Raceways and Boxes for Communications Systems	Certification	Material certification	1.3	A/E
534	27 08 00	Commissioning of Communications Systems	Pre-Functional Checklists	Pre-Functional Checklists	1.4	A/E
535	27 08 00	Commissioning of Communications Systems	Traing Agendas and Resumes	Traing Agendas and Resumes	1.4	A/E
536	27 10 00	Control, Communication and Signal Wiring	Certification	As required in 1.3.B	1.3	A/E
537	27 10 00	Control, Communication and Signal Wiring	Installation Requirements	As required in 1.3.C	1.3	A/E
538	27 10 00	Control, Communication and Signal Wiring	Data	Power Data	1.3	A/E
539	27 10 00	Control, Communication and Signal Wiring	Data	Conduit Sizes	1.3	A/E
540	27 10 00	Control, Communication and Signal Wiring	Submittals	Closeout Submittals	1.3	A/E
541	27 11 00	Communications Equipment Room Fittings	Submittals	Pictorial layouts, Literature	1.3	A/E
542	27 11 00	Communications Equipment Room Fittings	Environmental Requirements	As requred in 1.3.C	1.3	A/E
543	27 15 00	Communications Structured Cabling	Data	Telecommunications	1.3	A/E
544	27 15 00	Communications Structured Cabling	Certifications	As required in 1.3.B	1.3	A/E
545	27 15 00	Communications Structured Cabling	Submittals	Closeout Submittals	1.3	A/E
546	27 31 00	Voice Communications Switching and Routing Equipment	Various Submittals	As specified in 1.3	1.3	A/E
547	27 31 31	Voice Communications Switching and Routing Equipment - Extension	Survey	As required in 1.4.A	1.4	A/E
548	27 31 31	Voice Communications Switching and Routing Equipment - Extension	Submittals	As required in 1.4.B	1.4	A/E

OWNER: Dept of Veterans Affairs			SUBMITTAL REGISTER			
PROJECT TITLE: Renovate Surgical Suite - Phase II						
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
549	27 31 31	Voice Communications Switching and Routing Equipment - Extension	Environmental Requirements	As required in 1.4.C	1.4	A/E
550	27 31 31	Voice Communications Switching and Routing Equipment - Extension	Report	System Data Base Survey Report	1.4	A/E
551	27 31 31	Voice Communications Switching and Routing Equipment - Extension	Report	Facility Needs Analysis Report	1.4	A/E
552	27 31 31	Voice Communications Switching and Routing Equipment - Extension	Submittakls	Voice Traffic Management System	1.4	A/E
553	27 31 31	Voice Communications Switching and Routing Equipment - Extension	Performance Test Plan	As required in 1.4.G	1.4	A/E
554	27 31 31	Voice Communications Switching and Routing Equipment - Extension	Certificates	OEM Training Certificates	1.4	A/E
555	27 31 31	Voice Communications Switching and Routing Equipment - Extension	Closeout Submittals	As required in 1.4.I	1.4	A/E
556	27 31 31	Voice Communications Switching and Routing Equipment - Extension	Submittals	Maintenance Materials	1.4	A/E
557	27 51 16	Public Address and Mass Notification Systems	Qualifications	As required in 1.5	1.5	A/E
558	27 51 16	Public Address and Mass Notification Systems	Record Documents	As required in 1.8	1.8	A/E
559	27 51 16	Public Address and Mass Notification Systems	Project Close-Out	As required in 1.12	1.12	A/E
560	27 51 16	Public Address and Mass Notification Systems	Performance Testing	As required in 4.2	4.2	A/E
561	27 51 23	Intercommunications and Program Systems	Data	As required in 1.3.A	1.3.A	A/E
562	27 51 23	Intercommunications and Program Systems	Certifications	As required in 1.3.B	1.3.B	A/E
563	27 51 23	Intercommunications and Program Systems	Warranty	OEM Warranty	1.3.C	A/E
564	27 51 23	Intercommunications and Program Systems	Report	Needs Assessment	1.3.D	A/E
565	27 51 23	Intercommunications and Program Systems	Material	Maintenance Materials	1.3.E	A/E
566	27 52 23	Nurse Call and Code Blue Systems	Various submittals	As specified in 1.8	1.8	A/E
567	28 05 00	Common Work Results for Electronic Safety and Security	Submittals	as required in 1.6.D	1.6	A/E
568	28 05 13	Conductors and Cables for Electronic Safety and Security	Product Data	Manufacturer's Literature and Data	1.4	A/E
569	28 05 13	Conductors and Cables for Electronic Safety and Security	Certificates	Certifications	1.4	A/E
570	28 05 13	Conductors and Cables for Electronic Safety and Security	Wiring Diagrams	Wiring Diagrams	1.4	A/E
571	28 05 13	Conductors and Cables for Electronic Safety and Security	Cable Administration Drawings	Cable Administration Drawings	1.4	A/E

OWNER: Dept of Veterans Affairs			SUBMITTAL REGISTER			
PROJECT TITLE: Renovate Surgical Suite - Phase II						
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
572	28 05 13	Conductors and Cables for Electronic Safety and Security	Project Planning Documents	Project Planning Documents	1.4	A/E
573	28 05 13	Conductors and Cables for Electronic Safety and Security	Maintenance Data	Maintenance Data	1.4	A/E
574	28 05 26	Grounding and Bonding for Electronic Safety & Security	Mfg Data, Certificates, Shop Drawings	As requested in 1.3	1.3	A/E
575	28 05 28.33	Conduits and Backboxes for Electronic Safety and Security	Shop Drawings	Shop Drawings	1.5	A/E
576	28 05 28.33	Conduits and Backboxes for Electronic Safety and Security	Certificates	Certifications	1.5	A/E
577	28 05 28.33	Conduits and Backboxes for Electronic Safety and Security	Product Data	Manufacturer's Literature and Data	1.5	A/E
578	28 05 28.33	Conduits and Backboxes for Electronic Safety and Security	Coordination Drawings	Coordination Drawings	1.5	A/E
579	28 05 28.33	Conduits and Backboxes for Electronic Safety and Security	Closeout Submittals	Quality Control Test Reports	1.5	A/E
580	28 13 00	Physical Access Control System	Certificates	Quality Assurance compliance	1.4	A/E
581	28 13 00	Physical Access Control System	Drawings	Pre-Installation and AsBUILts	1.4	A/E
582	28 13 00	Physical Access Control System	Shop Drawings	As Required in 1.4.E	1.4	A/E
583	28 13 00	Physical Access Control System	Pre-Installation Design Package	As Required in 1.4.F	1.4	A/E
584	28 13 00	Physical Access Control System	Data	Secutity System Cut sheets	1.4	A/E
585	28 13 00	Physical Access Control System	Data / Certification	Mfg Certification of UL Listing	1.4	A/E
586	28 13 00	Physical Access Control System	Submittals	As Required in 1.4.J	1.4	A/E
587	28 13 00	Physical Access Control System	Submittals	As Required in 1.4.K	1.4	A/E
588	28 13 00	Physical Access Control System	Group II Technical Data Package	As Required in 1.4.L	1.4	A/E
589	28 13 00	Physical Access Control System	Group III Technical Data Package	As Required in 1.4.M	1.4	A/E
590	28 13 00	Physical Access Control System	Group IV Technical Data Package	As Required in 1.4.N	1.4	A/E
591	28 13 00	Physical Access Control System	Group V Technical Data Package	As Required in 1.4.O	1.4	A/E
592	28 13 00	Physical Access Control System	Certificates	FIPS 201 Compliance Certificates	1.4	A/E
593	28 13 00	Physical Access Control System	Checklist	System Readiness Checklist	1.4	A/E
594	28 23 00	Video Surveillance	Certificates	Quality Assurance Compliance	1.5	A/E

OWNER: Dept of Veterans Affairs				SUBMITTAL REGISTER		
PROJECT TITLE: Renovate Surgical Suite - Phase II						
LOCATION: Salem, VA						
CONTRACT NO: 658-19-103						
CONTRACTOR: TBD						
Line	Specification Section	Specification Name	Description	Item Submitted	Paragraph #	Classification: GOVT or A/E Reviewer
595	28 23 00	Video Surveillance	Pre-Installation	As-Built Package	1.5	A/E
596	28 23 00	Video Surveillance	Pre-Installation	Design Package	1.5	A/E
597	28 23 00	Video Surveillance	Data	Security System Cut sheets	1.5	A/E
598	28 23 00	Video Surveillance	Data / Certification	Mfg Certification of UL Listing	1.5	A/E
599	28 23 00	Video Surveillance	Checklist	System Readiness Checklist	1.5	A/E
600	28 31 00	Fire Detection and Alarm	Drawings	Drawings	1.4	A/E
601	28 31 00	Fire Detection and Alarm	Manuals	Operation and Maintenance Manuals	1.4	A/E
602	28 31 00	Fire Detection and Alarm	Certificates	Certifications	1.4	A/E
603	28 31 00	Fire Detection and Alarm	Shop Drawings	Shop Drawings	1.2	A/E
604	28 31 00	Fire Detection and Alarm	Closeout Submittals	Operation and Maintenance Manuals	1.2	A/E
605	28 31 00	Fire Detection and Alarm	Certificates	Certifications of Materials and Installation	1.2	A/E
606	28 31 00	Fire Detection and Alarm	Warranty	Warranty	1.2	A/E
607	28 31 00	Fire Detection and Alarm	Data	Instructions	3.5	A/E
608	31 20 11	Earthwork (Short Form)	Product Data	Data sheet for soils /fills provided	1.5	A/E
609	31 20 11	Earthwork (Short Form)	Product Data	Data sheet for soils /fills provided	1.5	A/E

05-01-20

SECTION 01 35 26
SAFETY REQUIREMENTS
TABLE OF CONTENTS

1.1	APPLICABLE PUBLICATIONS	2
1.2	DEFINITIONS	3
1.3	REGULATORY REQUIREMENTS	4
1.4	ACCIDENT PREVENTION PLAN (APP)	5
1.5	ACTIVITY HAZARD ANALYSES (AHAs)	9
1.6	PRECONSTRUCTION CONFERENCE	10
1.7	"SITE SAFETY AND HEALTH OFFICER" (SSHO) and "COMPETENT PERSON" (CP) ...	11
1.8	TRAINING	12
1.9	INSPECTIONS	13
1.10	ACCIDENTS, OSHA 300 LOGS, AND MAN-HOURS.....	14
1.11	PERSONAL PROTECTIVE EQUIPMENT (PPE)	15
1.12	INFECTION CONTROL	15
1.13	TUBERCULOSIS SCREENING	22
1.14	FIRE SAFETY	23
1.15	ELECTRICAL	25
1.16	FALL PROTECTION	26
1.17	SCAFFOLDS AND OTHER WORK PLATFORMS.....	27
1.18	EXCAVATION AND TRENCHES	28
1.19	CRANES	30
1.20	CONTROL OF HAZARDOUS ENERGY (LOCKOUT/TAGOUT)	31
1.21	CONFINED SPACE ENTRY	31
1.22	WELDING AND CUTTING	31
1.23	LADDERS	31
1.24	FLOOR & WALL OPENINGS	32

05-01-20

SECTION 01 35 26
SAFETY REQUIREMENTS

1.1 APPLICABLE PUBLICATIONS:

A. Latest publications listed below form part of this Article to extent referenced. Publications are referenced in text by basic designations only.

B. American Society of Safety Engineers (ASSE):

A10.1-2011.....Pre-Project & Pre-Task Safety and Health
Planning

A10.34-2012.....Protection of the Public on or Adjacent to
Construction Sites

A10.38-2013.....Basic Elements of an Employer's Program to
Provide a Safe and Healthful Work Environment
American National Standard Construction and
Demolition Operations

C. American Society for Testing and Materials (ASTM):

E84-2013.....Surface Burning Characteristics of Building
Materials

D. The Facilities Guidelines Institute (FGI):

FGI Guidelines-2010Guidelines for Design and Construction of
Healthcare Facilities

E. National Fire Protection Association (NFPA):

10-2018.....Standard for Portable Fire Extinguishers

30-2018.....Flammable and Combustible Liquids Code

51B-2019.....Standard for Fire Prevention During Welding,
Cutting and Other Hot Work

70-2020.....National Electrical Code

70B-2019.....Recommended Practice for Electrical Equipment
Maintenance

70E-2018Standard for Electrical Safety in the Workplace

99-2018.....Health Care Facilities Code

241-2019.....Standard for Safeguarding Construction,
Alteration, and Demolition Operations

F. The Joint Commission (TJC)

05-01-20

TJC ManualComprehensive Accreditation and Certification
Manual

G. U.S. Nuclear Regulatory Commission

10 CFR 20Standards for Protection Against Radiation

H. U.S. Occupational Safety and Health Administration (OSHA):

29 CFR 1910Safety and Health Regulations for General
Industry

29 CFR 1926Safety and Health Regulations for Construction
Industry

I. VHA Directive 2005-007

1.2 DEFINITIONS:

- A. Critical Lift. A lift with the hoisted load exceeding 75% of the crane's maximum capacity; lifts made out of the view of the operator (blind picks); lifts involving two or more cranes; personnel being hoisted; and special hazards such as lifts over occupied facilities, loads lifted close to power-lines, and lifts in high winds or where other adverse environmental conditions exist; and any lift which the crane operator believes is critical.
- B. OSHA "Competent Person" (CP). One who is capable of identifying existing and predictable hazards in the surroundings and working conditions which are unsanitary, hazardous or dangerous to employees, and who has the authorization to take prompt corrective measures to eliminate them (see 29 CFR 1926.32(f)).
- C. "Qualified Person" means one who, by possession of a recognized degree, certificate, or professional standing, or who by extensive knowledge, training and experience, has successfully demonstrated his ability to solve or resolve problems relating to the subject matter, the work, or the project.
- D. High Visibility Accident. Any mishap which may generate publicity or high visibility.
- E. Accident/Incident Criticality Categories:
1. No impact - near miss incidents that should be investigated but are not required to be reported to the VA;
 2. Minor incident/impact - incidents that require first aid or result in minor equipment damage (less than \$5000). These incidents must be investigated but are not required to be reported to the VA;

05-01-20

3. Moderate incident/impact - Any work-related injury or illness that results in:

- a. Days away from work (any time lost after day of injury/illness onset);
- b. Restricted work;
- c. Transfer to another job;
- d. Medical treatment beyond first aid;
- e. Loss of consciousness;

4. A significant injury or illness diagnosed by a physician or other licensed health care professional, even if it did not result in (1) through (5) above or,

5. Any incident that leads to major equipment damage (greater than \$5000).

F. These incidents must be investigated and are required to be reported to the VA;

1 Major incident/impact - Any mishap that leads to fatalities, hospitalizations, amputations, and losses of an eye as a result of contractors' activities. Or any incident which leads to major property damage (greater than \$20,000) and/or may generate publicity or high visibility. These incidents must be investigated and are required to be reported to the VA as soon as practical, but not later than 2 hours after the incident.

G. Medical Treatment. Treatment administered by a physician or by registered professional personnel under the standing orders of a physician. Medical treatment does not include first aid treatment even through provided by a physician or registered personnel.

1.3 REGULATORY REQUIREMENTS:

A. In addition to the detailed requirements included in the provisions of this contract, comply with 29 CFR 1926, comply with 29 CFR 1910 as incorporated by reference within 29 CFR 1926, comply with ASSE A10.34, and all applicable [federal, state, and local] laws, ordinances, criteria, rules and regulations. Submit matters of interpretation of standards for resolution before starting work. Where the requirements of this specification, applicable laws, criteria, ordinances, regulations, and referenced documents vary, the most stringent

05-01-20

requirements govern except with specific approval and acceptance by the Contracting Officer Representative (COR).

1.4 ACCIDENT PREVENTION PLAN (APP) :

- A. The APP (aka Construction Safety & Health Plan) shall interface with the Contractor's overall safety and health program. Include any portions of the Contractor's overall safety and health program referenced in the APP in the applicable APP element and ensure it is site-specific. The Government considers the Prime Contractor to be the "controlling authority" for all worksite safety and health of each subcontractor(s). Contractors are responsible for informing their subcontractors of the safety provisions under the terms of the contract and the penalties for noncompliance, coordinating the work to prevent one craft from interfering with or creating hazardous working conditions for other crafts, and inspecting subcontractor operations to ensure that accident prevention responsibilities are being carried out.
- B. The APP shall be prepared as follows:
1. Written in English by a qualified person who is employed by the Prime Contractor articulating the specific work and hazards pertaining to the contract (model language can be found in ASSE A10.33). Specifically articulating the safety requirements found within these VA contract safety specifications.
 2. Address both the Prime Contractors and the subcontractors work operations.
 3. State measures to be taken to control hazards associated with materials, services, or equipment provided by suppliers.
 4. Address all the elements/sub-elements and in order as follows:
 - a. **SIGNATURE SHEET.** Title, signature, and phone number of the following:
 - 1) Plan preparer (Qualified Person such as corporate safety staff person or contracted Certified Safety Professional with construction safety experience);
 - 2) Plan approver (company/corporate officers authorized to obligate the company);
 - 3) Plan concurrence (e.g., Chief of Operations, Corporate Chief of Safety, Corporate Industrial Hygienist, project manager or superintendent, project safety professional). Provide

05-01-20

concurrence of other applicable corporate and project
personnel (Contractor).

b. BACKGROUND INFORMATION. List the following:

- 1) Contractor;
- 2) Contract number;
- 3) Project name;
- 4) Brief project description, description of work to be performed, and location; phases of work anticipated (these will require an AHA).

c. STATEMENT OF SAFETY AND HEALTH POLICY. Provide a copy of current corporate/company Safety and Health Policy Statement, detailing commitment to providing a safe and healthful workplace for all employees. The Contractor's written safety program goals, objectives, and accident experience goals for this contract should be provided.

d. RESPONSIBILITIES AND LINES OF AUTHORITIES. Provide the following:

- 1) A statement of the employer's ultimate responsibility for the implementation of his SOH program;
- 2) Identification and accountability of personnel responsible for safety at both corporate and project level. Contracts specifically requiring safety or industrial hygiene personnel shall include a copy of their resumes.
- 3) The names of Competent and/or Qualified Person(s) and proof of competency/qualification to meet specific OSHA Competent/Qualified Person(s) requirements must be attached.;
- 4) Requirements that no work shall be performed unless a designated competent person is present on the job site;
- 5) Requirements for pre-task Activity Hazard Analysis (AHAs);
- 6) Lines of authority;
- 7) Policies and procedures regarding noncompliance with safety requirements (to include disciplinary actions for violation of safety requirements) should be identified;

e. SUBCONTRACTORS AND SUPPLIERS. If applicable, provide procedures for coordinating SOH activities with other employers on the job site:

- 1) Identification of subcontractors and suppliers (if known);

05-01-20

- 2) Safety responsibilities of subcontractors and suppliers.

f. TRAINING.

- 1) Site-specific SOH orientation training at the time of initial hire or assignment to the project for every employee before working on the project site is required.
- 2) Mandatory training and certifications that are applicable to this project (e.g., explosive actuated tools, crane operator, rigger, crane signal person, fall protection, electrical lockout/NFPA 70E, machine/equipment lockout, confined space, etc...) and any requirements for periodic retraining/recertification are required.
- 3) Procedures for ongoing safety and health training for supervisors and employees shall be established to address changes in site hazards/conditions.
- 4) OSHA 10-hour training is required for all workers on site and the OSHA 30-hour training is required for Trade Competent Persons (CPs)

g. SAFETY AND HEALTH INSPECTIONS.

- 1) Specific assignment of responsibilities for a minimum daily job site safety and health inspection during periods of work activity: Who will conduct (e.g., "Site Safety and Health CP"), proof of inspector's training/qualifications, when inspections will be conducted, procedures for documentation, deficiency tracking system, and follow-up procedures.
- 2) Any external inspections/certifications that may be required (e.g., contracted CSP or CSHT)

h. ACCIDENT/INCIDENT INVESTIGATION & REPORTING. The Contractor shall conduct mishap investigations of all Moderate and Major as well as all High Visibility Incidents. The APP shall include accident/incident investigation procedure and identify person(s) responsible to provide the following to the COR:

- 1) Exposure data (man-hours worked);
- 2) Accident investigation reports;
- 3) Project site injury and illness logs.

i. PLANS (PROGRAMS, PROCEDURES) REQUIRED. Based on a risk assessment of contracted activities and on mandatory OSHA compliance

05-01-20

programs, the Contractor shall address all applicable occupational, patient, and public safety risks in site-specific compliance and accident prevention plans. These Plans shall include but are not be limited to procedures for addressing the risks associates with the following:

- 1) Emergency response;
- 2) Contingency for severe weather;
- 3) Fire Prevention;
- 4) Medical Support;
- 5) Posting of emergency telephone numbers;
- 6) Prevention of alcohol and drug abuse;
- 7) Site sanitation (housekeeping, drinking water, toilets);
- 8) Night operations and lighting;
- 9) Hazard communication program;
- 10) Welding/Cutting "Hot" work;
- 11) Electrical Safe Work Practices (Electrical LOTO/NFPA 70E);
- 12) General Electrical Safety;
- 13) Hazardous energy control (Machine LOTO);
- 14) Site-Specific Fall Protection & Prevention;
- 15) Excavation/trenching;
- 16) Asbestos abatement;
- 17) Lead abatement;
- 18) Crane Critical lift;
- 19) Respiratory protection;
- 20) Health hazard control program;
- 21) Radiation Safety Program;
- 22) Abrasive blasting;
- 23) Heat/Cold Stress Monitoring;
- 24) Crystalline Silica Monitoring (Assessment);
- 25) Demolition plan (to include engineering survey);
- 26) Formwork and shoring erection and removal;
- 27) Precast Concrete;
- 28) Public (Mandatory compliance with ANSI/ASSE A10.34-2012).

C. Submit the APP to the COR for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES 15 calendar days prior to the date of the

05-01-20

preconstruction conference for acceptance. Work cannot proceed without an accepted APP.

- D. Once accepted by the COR, the APP and attachments will be enforced as part of the contract. Disregarding the provisions of this contract or the accepted APP will be cause for stopping of work, at the discretion of the Contracting Officer in accordance with FAR Clause 52.236-13, *Accident Prevention*, until the matter has been rectified.
- E. Once work begins, changes to the accepted APP shall be made with the knowledge and concurrence of the COR. Should any severe hazard exposure, i.e. imminent danger, become evident, stop work in the area, secure the area, and develop a plan to remove the exposure and control the hazard. Notify the Contracting Officer within 24 hours of discovery. Eliminate/remove the hazard. In the interim, take all necessary action to restore and maintain safe working conditions in order to safeguard onsite personnel, visitors, the public and the environment.

1.5 ACTIVITY HAZARD ANALYSES (AHAS) :

- A. AHAs are also known as Job Hazard Analyses, Job Safety Analyses, and Activity Safety Analyses. Before beginning each work activity involving a type of work presenting hazards not experienced in previous project operations or where a new work crew or sub-contractor is to perform the work, the Contractor(s) performing that work activity shall prepare an AHA (Example electronic AHA forms can be found on the US Army Corps of Engineers web site)
- B. AHAs shall define the activities being performed and identify the work sequences, the specific anticipated hazards, site conditions, equipment, materials, and the control measures to be implemented to eliminate or reduce each hazard to an acceptable level of risk.
- C. Work shall not begin until the AHA for the work activity has been accepted by the COR and discussed with all engaged in the activity, including the Contractor, subcontractor(s), and Government on-site representatives at preparatory and initial control phase meetings.
 - 1. The names of the Competent/Qualified Person(s) required for a particular activity (for example, excavations, scaffolding, fall protection, other activities as specified by OSHA and/or other State and Local agencies) shall be identified and included in the AHA.

05-01-20

- Certification of their competency/qualification shall be submitted to the Government Designated Authority (GDA) for acceptance prior to the start of that work activity.
2. The AHA shall be reviewed and modified as necessary to address changing site conditions, operations, or change of competent/qualified person(s).
 - a. If more than one Competent/Qualified Person is used on the AHA activity, a list of names shall be submitted as an attachment to the AHA. Those listed must be Competent/Qualified for the type of work involved in the AHA and familiar with current site safety issues.
 - b. If a new Competent/Qualified Person (not on the original list) is added, the list shall be updated (an administrative action not requiring an updated AHA). The new person shall acknowledge in writing that he or she has reviewed the AHA and is familiar with current site safety issues.
 3. Submit AHAs to the COR for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES for review at least 15 calendar days prior to the start of each phase. Subsequent AHAs as shall be formatted as amendments to the APP. The analysis should be used during daily inspections to ensure the implementation and effectiveness of the activity's safety and health controls.
 4. The AHA list will be reviewed periodically (at least monthly) at the Contractor supervisory safety meeting and updated as necessary when procedures, scheduling, or hazards change.
 5. Develop the activity hazard analyses using the project schedule as the basis for the activities performed. All activities listed on the project schedule will require an AHA. The AHAs will be developed by the contractor, supplier, or subcontractor and provided to the prime contractor for review and approval and then submitted to the COR.

1.6 PRECONSTRUCTION CONFERENCE:

- A. Contractor representatives who have a responsibility or significant role in implementation of the accident prevention program, as required by 29 CFR 1926.20(b)(1), on the project shall attend the preconstruction conference to gain a mutual understanding of its

05-01-20

implementation. This includes the project superintendent, subcontractor superintendents, and any other assigned safety and health professionals.

- B. Discuss the details of the submitted APP to include incorporated plans, programs, procedures and a listing of anticipated AHAs that will be developed and implemented during the performance of the contract. This list of proposed AHAs will be reviewed at the conference and an agreement will be reached between the Contractor and the Contracting Officer's representative as to which phases will require an analysis. In addition, establish a schedule for the preparation, submittal, review, and acceptance of AHAs to preclude project delays.
 - C. Deficiencies in the submitted APP will be brought to the attention of the Contractor within 14 days of submittal, and the Contractor shall revise the plan to correct deficiencies and re-submit it for acceptance. Do not begin work until there is an accepted APP.
- SPEC WRITER NOTE: If the contract will involve (a) work of a long duration or hazardous nature, or (b) performance within a Government facility that on the advice of VA construction safety representatives involves hazardous operations that might endanger the safety of the public, patients and/or Government personnel or property, the SSHO and Superintendent and/or Quality Control Manager must be separate persons (See Section 1.7(C) for choice).

1.7 "SITE SAFETY AND HEALTH OFFICER" (SSHO) AND "COMPETENT PERSON" (CP):

- A. The Prime Contractor shall designate a minimum of one SSHO at each project site that will be identified as the SSHO to administer the Contractor's safety program and government-accepted Accident Prevention Plan. Each subcontractor shall designate a minimum of one CP in compliance with 29 CFR 1926.20 (b) (2) that will be identified as a CP to administer their individual safety programs.
- B. Further, all specialized Competent Persons for the work crews will be supplied by the respective contractor as required by 29 CFR 1926 (i.e. Asbestos, Electrical, Cranes, & Derricks, Demolition, Fall Protection, Fire Safety/Life Safety, Ladder, Rigging, Scaffolds, and Trenches/Excavations).
- C. These Competent Persons can have collateral duties as the subcontractor's superintendent and/or work crew lead persons as well as

05-01-20

fill more than one specialized CP role (i.e. Asbestos, Electrical, Cranes, & Derricks, Demolition, Fall Protection, Fire Safety/Life Safety, Ladder, Rigging, Scaffolds, and Trenches/Excavations).

However, the SSHO has be a separate qualified individual from the Prime Contractor's Superintendent and/or Quality Control Manager with duties only as the SSHO

- D. The SSHO or an equally-qualified Designated Representative/alternate will maintain a presence on the site during construction operations in accordance with FAR Clause 52.236-6: *Superintendence by the Contractor*. CPs will maintain presence during their construction activities in accordance with above mentioned clause. A listing of the designated SSHO and all known CPs shall be submitted prior to the start of work as part of the APP with the training documentation and/or AHA as listed in Section 1.8 below.
- E. The repeated presence of uncontrolled hazards during a contractor's work operations will result in the designated CP as being deemed incompetent and result in the required removal of the employee in accordance with FAR Clause 52.236-5: Material and Workmanship, Paragraph (c).

1.8 TRAINING:

- A. The designated Prime Contractor SSHO must meet the requirements of all applicable OSHA standards and be capable (through training, experience, and qualifications) of ensuring that the requirements of 29 CFR 1926.16 and other appropriate Federal, State and local requirements are met for the project. As a minimum the SSHO must have completed the OSHA 30-hour Construction Safety class and have five (5) years of construction industry safety experience or three (3) years if he/she possesses a Certified Safety Professional (CSP) or certified Construction Safety and Health Technician (CSHT) certification or have a safety and health degree from an accredited university or college.
- B. All designated CPs shall have completed the OSHA 30-hour Construction Safety course within the past 5 years.
- C. In addition to the OSHA 30 Hour Construction Safety Course, all CPs with high hazard work operations such as operations involving asbestos, electrical, cranes, demolition, work at heights/fall protection, fire safety/life safety, ladder, rigging, scaffolds, and

05-01-20

trenches/excavations shall have a specialized formal course in the hazard recognition & control associated with those high hazard work operations. Documented "repeat" deficiencies in the execution of safety requirements will require retaking the requisite formal course.

- D. All other construction workers shall have the OSHA 10-hour Construction Safety Outreach course and any necessary safety training to be able to identify hazards within their work environment.
- E. Submit training records associated with the above training requirements to the COR for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES 15 calendar days prior to the date of the preconstruction conference for acceptance.
- F. Prior to any worker for the contractor or subcontractors beginning work, they shall undergo a safety briefing provided by the SSHO or his/her designated representative. As a minimum, this briefing shall include information on the site-specific hazards, construction limits, VAMC safety guidelines, means of egress, break areas, work hours, locations of restrooms, use of VAMC equipment, emergency procedures, accident reporting etc... Documentation shall be provided to the COR that individuals have undergone contractor's safety briefing.
- G. Ongoing safety training will be accomplished in the form of weekly documented safety meeting.

1.9 INSPECTIONS:

- A. The SSHO shall conduct frequent and regular safety inspections (daily) of the site and each of the subcontractors CPs shall conduct frequent and regular safety inspections (daily) of the work operations as required by 29 CFR 1926.20(b)(2). Each week, the SSHO shall conduct a formal documented inspection of the entire construction areas with the subcontractors' "Trade Safety and Health CPs" present in their work areas. Coordinate with, and report findings and corrective actions weekly to COR.
- B. A Certified Safety Professional (CSP) with specialized knowledge in construction safety or a certified Construction Safety and Health Technician (CSHT) shall randomly conduct a monthly site safety inspection. The CSP or CSHT can be a corporate safety professional or independently contracted. The CSP or CSHT will provide their

05-01-20

certificate number on the required report for verification as necessary.

1. Results of the inspection will be documented with tracking of the identified hazards to abatement.
2. The COR will be notified immediately prior to start of the inspection and invited to accompany the inspection.
3. Identified hazard and controls will be discussed to come to a mutual understanding to ensure abatement and prevent future reoccurrence.
4. A report of the inspection findings with status of abatement will be provided to the COR within one week of the onsite inspection.

1.10 ACCIDENTS, OSHA 300 LOGS, AND MAN-HOURS:

- A. The prime contractor shall establish and maintain an accident reporting, recordkeeping, and analysis system to track and analyze all injuries and illnesses, high visibility incidents, and accidental property damage (both government and contractor) that occur on site. Notify the COR as soon as practical, but no more than four hours after any accident meeting the definition of a Moderate or Major incidents, High Visibility Incidents, or any weight handling and hoisting equipment accident. Within notification include contractor name; contract title; type of contract; name of activity, installation or location where accident occurred; date and time of accident; names of personnel injured; extent of property damage, if any; extent of injury, if known, and brief description of accident (to include type of construction equipment used, PPE used, etc.). Preserve the conditions and evidence on the accident site until the COR determines whether a government investigation will be conducted.
- B. Conduct an accident investigation for all Minor, Moderate and Major incidents as defined in paragraph DEFINITIONS, and property damage accidents resulting in at least \$20,000 in damages, to establish the root cause(s) of the accident. Complete the VA Form 2162 (or equivalent) , and provide the report to the COR within 5 calendar days of the accident. The COR will provide copies of any required or special forms.
- C. A summation of all man-hours worked by the contractor and associated sub-contractors for each month will be reported to the COR monthly.

05-01-20

D. A summation of all Minor, Moderate, and Major incidents experienced on site by the contractor and associated sub-contractors for each month will be provided to the COR monthly. The contractor and associated sub-contractors' OSHA 300 logs will be made available to the COR as requested.

1.11 PERSONAL PROTECTIVE EQUIPMENT (PPE) :

A. PPE is governed in all areas by the nature of the work the employee is performing. For example, specific PPE required for performing work on electrical equipment is identified in NFPA 70E, Standard for Electrical Safety in the Workplace.

B. Mandatory PPE includes:

1. Hard Hats - unless written authorization is given by the COR in circumstances of work operations that have limited potential for falling object hazards such as during finishing work or minor remodeling. With authorization to relax the requirement of hard hats, if a worker becomes exposed to an overhead falling object hazard, then hard hats would be required in accordance with the OSHA regulations.
2. Safety glasses - unless written authorization is given by the COR in circumstances of no eye hazards, appropriate safety glasses meeting the ANSI Z.87.1 standard must be worn by each person on site.
3. Appropriate Safety Shoes - based on the hazards present, safety shoes meeting the requirements of ASTM F2413-11 shall be worn by each person on site unless written authorization is given by the COR in circumstances of no foot hazards.
4. Hearing protection - Use personal hearing protection at all times in designated noise hazardous areas or when performing noise hazardous tasks.

1.12 INFECTION CONTROL

A. Infection Control is critical in all medical center facilities. Interior construction activities causing disturbance of existing dust, or creating new dust, must be conducted within ventilation-controlled areas that minimize the flow of airborne particles into patient areas. Exterior construction activities causing disturbance of soil or creates dust in some other manner must be controlled.

05-01-20

B. An AHA associated with infection control will be performed by VA personnel in accordance with FGI Guidelines (i.e. Infection Control Risk Assessment (ICRA)). The ICRA procedure found on the American Society for Healthcare Engineering (ASHE) website will be utilized. Risk classifications of Class II or lower will require approval by the COR before beginning any construction work. Risk classifications of Class III or higher will require a permit before beginning any construction work. Infection Control permits will be issued by the COR. The Infection Control Permits will be posted outside the appropriate construction area. More than one permit may be issued for a construction project if the work is located in separate areas requiring separate classes. The primary project scope area for this project is: **Class IV**, however, work outside the primary project scope area may vary. The required infection control precautions with each class are as follows:

1. Class I requirements:

a. During Construction Work:

- 1) Notify the COR.
- 2) Execute work by methods to minimize raising dust from construction operations.
- 3) Ceiling tiles: Immediately replace a ceiling tiles displaced for visual inspection.

b. Upon Completion:

- 1) Clean work area upon completion of task
- 2) Notify the COR.

2. Class II requirements:

a. During Construction Work:

- 1) Notify the COR.
- 2) Provide active means to prevent airborne dust from dispersing into atmosphere such as wet methods or tool mounted dust collectors where possible.
- 3) Water mist work surfaces to control dust while cutting.
- 4) Seal unused doors with duct tape.
- 5) Block off and seal air vents.
- 6) Remove or isolate HVAC system in areas where work is being performed.

05-01-20

- b. Upon Completion:
 - 1) Wipe work surfaces with cleaner/disinfectant.
 - 2) Contain construction waste before transport in tightly covered containers.
 - 3) Wet mop and/or vacuum with HEPA filtered vacuum before leaving work area.
 - 4) Upon completion, restore HVAC system where work was performed
 - 5) Notify the COR.
- 3. Class III requirements:
 - a. During Construction Work:
 - 1) Obtain permit from the COR.
 - 2) Remove or Isolate HVAC system in area where work is being done to prevent contamination of duct system.
 - 3) Complete all critical barriers i.e. sheetrock, plywood, plastic, to seal area from non-work area or implement control cube method (cart with plastic covering and sealed connection to work site with HEPA vacuum for vacuuming prior to exit) before construction begins. Install construction barriers and ceiling protection carefully, outside of normal work hours.
 - 4) Maintain negative air pressure, 0.01 inches of water gauge, within work site utilizing HEPA equipped air filtration units and continuously monitored with a digital display, recording and alarm instrument, which must be calibrated on installation, maintained with periodic calibration and monitored by the contractor.
 - 5) Contain construction waste before transport in tightly covered containers.
 - 6) Cover transport receptacles or carts. Tape covering unless solid lid.
 - b. Upon Completion:
 - 1) Do not remove barriers from work area until completed project is inspected by the COR and thoroughly cleaned by the VA Environmental Services Department.
 - 2) Remove construction barriers and ceiling protection carefully to minimize spreading of dirt and debris associated with construction, outside of normal work hours.

05-01-20

- 3) Vacuum work area with HEPA filtered vacuums.
 - 4) Wet mop area with cleaner/disinfectant.
 - 5) Upon completion, restore HVAC system where work was performed.
 - 6) Return permit to the COR.
4. Class IV requirements:
- a. During Construction Work:
 - 1) Obtain permit from the COR.
 - 2) Isolate HVAC system in area where work is being done to prevent contamination of duct system.
 - 3) Complete all critical barriers i.e. sheetrock, plywood, plastic, to seal area from non work area or implement control cube method (cart with plastic covering and sealed connection to work site with HEPA vacuum for vacuuming prior to exit) before construction begins. Install construction barriers and ceiling protection carefully, outside of normal work hours.
 - 4) Maintain negative air pressure, 0.01 inches of water gauge, within work site utilizing HEPA equipped air filtration units and continuously monitored with a digital display, recording and alarm instrument, which must be calibrated on installation, maintained with periodic calibration and monitored by the contractor.
 - 5) Seal holes, pipes, conduits, and punctures.
 - 6) Construct anteroom and require all personnel to pass through this room so they can be vacuumed using a HEPA vacuum cleaner before leaving work site or they can wear cloth or paper coveralls that are removed each time they leave work site.
 - 7) All personnel entering work site are required to wear shoe covers. Shoe covers must be changed each time the worker exits the work area.
 - b. Upon Completion:
 - 1) Do not remove barriers from work area until completed project is inspected by the COR with thorough cleaning by the VA Environmental Services Dept.
 - 2) Remove construction barriers and ceiling protection carefully to minimize spreading of dirt and debris associated with construction, outside of normal work hours.

05-01-20

- 3) Contain construction waste before transport in tightly covered containers.
- 4) Cover transport receptacles or carts. Tape covering unless solid lid.
- 5) Vacuum work area with HEPA filtered vacuums.
- 6) Wet mop area with cleaner/disinfectant.
- 7) Upon completion, restore HVAC system where work was performed.
- 8) Return permit to the COR.

C. Barriers shall be erected as required based upon classification (Class III & IV requires barriers) and shall be constructed as follows:

1. Class III and IV - closed door with masking tape applied over the frame and door is acceptable for projects that can be contained in a single room.
2. Construction, demolition or reconstruction not capable of containment within a single room must have the following barriers erected and made presentable on hospital occupied side:
 - a. Class III & IV (where dust control is the only hazard, and an agreement is reached with the COR and Medical Center) - Airtight plastic barrier that extends from the floor to ceiling. Seams must be sealed with duct tape to prevent dust and debris from escaping
 - b. Class III & IV - Drywall barrier erected with joints covered or sealed to prevent dust and debris from escaping.
 - c. Class III & IV - Seal all penetrations in existing barrier airtight
 - d. Class III & IV - Barriers at penetration of ceiling envelopes, chases and ceiling spaces to stop movement air and debris
 - e. Class IV only - Anteroom or double entrance openings that allow workers to remove protective clothing or vacuum off existing clothing
 - f. Class III & IV - At elevators shafts or stairways within the field of construction, overlapping flap minimum of two feet wide of polyethylene enclosures for personnel access.

D. Products and Materials:

1. Sheet Plastic: Fire retardant polystyrene, 6-mil thickness meeting local fire codes

05-01-20

2. Barrier Doors: Self Closing, One-hour fire-rated solid core wood in steel frame, painted
 3. Dust proof one-hour fire-rated drywall
 4. High Efficiency Particulate Air-Equipped filtration machine rated at 95% capture of 0.3 microns including pollen, mold spores and dust particles. HEPA filters should have ASHRAE 85 or other prefilter to extend the useful life of the HEPA. Provide both primary and secondary filtrations units. Maintenance of equipment and replacement of the HEPA filters and other filters will be in accordance with manufacturer's instructions.
 5. Exhaust Hoses: Heavy duty, flexible steel reinforced; Ventilation Blower Hose
 6. Adhesive Walk-off Mats: Provide minimum size mats of 24 inches x 36 inches
 7. Disinfectant: Hospital-approved disinfectant or equivalent product
 8. Portable Ceiling Access Module
- E. Before any construction on site begins, all contractor personnel involved in the construction or renovation activity shall be educated and trained in infection prevention measures established by the medical center.
- F. A dust control program will be established and maintained as part of the contractor's infection preventive measures in accordance with the FGI Guidelines for Design and Construction of Healthcare Facilities. Prior to start of work, prepare a plan detailing project-specific dust protection measures with associated product data, including periodic status reports, and submit to the COR for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- G. Medical center Infection Control personnel will monitor for airborne disease (e.g. aspergillosis) during construction. A baseline of conditions will be established by the medical center prior to the start of work and periodically during the construction stage to determine impact of construction activities on indoor air quality with safe thresholds established.
- H. In general, the following preventive measures shall be adopted during construction to keep down dust and prevent mold.

05-01-20

1. Contractor shall verify that construction exhaust to exterior is not reintroduced to the medical center through intake vents or building openings. HEPA filtration is required where the exhaust dust may reenter the medical center.
2. Exhaust hoses shall be exhausted so that dust is not reintroduced to the medical center.
3. Adhesive Walk-off/Carpet Walk-off Mats shall be used at all interior transitions from the construction area to occupied medical center area. These mats shall be changed as often as required to maintain clean work areas directly outside construction area at all times.
4. Vacuum and wet mop all transition areas from construction to the occupied medical center at the end of each workday. Vacuum shall utilize HEPA filtration. Maintain surrounding area frequently. Remove debris as it is created. Transport these outside the construction area in containers with tightly fitting lids.
5. The contractor shall not haul debris through patient-care areas without prior approval of the COR and the Medical Center. When, approved, debris shall be hauled in enclosed dust proof containers or wrapped in plastic and sealed with duct tape. No sharp objects should be allowed to cut through the plastic. Wipe down the exterior of the containers with a damp rag to remove dust. All equipment, tools, material, etc. transported through occupied areas shall be made free from dust and moisture by vacuuming and wipe down.
6. There shall be no standing water during construction. This includes water in equipment drip pans and open containers within the construction areas. All accidental spills must be cleaned up and dried within 12 hours. Remove and dispose of porous materials that remain damp for more than 72 hours.
7. At completion, remove construction barriers and ceiling protection carefully, outside of normal work hours. Vacuum and clean all surfaces free of dust after the removal.

I. Final Cleanup:

1. Upon completion of project, or as work progresses, remove all construction debris from above ceiling, vertical shafts and utility chases that have been part of the construction.

05-01-20

2. Perform HEPA vacuum cleaning of all surfaces in the construction area. This includes walls, ceilings, cabinets, furniture (built-in or free standing), partitions, flooring, etc.
3. All new air ducts shall be cleaned prior to final inspection.

J. Exterior Construction

1. Contractor shall verify that dust will not be introduced into the medical center through intake vents or building openings. HEPA filtration on intake vents is required where dust may be introduced.
2. Dust created from disturbance of soil such as from vehicle movement will be wetted with use of a water truck as necessary
3. All cutting, drilling, grinding, sanding, or disturbance of materials shall be accomplished with tools equipped with either local exhaust ventilation (i.e. vacuum systems) or wet suppression controls.

1.13 TUBERCULOSIS SCREENING

- A. Contractor shall provide written certification that all contract employees assigned to the work site have had a pre-placement tuberculin screening within 90 days prior to assignment to the worksite and been found have negative TB screening reactions. Contractors shall be required to show documentation of negative TB screening reactions for any additional workers who are added after the 90-day requirement before they will be allowed to work on the work site. NOTE: This can be the Center for Disease Control (CDC) and Prevention and two-step skin testing or a Food and Drug Administration (FDA)-approved blood test.
1. Contract employees manifesting positive screening reactions to the tuberculin shall be examined according to current CDC guidelines prior to working on VHA property.
 2. Subsequently, if the employee is found without evidence of active (infectious) pulmonary TB, a statement documenting examination by a physician shall be on file with the employer (construction contractor), noting that the employee with a positive tuberculin screening test is without evidence of active (infectious) pulmonary TB.
 3. If the employee is found with evidence of active (infectious) pulmonary TB, the employee shall require treatment with a subsequent

05-01-20

statement to the fact on file with the employer before being allowed to return to work on VHA property.

1.14 FIRE SAFETY

- A. Fire Safety Plan: Establish and maintain a site-specific fire protection program in accordance with 29 CFR 1926. Prior to start of work, prepare a plan detailing project-specific fire safety measures, including periodic status reports, and submit to the COR for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. This plan may be an element of the Accident Prevention Plan.
- B. Site and Building Access: Maintain free and unobstructed access to facility emergency services and for fire, police and other emergency response forces in accordance with NFPA 241.
- C. Separate temporary facilities, such as trailers, storage sheds, and dumpsters, from existing buildings and new construction by distances in accordance with NFPA 241. For small facilities with less than 6 m (20 feet) exposing overall length, separate by 3m (10 feet).
- D. Temporary Construction Partitions:
 - 1. Install and maintain temporary construction partitions to provide smoke-tight separations between construction areas and adjoining areas. Construct partitions of gypsum board or treated plywood (flame spread rating of 25 or less in accordance with ASTM E84) on both sides of fire retardant treated wood or metal steel studs. Extend the partitions through suspended ceilings to floor slab deck or roof. Seal joints and penetrations. At door openings, install Class C, ¾ hour fire/smoke rated doors with self-closing devices.
 - 2. Install one-hour fire-rated temporary construction partitions as shown on drawings to maintain integrity of existing exit stair enclosures, exit passageways, fire-rated enclosures of hazardous areas, horizontal exits, smoke barriers, vertical shafts and openings enclosures.
 - 3. Close openings in smoke barriers and fire-rated construction to maintain fire ratings. Seal penetrations with listed through-penetration firestop materials in accordance with Section 07 84 00, FIRESTOPPING.

05-01-20

- E. Temporary Heating and Electrical: Install, use and maintain installations in accordance with 29 CFR 1926, NFPA 241 and NFPA 70.
- F. Means of Egress: Do not block exiting for occupied buildings, including paths from exits to roads. Minimize disruptions and coordinate with the COR.
- G. Egress Routes for Construction Workers: Maintain free and unobstructed egress. Inspect daily. Report findings and corrective actions weekly to the COR.
- H. Fire Extinguishers: Provide and maintain extinguishers in construction areas and temporary storage areas in accordance with 29 CFR 1926, NFPA 241 and NFPA 10.
- I. Flammable and Combustible Liquids: Store, dispense and use liquids in accordance with 29 CFR 1926, NFPA 241 and NFPA 30.
- K. Sprinklers: Install, test and activate new automatic sprinklers prior to removing existing sprinklers.
- L. Existing Fire Protection: Do not impair automatic sprinklers, smoke and heat detection, and fire alarm systems, except for portions immediately under construction, and temporarily for connections. Provide fire watch for impairments more than 4 hours in a 24-hour period. Request interruptions in accordance with Article, OPERATIONS AND STORAGE AREAS, and coordinate with the COR. All existing or temporary fire protection systems (fire alarms, sprinklers) located in construction areas shall be tested as coordinated with the medical center. Parameters for the testing and results of any tests performed shall be recorded by the medical center and copies provided to the COR.
- M. Smoke Detectors: Prevent accidental operation. Remove temporary covers at end of work operations each day. Coordinate with the COR.
- N. Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with the COR. Obtain permits from the COR at least 72 hours in advance.
- O. Fire Hazard Prevention and Safety Inspections: Inspect entire construction areas weekly. Coordinate with, and report findings and corrective actions weekly to the COR.
- P. Smoking: Smoking is prohibited in and adjacent to construction areas inside existing buildings and additions under construction. In separate

05-01-20

and detached buildings under construction, smoking is prohibited except in designated smoking rest areas.

- Q. Dispose of waste and debris in accordance with NFPA 241. Remove from buildings daily.
- R. If required, submit documentation to the COR that personnel have been trained in the fire safety aspects of working in areas with impaired structural or compartmentalization features.

1.15 ELECTRICAL

- A. All electrical work shall comply with NFPA 70 (NEC), NFPA 70B, NFPA 70E, 29 CFR Part 1910 Subpart J - General Environmental Controls, 29 CFR Part 1910 Subpart S - Electrical, and 29 CFR 1926 Subpart K in addition to other references required by contract.
- B. All qualified persons performing electrical work under this contract shall be licensed journeyman or master electricians. All apprentice electricians performing under this contract shall be deemed unqualified persons unless they are working under the immediate supervision of a licensed electrician or master electrician.
- C. All electrical work will be accomplished de-energized and in the Electrically Safe Work Condition (refer to NFPA 70E for Work Involving Electrical Hazards, including Exemptions to Work Permit). Any Contractor, subcontractor or temporary worker who fails to fully comply with this requirement is subject to immediate termination in accordance with FAR clause 52.236-5(c). Only in rare circumstance where achieving an electrically safe work condition prior to beginning work would increase or cause additional hazards or is infeasible due to equipment design or operational limitations is energized work permitted. The COR with approval of the Medical Center Director will make the determination if the circumstances would meet the exception outlined above. An AHA and permit specific to energized work activities will be developed, reviewed, and accepted by the VA prior to the start of that activity.
 - 1. Development of a Hazardous Electrical Energy Control Procedure is required prior to de-energization. A single Simple Lockout/Tagout Procedure for multiple work operations can only be used for work involving qualified person(s) de-energizing one set of conductors or

05-01-20

- circuit part source. Task specific Complex Lockout/Tagout Procedures are required at all other times.
2. Verification of the absence of voltage after de-energization and lockout/tagout is considered "energized electrical work" (live work) under NFPA 70E, and shall only be performed by qualified persons wearing appropriate shock protective (voltage rated) gloves and arc rate personal protective clothing and equipment, using Underwriters Laboratories (UL) tested and appropriately rated contact electrical testing instruments or equipment appropriate for the environment in which they will be used.
 3. Personal Protective Equipment (PPE) and electrical testing instruments will be readily available for inspection by the the COR.
- D. Before beginning any electrical work, an Activity Hazard Analysis (AHA) will be conducted to include Shock Hazard and Arc Flash Hazard analyses (NFPA Tables can be used only as a last alternative and it is strongly suggested a full Arc Flash Hazard Analyses be conducted). Work shall not begin until the AHA for the work activity and permit for energized work has been reviewed and accepted by the COR and discussed with all engaged in the activity, including the Contractor, subcontractor(s), and Government on-site representatives at preparatory and initial control phase meetings.
- E. Ground-fault circuit interrupters. GFCI protection shall be provided where an employee is operating or using cord- and plug-connected tools related to construction activity supplied by 125-volt, 15-, 20-, or 30-ampere circuits. Where employees operate or use equipment supplied by greater than 125-volt, 15-, 20-, or 30- ampere circuits, GFCI protection or an assured equipment grounding conductor program shall be implemented in accordance with NFPA 70E - 2015, Chapter 1, Article 110.4(C) (2) ..

1.16 FALL PROTECTION

- A. The fall protection (FP) threshold height requirement is 6 ft (1.8 m) for ALL WORK, unless specified differently or the OSHA 29 CFR 1926 requirements are more stringent, to include steel erection activities, systems-engineered activities (prefabricated) metal buildings, residential (wood) construction and scaffolding work.

05-01-20

1. The use of a Safety Monitoring System (SMS) as a fall protection method is prohibited.
2. The use of Controlled Access Zone (CAZ) as a fall protection method is prohibited.
3. A Warning Line System (WLS) may ONLY be used on floors or flat or low-sloped roofs (between 0 - 18.4 degrees or 4:12 slope) and shall be erected around all sides of the work area (See 29 CFR 1926.502(f) for construction of WLS requirements). Working within the WLS does not require FP. No worker shall be allowed in the area between the roof or floor edge and the WLS without FP. FP is required when working outside the WLS.
4. Fall protection while using a ladder will be governed by the OSHA requirements.

1.17 SCAFFOLDS AND OTHER WORK PLATFORMS

- A. All scaffolds and other work platforms construction activities shall comply with 29 CFR 1926 Subpart L.
- B. The fall protection (FP) threshold height requirement is 6 ft (1.8 m) as stated in Section 1.16.
- C. The following hierarchy and prohibitions shall be followed in selecting appropriate work platforms.
 1. Scaffolds, platforms, or temporary floors shall be provided for all work except that can be performed safely from the ground or similar footing.
 2. Ladders less than 20 feet may be used as work platforms only when use of small hand tools or handling of light material is involved.
 3. Ladder jacks, lean-to, and prop-scaffolds are prohibited.
 4. Emergency descent devices shall not be used as working platforms.
- D. Contractors shall use a scaffold tagging system in which all scaffolds are tagged by the Competent Person. Tags shall be color-coded: green indicates the scaffold has been inspected and is safe to use; red indicates the scaffold is unsafe to use. Tags shall be readily visible, made of materials that will withstand the environment in which they are used, be legible and shall include:
 1. The Competent Person's name and signature;
 2. Dates of initial and last inspections.

05-01-20

- E. Mast Climbing work platforms: When access ladders, including masts designed as ladders, exceed 20 ft (6 m) in height, positive fall protection shall be used.

1.18 EXCAVATION AND TRENCHES

- A. All excavation and trenching work shall comply with 29 CFR 1926 Subpart P. Excavations less than 5 feet in depth require evaluation by the contractor's "Competent Person" (CP) for determination of the necessity of an excavation protective system where kneeling, laying in, or stooping within the excavation is required.
- B. All excavations and trenches 24 inches in depth or greater shall require a written trenching and excavation permit (NOTE - some States and other local jurisdictions require separate state/jurisdiction-issued excavation permits). The permit shall have two sections, one section will be completed prior to digging or drilling and the other will be completed prior to personnel entering the excavations greater than 5 feet in depth. Each section of the permit shall be provided to the COR prior to proceeding with digging or drilling and prior to proceeding with entering the excavation. After completion of the work and prior to opening a new section of an excavation, the permit shall be closed out and provided to the COR. The permit shall be maintained onsite and the first section of the permit shall include the following:
1. Estimated start time & stop time.
 2. Specific location and nature of the work.
 2. Indication of the contractor's "Competent Person" (CP) in excavation safety with qualifications and signature. Formal course in excavation safety is required by the contractor's CP.
 3. Indication of whether soil or concrete removal to an offsite location is necessary.
 4. Indication of whether soil samples are required to determined soil contamination.
 5. Indication of coordination with local authority (i.e. "One Call") or contractor's effort to determine utility location with search and survey equipment.
 6. Indication of review of site drawings for proximity of utilities to digging/drilling.

05-01-20

C. The second section of the permit for excavations greater than five feet in depth shall include the following:

1. Determination of OSHA classification of soil. Soil samples will be from freshly dug soil with samples taken from different soil type layers as necessary and placed at a safe distance from the excavation by the excavating equipment. A pocket penetrometer will be utilized in determination of the unconfined compression strength of the soil for comparison against OSHA table (Less than 0.5 Tons/FT² - Type C, 0.5 Tons/FT² to 1.5 Tons/FT² - Type B, greater than 1.5 Tons/FT² - Type A without condition to reduce to Type B).
2. Indication of selected protective system (sloping/benching, shoring, shielding). When soil classification is identified as "Type A" or "Solid Rock", only shoring or shielding or Professional Engineer designed systems can be used for protection. A Sloping/Benching system may only be used when classifying the soil as Type B or Type C. Refer to Appendix B of 29 CFR 1926, Subpart P for further information on protective systems designs.
3. Indication of the spoil pile being stored at least 2 feet from the edge of the excavation and safe access being provided within 25 feet of the workers.
4. Indication of assessment for a potential toxic, explosive, or oxygen deficient atmosphere where oxygen deficiency (atmospheres containing less than 19.5 percent oxygen) or a hazardous atmosphere exists or could reasonably be expected to exist. Internal combustion engine equipment is not allowed in an excavation without providing force air ventilation to lower the concentration to below OSHA PELs, providing sufficient oxygen levels, and atmospheric testing as necessary to ensure safe levels are maintained.

D As required by OSHA 29 CFR 1926.651(b) (1), the estimated location of utility installations, such as sewer, telephone, fuel, electric, water lines, or any other underground installations that reasonably may be expected to be encountered during excavation work, shall be determined prior to opening an excavation.

1. The planned dig site will be outlined/marked in white prior to locating the utilities.

05-01-20

2. Used of the American Public Works Association Uniform Color Code is required for the marking of the proposed excavation and located utilities.
3. 811 will be called two business days before digging on all local or State lands and public Right-of Ways.
4. Digging will not commence until all known utilities are marked.
5. Utility markings will be maintained
- E. Excavations will be hand dug or excavated by other similar safe and acceptable means as excavation operations approach within 3 to 5 feet of identified underground utilities. Exploratory bar or other detection equipment will be utilized as necessary to further identify the location of underground utilities.
- F. Excavations greater than 20 feet in depth require a Professional Engineer designed excavation protective system.

1.19 CRANES

- A. All crane work shall comply with 29 CFR 1926 Subpart CC.
- B. Prior to operating a crane, the operator must be licensed, qualified or certified to operate the crane. Thus, all the provisions contained with Subpart CC are effective and there is no "Phase In" date.
- C. A detailed lift plan for all lifts shall be submitted to the COR 14 days prior to the scheduled lift complete with route for truck carrying load, crane load analysis, siting of crane and path of swing and all other elements of a critical lift plan where the lift meets the definition of a critical lift. Critical lifts require a more comprehensive lift plan to minimize the potential of crane failure and/or catastrophic loss. The plan must be reviewed and accepted by the General Contractor before being submitted to the VA for review. The lift will not be allowed to proceed without prior acceptance of this document.
- D. Crane operators shall not carry loads
 1. over the general public or VAMC personnel
 2. over any occupied building unless
 - a. the top two floors are vacated
 - b. or overhead protection with a design live load of 300 psf is provided

05-01-20

1.20 CONTROL OF HAZARDOUS ENERGY (LOCKOUT/TAGOUT)

- A. All installation, maintenance, and servicing of equipment or machinery shall comply with 29 CFR 1910.147 except for specifically referenced operations in 29 CFR 1926 such as concrete & masonry equipment [1926.702(j)], heavy machinery & equipment [1926.600(a)(3)(i)], and process safety management of highly hazardous chemicals (1926.64). Control of hazardous electrical energy during the installation, maintenance, or servicing of electrical equipment shall comply with Section 1.15 to include NFPA 70E and other VA specific requirements discussed in the section.

1.21 CONFINED SPACE ENTRY

- A. All confined space entry shall comply with 29 CFR 1926, Subpart AA except for specifically referenced operations in 29 CFR 1926 such as excavations/trenches [1926.651(g)].
- B. A site-specific Confined Space Entry Plan (including permitting process) shall be developed and submitted to the COR.

1.22 WELDING AND CUTTING

- A. As specified in section 1.14, Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with the COR. Obtain permits from the COR at least 72 hours in advance.

1.23 LADDERS

- A. All Ladder use shall comply with 29 CFR 1926 Subpart X.
- B. All portable ladders shall be of sufficient length and shall be placed so that workers will not stretch or assume a hazardous position.
- C. Manufacturer safety labels shall be in place on ladders
- D. Step Ladders shall not be used in the closed position
- E. Top steps or cap of step ladders shall not be used as a step
- F. Portable ladders, used as temporary access, shall extend at least 3 ft (0.9 m) above the upper landing surface.
1. When a 3 ft (0.9-m) extension is not possible, a grasping device (such as a grab rail) shall be provided to assist workers in mounting and dismounting the ladder.
 2. In no case shall the length of the ladder be such that ladder deflection under a load would, by itself, cause the ladder to slip from its support.

05-01-20

G. Ladders shall be inspected for visible defects on a daily basis and after any occurrence that could affect their safe use. Broken or damaged ladders shall be immediately tagged "DO NOT USE," or with similar wording, and withdrawn from service until restored to a condition meeting their original design.

1.24 FLOOR & WALL OPENINGS

- A. All floor and wall openings shall comply with 29 CFR 1926 Subpart M.
- B. Floor and roof holes/openings are any that measure over 2 in (51 mm) in any direction of a walking/working surface which persons may trip or fall into or where objects may fall to the level below. Skylights located in floors or roofs are considered floor or roof hole/openings.
- C. All floor, roof openings or hole into which a person can accidentally walk or fall through shall be guarded either by a railing system with toeboards along all exposed sides or a load-bearing cover. When the cover is not in place, the opening or hole shall be protected by a removable guardrail system or shall be attended when the guarding system has been removed, or other fall protection system.
 - 1. Covers shall be capable of supporting, without failure, at least twice the weight of the worker, equipment and material combined.
 - 2. Covers shall be secured when installed, clearly marked with the word "HOLE", "COVER" or "Danger, Roof Opening-Do Not Remove" or color-coded or equivalent methods (e.g., red or orange "X"). Workers must be made aware of the meaning for color coding and equivalent methods.
 - 3. Roofing material, such as roofing membrane, insulation or felts, covering or partly covering openings or holes, shall be immediately cut out. No hole or opening shall be left unattended unless covered.
 - 4. Non-load-bearing skylights shall be guarded by a load-bearing skylight screen, cover, or railing system along all exposed sides.
 - 5. Workers are prohibited from standing/walking on skylights.

- - - E N D - - -

11-01-20

SECTION 01 42 19
REFERENCE STANDARDS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the availability and source of references and standards specified in the project manual under paragraphs APPLICABLE PUBLICATIONS and/or shown on the drawings.

1.2 AVAILABILITY OF SPECIFICATIONS LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS FPMR PART 101-29 (FAR 52.211-1) (AUG 1998)

- A. The GSA Index of Federal Specifications, Standards and Commercial Item Descriptions, FPMR Part 101-29 and copies of specifications, standards, and commercial item descriptions cited in the solicitation may be obtained for a fee by submitting a request to - GSA Federal Supply Service, Specifications Section, Suite 8100, 470 East L'Enfant Plaza, SW, Washington, DC 20407, Telephone (202) 619-8925, Facsimile (202) 619-8978.
- B. If the General Services Administration, Department of Agriculture, or Department of Veterans Affairs issued this solicitation, a single copy of specifications, standards, and commercial item descriptions cited in this solicitation may be obtained free of charge by submitting a request to the addressee in paragraph (a) of this provision. Additional copies will be issued for a fee.

1.3 AVAILABILITY FOR EXAMINATION OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-4) (JUN 1988)

- A. The specifications and standards cited in this solicitation can be examined at the following location:
- DEPARTMENT OF VETERANS AFFAIRS
Office of Construction & Facilities Management
Facilities Quality Service (00CFM1A)
425 Eye Street N.W, (sixth floor)
Washington, DC 20001
Telephone Numbers: (202) 632-5249 or (202) 632-5178
Between 9:00 AM - 3:00 PM

11-01-20

**1.4 AVAILABILITY OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL
SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-3)
(JUN 1988)**

The specifications cited in this solicitation may be obtained from the
associations or organizations listed below.

AA	Aluminum Association Inc. http://www.aluminum.org
AABC	Associated Air Balance Council https://www.aabc.com
AAMA	American Architectural Manufacturer's Association http://www.aamanet.org
AASHTO	American Association of State Highway and Transportation Officials http://www.aashto.org
AATCC	American Association of Textile Chemists and Colorists http://www.aatcc.org
ACGIH	American Conference of Governmental Industrial Hygienists http://www.acgih.org
ACI	American Concrete Institute http://www.aci-int.net
ACPA	American Concrete Pipe Association http://www.concrete-pipe.org
ACPPA	American Concrete Pressure Pipe Association http://www.acppa.org
ADC	Air Diffusion Council http://flexibleduct.org
AGA	American Gas Association http://www.aga.org
AGC	Associated General Contractors of America http://www.agc.org
AGMA	American Gear Manufacturers Association, Inc. http://www.agma.org
AH	American Hort https://www.americanhort.org
AHAM	Association of Home Appliance Manufacturers http://www.aham.org

11-01-20

AIA	American Institute of Architects http://www.aia.org
AISC	American Institute of Steel Construction http://www.aisc.org
AIISI	American Iron and Steel Institute http://www.steel.org
AITC	American Institute of Timber Construction https://aitc-glulam.org
AMCA	Air Movement and Control Association, Inc. http://www.amca.org
ANSI	American National Standards Institute, Inc. http://www.ansi.org
APA	The Engineered Wood Association http://www.apawood.org
ARI	Air-Conditioning and Refrigeration Institute http://www.ari.org
ARPM	Association for Rubber Product Manufacturers https://arpm.com
ASABE	American Society of Agricultural and Biological Engineers https://www.asabe.org
ASCE	American Society of Civil Engineers http://www.asce.org
ASHRAE	American Society of Heating, Refrigerating, and Air-Conditioning Engineers http://www.ashrae.org
ASME	American Society of Mechanical Engineers http://www.asme.org
ASSE	American Society of Sanitary Engineering International http://www.asse-plumbing.org
ASTM	American Society for Testing and Materials International http://www.astm.org
AWI	Architectural Woodwork Institute https://www.awinet.org
AWS	American Welding Society https://www.aws.org

11-01-20

AWWA	American Water Works Association https://www.awwa.org
BHMA	Builders Hardware Manufacturers Association https://www.buildershardware.com
BIA	The Brick Industry Association http://www.gobrick.com
CAGI	Compressed Air and Gas Institute https://www.cagi.org
CGA	Compressed Gas Association, Inc. https://www.cganet.com
CI	The Chlorine Institute, Inc. https://www.chlorineinstitute.org
CISCA	Ceilings and Interior Systems Construction Association https://www.cisca.org
CISPI	Cast Iron Soil Pipe Institute https://www.cispi.org
CLFMI	Chain Link Fence Manufacturers Institute https://www.chainlinkinfo.org
CPA	Composite Panel Association https://www.compositepanel.org
CPMB	Concrete Plant Manufacturers Bureau https://www.cpmc.org
CRA	California Redwood Association http://www.calredwood.org
CRSI	Concrete Reinforcing Steel Institute https://www.crsi.org
CTI	Cooling Technology Institute https://www.cti.org
DHA	Decorative Hardwoods Association https://www.decorativehardwoods.org
DHI	Door and Hardware Institute https://www.dhi.org
EGSA	Electrical Generating Systems Association http://www.egsa.org
EEI	Edison Electric Institute https://www.eei.org

11-01-20

EPA	United States Environmental Protection Agency https://www.epa.gov
ETL	ETL Testing Services http://www.intertek.com
FAA	Federal Aviation Administration https://www.faa.gov
FCC	Federal Communications Commission https://www.fcc.gov
FPS	Forest Products Society http://www.forestprod.org
GANA	Glass Association of North America http://www.glasswebsite.com
FM	Factory Mutual Global Insurance https://www.fmglobal.com
GA	Gypsum Association https://gypsum.org
GSA	General Services Administration https://www.gsa.gov
HI	Hydraulic Institute http://www.pumps.org
ICC	International Code Council https://shop.iccsafe.org
ICEA	Insulated Cable Engineers Association https://www.icea.net
ICAC	Institute of Clean Air Companies http://www.icac.com
IEEE	Institute of Electrical and Electronics Engineers https://www.ieee.org/
IGMA	Insulating Glass Manufacturers Alliance https://www.igmaonline.org
IMSA	International Municipal Signal Association http://www.imsasafety.org
MBMA	Metal Building Manufacturers Association https://www.mbma.com

11-01-20

MSS Manufacturers Standardization Society of the Valve and Fittings
 Industry
 <http://msshq.org>

NAAMM National Association of Architectural Metal Manufacturers
 <https://www.naamm.org>

PHCC Plumbing-Heating-Cooling Contractors Association
 <https://www.phccweb.org>

NBS National Bureau of Standards
 See - NIST

NBBI The National Board of Boiler and Pressure Vessel Inspectors
 <https://www.nationalboard.org>

NEC National Electric Code
 See - NFPA National Fire Protection Association

NEMA National Electrical Manufacturers Association
 <https://www.nema.org>

NFPA National Fire Protection Association
 <https://www.nfpa.org>

NHLA National Hardwood Lumber Association
 <https://www.nhla.com>

NIH National Institute of Health
 <https://www.nih.gov>

NIST National Institute of Standards and Technology
 <https://www.nist.gov>

NELMA Northeastern Lumber Manufacturers Association, Inc.
 <http://www.nelma.org>

NPA National Particleboard Association
 (See CPA, Composite Panel Association)

NSF National Sanitation Foundation
 <http://www.nsf.org>

OSHA Occupational Safety and Health Administration
 Department of Labor
 <https://www.osha.gov>

PCA Portland Cement Association
 <https://www.cement.org>

PCI Precast Prestressed Concrete Institute
 <https://www.pci.org>

11-01-20

PPI	Plastics Pipe Institute https://www.plasticpipe.org
PEI	Porcelain Enamel Institute http://www.porcelainenamel.com
PTI	Post-Tensioning Institute http://www.post-tensioning.org
RFCI	Resilient Floor Covering Institute https://www.rfci.com
RIS	Redwood Inspection Service (See Western Wood Products Association) https://www.wwpa.org
SCMA	Southern Cypress Manufacturers Association http://www.cypressinfo.org
SDI	Steel Door Institute http://www.steeldoor.org
SJI	Steel Joist Institute https://www.steeljoist.org
SMACNA	Sheet Metal & Air-Conditioning Contractors' National Association https://www.smacna.org
SSPC	The Society for Protective Coatings https://www.sspc.org
STI	Steel Tank Institute https://www.steeltank.com
SWI	Steel Window Institute https://www.steelwindows.com
TCNA	Tile Council of North America https://www.tcnatile.com
TEMA	Tubular Exchanger Manufacturers Association http://www.tema.org
TPI	Truss Plate Institute https://www.tpinst.org
UBC	The Uniform Building Code (See ICC)
UL	Underwriters' Laboratories Incorporated https://www.ul.com

11-01-20

ULC Underwriters' Laboratories of Canada
<https://www.ulc.ca>

WCLB West Coast Lumber Inspection Bureau
<http://www.wclib.org>

WDMA Window and Door Manufacturers Association
<https://www.wdma.com>

WRCLA Western Red Cedar Lumber Association
<https://www.realcedar.com>

WWPA Western Wood Products Association
<http://www.wwpa.org>

- - - E N D - - -

SECTION 01 45 00

QUALITY CONTROL

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies requirements for contractor quality control.

1.2 SUBMITTALS

1. Submit in the following accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
2. B. QC Plan; Government Approval Required; Submit a QC plan within 15 calendar days after receipt of NTP.

1.3 INFORMATION FOR THE CONTRACTING OFFICER

- A. Prior to commencing work on construction, the Contractor can obtain a
- A. single copy set of the current report forms from the COR. The report
- A. forms will consist of the Contractor Production Report, Contractor
- A. Quality Control (CQC) Report, Preparatory Phase Checklist, Initial
- A. Phase Checklist, Deficiency List, and Testing Plan and Log.
- B. Deliver the following to the COR:
1. CQC Report: Original and one copy within 24hrs after the date
1. covered by the report.
 2. Contractor Production Report: Original and one copy within 24hrs
after the date covered by the report.
 3. Preparatory Phase Checklist: Original attached to the original CQC
Report and one copy attached to each copy;
 4. Initial Phase Checklist: Original attached to the original
CQC Report and one copy attached to each copy;
 5. Field Test Reports: One copy, within two working days after the test
is performed, attached to the CQC Report;
 6. QC Meeting Minutes: One copy, within two working days after the
meeting; and
 7. QC Certifications: As required by the paragraph entitled "QC
Certifications."

1.4 QC PROGRAM REQUIREMENTS

- A. Establish and maintain an effective quality control (QC) program in
compliance with the Contract Clause titled "Inspection of
Construction." QC consists of plans, procedures, and organization

necessary to produce an end product which complies with the contract requirements. Cover all construction operations, both onsite and offsite, and be keyed to the proposed construction design and construction sequence. The project superintendent will be held responsible for the quality of work and is subject to removal by the Contracting Officer for non-compliance with the quality requirements specified in the contract. In this context the highest level manager responsible for the overall construction activities at the site, including quality and production is the project superintendent. The project superintendent must maintain a physical presence at the site at all times and is responsible for all construction and related activities at the site, except as otherwise acceptable to the Contracting Officer. The QC program shall consist of a QC Manager, a QC plan, a Coordination and Mutual Understanding Meeting, QC meetings, three phases of control, submittal review and approval, testing, and QC certifications and documentation necessary to provide materials, equipment, workmanship, fabrication, construction and operations which comply with the requirements of this contract. The QC Manager shall attend all three phase inspections and QC meetings.

B. Preliminary Work Authorized Prior to Acceptance

The only work that is authorized to proceed prior to the acceptance of the QC plan is mobilization of storage and office trailers, temporary utilities, and surveying.

C. Acceptance

Acceptance of the Contractor's plan is required prior to the start of construction. Acceptance is conditional and will be predicated on satisfactory performance during construction. The Government reserves the right to require the Contractor to make changes in his CQC Plan and operations including removal of personnel, as necessary, to obtain the quality specified.

D. Notification of Changes

Notify the COR, in writing, of any proposed change, including changes in the QC organization personnel, a minimum of seven calendar days prior to a proposed change. Proposed changes shall be subject to the acceptance by the Government.

1.5 QC ORGANIZATION

A. QC Manager

Identify as QC Manager an individual who is responsible for the overall management of the QC program and has authority to act in all QC matters for the Contractor. The QC Manager must be an individual with a minimum of 5 years combined experience as a superintendent, inspector, QC Manager, project manager, or construction manager on similar size and type construction contracts which included the major trades that are part of this contract. The QC Manager is subject to acceptance by the Contracting Officer. The QC Manager must be an employee of the prime contractor and shall not serve as the project superintendent. The CQC System Manager may have duties as site safety and health officer in addition to quality control.

1.6 QC PLAN

A. Requirements

Provide, for acceptance by the Government, a QC plan submitted in a three-ring binder that covers both on-site and off-site work and includes the following with a table of contents listing the major sections identified with tabs.

1. QC ORGANIZATION: A chart showing the QC organizational structure and its relationship to the production side of the organization.
2. NAMES AND QUALIFICATIONS: In resume format, for each person in the QC organization.
3. OUTSIDE ORGANIZATIONS: A listing of outside organizations such as architectural and consulting engineering firms that will be employed by the Contractor and a description of the services these firms will provide.
4. APPOINTMENT LETTERS: Letters signed by an officer of the firm appointing the QC Manager and Alternate QC Manager and stating that they are responsible for managing and implementing the QC program as described in this contract. Include in this letter the QC Manager's authority to direct the removal and replacement of non-conforming work.
5. SUBMITTAL PROCEDURES AND INITIAL SUBMITTAL REGISTER: Procedures for reviewing, approving and managing submittals. Provide the name(s) of the person(s) in the QC organization authorized to review and certify submittals prior to approval.

6. TESTING LABORATORY INFORMATION: Testing laboratory information required by the paragraphs "Accredited Laboratories" or "Testing Laboratory Requirements", as applicable.
7. TESTING PLAN AND LOG: A Testing Plan and Log that includes the tests required, referenced by the specification paragraph number requiring the test, the frequency, and the person responsible for each test.
8. SPECIAL INSPECTIONS: Any special inspection requirements as required in accordance with ICC IBC.
9. PROCEDURES TO COMPLETE REWORK ITEMS: Procedures to identify, record, track and complete rework items.
10. DOCUMENTATION PROCEDURES: Include proposed reporting formats.
11. LIST OF DEFINABLE FEATURES: A Definable Feature of Work (DFOW) is a task, which is separate and distinct from other tasks, that has the same control requirements and work crews. The list shall be cross-referenced to the Contractor's Construction Schedule and the specification sections. For projects requiring a Progress Chart, the list of definable features of work shall include but not be limited to all items of work on the schedule. For projects requiring a Network Analysis Schedule, the list of definable features of work shall include but not be limited to all critical path activities.
12. PROCEDURES FOR PERFORMING THREE PHASES OF CONTROL: For each DFOW provide Preparatory and Initial Phase Checklists. Each list shall include a breakdown of quality checks that will be used when performing the quality control functions, inspections, and tests required by the contract documents. The preparatory and initial phases shall be conducted with a view towards obtaining quality construction by planning ahead and identifying potential problems.
13. PROCEDURES FOR COMPLETION INSPECTION: See the paragraph entitled "COMPLETION INSPECTIONS".

1.7 COORDINATION AND MUTUAL UNDERSTANDING MEETING

- A. During the Pre-Construction conference and prior to the start of construction, discuss the QC program required by this contract. A separate Meeting of Mutual Understanding will be held between contractors QC and onsite staff and the COR. The purpose of this meeting is to develop a mutual understanding of the QC details, including documentation, administration for on-site and off-site work, and the coordination of the Contractor's management, production and the

QC personnel. At the meeting, the Contractor will be required to explain how three phases of control will be implemented for each DFW. Contractor's personnel required to attend shall include the QC Manager, superintendent, and site safety officer. Minutes of the meeting will be prepared by the COR and signed by both the Contractor and the COR. Repeat the coordination and mutual understanding meeting when a new QC Manager is appointed.

1.8 QC MEETINGS

- A. After the start of construction, the QC Manager shall conduct QC meetings once every two weeks at the work site with the superintendent and the foreman responsible for the ongoing and upcoming work. The QC Manager shall prepare the minutes of the meeting and provide a copy to the COR within two working days after the meeting. As a minimum, the following shall be accomplished at each meeting:
1. Review the minutes of the previous meeting;
 2. Review the schedule and the status of work and rework;
 3. Review the status of submittals;
 4. Review the work to be accomplished in the next two weeks and documentation required;
 5. Resolve QC and production problems (RFIs, etc.);
 6. Address items that may require revising the QC plan; and
 7. Review Accident Prevention Plan (APP).

1.9 THREE PHASES OF CONTROL

- A. The three phases of control shall adequately cover both on-site and off-site work and shall include the following for each DFW.
1. Preparatory Phase
Notify the COR at least three work days in advance of each preparatory phase. Conduct the preparatory phase with the superintendent, QC Manager, and the foreman responsible for the definable feature of work. Document the results of the preparatory phase actions in the daily CQC Report and in the QC checklist. Perform the following prior to beginning work on each definable feature of work:
 - a. Review each paragraph of the applicable specification sections;
 - b. Review the contract drawings;
 - c. Verify that appropriate shop drawings and submittals for

materials and equipment have been submitted and approved. Verify receipt of approved factory test results, when required;

- d. Review the testing plan and ensure that provisions have been made to provide the required QC testing;
- e. Examine the work area to ensure that the required preliminary work has been completed;
- f. Examine the required materials, equipment and sample work to ensure that they are on hand and conform to the approved shop drawings and submitted data;
- g. Review the APP and appropriate Activity Hazard Analysis (AHA) to ensure that applicable safety requirements are met, and that required Material Safety Data Sheets (MSDS) are submitted;
- h. Discuss specific controls used and the construction methods and the approach that will be used to provide quality construction by planning ahead and identifying potential problems for each DFOW. Include review of repetitive deficiencies;
- i. Review prevailing wages set forth by the wage determination applicable to this contract.

2. Initial Phase

Notify the COR at least two work days in advance of each initial phase. Conduct the Initial Phase with the QC Manager and foreman responsible for that DFOW after a representative sample of work has been completed. Observe the initial segment of the work to ensure that it complies with contract requirements. Document the results of the Initial Phase in the daily CQC Report and in the QC checklist. Perform the following for each DFOW:

- a. Check work to ensure that it is in full compliance with contract requirements.
- b. Establish the quality of workmanship required;
- c. Resolve conflicts;
- d. Ensure that testing is performed by the approved laboratory and verify the required control inspection and testing is in compliance with the contract.
- e. Check work procedures for compliance with the APP and the appropriate AHA to ensure that applicable safety requirements are met.

3. Follow-Up Phase

Perform follow-up inspections for on-going work on a weekly basis, or more frequently as necessary, until the completion of each DFOW and document in the daily CQC Report and in the QC checklist:

- a. Ensure the work is in compliance with contract requirements;
- b. Maintain the quality of workmanship required;
- c. Ensure that testing is performed by the approved laboratory;
- d. Ensure that rework items are being corrected; and
- e. Assure manufacturers' representatives have performed necessary inspections, if required.

4. Additional Preparatory and Initial Phases

Additional preparatory and initial phases shall be conducted on the same DFOW if the quality of on-going work is unacceptable, if there are changes in the applicable QC organization, if there are changes in the on-site production supervision or work crew, if work on a DFOW is resumed after substantial period of inactivity, or if other problems develop.

5. Notification of Three Phases of Control for Off-Site Work

Notify the COR at least three work days prior to the start of a preparatory inspection and at least two work days for an initial inspection.

1.10 SUBMITTAL REVIEW AND APPROVAL

- A. The CQC organization is responsible for certifying that all submittals and deliverables are in compliance with the contract requirements.

1.11 TESTING

- A. Except as stated otherwise in the specification sections, perform sampling and testing required under this contract.

B. Accreditation Requirements

Construction materials testing laboratories must be accredited by a laboratory accreditation authority and will be required to submit a copy of the Certificate of Accreditation and Scope of Accreditation. The laboratory's scope of accreditation must include the appropriate ASTM standards (i.e.; E 329, C 1077, D 3666, D 3740, A 880, E 543) listed in the technical sections of the specifications. Laboratories engaged in Hazardous Materials Testing shall meet the requirements of OSHA and EPA. The policy applies to the specific laboratory performing the actual testing, not just the "Corporate Office."

1. Laboratory Accreditation Authorities

Laboratory Accreditation Authorities include the National Voluntary Laboratory Accreditation Program (NVLAP) administered by the National Institute of Standards and Technology, the American Association of State Highway and Transportation Officials (AASHTO), International Accreditation Services, Inc. (IAS), U. S. Army Corps of Engineers Materials Testing Center (MTC), the American Association for Laboratory Accreditation (A2LA), the Washington Association of Building Officials (WABO) (Approval authority for WABO is limited to projects within Washington State), and the Washington Area Council of Engineering Laboratories (WACEL) (Approval authority by WACEL is limited to projects within the NAVFAC WASH and Public Works Center Washington geographical area).

2. Capability Check

The CO retains the right to check laboratory equipment in the proposed laboratory and the laboratory technician's testing procedures, techniques, and other items pertinent to testing, for compliance with the standards set forth in this contract.

3. Test Results

Cite applicable Contract requirements, tests or analytical procedures used. Provide actual results and include a statement that the item tested or analyzed conforms or fails to conform to specified requirements. If the item fails to conform, notify the COR immediately. Conspicuously stamp the cover sheet for each report in large red letters "CONFORMS" or "DOES NOT CONFORM" to the specification requirements, whichever is applicable. Test results shall be signed by a testing laboratory representative authorized to sign certified test reports. Furnish the signed reports, certifications, and other documentation to the COR.

1.12 QC CERTIFICATIONS

A. Contractor Quality Control Report Certification

Each CQC Report shall contain the following statement: "On behalf of the Contractor, I certify that this report is complete and correct and equipment and material used and work performed during this reporting period is in compliance with the contract drawings and specifications to the best of my knowledge except as noted in this report."

B. Submittal Certification

Each submittal shall contain the following statement: "I certify that the above submitted items have been reviewed in detail and are correct and in strict conformance with the contract drawings and specifications except as otherwise stated."

C. Invoice Certification

Furnish a certificate to the COR with each payment request, signed by the QC Manager, attesting that as-built drawings are current and attesting that the work for which payment is requested, including stored material, is in compliance with contract requirements.

D. Completion Certification

Upon completion of work under this contract, the QC Manager shall furnish a certificate to the COR attesting that "the work has been completed, inspected, tested and is in compliance with the contract."

1.13 COMPLETION INSPECTIONS

A. Punch-Out Inspection

Near the completion of all work or any increment thereof established by a completion time stated in the Contract clause "Commencement, Prosecution, and Completion of Work," or stated elsewhere in the specifications, the QC Manager shall conduct an inspection of the work and develop a punch list of items which do not conform to the approved drawings and specifications. Include in the punch list any remaining items of the "Deficiency List", which were not corrected prior to the Punch-Out inspection. The punch list shall include the estimated date by which the deficiencies will be corrected. A copy of the punch list shall be provided to the COR. The QC Manager shall make follow-on inspections to ascertain that all deficiencies have been corrected. Once this is accomplished, the Contractor shall notify the Government that the facility is ready for the Government "Pre-Final Inspection".

B. Pre-Final Inspection

The Government and QC manager will perform this inspection to verify that the facility is complete and ready to be occupied. A Government pre-final punch list may be developed as a result of this inspection. The QC Manager shall ensure that all items on this list are corrected prior to notifying the Government that a "Final" inspection with the customer can be scheduled. Any items noted on the "Pre-Final" inspection shall be corrected in a timely manner and shall be

accomplished before the contract completion date for the work or any particular increment thereof if the project is divided into increments by separate completion dates.

C. Final Acceptance Inspection

The QC Manager, the superintendent, and Contracting Officer must be in attendance at the final acceptance inspection. Additional Government personnel may be in attendance at this inspection. The final acceptance inspection will be formally scheduled by the COR based upon results of the "Pre-Final Inspection". Notice shall be given to the COR at least 14 days prior to the final inspection. The notice shall state that all specific items previously identified to the Contractor as being unacceptable will be complete by the date scheduled for the final acceptance inspection. Failure of the Contractor to have all contract work acceptably complete for this inspection may be cause for the Contracting Officer to bill the Contractor for the Government's additional inspection cost in accordance with the contract clause "Inspection of Construction".

1.14 DOCUMENTATION

Maintain current and complete records of on-site and off-site QC program operations and activities. The forms identified under the paragraph "INFORMATION FOR THE CONTRACTING OFFICER" shall be used. Reports are required for each day work is performed. Account for each calendar day throughout the life of the contract. Every space on the forms must be filled in. Use N/A if nothing can be reported in one of the spaces. The superintendent and the QC Manager must prepare and sign the Contractor Production and CQC Reports, respectively. The reporting of work shall be identified by terminology consistent with the construction schedule. In the "remarks" section in this report which will contain pertinent information including directions received, problems encountered during construction, work progress and delays, conflicts or errors in the drawings or specifications, field changes, safety hazards encountered, instructions given and corrective actions taken, delays encountered and a record of visitors to the work site. For each remark given, identify the Schedule

Activity No. that is associated with the remark.

A. Quality Control Validation

Establish and maintain the following in a series of three ring binders.

Binders shall be divided and tabbed as shown below. These binders shall be readily available to the Government's Quality Assurance Team during all business hours.

1. All completed Preparatory and Initial Phase Checklists, arranged by specification section.
2. All milestone inspections, arranged by Activity/Event Number.
3. A current up-to-date copy of the Testing and Plan Log with supporting field test reports, arranged by specification section.
4. Copies of all contract modifications, arranged in numerical order. Also include documentation that modified work was accomplished.
5. A current up-to-date copy of the Deficiency List.
6. Maintain up-to-date copies of all punch lists issued by the QC Staff on the Contractor and Sub-Contractors and all punch lists issued by the Government.

B. As-Built Drawings

The QC Manager is required to review the as-built drawings and ensure as-builts are kept current on a daily basis and marked to show deviations, which have been made from the Contract drawings. Ensure each deviation has been identified with the appropriate modifying documentation, e.g. modification number, RFI number, etc. The QC Manager shall initial each deviation or revision. Upon completion of work, the QC Manager shall submit a certificate attesting to the accuracy of the as-built drawings prior to submission to the COR.

1.15 NOTIFICATION ON NON-COMPLIANCE

The Contracting Officer will notify the Contractor of any detected non-compliance with the foregoing requirements. The Contractor shall take immediate corrective action. If the contractor fails or refuses to correct the non-compliant work, the Contracting Officer will issue a non-compliance notice. Such notice, when delivered to the Contractor at the work site, shall be deemed sufficient for the purpose of notification. If the Contractor fails or refuses to comply promptly, the CO may issue an order stopping all or part of the work until satisfactory corrective action has been taken. The Contractor shall make no part of the time lost due to such stop orders the subject of claim for extension of time, for excess costs, or damages.

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

PART 2 PRODUCTS - Not Used

PART 3 EXECUTION - Not Used

-- End of Section -

CONTRACTOR'S QUALITY CONTROL REPORT (QCR)		DATE:	REPORT NO.:
CONTRACT NUMBER AND NAME OF CONTRACTOR:		DESCRIPTION AND LOCATION OF THE WORK:	
WEATHER CLASSIFICATION: CLASS A No interruptions of any kind from weather conditions occurring on this or previous shifts. CLASS B Weather occurred during this shift that caused a complete stoppage of all work. CLASS C Weather occurred during this shift that caused a partial stoppage of work. CLASS D Weather overhead excellent or suitable during shift. Work completely stopped due to results of previous adverse weather. CLASS E Weather overhead excellent or suitable during shift but work partially stopped due to previous adverse manner. OTHER Explain.		CLASSIFICATION: CLASS _____ TEMPERATURE: MAX _____ MIN _____ PRECIPITATION: INCHES _____ 	
CONTRACTOR/SUBCONTRACTORS AND AREA OF RESPONSIBILITY FOR WORK PERFORMED TODAY: <i>(Attach list of items of equipment either idle or working as appropriate.)</i> a. _____ b. _____ c. _____ d. _____ e. _____ f. _____ g. _____ 1. WORK PERFORMED TODAY: (Indicate location and description of work performed. Refer to work performed by prime and/or subcontractors by letter in Table above.)			
2. TYPE AND RESULTS OF INSPECTION: (Indicate whether: P - Preparatory, I - Initial, or F - Follow-up and include satisfactory work completed or deficiencies with action to be taken.)			
3. TESTS REQUIRED BY PLANS AND/OR SPECIFICATIONS PERFORMED AND RESULTS OF TESTS:			

4. VERBAL INSTRUCTIONS RECEIVED: (List any instructions given by Government personnel on construction deficiencies, retesting required, etc., with action to be taken.)

5. REMARKS: (Cover any conflicts in plans, specifications or instructions: acceptability of incoming materials: offsite surveillance activities; progress of work, delays, causes and extent thereof; days of no work with reasons for same.)

6. SAFETY: (Include any infractions of approved safety plan, safety manual or instructions from Government personnel. Specify corrective action taken.)

INSPECTOR

CONTRACTOR'S CERTIFICATION: I certify that the above report is complete and correct and that all material and equipment used, work performed and tests conducted during this reporting period were in strict compliance with the contract plans and specifications except as noted above.

CONTRACTOR'S APPROVED AUTHORIZED REPRESENTATIVE

11-01-18

SECTION 01 45 29
TESTING LABORATORY SERVICES

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies materials testing activities and inspection services required during project construction to be provided by a Testing Laboratory retained by the General Contractor.

1.2 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.
- B. American Association of State Highway and Transportation Officials (AASHTO):
- T27-11.....Standard Method of Test for Sieve Analysis of Fine and Coarse Aggregates
- T96-02 (R2006).....Standard Method of Test for Resistance to Degradation of Small-Size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine
- T99-10.....Standard Method of Test for Moisture-Density Relations of Soils Using a 2.5 Kg (5.5 lb.) Rammer and a 305 mm (12 in.) Drop
- T104-99 (R2007).....Standard Method of Test for Soundness of Aggregate by Use of Sodium Sulfate or Magnesium Sulfate
- T180-10.....Standard Method of Test for Moisture-Density Relations of Soils using a 4.54 kg (10 lb.) Rammer and a 457 mm (18 in.) Drop
- T191-02 (R2006).....Standard Method of Test for Density of Soil In-Place by the Sand-Cone Method
- T310-13.....Standard Method of Test for In-place Density and Moisture Content of Soil and Soil-aggregate by Nuclear Methods (Shallow Depth)
- C. American Concrete Institute (ACI):
- 506.4R-94 (R2004).....Guide for the Evaluation of Shotcrete

11-01-18

D. American Society for Testing and Materials (ASTM):

A370-12.....Standard Test Methods and Definitions for
Mechanical Testing of Steel Products

A416/A416M-10.....Standard Specification for Steel Strand,
Uncoated Seven-Wire for Prestressed Concrete

C31/C31M-10.....Standard Practice for Making and Curing
Concrete Test Specimens in the Field

C33/C33M-11a.....Standard Specification for Concrete Aggregates

C39/C39M-12.....Standard Test Method for Compressive Strength
of Cylindrical Concrete Specimens

C109/C109M-11b.....Standard Test Method for Compressive Strength
of Hydraulic Cement Mortars

C136-06.....Standard Test Method for Sieve Analysis of Fine
and Coarse Aggregates

C138/C138M-10b.....Standard Test Method for Density (Unit Weight),
Yield, and Air Content (Gravimetric) of
Concrete

C140-12.....Standard Test Methods for Sampling and Testing
Concrete Masonry Units and Related Units

C143/C143M-10a.....Standard Test Method for Slump of Hydraulic
Cement Concrete

C172/C172M-10.....Standard Practice for Sampling Freshly Mixed
Concrete

C173/C173M-10b.....Standard Test Method for Air Content of freshly
Mixed Concrete by the Volumetric Method

C330/C330M-09.....Standard Specification for Lightweight
Aggregates for Structural Concrete

C567/C567M-11.....Standard Test Method for Density Structural
Lightweight Concrete

C780-11.....Standard Test Method for Pre-construction and
Construction Evaluation of Mortars for Plain
and Reinforced Unit Masonry

C1019-11.....Standard Test Method for Sampling and Testing
Grout

C1064/C1064M-11.....Standard Test Method for Temperature of Freshly
Mixed Portland Cement Concrete

11-01-18

C1077-11c.....Standard Practice for Agencies Testing Concrete
and Concrete Aggregates for Use in Construction
and Criteria for Testing Agency Evaluation

C1314-11a.....Standard Test Method for Compressive Strength
of Masonry Prisms

D422-63 (2007).....Standard Test Method for Particle-Size Analysis
of Soils

D698-07e1.....Standard Test Methods for Laboratory Compaction
Characteristics of Soil Using Standard Effort

D1140-00 (2006).....Standard Test Methods for Amount of Material in
Soils Finer than No. 200 Sieve

D1143/D1143M-07e1.....Standard Test Methods for Deep Foundations
Under Static Axial Compressive Load

D1188-07e1.....Standard Test Method for Bulk Specific Gravity
and Density of Compacted Bituminous Mixtures
Using Coated Samples

D1556-07.....Standard Test Method for Density and Unit
Weight of Soil in Place by the Sand-Cone Method

D1557-09.....Standard Test Methods for Laboratory Compaction
Characteristics of Soil Using Modified Effort
(56,000ft lbf/ft³ (2,700 KNm/m³))

D2166-06.....Standard Test Method for Unconfined Compressive
Strength of Cohesive Soil

D2167-08).....Standard Test Method for Density and Unit
Weight of Soil in Place by the Rubber Balloon
Method

D2216-10.....Standard Test Methods for Laboratory
Determination of Water (Moisture) Content of
Soil and Rock by Mass

D2974-07a.....Standard Test Methods for Moisture, Ash, and
Organic Matter of Peat and Other Organic Soils

D3666-11.....Standard Specification for Minimum Requirements
for Agencies Testing and Inspecting Road and
Paving Materials

D3740-11.....Standard Practice for Minimum Requirements for
Agencies Engaged in Testing and/or Inspection

11-01-18

	of Soil and Rock as used in Engineering Design and Construction
D6938-10.....	Standard Test Method for In-Place Density and Water Content of Soil and Soil-Aggregate by Nuclear Methods (Shallow Depth)
E94-04 (2010).....	Standard Guide for Radiographic Examination
E164-08.....	Standard Practice for Contact Ultrasonic Testing of Weldments
E329-11c.....	Standard Specification for Agencies Engaged in Construction Inspection, Testing, or Special Inspection
E543-09.....	Standard Specification for Agencies Performing Non-Destructive Testing
E605-93 (R2011).....	Standard Test Methods for Thickness and Density of Sprayed Fire Resistive Material (SFRM) Applied to Structural Members
E709-08.....	Standard Guide for Magnetic Particle Examination
E1155-96 (R2008).....	Determining FF Floor Flatness and FL Floor Levelness Numbers
F3125/F3125M-15.....	Standard Specification for High Strength Structural Bolts, Steel and Alloy Steel, Heat Treated, 120 ksi (830 MPa) and 150 ksi (1040 MPa) Minimum Tensile Strength, Inch and Metric Dimensions
E. American Welding Society (AWS):	
D1.D1.1M-10.....	Structural Welding Code-Steel

1.3 REQUIREMENTS:

- A. Accreditation Requirements: Construction materials testing laboratories must be accredited by a laboratory accreditation authority and will be required to submit a copy of the Certificate of Accreditation and Scope of Accreditation. The laboratory's scope of accreditation must include the appropriate ASTM standards (i.e.; E329, C1077, D3666, D3740, A880, E543) listed in the technical sections of the specifications. Laboratories engaged in Hazardous Materials Testing shall meet the requirements of OSHA and EPA. The policy applies to the specific

11-01-18

laboratory performing the actual testing, not just the "Corporate Office."

- B. Inspection and Testing: Testing laboratory shall inspect materials and workmanship and perform tests described herein and additional tests requested by COR. When it appears materials furnished, or work performed by Contractor fail to meet construction contract requirements, Testing Laboratory shall direct attention of COR to such failure.
- C. Written Reports: Testing laboratory shall submit test reports to COR, Contractor, unless other arrangements are agreed to in writing by the COR. Submit reports of tests that fail to meet construction contract requirements on colored paper.
- D. Verbal Reports: Give verbal notification to COR immediately of any irregularity.

PART 2 - EXECUTION

2.1 EARTHWORK:

- A. General: The Testing Laboratory shall provide qualified personnel, materials, equipment, and transportation as required to perform the services identified/required herein, within the agreed to schedule and/or time frame. The work to be performed shall be as identified herein and shall include but not be limited to the following:
 - 1. Observe fill and subgrades during proof-rolling to evaluate suitability of surface material to receive fill or base course. Provide recommendations to the COR regarding suitability or unsuitability of areas where proof-rolling was observed. Where unsuitable results are observed, witness excavation of unsuitable material and recommend to COR extent of removal and replacement of unsuitable materials and observe proof-rolling of replaced areas until satisfactory results are obtained.
 - 2. Provide part time observation of fill placement and compaction and field density testing in building areas and provide part time observation of fill placement and compaction and field density testing in pavement areas to verify that earthwork compaction obtained is in accordance with contract documents.
 - 3. Provide supervised geotechnical technician to inspect excavation, subsurface preparation, and backfill for structural fill.

11-01-18

B. Testing Compaction:

1. Determine maximum density and optimum moisture content for each type of fill, backfill and subgrade material used, in compliance with ASTM D1557.
2. Make field density tests in accordance with the primary testing method following ASTM D6938 wherever possible. Field density tests utilizing ASTM D1556, AASHTO T191, or ASTM D2167 shall be utilized on a case by case basis only if there are problems with the validity of the results from the primary method due to specific site field conditions. Should the testing laboratory propose these alternative methods, they should provide satisfactory explanation to the COR before the tests are conducted.

C. Testing for Footing Bearing Capacity: Evaluate if suitable bearing capacity material is encountered in footing subgrade.

D. Testing Materials: Test suitability of on-site and off-site borrow as directed by COR.

2.2 FOUNDATION PILES:

- A. Witness load test procedure for conformance with ASTM D1143 and interpret test data to verify geotechnical recommendations for pile capacity. Submit load test report in accordance with ASTM D1143.
- B. Review Contractor's equipment, methods, and procedures prior to starting any work on site. Provide continuous inspection of pile installation. Maintain a record of all pertinent phases of operation for submittal to COR.

2.3 CONCRETE:

A. Field Inspection and Materials Testing:

1. Provide a technician at site of placement at all times to perform concrete sampling and testing.
2. Review the delivery tickets of the ready-mix concrete trucks arriving on-site. Notify the Contractor if the concrete cannot be placed within the specified time limits or if the type of concrete delivered is incorrect. Reject any loads that do not comply with the Specification requirements. Rejected loads are to be removed from the site at the Contractor's expense. Any rejected concrete that is placed will be subject to removal.

11-01-18

3. Take concrete samples at point of placement in accordance with ASTM C172. Mold and cure compression test cylinders in accordance with ASTM C31. Make at least three cylinders for each 40 m³ (50 cubic yards) or less of each concrete type, and at least three cylinders for any one day's pour for each concrete type. Label each cylinder with an identification number. COR may require additional cylinders to be molded and cured under job conditions.
4. Perform slump tests in accordance with ASTM C143. Test the first truck each day, and every time test cylinders are made. Test pumped concrete at the hopper and at the discharge end of the hose at the beginning of each day's pumping operations to determine change in slump.
5. Determine the air content of concrete per ASTM C173. For concrete required to be air-entrained, test the first truck and every 20 m³ (25 cubic yards) thereafter each day. For concrete not required to be air-entrained, test every 80 m³ (100 cubic yards) at random. For pumped concrete, initially test concrete at both the hopper and the discharge end of the hose to determine change in air content.
6. If slump or air content fall outside specified limits, make another test immediately from another portion of same batch.
7. Perform unit weight tests in compliance with ASTM C138 for normal weight concrete and ASTM C567 for lightweight concrete. Test the first truck and each time cylinders are made.
8. Notify laboratory technician at batch plant of mix irregularities and request materials and proportioning check.
9. Verify that specified mixing has been accomplished.
10. Environmental Conditions: Determine the temperature per ASTM C1064 for each truckload of concrete during hot weather and cold weather concreting operations:
 - a. When ambient air temperature falls below 4.4 degrees C (40 degrees F), record maximum and minimum air temperatures in each 24 hour period; record air temperature inside protective enclosure; record minimum temperature of surface of hardened concrete.
 - b. When ambient air temperature rises above 29.4 degrees C (85 degrees F), record maximum and minimum air temperature in each 24

11-01-18

hour period; record minimum relative humidity; record maximum wind velocity; record maximum temperature of surface of hardened concrete.

11. Inspect the reinforcing steel placement, including bar size, bar spacing, top and bottom concrete cover, proper tie into the chairs, and grade of steel prior to concrete placement. Submit detailed report of observations.
12. Observe conveying, placement, and consolidation of concrete for conformance to specifications.
13. Observe condition of formed surfaces upon removal of formwork prior to repair of surface defects and observe repair of surface defects.
14. Observe curing procedures for conformance with specifications, record dates of concrete placement, start of preliminary curing, start of final curing, end of curing period.
15. Observe preparations for placement of concrete:
 - a. Inspect handling, conveying, and placing equipment, inspect vibrating and compaction equipment.
 - b. Inspect preparation of construction, expansion, and isolation joints.
16. Observe preparations for protection from hot weather, cold weather, sun, and rain, and preparations for curing.
17. Observe concrete mixing:
 - a. Monitor and record amount of water added at project site.
 - b. Observe minimum and maximum mixing times.
18. Measure concrete flatwork for levelness and flatness as follows:
 - a. Perform Floor Tolerance Measurements F_F and F_L in accordance with ASTM E1155. Calculate the actual overall F- numbers using the inferior/superior area method.
 - b. Perform all floor tolerance measurements within 48 hours after slab installation and prior to removal of shoring and formwork.
 - c. Provide the Contractor and the COR with the results of all profile tests, including a running tabulation of the overall F_F and F_L values for all slabs installed to date, within 72 hours after each slab installation.
19. Other inspections:
 - a. Grouting under base plates.

11-01-18

b. Grouting anchor bolts and reinforcing steel in hardened concrete.

B. Laboratory Tests of Field Samples:

1. Test compression test cylinders for strength in accordance with ASTM C39. For each test series, test one cylinder at 7 days and one cylinder at 28 days. Use remaining cylinder as a spare tested as directed by COR. Compile laboratory test reports as follows:
Compressive strength test shall be result of one cylinder, except when one cylinder shows evidence of improper sampling, molding or testing, in which case it shall be discarded and strength of spare cylinder shall be used.
2. Make weight tests of hardened lightweight structural concrete in accordance with ASTM C567.
3. Furnish certified compression test reports (duplicate) to COR. In test report, indicate the following information:
 - a. Cylinder identification number and date cast.
 - b. Specific location at which test samples were taken.
 - c. Type of concrete, slump, and percent air.
 - d. Compressive strength of concrete in MPa (psi).
 - e. Weight of lightweight structural concrete in kg/m³ (pounds per cubic feet).
 - f. Weather conditions during placing.
 - g. Temperature of concrete in each test cylinder when test cylinder was molded.
 - h. Maximum and minimum ambient temperature during placing.
 - i. Ambient temperature when concrete sample in test cylinder was taken.
 - j. Date delivered to laboratory and date tested.

2.4 STRUCTURAL STEEL:

- A. General: Provide shop and field inspection and testing services to certify structural steel work is done in accordance with contract documents. Welding shall conform to AWS D1.1 Structural Welding Code.
- B. Fabrication and Erection:
 1. Weld Inspection:
 - a. Inspect welding equipment for capacity, maintenance and working condition.

11-01-18

- b. Verify specified electrodes and handling and storage of electrodes in accordance with AWS D1.1.
 - c. Inspect preparation and assembly of materials to be welded for conformance with AWS D1.1.
 - d. Inspect preheating and interpass temperatures for conformance with AWS D1.1.
 - e. Measure 25 percent of fillet welds.
 - f. Welding Magnetic Particle Testing: Test in accordance with ASTM E709 for a minimum of:
 - 1) 20 percent of all shear plate fillet welds at random, final pass only.
 - 2) 20 percent of all continuity plate and bracing gusset plate fillet welds, at random, final pass only.
 - 3) 100 percent of tension member fillet welds (i.e., hanger connection plates and other similar connections) for root and final passes.
 - 4) 20 percent of length of built-up column member partial penetration and fillet welds at random for root and final passes.
 - 5) 100 percent of length of built-up girder member partial penetration and fillet welds for root and final passes.
 - g. Welding Ultrasonic Testing: Test in accordance with ASTM E164 and AWS D1.1 for 100 percent of all full penetration welds, braced and moment frame column splices, and a minimum of 20 percent of all other partial penetration column splices, at random.
 - h. Verify that correction of rejected welds are made in accordance with AWS D1.1.
 - i. Testing and inspection do not relieve the Contractor of the responsibility for providing materials and fabrication procedures in compliance with the specified requirements.
2. Bolt Inspection:
- a. Inspect high-strength bolted connections in accordance AISC Specifications for Structural Joints Using ASTM F3125 Bolts.
 - b. Slip-Critical Connections: Inspect 10 percent of bolts, but not less than 2 bolts, selected at random in each connection in accordance with AISC Specifications for Structural Joints Using

11-01-18

ASTM F3125 Bolts. Inspect all bolts in connection when one or more are rejected.

- c. Fully Pre-tensioned Connections: Inspect 10 percent of bolts, but not less than 2 bolts, selected at random in 25 percent of connections in accordance with AISC Specification for Structural Joints Using ASTM F3125 Bolts. Inspect all bolts in connection when one or more are rejected.
 - d. Bolts installed by turn-of-nut tightening may be inspected with calibrated wrench when visual inspection was not performed during tightening.
 - e. Snug Tight Connections: Inspect 10 percent of connections verifying that plies of connected elements have been brought into snug contact.
 - f. Inspect field erected assemblies; verify locations of structural steel for plumbness, level, and alignment.
- C. Submit inspection reports, record of welders and their certification, and identification, and instances of noncompliance to COR.

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

11-01-18

PAGE INTENTIONALLY LEFT BLANK

01-01-21

SECTION 01 57 19
TEMPORARY ENVIRONMENTAL CONTROLS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the control of environmental pollution and damage that the Contractor must consider for air, water, and land resources. It includes management of visual aesthetics, noise, solid waste, radiant energy, and radioactive materials, as well as other pollutants and resources encountered or generated by the Contractor. The Contractor is obligated to consider specified control measures with the costs included within the various contract items of work.
- B. Environmental pollution and damage is defined as the presence of chemical, physical, or biological elements or agents which:
1. Adversely effect human health or welfare,
 2. Unfavorably alter ecological balances of importance to human life,
 3. Effect other species of importance to humankind, or;
 4. Degrade the utility of the environment for aesthetic, cultural, and historical purposes.
- C. Definitions of Pollutants:
1. Chemical Waste: Petroleum products, bituminous materials, salts, acids, alkalis, herbicides, pesticides, organic chemicals, and inorganic wastes.
 2. Debris: Combustible and noncombustible wastes, such as leaves, tree trimmings, ashes, and waste materials resulting from construction or maintenance and repair work.
 3. Sediment: Soil and other debris that has been eroded and transported by runoff water.
 4. Solid Waste: Rubbish, debris, garbage, and other discarded solid materials resulting from industrial, commercial, and agricultural operations and from community activities.
 5. Surface Discharge: The term "Surface Discharge" implies that the water is discharged with possible sheeting action and subsequent soil erosion may occur. Waters that are surface discharged may terminate in drainage ditches, storm sewers, creeks, and/or "water

01-01-21

of the United States" and would require a permit to discharge water from the governing agency.

6. Rubbish: Combustible and noncombustible wastes such as paper, boxes, glass and crockery, metal and lumber scrap, tin cans, and bones.
7. Sanitary Wastes:
 - a. Sewage: Domestic sanitary sewage and human and animal waste.
 - b. Garbage: Refuse and scraps resulting from preparation, cooking, dispensing, and consumption of food.

1.2 QUALITY CONTROL

- A. Establish and maintain quality control for the environmental protection of all items set forth herein.
- B. Record on daily reports any problems in complying with laws, regulations, and ordinances. Note any corrective action taken.

1.3 REFERENCES

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.
- B. U.S. National Archives and Records Administration (NARA):
33 CFR 328..... Definitions

1.4 SUBMITTALS

- A. In accordance with Section, 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:
 1. Environmental Protection Plan: After the contract is awarded and prior to the commencement of the work, the Contractor shall meet with the Contracting Officer's Representative (COR) to discuss the proposed Environmental Protection Plan and to develop mutual understanding relative to details of environmental protection. Not more than 20 days after the meeting, the Contractor shall prepare and submit to the Contracting Officer for approval, a written and/or graphic Environmental Protection Plan including, but not limited to, the following:
 - a. Name(s) of person(s) within the Contractor's organization who is (are) responsible for ensuring adherence to the Environmental Protection Plan.
 - b. Name(s) and qualifications of person(s) responsible for manifesting hazardous waste to be removed from the site.

01-01-21

- c. Name(s) and qualifications of person(s) responsible for training the Contractor's environmental protection personnel.
 - d. Description of the Contractor's environmental protection personnel training program.
 - e. A list of Federal, State, and local laws, regulations, and permits concerning environmental protection, pollution control, noise control and abatement that are applicable to the Contractor's proposed operations and the requirements imposed by those laws, regulations, and permits.
 - f. Methods for protection of features to be preserved within authorized work areas including trees, shrubs, vines, grasses, ground cover, landscape features, air and water quality, fish and wildlife, soil, historical, and archeological and cultural resources.
 - g. Procedures to provide the environmental protection that comply with the applicable laws and regulations. Describe the procedures to correct pollution of the environment due to accident, natural causes, or failure to follow the procedures as described in the Environmental Protection Plan.
 - h. Permits, licenses, and the location of the solid waste disposal area.
 - i. Drawings showing locations of any proposed temporary excavations, material storage areas, structures, sanitary facilities, and stockpiles of excess or spoil materials. Include as part of an Erosion Control Plan approved by the District Office of the U.S. Soil Conservation Service and the Department of Veterans Affairs.
 - j. Environmental Monitoring Plans for the job site including land, water, air, and noise.
 - k. Work Area Plan showing the proposed activity in each portion of the area and identifying the areas of limited use or nonuse. Plan should include measures for marking the limits of use areas. This plan may be incorporated within the Erosion Control Plan.
 - l. Inclusion of "best management practices" and methodologies.
- B. Approval of the Contractor's Environmental Protection Plan will not relieve the Contractor of responsibility for adequate and continued control of pollutants and other environmental protection measures.

01-01-21

1.5 PROTECTION OF ENVIRONMENTAL RESOURCES

- A. Protect environmental resources within the project boundaries and those affected outside the limits of permanent work during the entire period of this contract. Confine activities to areas defined by the specifications and drawings.
- B. Protection of Land Resources: Prior to construction, identify all land resources to be preserved within the work area. Do not remove, cut, deface, injure, or destroy land resources including trees, shrubs, vines, grasses, topsoil, and landforms without permission from the COR. Do not fasten or attach ropes, cables, or guys to trees for anchorage unless specifically authorized, or where special emergency use is permitted. Provide erosion control plans, in phases where required.
 - 1. Work Area Limits: Prior to any construction, mark the areas that require work to be performed under this contract. Mark or fence isolated areas within the general work area that are to be saved and protected. Protect monuments, works of art, and markers before construction operations begin. Convey to all personnel the purpose of marking and protecting all necessary objects.
 - 2. Protection of Landscape: Protect trees, shrubs, vines, grasses, land forms, and other landscape features shown on the drawings to be preserved by marking, fencing, or using any other approved techniques.
 - a. Box and protect from damage existing trees and shrubs to remain on the construction site.
 - b. Immediately repair all damage to existing trees and shrubs by trimming, cleaning, and painting with antiseptic tree paint.
 - c. Do not store building materials or perform construction activities closer to existing trees or shrubs than the farthest extension of their limbs.
 - 3. Reduction of Exposure of Unprotected Erodible Soils: Plan and conduct earthwork to minimize the duration of exposure of unprotected soils. Clear areas in reasonably sized increments only as needed to use. Form earthwork to final grade as shown. Immediately protect side slopes and back slopes upon completion of rough grading.

01-01-21

4. Temporary Protection of Disturbed Areas: Construct diversion ditches, benches, and berms to retard and divert runoff from the construction site to protected drainage areas approved under paragraph 208 of the Clean Water Act.
 - a. Sediment Basins: Trap sediment from construction areas in temporary or permanent sediment basins that accommodate the runoff of a local 25 (design year) storm. After each storm, pump the basins dry and remove the accumulated sediment. Control overflow/drainage with paved weirs or by vertical overflow pipes, draining from the surface.
 - b. Reuse or conserve the collected topsoil sediment as directed by the COR. Topsoil use and requirements are specified in Section 31 20 11, EARTHWORK (SHORT FORM).
 - c. Institute effluent quality monitoring programs as required by Federal, State, and local environmental agencies.
5. Erosion and Sedimentation Control Devices: The erosion and sediment controls selected and maintained by the Contractor shall be such that water quality standards are not violated as a result of the Contractor's activities. Construct or install all temporary and permanent erosion and sedimentation control features on the Environmental Protection Plan. Maintain temporary erosion and sediment control measures such as berms, dikes, drains, sedimentation basins, grassing, and mulching, until permanent drainage and erosion control facilities are completed and operative.
6. Manage and control spoil areas on and off Government property to limit spoil to areas shown on the Environmental Protection Plan and prevent erosion of soil or sediment from entering nearby water courses or lakes.
7. Protect adjacent areas from despoilment by temporary excavations and embankments.
8. Handle and dispose of solid wastes in such a manner that will prevent contamination of the environment. Place solid wastes (excluding clearing debris) in containers that are emptied on a regular schedule. Transport all solid waste off Government property and dispose of waste in compliance with Federal, State, and local requirements.

01-01-21

9. Store chemical waste away from the work areas in corrosion resistant containers and dispose of waste in accordance with Federal, State, and local regulations.
 10. Handle discarded materials other than those included in the solid waste category as directed by the COR.
- C. Protection of Water Resources: Keep construction activities under surveillance, management, and control to avoid pollution of surface and ground waters and sewer systems. Implement management techniques to control water pollution by the listed construction activities that are included in this contract.
1. Washing and Curing Water: Do not allow wastewater directly derived from construction activities to enter water areas. Collect and place wastewater in retention ponds allowing the suspended material to settle, the pollutants to separate, or the water to evaporate.
 2. Control movement of materials and equipment at stream crossings during construction to prevent violation of water pollution control standards of the Federal, State, or local government.
 3. Monitor water areas affected by construction.
- D. Protection of Fish and Wildlife Resources: Keep construction activities under surveillance, management, and control to minimize interference with, disturbance of, or damage to fish and wildlife. Prior to beginning construction operations, list species that require specific attention along with measures for their protection.
- E. Protection of Air Resources: Keep construction activities under surveillance, management, and control to minimize pollution of air resources. Burning is not permitted on the job site. Keep activities, equipment, processes, and work operated or performed, in strict accordance with the State of Virginia DEQ and Federal emission and performance laws and standards. Maintain ambient air quality standards set by the Environmental Protection Agency, for those construction operations and activities specified.
1. Particulates: Control dust particles, aerosols, and gaseous by-products from all construction activities, processing, and preparation of materials (such as from asphaltic batch plants) at all times, including weekends, holidays, and hours when work is not in progress.

01-01-21

2. Particulates Control: Maintain all excavations, stockpiles, haul roads, permanent and temporary access roads, plant sites, spoil areas, borrow areas, and all other work areas within or outside the project boundaries free from particulates which would cause a hazard or a nuisance. Sprinklering, chemical treatment of an approved type, light bituminous treatment, baghouse, scrubbers, electrostatic precipitators, or other methods are permitted to control particulates in the work area.
3. Hydrocarbons and Carbon Monoxide: Control monoxide emissions from equipment to Federal and State allowable limits.
4. Odors: Control odors of construction activities and prevent obnoxious odors from occurring.

F. Reduction of Noise: Minimize noise using every action possible. Perform noise-producing work in less sensitive hours of the day or week as directed by the COR. Maintain noise-produced work at or below the decibel levels and within the time periods specified.

1. Perform construction activities involving repetitive, high-level impact noise only between 8:00 a.m. and 6:00 p.m unless otherwise permitted by local ordinance or the COR. Repetitive impact noise on the property shall not exceed the following dB limitations:

Time Duration of Impact Noise	Sound Level in dB
More than 12 minutes in any hour	70
Less than 30 seconds of any hour	85
Less than three minutes of any hour	80
Less than 12 minutes of any hour	75

2. Provide sound-deadening devices on equipment and take noise abatement measures that are necessary to comply with the requirements of this contract, consisting of, but not limited to, the following:
 - a. Maintain maximum permissible construction equipment noise levels at 15 meter (50 feet) (dBA):

EARTHMOVING		MATERIALS HANDLING	
FRONT LOADERS	75	CONCRETE MIXERS	75
BACKHOES	75	CONCRETE PUMPS	75
DOZERS	75	CRANES	75

01-01-21

TRACTORS	75	DERRICKS IMPACT	75
SCAPERS	80	PILE DRIVERS	95
GRADERS	75	JACK HAMMERS	75
TRUCKS	75	ROCK DRILLS	80
PAVERS, STATIONARY	80	PNEUMATIC TOOLS	80
PUMPS	75	SAWS	75
GENERATORS	75	VIBRATORS	75
COMPRESSORS	75		

- b. Use shields or other physical barriers to restrict noise transmission.
 - c. Provide soundproof housings or enclosures for noise-producing machinery.
 - d. Use efficient silencers on equipment air intakes.
 - e. Use efficient intake and exhaust mufflers on internal combustion engines that are maintained so equipment performs below noise levels specified.
 - f. Line hoppers and storage bins with sound deadening material.
 - g. Conduct truck loading, unloading, and hauling operations so that noise is kept to a minimum.
3. Measure sound level for noise exposure due to the construction at least once every working day while work is being performed above 55 dB(A) noise level. Measure noise exposure at the construction limits or 15 m (50 feet) from the noise source, whichever is greater. Measure the sound levels on the A weighing network of a General Purpose sound level meter at slow response. To minimize the effect of reflective sound waves at buildings, take measurements at 900 to 1800 mm (three to six feet) in front of any building face. Submit the recorded information to the COR noting any problems and the alternatives for mitigating actions.
- G. Restoration of Damaged Property: If any direct or indirect damage is done to public or private property resulting from any act, omission, neglect, or misconduct, the Contractor shall restore the damaged property to a condition equal to that existing before the damage at no additional cost to the Government. Repair, rebuild, or restore property as directed or make good such damage in an acceptable manner.

01-01-21

H. Final Clean-up: On completion of project and after removal of all debris, rubbish, and temporary construction, Contractor shall leave the construction area in a clean condition satisfactory to the COR. Cleaning shall include off the station disposal of all items and materials not required to be salvaged, as well as all debris and rubbish resulting from demolition and new work operations.

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

01-01-21

Page Intentionally Left Blank

01-01-21

SECTION 01 74 19
CONSTRUCTION WASTE MANAGEMENT

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the requirements for the management of non-hazardous building construction and demolition waste.
- B. Waste disposal in landfills shall be minimized to the greatest extent possible. Of the inevitable waste that is generated, as much of the waste material as economically feasible shall be salvaged, recycled or reused.
- C. Contractor shall use all reasonable means to divert construction and demolition waste from landfills and incinerators, and facilitate their salvage and recycle not limited to the following:
- D. Waste Management Plan development and implementation.
- E. Techniques to minimize waste generation.
- F. Sorting and separating of waste materials.
- G. Salvage of existing materials and items for reuse or resale.
- H. Recycling of materials that cannot be reused or sold.
- I. At a minimum the following waste categories shall be diverted from landfills:
- J. Soil.
- K. Inerts (eg, concrete, masonry and asphalt).
- L. Clean dimensional wood and palette wood.
- M. Green waste (biodegradable landscaping materials).
- N. Engineered wood products (plywood, particle board and I-joists, etc).
- O. Metal products (eg, steel, wire, beverage containers, copper, etc).
- P. Sheathings
- Q. Cardboard, paper and packaging.
- R. Bitumen roofing materials.
- S. Plastics (eg, ABS, PVC).
- T. Carpet and/or pad.
- U. Gypsum board.
- V. Insulation.
- W. Paint.
- X. Fluorescent lamps.

01-01-21

1.2 RELATED WORK

- A. Section 02 41 00, DEMOLITION.
- B. Section 01 00 00, GENERAL REQUIREMENTS.

1.3 QUALITY ASSURANCE

- A. Contractor shall practice efficient waste management cutting and installing building products. Processes shall be employed to ensure the generation of as little waste as possible. Demolition waste includes products of the following:
 - 1. Excess or unusable construction materials.
 - 2. Packaging used for construction products.
 - 3. Poor planning and/or layout.
 - 4. Construction error.
 - 5. Over ordering.
 - 6. Weather damage.
 - 7. Contamination.
 - 8. Mishandling.
 - 9. Breakage.
- B. Establish and maintain the management of non-hazardous building construction and demolition waste set forth herein. Conduct a site assessment to estimate the types of materials that will be generated by demolition and construction.
- C. Contractor shall develop and implement procedures to recycle construction and demolition waste to a minimum of 25 percent.
- D. Contractor shall be responsible for implementation of programs involving rebates or similar incentives related to recycling. Any revenues or savings obtained from salvage or recycling shall accrue to the contractor.
- E. Contractor shall provide all demolition, removal and legal disposal of materials. Contractor shall ensure that facilities used for recycling, reuse and disposal shall be permitted for the intended use to the extent required by local, state, federal regulations.
- F. Contractor shall assign a specific area to facilitate separation of materials for reuse, salvage, recycling, and return. Such areas are to be kept neat and clean and clearly marked in order to avoid contamination or mixing of materials.

Manninen, Jon M.
2025-11-18 19:23:00

Neither of these are required

Manninen, Jon M.
2025-11-18 19:24:00

25 percent

01-01-21

- G. Contractor shall provide on-site instructions and supervision of separation, handling, salvaging, recycling, reuse and return methods to be used by all parties during waste generating stages.
- H. Record on daily reports any problems in complying with laws, regulations and ordinances with corrective action taken.

1.4 TERMINOLOGY

- A. Class III Landfill: A landfill that accepts non-hazardous resources such as household, commercial and industrial waste resulting from construction, remodeling, repair and demolition operations.
- B. Clean: Untreated and unpainted; uncontaminated with adhesives, oils, solvents, mastics and like products.
- C. Construction and Demolition Waste: Includes all non-hazardous resources resulting from construction, remodeling, alterations, repair and demolition operations.
- D. Dismantle: The process of parting out a building in such a way as to preserve the usefulness of its materials and components.
- E. Disposal: Acceptance of solid wastes at a legally operating facility for the purpose of land filling (includes Class III landfills and inert fills).
- F. Inert Backfill Site: A location, other than inert fill or other disposal facility, to which inert materials are taken for the purpose of filling an excavation, shoring or other soil engineering operation.
- G. Inert Fill: A facility that can legally accept inert waste, such as asphalt and concrete exclusively for the purpose of disposal.
- H. Inert Solids/Inert Waste: Non-liquid solid resources including, but not limited to, soil and concrete that does not contain hazardous waste or soluble pollutants at concentrations in excess of water-quality objectives established by a regional water board, and does not contain significant quantities of decomposable solid resources.
- I. Mixed Debris: Loads that include commingled recyclable and non-recyclable materials generated at the construction site.
- J. Mixed Debris Recycling Facility: A solid resource processing facility that accepts loads of mixed construction and demolition debris for the purpose of recovering re-usable and recyclable materials and disposing non-recyclable materials.

01-01-21

- K. Permitted Waste Hauler: A company that holds a valid permit to collect and transport solid wastes from individuals or businesses for the purpose of recycling or disposal.
- L. Recycling: The process of sorting, cleansing, treating, and reconstituting materials for the purpose of using the altered form in the manufacture of a new product. Recycling does not include burning, incinerating or thermally destroying solid waste.
1. On-site Recycling - Materials that are sorted and processed on site for use in an altered state in the work, i.e. concrete crushed for use as a sub-base in paving.
 2. Off-site Recycling - Materials hauled to a location and used in an altered form in the manufacture of new products.
- M. Recycling Facility: An operation that can legally accept materials for the purpose of processing the materials into an altered form for the manufacture of new products. Depending on the types of materials accepted and operating procedures, a recycling facility may or may not be required to have a solid waste facilities permit or be regulated by the local enforcement agency.
- N. Reuse: Materials that are recovered for use in the same form, on-site or off-site.
- O. Return: To give back reusable items or unused products to vendors for credit.
- P. Salvage: To remove waste materials from the site for resale or re-use by a third party.
- Q. Source-Separated Materials: Materials that are sorted by type at the site for the purpose of reuse and recycling.
- R. Solid Waste: Materials that have been designated as non-recyclable and are discarded for the purposes of disposal.
- S. Transfer Station: A facility that can legally accept solid waste for the purpose of temporarily storing the materials for re-loading onto other trucks and transporting them to a landfill for disposal, or recovering some materials for re-use or recycling.

1.5 SUBMITTALS

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES, furnish the following:

01-01-21

- B. Prepare and submit to the COR a written demolition debris management plan. The plan shall include, but not be limited to, the following information:
1. Procedures to be used for debris management.
 2. Techniques to be used to minimize waste generation.
 3. Analysis of the estimated job site waste to be generated:
 - a. List of each material and quantity to be salvaged, reused, recycled.
 - b. List of each material and quantity proposed to be taken to a landfill.
 4. Detailed description of the Means/Methods to be used for material handling.
 - a. On site: Material separation, storage, protection where applicable.
 - b. Off site: Transportation means and destination. Include list of materials.
 - 1) Description of materials to be site-separated and self-hauled to designated facilities.
 - 2) Description of mixed materials to be collected by designated waste haulers and removed from the site.
 - a) The names and locations of mixed debris reuse and recycling facilities or sites.
 - b) The names and locations of trash disposal landfill facilities or sites.
 - c) Documentation that the facilities or sites are approved to receive the materials.
- C. Designated Manager responsible for instructing personnel, supervising, documenting and administer over meetings relevant to the Waste Management Plan.
- D. Monthly summary of construction and demolition debris diversion and disposal, quantifying all materials generated at the work site and disposed of or diverted from disposal through recycling.
- E. Target waste diversion rate by material and an overall diversion rate.
- F. Final report documenting the results of implementation of the preconstruction waste management plan.

01-01-21

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced by the basic designation only. In the event that criteria requirements conflict, the most stringent requirements shall be met.
- B. U.S. Green Building Council (USGBC): LEED Green Building Rating System for New Construction
 - 1. Green Building Initiative (GBI): Green Globes for New Construction 2019.

1.7 RECORDS

- A. Maintain records to document the quantity of waste generated; the quantity of waste diverted through sale, reuse, or recycling; and the quantity of waste disposed by landfill or incineration. Records shall be kept in accordance with the 

PART 2 - PRODUCTS

2.1 MATERIALS

- A. List of each material and quantity to be salvaged, recycled, reused.
- B. List of each material and quantity proposed to be taken to a landfill.
- C. Material tracking data: Receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices, net total costs or savings.

PART 3 - EXECUTION

3.1 COLLECTION

- A. Provide all necessary containers, bins and storage areas to facilitate effective waste management.
- B. Clearly identify containers, bins and storage areas so that recyclable materials are separated from trash and can be transported to respective recycling facility for processing.
- C. Hazardous wastes shall be separated, stored, disposed of according to local, state, federal regulations.

3.2 DISPOSAL

- A. Contractor shall be responsible for transporting and disposing of materials that cannot be delivered to a source-separated or mixed materials recycling facility to a transfer station or disposal facility that can accept the materials in accordance with state and federal regulations.

Manninen, Jon M.
2025-11-18 19:24:00

Not needed. delete

01-01-21

- B. Construction or demolition materials with no practical reuse or that cannot be salvaged or recycled shall be disposed of at a landfill or incinerator.

3.3 REPORT

- A. With each application for progress payment, submit a summary of construction and demolition debris diversion and disposal including beginning and ending dates of period covered.
- B. Quantify all materials diverted from landfill disposal through salvage or recycling during the period with the receiving parties, dates removed, transportation costs, weight tickets, manifests, invoices. Include the net total costs or savings for each salvaged or recycled material.
- C. Quantify all materials disposed of during the period with the receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices. Include the net total costs for each disposal.

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

01-01-21

PAGE INTENTIONALLY LEFT BLANK

08-01-16

SECTION 02 21 13

SITE SURVEYS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Researching and collecting documents informing surveys.
2. Performing site (topographic and feature) survey, and utility survey.
3. Creating survey drawings.

1.2 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American Land Title Association and American Congress on Surveying and Mapping (ALTA-ACSM):

1. Accuracy Standards for ALTA-ACSM Land Title Surveys.

C. Federal Geographic Data Committee (FGDC):

1. STD-007.03-98 - Geospatial Positioning Accuracy Standards Part 3: National Standard for Spatial Data Accuracy.
2. STD-007.04-02 - Geospatial Positioning Accuracy Standards Part 4: Standards for Architecture, Engineering, Construction (A/E/C) and Facility Management.

1.3 SUBMITTALS

A. Submittal shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Survey Drawings:

1. Prints: Two sets of black line, full size prints of each drawing.
2. Electronic Files: Consistent with computer-aided design (CAD) Standards described at www.cfm.va.gov/til/projReq.asp.

1.4 QUALITY ASSURANCE

A. Land Surveyor: One of the following:

1. Experienced professional land surveyor licensed in state in which project is located.
2. Experienced professional civil engineer licensed in state in which project is located and authorized to practice land surveying as civil engineer.

08-01-16

1.5 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 ACCESSORIES

- A. Stakes: Hardwood.
- B. Flagging: Plastic, roll form, highly visible, solid color.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Research public and VA facility records for deeds, maps, monuments, plats, surveys, title certificates or abstracts, rights-of-way, easements, section line, other boundary line locations, and other documents pertaining to project site.
- B. Research public and VA facility utility records for aerial, surface, and subgrade structures and utility service lines and easements.

3.2 PREPARATION

- A. Coordinate with Contracting Officer's Representative for site access.
- B. Coordinate with adjacent property owners when access to adjoining properties is required.
 - 1. Notify Contracting Officer's Representative when access is denied.

3.3 SURVEYS

- A. Perform survey on ground according to FGDC STD-007.3 and FGDC STD-007.4.
- B. Perform survey only in area of interest to project. Survey boundary need not be more than fifty feet (50') past area of proposed work.
- C. Topographic Survey:
 - 1. Vertical Control: National Geodetic Survey or existing VA Medical Center benchmark.
 - 2. Establish minimum three permanent benchmarks.
 - 3. Determine project site contours at maximum 300 mm (1 foot) interval.
 - 4. Determine spot elevations at specified locations.
- D. Utility Survey:
 - 1. Locate piped utilities and utility structures. Identify service type, sizes, depths, and pressures.
 - 2. Locate fire hydrants.

08-01-16

3. Locate wired utilities and utility structures. Identify service type, rated capacities, and elevations above and below grade.
4. Identify each utility authority including contact person and phone number.
- E. Locate permanent structures within survey boundary.
 1. Determine structure plan dimensions, heights, and vertical offsets.
 2. Determine projections and overhangs beyond structure perimeter at grade.
 3. Determine number of stories and primary building materials.
- F. Locate rights-of-way and easements within and adjacent to survey boundary by perpendicular dimension to property line.
 1. Locate project site access from rights-of-way by dimension from survey monument. Determine site access width.

3.4 SURVEY DRAWING REQUIREMENTS

- A. Consult Contracting Officer's Representative to confirm required survey scale and drawing size.
 1. Drawing Size: Maximum 760 by 1070 mm (30 by 42 inches).
 2. Boundary Survey Scale: Maximum 1 to 35 (1 inch equals 30 feet).
 3. Enlarged Detail Areas: Scale as required to present dimensional data and survey information clearly. Maintain orientation aligned with smaller scale view.
 4. Plan Orientation: North at top of drawing sheet.
- B. Drawing Notations:
 1. Land Surveyor: Name, address, telephone number, signature, seal, and registration number.
 2. Survey Dates: Date survey was initially completed and subsequent revision dates.
 3. Certification: Certify each drawing adjacent to land surveyor's seal:
 - a. "I hereby certify that all information indicated on this drawing was obtained or verified by actual measurements in the field and that every effort has been made to provide complete and accurate information."
 - b. Title, number, and total number of drawings on each drawing.
 - c. Scale in metric and imperial measurement.
 - d. Graphic scale in metric and imperial measurement.

08-01-16

- e. Graphic symbol and abbreviation legends.
 - f. North arrow for plan view drawings.
 - g. Benchmark locations.
 - h. Horizontal and vertical control datum.
 - i. Adjacent property owner names.
 - j. Zoning classifications.
 - k. Building street numbers.
4. Evidence of Possession: Indicate character and location of evidence of possession affecting project site. Notation absence signifies no observable evidence of possession.
- C. Vicinity Map: Indicate project site and nearby roadways and intersections.
- D. Record Documents Forming Survey Basis: Indicate titles, source, and recording data of documents relied upon to complete survey.
- E. Legal Description: Recorded title boundaries.
- F. Structures and Site Improvements: Indicate buildings, walls, fences, signs, and other visible improvements.
- 1. Indicate each building dimensioned to property lines and other structures.
 - 2. Indicate exterior dimensions of buildings at ground level.
 - 3. Indicate maximum measured height of buildings above grade, point of measurement, and number of stories.
 - 4. Indicate spot elevations at building entrances, first floor, service docks, corners, steps, ramps, and grade slabs.
 - 5. Indicate structures and site improvements within 1500 mm (5 feet) of survey boundary.
 - 6. Indicate encroachments on project site, adjoining property, easements, rights-of-way, and setback lines from fire escapes, bay windows, windows and doors opening out, flue pipes, stoops, eaves, cornices, areaways, stoops, other building projections, and site improvements.
 - 7. Identify setback, height, and floor space area restrictions set by applicable zoning and building codes and recorded subdivision maps. Indicate if no restrictions exist.
- G. Pavements:

08-01-16

1. Indicate location, alignment, and dimensions for vehicular and pedestrian pavements.
2. Indicate pavement encroachments from adjacent properties onto project site and onto adjacent properties from project site.
 - a. Dimension encroachments from survey boundary.
3. Indicate roadway centerlines with true bearings and lengths by 15 m (50 feet) stationing.
 - a. Indicate elevations at station points along roadway centerlines, roadway edges, and top and bottom of curbs.
4. Indicate parking areas, parking striping, and total parking spaces.
 - a. Identify accessible parking spaces.
5. Indicate curb cuts, driveways, and other accesses to public ways.
- H. Indicate topographic contours.
- I. Flood Zone: Indicate applicable flood zone from Federal Flood Insurance Rate Maps, by scaled map location and graphic plotting.
- J. Public and Private Utilities:
 1. Indicate information source and operating authority for each utility.
 2. Indicate utilities existing on or serving project site.
 3. Indicate fire hydrants on project site.
 4. Indicate manholes, catch basins, inlets, vaults, and other surface indications of subgrade services.
 5. Indicate depths or invert elevations, sizes, materials, and pressures of utility pipes.
 6. Indicate wires and cables serving, crossing, and adjacent to project site.
 7. Indicate exterior lighting, traffic control facilities, security, and communications systems.
 8. Indicate utility poles on project site and within 3 m (10 feet) of survey boundary.
 9. Indicate dimensions of cross-wires or overhangs affecting project site.
- K. Observable Evidence:
 1. Indicate in-progress and recently completed earth moving work, building construction, and building additions.

08-01-16

2. Indicate in-progress and recently completed pavement construction and repairs.
3. Indicate areas used as solid waste dump, sump, and sanitary landfill.

L. Trees:

1. Indicate individual trees with minimum 150 mm (6 inches) diameter measured at 400 mm (48 inches) above grade.

- - - E N D - - -

08-01-17

SECTION 02 41 00

DEMOLITION

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies demolition and removal of buildings, portions of buildings, utilities, other structures and debris from trash dumps shown.

1.2 RELATED WORK:

- A. Disconnecting utility services prior to demolition: Section 01 00 00, GENERAL REQUIREMENTS.
- B. Reserved items that are to remain the property of the Government: Section 01 00 00, GENERAL REQUIREMENTS.
- C. Safety Requirements: Section 01 35 26 Safety Requirements Article, ACCIDENT PREVENTION PLAN (APP).
- D. Infectious Control: Section 01 35 26, SAFETY REQUIREMENTS.
- E. Environmental Protection: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.
- F. Construction Waste Management: Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT.

1.3 PROTECTION:

- A. Perform demolition in such manner as to eliminate hazards to persons and property; to minimize interference with use of adjacent areas, utilities and structures or interruption of use of such utilities; and to provide free passage to and from such adjacent areas of structures. Comply with requirements of GENERAL CONDITIONS Article, ACCIDENT PREVENTION.
- B. Provide safeguards, including warning signs, barricades, temporary fences, warning lights, and other similar items that are required for protection of all personnel during demolition and removal operations. Comply with requirements of Section 01 00 00, GENERAL REQUIREMENTS, Article PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES AND IMPROVEMENTS.
- C. Maintain fences, barricades, lights, and other similar items around exposed excavations until such excavations have been completely filled.

08-01-17

- D. Provide enclosed dust chutes with control gates from each floor to carry debris to truck beds and govern flow of material into truck. Provide overhead bridges of tight board or prefabricated metal construction at dust chutes to protect persons and property from falling debris.
- E. Prevent spread of flying particles and dust. Sprinkle rubbish and debris with water to keep dust to a minimum. Do not use water if it results in hazardous or objectionable condition such as, but not limited to; ice, flooding, or pollution. Vacuum and dust the work area daily.
- F. In addition to previously listed fire and safety rules to be observed in performance of work, include following:
 - 1. No wall or part of wall shall be permitted to fall outwardly from structures.
 - 2. Maintain at least one stairway in each structure in usable condition to highest remaining floor. Keep stairway free of obstructions and debris until that level of structure has been removed.
 - 3. Wherever a cutting torch or other equipment that might cause a fire is used, provide and maintain fire extinguishers nearby ready for immediate use. Instruct all possible users in use of fire extinguishers.
 - 4. Keep hydrants clear and accessible at all times. Prohibit debris from accumulating within a radius of 4500 mm (15 feet) of fire hydrants.
- G. Before beginning any demolition work, the Contractor shall survey the site and examine the drawings and specifications to determine the extent of the work. The contractor shall take necessary precautions to avoid damages to existing items to remain in place, to be reused, or to remain the property of the Medical Center; any damaged items shall be repaired or replaced as approved by the COR. The Contractor shall coordinate the work of this section with all other work and shall construct and maintain shoring, bracing, and supports as required. The Contractor shall ensure that structural elements are not overloaded and shall be responsible for increasing structural supports or adding new supports as may be required as a result of any cutting, removal, or demolition work performed under this contract. Do not overload

08-01-17

structural elements. Provide new supports and reinforcement for existing construction weakened by demolition or removal works. Repairs, reinforcement, or structural replacement must have COR's approval.

H. The work shall comply with the requirements of Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.

I. The work shall comply with the requirements of Section 01 00 00, GENERAL REQUIREMENTS and Section 01 35 26, SAFETY REQUIREMENTS.

1.4 UTILITY SERVICES:

A. Demolish and remove outside utility service lines shown to be removed.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 DEMOLITION:

A. Completely demolish and remove buildings and structures, including all appurtenances related or connected thereto, as noted below:

1. As required for installation of new utility service lines.
2. To full depth within an area defined by hypothetical lines located 1500 mm (5 feet) outside building lines of new structures.

B. Debris, including brick, concrete, stone, metals and similar materials shall become property of Contractor and shall be disposed of by him daily, off the Medical Center to avoid accumulation at the demolition site. Materials that cannot be removed daily shall be stored in areas specified by the COR. Break up concrete slabs below grade that do not require removal from present location into pieces not exceeding 600 mm (24 inches) square to permit drainage. Contractor shall dispose debris in compliance with applicable federal, state or local permits, rules and/or regulations.

C. In removing buildings and structures of more than two stories, demolish work story by story starting at highest level and progressing down to third floor level. Demolition of first and second stories may proceed simultaneously.

D. Remove and legally dispose of all materials, other than earth to remain as part of project work, from any trash dumps shown. Materials removed shall become property of contractor and shall be disposed of in compliance with applicable federal, state or local permits, rules and/or regulations. All materials in the indicated trash dump areas, including above surrounding grade and extending to a depth of 1500mm

08-01-17

(5feet) below surrounding grade, shall be included as part of the lump sum compensation for the work of this section. Materials that are located beneath the surface of the surrounding ground more than 1500 mm (5 feet), or materials that are discovered to be hazardous, shall be handled as unforeseen. The removal of hazardous material shall be referred to Hazardous Materials specifications.

- E. Remove existing utilities as indicated or uncovered by work and terminate in a manner conforming to the nationally recognized code covering the specific utility and approved by the COR. When Utility lines are encountered that are not indicated on the drawings, the COR shall be notified prior to further work in that area.

3.2 CLEAN-UP:

- A. On completion of work of this section and after removal of all debris, leave site in clean condition satisfactory to COR. Clean-up shall include off the Medical Center disposal of all items and materials not required to remain property of the Government as well as all debris and rubbish resulting from demolition operations.

- - - E N D - - -

01-01-21

SECTION 02 65 00
UNDERGROUND STORAGE TANK REMOVAL

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Removing and disposal of underground storage tank (UST) liquid contents.
2. Cleaning, inerting, removing, and disposing UST.
3. Testing and removing contaminated soils.
4. Backfilling and restoring excavation areas.
5. Reporting

1.2 RELATED WORK

- A. Section 01 45 29, TESTING LABORATORY SERVICES: Laboratory Services.
- B. Section 02 41 00, DEMOLITION: Demolition Exposing UST.
- C. Section 31 20 11, EARTHWORK (SHORT FORM): UST Removal Excavation.
- D. Section 31 20 11, EARTHWORK (SHORT FORM): Excavation Backfilling.

1.3 PRICE AND PAYMENT PROCEDURES

- A. Differing Site Conditions: Extent of excavation and restoration for UST removal indicated on drawings and extent of additional soils sampling and testing specified in this section are estimated. Variations less than 5 percent change are not cause for contract price and time adjustments. Additional work will be paid by unit prices as directed by Contracting Officer's Representative.

1.4 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. City of Salem Building Code & Fire Department Codes
- C. Virginia Administrative Code
 1. 9VAC25-580-320 - Permanent closure and changes-in-service of underground storage tanks.
- D. American Petroleum Institute (API):
 1. 1604-96(R2010) - Closure of Underground Petroleum Storage Tanks.
 2. 2217A-09 - Safe Work in Inert Confined Spaces in the Petroleum and Petrochemical Industries.
 3. 2015-14 - Safe Entry and Cleaning of Petroleum Storage Tanks.
- E. Code of Federal Regulations (CFR):

01-01-21

1. 40 CFR Part 280 - Underground Storage Tanks; Technical Requirements.
2. 49 CFR Part 178 - Specifications for Packaging.

F. United States Environmental Protection Agency (EPA):

1. SW-846 - Evaluating Solid Waste: Physical/Chemical Methods.

1.5 PRE-REMOVAL MEETINGS

A. Conduct pre-removal meeting at project site minimum 30 days before beginning work of this section.

1. Required Participants:

- a. Contracting Officer's Representative.
- b. Architect/Engineer.
- c. Independent Inspection and Testing Agency.
- d. Virginia Department of Environmental Quality (DEQ)
- e. Contractor.
- f. UST removal contractor.

2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.

- a. Removal schedule.
- b. Removal sequence.
- c. Preparatory work.
- d. Contaminated material containment and disposal.
- e. Removal.
- f. Inspecting and testing.
- g. Other items affecting successful completion.

3. Document and distribute meeting minutes to participants to record decisions affecting UST removal/closure.

1.6 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Notice of intent to close UST.

C. Test Reports: Submit laboratory analytical reports.

1. UST liquid contents analysis.
2. UST interior environment analysis (including %LEL and if entering the tank for cleaning oxygen, carbon monoxide and other gases of concern).
3. Soil sample analysis.

D. Qualifications: Substantiate qualifications comply with specifications.

01-01-21

1. UST removal contractor.
 2. Testing laboratory.
 3. Liquid disposal facility.
 4. UST and associated piping/equipment disposal facility.
 5. Soil disposal facility.
- E. UST removal plan.
- F. Record Documents:
1. Six copies of Final UST Closure Report.
 2. Record Drawings in electronic computer-aided design (CAD) file format showing:
 - a. Soil sample locations.
 - b. Detailed plan view.
 - c. Piping removal diagrams.
 - d. Control removal diagrams.
 - e. Component diagrams including tank removal procedure.
 - f. Detailed sequence of procedure.
 3. Photographs of work in progress showing UST removal plan compliance.
 4. Chain-of-custody documentation.
 5. Disposal facility receipts, disposition reports, and non-hazardous waste manifests.

1.7 QUALITY ASSURANCE

- A. UST Removal Contactor: Experienced contractor, registered or licensed by applicable state agency regulating UST removal.
- B. Testing Laboratory: State certified independent testing laboratory experienced in hazardous waste liquid and soil testing.
- C. Liquid Disposal Facility: State certified disposal facility qualified to receive and dispose UST liquid contents.
- D. UST Disposal Facility: State certified disposal facility qualified to receive and dispose UST(s).
- E. Soil Disposal Facility: State certified disposal facility qualified to receive and dispose contaminated soils.
- F. UST Removal Plan: Describe detailed procedures for:
 1. Removing and disposing UST liquid content.
 2. Removing, ventilating, cleaning and disposing UST.
 3. Soil sampling and testing.
 4. Removing and disposing contaminated soils.

01-01-21

G. UST Final Closure Report: Assemble work progress documentation showing removal plan compliance, including:

1. Sample test records.
2. Local Municipality and Fire Marshal requirements.
3. State Agency requirements.
4. Hazardous material plan for local VA management.

1.8 FIELD CONDITIONS

A. Do not close or obstruct streets, sidewalks or drives without Contracting Officer's Representative's approval.

1. Submit closure request minimum 45 days before starting work.

1.9 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 ACCESSORIES

A. Waste Collection Drums: 49 CFR Part 178; Type 1A2, steel, removable head, 200 L (55 gallon) capacity, capable of containing waste without loss.

PART 3 - EXECUTION

3.1 PREPARATION

A. Coordinate demolition specified in Section 02 41 00, DEMOLITION required to access UST site.

3.2 UST CLOSURE SEQUENCE

- A. Notify applicable State Agency and local municipality a minimum 30 days before UST closure.
- B. Determine if contamination from UST is present.
- C. When contamination exists, notify Contracting Officer's Representative and cooperate to record site with applicable State Agency and EPA.
- D. Remove UST liquid contents, UST, and associated equipment (i.e., product lines, dispensers).
- E. Remove contaminated soil.
- F. Backfill excavated area.
- G. Restore excavation surfaces.

3.3 UST CLOSURE

A. Conform to API 1604, 40 CFR Part 280, 29 CFR Part 1910, 29 CFR Part 1926, and 9VAC25-580-320.

01-01-21

3.4 UST LIQUID CONTENTS REMOVAL

- A. Collect, test, and analyze UST liquid content samples.
 - 1. Identify individual constituents and concentrations.
 - 2. Identify lower explosive limits for constituents in gaseous form.
 - 3. Identify disposal facilities qualified to receive and process UST liquid contents (i.e., petroleum and/or petroleum contact water [PCW]).
- B. Remove UST liquid contents before removing UST.
 - 1. Record liquid volume removed from UST.
- C. Deliver UST liquid contents to disposal facility.
 - 1. Obtain signed receipt including date, time, total liquid volume, and description of materials received.
 - 2. Obtain final report of UST liquid contents disposition after disposal completion.

3.5 REMOVAL OF PIPING, ANCILLARY EQUIPMENT, AND UST

- A. Excavate overburden and soils immediately surrounding UST as specified in Section 31 20 11, EARTHWORK (SHORT FORM).
 - 1. Contain and cover excavated materials with 0.15 mm/6 mil polyethylene sheeting to prevent loss and mixing with other materials until completion of initial soil testing. Provide straw bale berm around the outer limits of the containment area and cover with polyethylene sheets. Secure edges of sheets to keep the polyethylene sheeting in place.
 - 2. Disconnect all piping and ancillary equipment from the tank. Remove the piping completely (interior and exterior of the tank). Cap all tank ancillary equipment and piping connections, except those connections necessary to inert the tank within the excavation zone. Clean the piping exterior and ancillary equipment to remove all soil and inspect for signs of corrosion and leakage. Ensure no spillage of the piping contents occurs. Remove the tank from the excavation and clean the exterior to remove all soil and inspect for signs of corrosion, structural damage, or leakage. Use only non-sparking type materials or equipment which comes into contact with the tank, or in the vicinity of the excavation such as shovels, slings and tools. After removal from the excavation, place the tank on a level surface

01-01-21

at an approved location and secure it with wood blocks to prevent movement.

B. Place UST on ground adjacent to removal location.

C. Secure UST before cleaning.

3.6 UST CLEANING

A. Measure combustible gas and oxygen concentrations within UST.

B. Ventilate UST interior to reduce combustible gas concentrations to maximum 10 percent of lower explosive limit and to provide 19.5 to 23.5 percent oxygen concentration.

1. Test UST interior atmosphere confirming gas concentrations.

2. Complete required ventilation before cleaning.

C. Cut ports in UST wall facilitating cleaning access. Comply with API Standard 2217A and API Standard 2015 for UST entry.

D. Clean surface contaminants from UST and access port interior wall surfaces.

1. Contain removed materials without producing further contamination.

2. Collect removed materials in waste collection drums. Seal drums to prevent material loss.

E. Request UST inspection by local Building Inspector and/or Fire Marshal, as required, certifying completed UST cleaning.

F. Dismantle UST as required for transport to disposal facility.

G. Deliver UST, removed access ports, and waste collection drums to disposal facility.

1. Obtain signed receipt including date, time, quantity, and description of materials received.

2. Obtain final report of materials disposition after disposal completion.

3.7 SOIL TESTING

A. Collect appropriate amount of soil samples from UST excavation area after tank removal. Sampling requirements vary vastly from state to state. Designer should consult the latest state requirements for the appropriate sampling methods.

1. Collect appropriate amount of soil samples from the UST piping, fuel island/or dispensers, and soil stockpile. Testing requirements are dependent on regulations applicable to the locations where the tanks and piping are being removed. Verify number of tests required and

01-01-21

required location for each test. Containerize samples to prevent sample loss and preserve sample condition until tested.

2. Test and analyze samples according to Virginia DEQ requirements and EPA SW-846 for total petroleum hydrocarbon (TPH) concentrations. Hydrocarbon tests vary vastly from state to state. Contractor should consult the latest state requirements for the appropriate hydrocarbon test methods. Additional analysis will likely include: benzene, toluene, ethylbenzene, and xylenes (BTEX), and polynuclear aromatic hydrocarbons (PAHs).

B. When soil testing reveals evidence of hydrocarbons at concentrations greater than permitted by applicable Virginia DEQ for uncontaminated soil used as fill material, collect appropriate amount of soil samples in accordance with applicable state agency.

1. Test and analyze samples as specified for initial samples.
2. Notify Contracting Officer's Representative when additional samples are contaminated.
3. The base price for volume between the final tank volume of material for the enclosure and the enclosure shall not to exceed 76 cubic meters (100 cubic yards) of soil removed. Any work beyond 76 cubic meters (100 cubic yards) and more than 6 test locations shall be considered extra and shall be based on unit pricing.

C. Perform additional soil sampling and testing around UST as directed by Contracting Officer's Representative until contamination concentration is less than permitted by applicable Virginia DEQ for uncontaminated soil used as fill material.

3.8 CONTAMINATED SOIL REMOVAL

- A. Remove contaminated soil from site according to Virginia DEQ requirements. Petroleum contaminated soil should be profiled, and analytical results provided to the landfill for their approval prior to transportation. Upon approval, the petroleum contaminated soil should be transported under non-hazardous waste manifest (if applicable).
- B. Deliver contaminated soils to disposal or treatment facility.
 1. Obtain signed receipt including date, time, quantity, and description of materials received.
 2. Obtain final report of materials disposition after disposal completion.

01-01-21

3. Obtain a copy of each non-hazardous waste manifest.

3.9 UST EXCAVATION BACKFILL AND RESTORATION

- A. Backfill excavation with fill materials and compact as specified in Section 31 20 11, EARTHWORK (SHORT FORM).
- B. Restore pavements, sidewalks, and curbs matching adjacent materials.
- C. Restore landscaped areas and grass areas to match adjacent materials.

3.10 FIELD QUALITY CONTROL

- A. Field Tests: Performed by testing laboratory specified in Section 01 45 29, TESTING LABORATORY SERVICES.
- B. Perform sampling and testing for the following:
 1. UST liquid contents.
 2. UST interior environment.
 3. Soils contamination.
- C. Record chain-of-custody for samples until disposal.

3.11 PROTECTION

- A. Protect restored areas from traffic and construction operations.
- B. Repair damage.

- - - E N D - - -

01-01-21

SECTION 03 30 53
(SHORT FORM) CAST-IN-PLACE CONCRETE

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Cast-in-place structural concrete.

1.2 RELATED WORK

A. Section 01 45 29, TESTING LABORATORY SERVICES: Materials Testing and Inspection During Construction.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this Section.

B. American Concrete Institute (ACI):

- 117-10 (R2015).....Specification for Tolerances for Concrete Construction and Materials and Commentary
- 211.1-91 (R2009).....Standard Practice for Selecting Proportions for Normal, Heavyweight, and Mass Concrete.
- 211.2-98 (R2004).....Standard Practice for Selecting Proportions for Structural Lightweight Concrete.
- 301/301M-16.....Specifications for Structural Concrete.
- 305.1-14 -Hot Weather Concreting.
- 306.1-90 (R2002).....Cold Weather Concreting.
- 318/318M-19.....Building Code Requirements for Structural Concrete and Commentary
- 347R-14 -Guide to Formwork for Concrete.
- SP-66-04-.....ACI Detailing Manual.

C. ASTM International (ASTM):

- A615/A615M-20.....Standard Specification for Deformed and Plain Carbon Steel Bars for Concrete Reinforcement
- A996/A996M-16.....Standard Specification for Rail Steel and Axle Steel Deformed Bars for Concrete Reinforcement
- A1064/A1064M-18a.....Standard Specification for Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete
- C33/C33M-18.....Standard Specification for Concrete Aggregates.

01-01-21

C39/C39M-20.....Standard Test Method for Compressive Strength
of Cylindrical Concrete Specimens.

C94/C94M-20.....Standard Specification for Ready-Mixed
Concrete.

C143/C143M-20.....Standard Test Method for Slump of Hydraulic
Cement Concrete.

C150/C150M-20.....Standard Specification for Portland Cement.

C171-16.....Standard Specification for Sheet Materials for
Curing Concrete.

C192/C192M-19.....Standard practice for Making and Curing
Concrete Test Specimens in the Laboratory.

C219-20a.....Standard Terminology Relating to Hydraulic and
Other Inorganic Cements.

C260/C260M-10a (2016)Standard Specification for Air-Entraining
Admixtures for Concrete.

C330/C330M-17a.....Standard Specification for Lightweight
Aggregates for Structural Concrete.

C494/C494M-19.....Standard Specification for Chemical Admixtures
for Concrete.

C618-19Standard Specification for Coal Fly Ash and Raw
or Calcined Natural Pozzolan for Use in
Concrete.

C881/C881M-20Standard Specification for Epoxy-Resin-Base
Bonding Systems for Concrete.

C989/C989M-18aStandard Specification for Slag Cement for Use
in Concrete and Mortars.

C1240-20Standard Specification for Silica Fume Used in
Cementitious Mixtures.

D1751-18Standard Specification for Preformed Expansion
Joint Fillers for Concrete Paving and
Structural Construction (Non-extruding and
Resilient Bituminous Types).

E1155-20.....Determining FF Floor Flatness and FL Floor
Levelness Numbers.

01-01-21

E1745-17Standard Specification for Water Vapor
Retarders Used in Contact with Soil or Granular
Fill under Concrete Slabs.

D. International Concrete Repair Institute:

310.2R-2013 -.....Selecting and Specifying Concrete Surface
Preparation for Sealers, Coatings, Polymer
Overlays, and Concrete Repair.

1.4 SUBMITTALS

A. Submittal Procedures: Refer to Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. All items indicated below are required submittals requiring Contracting Officer's Representative (COR) review and approval.

B. Submittal Drawings:

1. Submit large scale drawings of reinforcing steel, including all reinforcing bend diagrams and reinforcing details, to the COR for review and approval.

C. Manufacturer's Literature and Data:

1. Concrete Mix Design.
2. Air-entraining admixture, chemical admixtures, and curing compounds.
3. Indicate manufacturer's recommendation for each application.

D. Certificates: Certify products comply with specifications.

1. Each ready mix concrete batch delivered to site.

1.5 DELIVERY

A. Deliver each ready-mixed concrete batch with mix certification in duplicate according to ASTM International (ASTM) C94/C94M.

1.6 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

A. Portland Cement: ASTM C150/C150M, Type I or II.

B. Pozzolans:

1. Fly Ash: ASTM International (ASTM) C618, Class C or F including supplementary optional physical requirements. Pozzolans shall not exceed 25 percent of total cementitious materials by weight.

01-01-21

2. Slag: ASTM International (ASTM) C989/C989M; Grade 80, Grade 100, or Grade 120.
3. Silica Fume: ASTM International (ASTM) C1240.
- C. Coarse Aggregate: ASTM International (ASTM) C33/C33M.
 1. Size 467 for footings and walls over 300 mm (12 inches) thick.
 2. Size 7 for coarse aggregate for applied topping and metal pan stair fill.
 3. Size 67 for other applications.
- D. Fine Aggregate: ASTM International (ASTM) C33/C33M.
- E. Lightweight Aggregate for Structural Concrete:
ASTM International (ASTM) C330/C330M, Table 1.
- F. Mixing Water: Fresh, clean, and potable.
- G. Air-Entraining Admixture: ASTM International (ASTM) C260/C260M.
- H. Chemical Admixtures: ASTM International (ASTM) C494/C494M.
- I. Vapor Barrier: ASTM International (ASTM) E1745, Class A with a minimum puncture resistance of 2200 g (3000 pounds); minimum 0.38 mm (15 mil) thick.
- J. Reinforcing Steel: ASTM International (ASTM) A615/A615M or
ASTM International (ASTM) A996/A996M, deformed. See Structural Drawings for grade.
- K. Forms: Wood, plywood, metal, or other materials, approved by
Contracting Officer, of grade or type suitable to obtain type of finish specified.
 1. Plywood: Exterior grade, free of defects and patches on contact surface.
 2. Lumber: Sound, grade-marked, S4S stress graded softwood.
 3. Form coating: As recommended by Contractor.
- L. Welded Wire Fabric: ASTM International (ASTM) A1064/A1064M, plain; Grade 65; sized as indicated.
- M. Expansion Joint Filler: ASTM International (ASTM) D1751.
- N. Sheet Materials for Curing Concrete: ASTM International (ASTM) C171.
- O. Grout, Non-Shrinking: Premixed ferrous or non-ferrous. Grout to show no settlement or vertical drying shrinkage at 3 days. Compressive strength for grout, at least 18 MPa (2500 psi) at 3 days and 35 MPa (5000 psi) at 28 days.

01-01-21

2.2 ACCESSORIES

- A. Bonding Agent: ASTM International (ASTM) C 1059/C 1059M, Type II.
- B. Structural Adhesive: ASTM International (ASTM) C881, 2-component material suitable for use on dry or damp surfaces. Provide material Type, Grade, and Class to suit Project requirements.
- C. Water Stops: Rubber base with self-healing properties. Expanding clay based products not acceptable.
- D. Weeps: Geotextile type as recommended by Contractor and approved by the COR.

2.3 CONCRETE MIXES

- A. Design concrete mixes according to ASTM International (ASTM) C94/C94M, Option C.
- B. Compressive strength at 28 days: See Structural Drawings.
- C. Submit mix design and results of compression tests to the Contracting Officer for his evaluation. Identify all materials, including admixtures, making-up the concrete.
- D. Maximum Slump for Vibrated Concrete: 100 mm (4 inches) tested according to ASTM International (ASTM) C143.
- E. Cement and Water Factor (See Table I):

TABLE I - CEMENT AND WATER FACTORS FOR CONCRETE				
Concrete: Strength	Non-Air-Entrained		Air-Entrained	
Min. 28 Day Comp. Str. MPa (psi)	Min. Cement kg/cu. m (lbs./cu. yd.)	Max. Water Cement Ratio	Min. Cement kg/cu. m (lbs./cu. yd.)	Max. Water Cement Ratio
35 (5000)1,3	375 (630)	0.45	385 (650)	0.40
30 (4000)1,3	325 (550)	0.55	340 (570)	0.50
25 (3000)1,3	280 (470)	0.65	290 (490)	0.55
25 (3000)1,2	300 (500)	See 4 Below	310 (520)	See 4 Below

01-01-21

TABLE I - CEMENT AND WATER FACTORS FOR CONCRETE				
Concrete: Strength	Non-Air-Entrained		Air-Entrained	
Min. 28 Day Comp. Str. MPa (psi)	Min. Cement kg/cu. m (lbs./cu. yd.)	Max. Water Cement Ratio	Min. Cement kg/cu. m (lbs./cu. yd.)	Max. Water Cement Ratio
Notes: 1. If trial mixes are used, achieve a compressive strength 8.3 MPa (1 200 psi) in excess of f'c. For concrete strengths greater than 35 MPa (5,000 psi), achieve a compressive strength 9.7 MPa (1,400 psi) in excess of f'c. 2. Lightweight Structural Concrete: Pump mixes may require higher cement values as specified in ACI 318/318M. 3. For Concrete Exposed to High Sulfate Content Soils: Maximum water cement ratio is 0.44. 4. Laboratory Determined according to ACI 211.1 for normal weight concrete or ACI 211.2 for lightweight structural concrete.				

F. Air-entrainment as specified, and conform with the following for air content table:

TABLE II - TOTAL AIR CONTENT FOR VARIOUS SIZES OF COARSE AGGREGATES	
Nominal Maximum Size of Coarse Aggregate	Total Air Content, percent
10 mm (3/8 inches)	6 Moderate exposure; 7.5 severe exposure
13 mm (1/2 inches)	5.5 Moderate exposure; 7 severe exposure
19 mm (3/4 inches)	5 Moderate exposure; 6 severe exposure
25 mm (1 inches)	4.5 Moderate exposure; 6 severe exposure
40 mm (1 1/2 inches)	4.5 Moderate exposure; 5.5 severe exposure

2.4 BATCHING AND MIXING

A. Store, batch, and mix materials according to ASTM C94/C94M.

01-01-21

1. Ready-Mixed Concrete: Comply with ASTM International (ASTM) C94/C94M, except use of non-agitating equipment for transporting concrete to Site is not acceptable.
2. EXECUTION Mixing Structural Lightweight Concrete: Charge mixer with 2/3 of total mixing water and total aggregate for each batch. Mix ingredients minimum 30 seconds in stationary mixer or minimum 10 revolutions at mixing speed in truck mixer. Add remaining mixing water and other ingredients and continue mixing. Above procedure may be modified as recommended by aggregate producer.
3. When aggregate producer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

PART 3 - EXECUTION

3.1 FORMWORK

- A. Installation: Conform to ACI 347. Construct forms to obtain concrete of the shapes, dimensions and profiles indicated, with tight joints.
- B. Design and construct forms to prevent bowing-out of forms between supports and to be removable without prying against or otherwise damaging fresh concrete.
- C. When patching formed concrete, seal form edges against existing surface to prevent leakage; set forms so that patch is flush with adjacent surfaces.
- D. Treating and Wetting: Treat or wet concrete contact surfaces:
 1. Coat plywood and lumber forms with non-staining form sealer.
 2. Wet wood forms thoroughly when they are not treated with form release agent.
 3. Prevent water from accumulating and remaining within forms.
 4. Clean and coat removable metal forms with light form oil before reinforcement is placed.
 5. In hot weather, cool metal forms by thoroughly wetting with water just before placing concrete.
 6. Prevent water from accumulating and remaining within forms.
- E. Inserts, Sleeves, and Similar Items: Install flashing reglets, masonry ties, anchors, inserts, wires, hangers, sleeves, boxes for floor

01-01-21

hinges, and other cast-in items specified in other Sections. Place where indicated, square, flush and secured to formwork.

- F. Construction Tolerances - General: Install and maintain concrete formwork to assure completion of work within specified tolerances.
- G. Adjust or replace completed work exceeding specified tolerances before placing concrete.

3.2 REINFORCEMENT

- A. Install concrete reinforcement according to ACI 318 and ACI SP-66.
- B. Support and securely tie reinforcing steel to prevent displacement during placing of concrete.
- C. Drilling for Dowels in Existing Concrete: Use sharp bits, drill hole slightly oversize, fill with epoxy grout, inset the dowel, and remove excess epoxy.

3.3 VAPOR BARRIER

- A. Except where membrane waterproofing is required, place interior concrete slabs on a continuous vapor barrier.
- B. Lap joints 150 mm (6 inches) and seal with a compatible pressure-sensitive tape.
- C. Patch punctures and tears.

3.4 PLACING CONCRETE

- A. Remove water from excavations before concrete is placed. Remove hardened concrete, debris and other foreign materials from interior of forms, and from inside of mixing and conveying equipment. Obtain approval from Contracting Officer's Representative before placing concrete.
- B. Install screeds at required elevations for concrete slabs.
- C. Roughen and clean free from laitance, foreign matter, and loose particles before placing new concrete on existing concrete.
 - 1. Blow-out areas with compressed air and immediately coat contact areas with adhesive in compliance with manufacturer's instructions.
- D. Place structural concrete according to ACI 301 and ACI 318.
- E. Convey concrete from mixer to final place of deposit by method that will prevent segregation or loss of ingredients. Do not deposit, in Work, concrete that has attained its initial set or has contained its water or cement more than 1 1/2 hours. Do not allow concrete to drop

01-01-21

freely more than 1500 mm (5 feet) in unexposed work nor more than 900 mm (3 feet) in exposed work.

- F. Place and consolidate concrete in horizontal layers not exceeding 300 mm (12 inches) in thickness. Consolidate concrete by spading, rodding, and mechanical vibrator. Do not secure vibrator to forms or reinforcement. Continuously vibrate during placement of concrete.
- G. Concrete Fill in Stair Tread and Landing Pans: Coat steel with bonding agent and fill pans with concrete. Reinforce with 2 inch by 2 inch by 1.6 mm (0.06 inch) welded wire mesh at midpoint.
- H. Hot Weather Concrete Placement: As recommended by ACI 305.1 to prevent adversely affecting properties and serviceability of hardened concrete.
- I. Cold Weather Concrete Placement: As recommended by ACI 306.1, to prevent freezing of thin sections less than 300 mm (12 inches) and to permit concrete to gain strength properly.
 - 1. Do not use calcium chloride without written approval from Contracting Officer's Representative.

3.5 TOLERANCES

- A. Slab on Grade Finish Tolerance: Comply with ACI 117, FF-number and FL-number method.
 - 1. Paragraph 4.8.3, Class A 3 mm (1/8 inches) for offset in form-work.
 - 2. Table R4.8.4, "Flat" 6 mm (1/4 inch) in 3 m (10 feet) for slabs.

3.6 PROTECTION AND CURING

- A. Protect exposed surfaces of concrete from premature drying, wash by rain or running water, wind, mechanical damage, and excessive hot or cold temperatures.
- B. Curing Methods: Cure concrete with curing compound using wet method with sheets.
- C. Formed Concrete Curing: Wet the tops and exposed portions of formed concrete and keep moist until forms are removed.
 - 1. If forms are removed before 14 days after concrete is cast, install sheet curing materials as specified above.
- D. Concrete Flatwork Curing:
 - 1. Install sheet materials according to the manufacturer's instructions.

01-01-21

- a. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

3.7 FORM REMOVAL

- A. Maintain forms in place until concrete is self-supporting, with construction operation loads.
- B. Remove fins, laitance and loose material from concrete surfaces when forms are removed. Repair honeycombs, rock pockets, sand runs, spalls, or otherwise damaged surfaces by patching with the same mix as concrete minus the coarse aggregates.
- C. Finish to match adjacent surfaces.

3.8 FINISHES

- A. Vertical and Overhead Surface Finishes:
 1. Surfaces Concealed in Completed Construction: As-cast; no additional finishing required.
 2. Surfaces Exposed in Unfinished Areas: As-cast; no additional finishing required.
 - a. Mechanical rooms.
 - b. Electrical rooms.
 3. Surfaces Exposed to View Scheduled for Paint Finish: Remove fins, burrs and similar projections by mechanical means approved by Contracting Officer's Representative flush with adjacent surface. Lightly rub with fine abrasive stone or hone. Use ample amount of water during rubbing without working up a lather of mortar or changing texture of concrete.
 4. Surfaces Exposed to View in Finished Areas: Grout finish, unless otherwise shown, for uniform color and smooth finish treated.
 - a. Remove laitance, fins and burrs.
 - b. Scrub concrete with wire brushes. Clean stained concrete surfaces with hone or stone.
 - c. Apply grout composed of 1 part Portland cement and 1 part clean, fine sand (smaller than 600 micro-m (No. 30) sieve). Work grout into surface of concrete with cork floats or fiber brushes until pits and honeycomb are filled.

01-01-21

- d. After grout has hardened, but is still plastic, remove surplus grout with sponge rubber float and by rubbing with clean burlap.
 - e. In hot, dry weather fog spray surfaces with water to keep grout wet during setting period. Complete finished areas in same day. Confine limits of finished areas to natural breaks in wall surface. Do not leave grout on concrete surface overnight.
- B. Slab Finishes:
- 1. Allow bleed water to evaporate before surface is finished. Do not sprinkle dry cement on surface to absorb water.
 - 2. Scratch Finish: Rake or wire broom after partial setting slab
 - 2. surfaces to received bonded applied cementitious application, within
 - 2. 2 hours after placing, to roughen surface and provide permanent bond
 - 2. between base slab and applied cementitious materials.
 - 3. Float Finish: Interior and exterior ramps, interior stair treads, and platforms, both equipment pads, and slabs to receive non-cementitious materials, except as specified.
 - a. Screen and float to smooth dense finish.
 - b. After first floating, while surface is still soft, check surfaces for alignment using straightedge or template. Correct high spots by cutting down with trowel or similar tool. Correct low spots by filling in with material same composition as floor finish. Remove any surface projections on floated finish by rubbing or dry grinding. Refloat slab to uniform sandy texture.
 - 4. Steel Trowel Finish: Applied toppings, concrete surfaces to receive resilient floor covering or carpet, future floor roof and other monolithic concrete floor slabs exposed to view without other finish indicated or specified.
 - a. Delay final steel troweling to secure smooth, dense surface, usually when surface can no longer be dented by fingers. During final troweling, tilt steel trowel at slight angle and exert heavy pressure on trowel to compact cement paste and form dense, smooth surface.
 - b. Finished surface: Free from trowel marks. Uniform in texture and
 - b. appearance.

01-01-21

5. Broom Finish: Finish exterior slabs, ramps, and stair treads with bristle brush moistened with clear water after surfaces have been floated.
6. Finished Slab Flatness (FF) and Levelness (FL):
 - a. Slab on Grade: Specified overall value FF 25/FL 20. Minimum local value FF 17/FL 15.
 - b. Test flatness and levelness according to ASTM E1155.

- - E N D - -

01-01-21

**SECTION 04 01 00
MAINTENANCE OF MASONRY**

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Replacing existing and damaged masonry units.

1.2 RELATED WORK

A. Section 04 05 13, MASONRY MORTARING: Mortars for new masonry.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

C67/C67M-20.....Sampling and Testing Brick and Structural Clay
Tile.

C144-18.....Aggregate for Masonry Mortar.

C150/C150M-20.....Specification for Portland Cement.

C207-18 -Hydrated Lime for Masonry Purposes

C216-19 -Facing Brick (Solid Masonry Units Made from
Clay or Shale)

C270-19a1.....Mortar for Unit Masonry

C295/C295M-19.....Petrographic Examination of Aggregates for
Concrete

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA,
AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Description of each product.
2. Replacement units indicating manufacturer recommendation for each application.

C. Samples:

1. Pointing Mortar: Molded, 150 mm (6 inches) long for each type, texture, and color.

D. Test reports:

1. Preconstruction test results of existing masonry mortar and units.
2. Recommended mortar mix and mortar materials sources.

01-01-21

1.5 QUALITY ASSURANCE

A. Installer Qualifications:

1. Documented experience in completion of work, similar in design, material, and extent specified.

B. Preconstruction Testing:

1. Existing Brick: according to ASTM C67.
2. Existing Mortar: according to ASTM C295/C295M.
 - a. Recommend mortar mix compatible with existing and mortar material sources required to match existing color and texture.

1.6 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

- A. Store materials covered, protected from weather, and elevated above grade.
 1. Prevent contamination of aggregates.
- B. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

A. Environment:

1. Cold Weather Requirements: Maintain mortar ingredients and substrate within temperature range between 4 degrees C (40 degrees F) and 49 degrees C (120 degrees F) when outside temperature is less than 4 degrees C (40 degrees F).
2. Hot Weather Requirements: Protect mortar-joint from evaporation of moisture from mortar material. When required, provide adequately shaded work area.

1.9 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Mortar Components:

01-01-21

1. Hydrated Lime: ASTM C207, Type S.
2. Aggregate: ASTM C144.
3. Portland Cement: ASTM C150/C150M, Type I.
4. Water: Potable, free of substances that are detrimental to grout, masonry, and metal.

2.2 PRODUCTS - GENERAL

- A. Provide each product from one manufacturer and from one production run.

2.3 REPLACEMENT MASONRY UNITS

- A. Face Brick:
 1. ASTM C216, matching existing.
 2. Efflorescence: Rated slight efflorescent when tested according to ASTM C67.
- B. Other Masonry Units: Match existing.

2.4 MIXES

- A. Tuck Pointing Mortar: ASTM C270;
 1. Type N.

2.5 ACCESSORIES

- A. Cleaning Agent: Soapless, non-acidic, detergent, specially prepared for cleaning brick masonry.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
 1. Protect from mortar droppings and cleaning operations.
- C. Remove existing fixtures and fittings concealing masonry joints to permit repointing and repair.

3.2 EXISTING MORTAR JOINTS

- A. Cut out existing bed and head mortar joints, to uniform depth of 19 mm (3/4 inches), or to sound mortar without damaging edges and faces of existing masonry units to remain.
- B. Remove dust and debris from joints.
 1. Do not rinse when temperature is below freezing.

3.3 TUCK POINTING

- A. Dampen joints immediately before tuck pointing. Allow masonry units to absorb surface water.

01-01-21

- B. Tightly pack tuck pointing mortar into joints in thin layers, 6 mm (1/4 inch) thick, maximum.
- C. Allow layer to become slightly hardened before applying next layer.
- D. Pack final layer flush with surfaces of masonry units.

3.4 MASONRY UNIT REPLACEMENT

- A. Cut out mortar joints surrounding masonry units requiring replacement.
 - 1. Remove existing masonry units creating opening for replacement masonry unit installation.
 - 2. Remove mortar, dust, and debris from opening perimeter surfaces.
 - 3. Prevent debris from falling into cavity.
- B. Dampen surfaces of surrounding existing masonry before installing replacement masonry units.
 - 1. Allow existing masonry to absorb surface moisture before installing replacement units.
 - 2. Butter contact surfaces of existing masonry and replacement masonry units with mortar.
 - 3. Center replacement masonry units in opening and press into position.
 - 4. Remove excess mortar.
 - 5. Tuck point replacement masonry units to ensure full head and bed joints.

3.5 JOINT TOOLING

- A. Tool replaced masonry joints when mortar becomes slightly hardened.
- B. Produce smooth, compacted, joint matching existing.

3.6 CLEANING

- A. Remove mortar splatter from exposed surfaces immediately.
- B. Clean exposed masonry surfaces on completion.
- C. Remove mortar droppings and other foreign substances from wall surfaces.
- D. Wet surfaces with clean water.
- E. Wash with cleaning agent.
- F. Brush masonry surfaces with stiff fiber brushes while washing.
- G. Immediately after washing, rinse with clean water.
 - 1. Remove traces of detergent, foreign streaks or stains.

- - E N D - -

11-01-18

SECTION 05 12 00
STRUCTURAL STEEL FRAMING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Structural steel shapes, plates, and bars.
2. Structural pipe.
3. Bolts, nuts, and washers.

1.2 RELATED REQUIREMENTS

- A. Materials Testing and Inspection During Construction: Section 01 45 29, TESTING LABORATORY SERVICES.
- B. Steel Finishes: Section 09 06 00, SCHEDULE FOR FINISHES.
- C. Painting: Section 09 91 00, PAINTING.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. American Institute of Steel Construction (AISC):
1. AISC Manual - Steel Construction Manual, 14th Ed.
 2. 303-10 - Code of Structural Steel Buildings and Bridges.
 3. 360-10: Specification for Structural Steel Buildings.
- C. The American Society of Mechanical Engineers (ASME):
1. B18.22.1-09 - Washers: Helical Spring-Lock, Tooth Lock, and Plain Washers.
- D. American Welding Society (AWS):
1. D1.1/D1.1M-15 - Structural Welding Code - Steel.
- E. ASTM International (ASTM):
1. A6/A6M-14 - General Requirements for Rolled Structural Steel Bars, Plates, Shapes, and Sheet Piling.
 2. A36/A36M-14 - Carbon Structural Steel.
 3. A53/A53M-12 - Pipe, Steel, Black and Hot-Dip, Zinc-Coated, Welded and Seamless.
 4. A123/A123M-15 - Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.
 5. A242/A242M-13 - High-Strength Low-Alloy Structural Steel.
 6. A283/A283M-13 - Low and Intermediate Tensile Strength Carbon Steel Plates.

11-01-18

7. A307-14 - Carbon Steel Bolts, Studs, and Threaded Rod 60,000 PSI Tensile Strength.
8. A500/A500M-13 - Cold-Formed Welded and Seamless Carbon Steel Structural Tubing and Rounds and Shapes.
9. A501/A501M-14 - Hot-Formed Welded and Seamless Carbon Steel Structural Tubing and Rounds and Shapes.
10. A572/A572M-15 - High-Strength Low-Alloy Columbium-Vanadium Structural Steel.
11. A992/A992M-15 - Structural Shapes.
12. F2329/F2329M-15 - Zinc Coating, Hot-Dip, Requirements for Application to Carbon and Alloy steel Bolts, Screws, washers, Nuts, and Special Threaded Fasteners.
13. F3125/F3125M-15 - Standard Specification for High Strength Structural Bolts, Steel and Alloy Steel, Heat Treated, 120 ksi (830 MPa) and 150 ksi (1040 MPa) Minimum Tensile Strength, Inch and Metric Dimensions

F. Master Painters Institute (MPI):

1. No. 18 - Primer, Zinc Rich, Organic.

G. Military Specifications (Mil. Spec.):

1. MIL-P-21035 - Paint, High Zinc Dust Content, Galvanizing, Repair.

H. Occupational Safety and Health Administration (OSHA):

1. 29 CFR 1926.752(e) - Guidelines For Establishing The Components Of A Site-Specific Erection Plan.
2. 29 CFR 1926-2001 - Safety Standards for Steel Erection.

I. Research Council on Structural Connections (RCSC) of The Engineering Foundation:

1. Specification for Structural Joints Using ASTM F3125 Bolts.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
 1. Show size, configuration, and fabrication and installation details.
- C. Test Reports: Certify products comply with specifications.
 1. Welders' qualifying tests.
- D. Certificates: Certify each product complies with specifications.
 1. Structural steel.

11-01-18

2. Steel connections.
 3. Welding materials.
 4. Shop coat primer paint.
- E. Qualifications: Substantiate qualifications comply with specifications.
1. Fabricator.
 2. Installer.
 3. Welders and welding procedures.
- F. Delegated Design Drawings and Calculations: Signed and sealed by responsible Architect/Engineer.
1. Connection calculations.
- G. Record Surveys.

1.5 QUALITY ASSURANCE

- A. Fabricator Qualifications:
1. Regularly fabricates specified products.
 2. Fabricated specified products with satisfactory service on five similar installations for minimum five years.
- B. Installer Qualifications:
1. Installed specified products with satisfactory service on five similar installations for minimum five years.
- C. Before commencement of Work, ensure steel erector provides written notification required by OSHA 29 CFR 1926.752(e). Submit a copy of the notification to Contracting Officer's Representative.
- D. Welders and Welding Procedures Qualifications: AWS D1.1/D1.1M.

1.6 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

- A. Delegated Design: Prepare submittal documents including design calculations and drawings signed and sealed by registered design professional, licensed in state where project is located.
- B. Design structural steel framing connections complying with specified performance:
1. Load Capacity: Resist full capacity of supported framing member. Account for connection and member loads and eccentricities.

11-01-18

- a. Request additional design criteria when necessary to complete connection design.
2. Configuration: Design and detail all connections for each member size, steel grade and connection type to resist the loads and reactions indicated on the drawings or specified herein. Use details consistent with details shown on drawings, supplementing where necessary. The details shown on drawings are conceptual and do not indicate the required weld sizes or number of bolts unless specifically noted. Use rational engineering design and standard practice in detailing, accounting for all loads and eccentricities in both the connection and the members. Promptly notify the Contracting Officer Representative of any location where the connection design criteria is not clearly indicated. The design of all connections is subject to the review and acceptance of the Contracting Officer's Representative. Submit structural calculations prepared and sealed by a qualified engineer registered in the state where the project is located. Submit calculations for review before preparation of detail drawings.

2.2 MATERIALS

- A. W-Shapes:
 1. ASTM A992/A992M.
- B. Channel and Angles:
 1. ASTM A36/A36M.
- C. Plates and Bars:
 1. ASTM A36/A36M.
- D. Hollow Structural Sections:
 1. ASTM A500/A500M.
 2. ASTM A501/A501M.
- E. Structural Pipe: ASTM A53/A53M, Grade B.
- F. Bolts, Nuts and Washers: Galvanized for galvanized framing and plain finish for other framing.
 1. High-strength bolts, including nuts and washers: ASTM F3125.
 2. Bolts and nuts, other than high-strength: ASTM A307, Grade A.
 3. Plain washers, other than those in contact with high-strength bolt heads and nuts: ASME B18.22.1.
- G. Welding Materials: AWS D1.1, type to suit application.

11-01-18

2.3 FABRICATION

- A. Fabricate structural steel according to Chapter M, AISC 360.
- B. Shop and Field Connections:
 - 1. Weld connections according to AWS D1.1/D1.1M. Welds shall be made only by welders and welding operators who have been previously qualified by tests as prescribed in AWS D1.1 to perform type of work required.
 - 2. The surfaces of existing steel used for connections of new steel and new steel shall be prepared according to the Society for Protective Coatings (SSPC) Method specified herein that corresponds to its location and exposure as follows:
 - a. Interior, Not Exposed to View (above suspended ceilings, under sprayed-on fireproofing, steel to be encased in concrete): SSPC-SP-2, Hand-Tool Cleaning.
 - b. Interior, Existing steel to be used as base metal for welding: SSPC-SP-3, Power-Tool Cleaning.
 - c. Interior, Exposed in the Finished Building: SSPC-SP-6, Commercial Blast Cleaning, unless noted otherwise on the Drawings.
 - d. Exterior (exposed to weather or in unconditioned space): SSPC-SP-6, Commercial Blast Cleaning, unless noted otherwise on the Drawings.
 - e. Members to be Hot Dipped Galvanized: SSPC-SP3, Power Tool Cleaning, before galvanizing.
 - 3. Pre-Weld Inspection: Steel to be field welded and the filler material to be used shall be subject to inspection before welding is performed.
 - 4. Welds indicated on the Contract Documents or the approved shop or erection drawings shall be created by electric arc welding processes that comply in all respects with the codes and specifications herein noted covering the design, fabrication, and inspection of welded structures and the qualifications of welders and supervisors. Control the heat input, weld length, weld sequence and cooling process to prevent distortion of the completed assembly.
 - 5. Each welder's work shall be traceable.
 - 6. High-Strength Bolts: High-strength bolts tightened to a bolt tension minimum 70 percent of their minimum tensile strength. Tightening

11-01-18

done with properly calibrated wrenches, by turn-of-nut method or by use of direct tension indicators (bolts or washers). Tighten bolts in connections identified as slip-critical using Direct Tension Indicators. Twist-off torque bolts are not an acceptable alternate fastener for slip critical connections.

2.4 FINISHES

A. Shop Priming:

1. Prime paint structural steel according to AISC 303, Section 6.
 - a. Interstitial Space Structural Steel: Prime paint, unless indicated to receive sprayed on fireproofing.

B. Shop Finish Painting: Apply primer and finish paint as specified in Section 09 91 00, PAINTING.

C. Do not paint:

1. Surfaces within 50 mm (2 inches) of field welded joints.
2. Surfaces indicated to be encased in concrete.
3. Surfaces receiving sprayed on fireproofing.
4. Beam top flanges receiving shear connector studs applied.

D. Structural Steel Galvanizing: ASTM A123/A123M, hot dipped, after fabrication. Touch-up after erection: Clean and wire brush any abraded and other spots worn through zinc coating, including threaded portions of bolts and welds and touch-up with galvanizing repair paint.

1. Galvanize structural steel framing installed at exterior locations.

E. Bolts, Nuts, and Washers Galvanizing: ASTM F2329, hot-dipped.

2.5 ACCESSORIES

A. General: Shop paint steel according to AISC 303, Section 6.

B. Finish Paint System: Primer and finish as specified in Section 09 91 00, PAINTING.

C. Galvanizing Repair Paint: MPI No. 18.

PART 3 - EXECUTION

3.1 ERECTION

- A. Erect structural steel according to AISC 303 and AISC 360.
- B. Set structural steel accurately at locations and elevations indicated on drawings.
- C. Maintain erection tolerances of structural steel within AISC 303 requirements.

11-01-18

1. Pour Stop Elevation Tolerance: 6 mm (1/4 inch), maximum, before concrete placement.

D. Weld and bolt connections as specified for shop connections.

3.2 FIELD PAINTING

- A. After welding, clean and prime weld areas to match adjacent finish.
- B. Touch-up primer damaged by construction operations.
- C. Apply galvanizing repair paint to galvanized coatings damaged by construction operations.
- D. Finish Painting: As specified in Section 09 91 00, PAINTING.

3.3 FIELD QUALITY CONTROL

- A. Record Survey:
 1. Measure and record structural steel framing plumbness, level, and alignment after completing bolting and welding and before installation of work supported by structural steel.
 2. Identify deviations from allowable tolerances specified in AISC Manual.

- - E N D - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

11-01-18

Page Intentionally Left Blank

01-01-21

SECTION 05 40 00
COLD-FORMED METAL FRAMING

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies materials and services required for installation of cold-formed steel, including tracks and required accessories as shown and specified. This Section includes the following:

1. Exterior load-bearing steel stud walls.
2. Interior load-bearing steel stud walls.
3. Exterior non-load-bearing steel stud curtain wall.

1.2 RELATED WORK

- A. Section 01 81 13 SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- B. Section 05 12 00, STRUCTURAL STEEL FRAMING: Structural steel framing.
- C. Section 09 22 16, NON-STRUCTURAL METAL FRAMING: Non-load-bearing metal stud framing assemblies.
- D. Section 09 29 00, GYPSUM BOARD: Gypsum board assemblies.

1.3 DESIGN REQUIREMENTS

- A. Design steel in accordance with American Iron and Steel Institute Publication "Specification for the Design of Cold-Formed Steel Structural Members", except as otherwise shown or specified.
- B. Structural Performance: Engineer, fabricate and erect cold-formed metal framing with the minimum physical and structural properties indicated.
- C. Structural Performance: Engineer, fabricate, and erect cold-formed metal framing to withstand design loads within limits and under conditions required.

1. Design Loads:

- a. Gravity, wind and seismic loading as indicated on the drawings or in this specification.

b. Blast Loads:

- 1) Light gauge framing in exterior walls shall be blast resistant and meet the following criteria per the VA Physical Security and Resiliency Design Manual.
- 2) Standoff Distance: 25 feet (Life Safety Protected
- 3) Design Threat in accordance with Table 6-1 of the referenced Physical Security and Resiliency Design Manual.

01-01-21

- 4) Deformation not to exceed deformation limits shown in Table 6-2 of the referenced Physical Security and Resiliency Design Manual.
2. Design framing systems to withstand design loads without deflections greater than the following:
 - a. Exterior Non-load-Bearing Curtain wall: Lateral deflection limited to 3/8 inch. .
3. Design framing systems to provide for movement of framing members without damage or overstressing, sheathing failure, connection failure, undue strain on fasteners and anchors, or other detrimental effects when subject to a maximum ambient temperature change (range) of 67 degrees C (120 degrees F).
4. Design framing system to accommodate deflection of primary building structure and construction tolerances, and to maintain clearances at openings.
5. Design exterior non-load-bearing curtain wall framing to accommodate lateral deflection without regard to contribution of sheathing materials.
6. Engineering Responsibility: Engage a fabricator who assumes undivided responsibility for engineering cold-formed metal framing by employing a qualified professional engineer to prepare design calculations, shop drawings, and other structural data.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. All items indicated below are required submittals requiring Contracting Officer's Representative (COR) review and approval
- B. Shop Drawings: Shop and erection drawings showing steel unit layout, connections to supporting members, and information necessary to complete installation as shown and specified.
- C. Manufacturer's Literature and Data: Showing steel component sections and specifying structural characteristics.
- D. Design of the light gauge for this project shall be provided by the contractor's structural engineer for the loads shown on the construction documents. Submit signed and sealed calculations performed by a structural engineer with at least 5 years experience in the design

01-01-21

of light gauge metal and registered in the state of the project.
Calculations shall be submitted with plans elevations and details for
review and approval.

E. Blast Design Calculations: Light Gauge Members and Connections

1. Submit calculations for review and approval prepared by qualified
blast consultant, with a minimum of 5 years experience in design of
blast resistant window systems when delegated designer of the light
gauge responsible for design of light gauge members for gravity,
wind and seismic loadings varies from minimum sizes required for
blast loading shown on the drawings. The magnitudes of the design
threats W1 and GP2 are defined in the Physical Security and
Resiliency Design Standards Data Definitions which is a document
separate from the referenced VA Security and Resiliency Design
Manual. The Physical Security and Resiliency Design Standards Data
Definitions are provided on a need-to-know basis by the structural
blast specialist performing the blast design on VA projects. It is
the responsibility of the delegated engineer responsible for the
design of blast resistant cold formed framing to request and obtain
the Physical Security Design and Resiliency Data Standard Data
Definitions from the VA Office of Construction and Facilities
Management (CFM). Any associated delays or increased costs due to
failure to obtain this information will be borne by the contractor.

F. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled
content percentage by weight.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent
referenced. Publications are referenced in text by basic designation
only.
- B. American Iron and Steel Institute (AISI): Specification and Commentary
for the Design of Cold-Formed Steel Structural Members (2016)
- C. ASTM International (ASTM):
A36/A36M-19.....Standard Specification for Carbon Structural
Steel
A123/A123M-17.....Standard Specifications for Zinc (Hot-Dip
Galvanized) Coatings on Iron and Steel Products

01-01-21

- A153/A153M-16a.....Standard Specifications for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
- A307-14e1.....Standard Specifications for Carbon Steel Bolts, Studs, and Threaded Rod 60,000 PSI Tensile Strength
- A653/A653M-20.....Standard Specification for Steel Sheet, Zinc Coated (Galvanized) or Zinc Iron Alloy Coated (Galvannealed) by the Hot Dip Process
- C955-18e1.....Standard Specification for Cold Formed Steel Structural Framing Members
- C1107/1107M-20.....Standard Specification for Packaged Dry, Hydraulic-Cement Grout (Non-shrink)
- E488/E488M-18.....Standard Test Methods for Strength of Anchors in Concrete Elements
- E1190-11 (2018).....Standard Test Methods for Strength of Power-Actuated Fasteners Installed in Structural Members
- D. American Welding Society (AWS):
- D1.3/D1.3M-18.....Structural Welding Code-Sheet Steel
- E. Military Specifications (Mil. Spec.):
- MIL-P-21035B.....Paint, High Zinc Dust Content, Galvanizing Repair
- F. VA Physical Security and Resiliency Design Manual October 1, 2020.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Sheet Steel for joists, studs and accessories 16 gauge and heavier: ASTM A653, structural steel, zinc coated G90, with a yield of 340 MPa (50 ksi) minimum.
- B. Steel for cold form stud wall: with a yield strength of 50 ksi minimum.
- C. Galvanizing Repair Paint: MIL-P-21035B.

2.2 WALL FRAMING

- A. Steel Studs: Complying with ASTM C 955. Manufacturer's standard C-shaped steel studs of web depth indicated, with lipped flanges, and complying with the following:
1. Minimum Base-Steel Thickness (uncoated): 1.37 mm (0.0538 inch)
 2. Flange Width: 2 inches

01-01-21

3. Web: Unpunched.

B. Steel Track: Manufacturer's standard U-shaped steel track, unpunched, of web depths indicated, with straight flanges, and complying with the following:

1. Design Uncoated-Steel Thickness: Matching steel studs.
2. Flange Width: Manufacturer's standard deep flange where indicated, standard flange elsewhere.

2.3 JOIST FRAMING

A. Steel Joists: Manufacturer's standard C-shaped steel joists, unpunched, of web depths indicated, with lipped flanges, and complying with the following:

1. Minimum Base-Steel Thickness: 1.37 mm (0.0538 inch).
Design Thickness: 1.45 mm (0.0566 inch).
2. Flange Width: (2 inches).

B. Steel Joist Track: Manufacturer's standard U-shaped steel joist track, unpunched, of web depths indicated, with straight flanges, and complying with the following:

1. Design Thickness: Matching steel joists.
2. Flange Width: 51 mm (2 inches).

2.4 FRAMING ACCESSORIES

A. Fabricate steel framing accessories of the same material and finish used for framing members, with a minimum yield strength of 230 MPa (33 ksi).

B. Provide accessories of manufacturer's standard thickness and configuration, unless otherwise indicated, as follows:

1. Supplementary framing.
2. Bracing, bridging, and solid blocking.
3. Web stiffeners.
4. Gusset plates.
5. Deflection track and vertical slide clips.
6. Stud kickers and girts.
7. Joist hangers and end closures.
8. Reinforcement plates.

2.5 ANCHORS, CLIPS, AND FASTENERS

A. Steel Shapes and Clips: ASTM A36, zinc coated by the hot-dip process according to ASTM A123.

01-01-21

- B. Cast-in-Place Anchor Bolts and Studs: ASTM A307, Grade A, zinc coated by the hot-dip process according to ASTM A153.
- C. Expansion Anchors: Fabricated from corrosion-resistant materials, with capability to sustain, without failure, a load equal to 5 times the design load, as determined by testing per ASTM E488 conducted by a qualified independent testing agency.
- D. Power-Actuated Anchors: Fastener system of type suitable for application indicated, fabricated from corrosion-resistant materials, with capability to sustain, without failure, a load equal to 10 times the design load, as determined by testing per ASTM E1190 conducted by a qualified independent testing agency.
- E. Mechanical Fasteners: Corrosion-resistant coated, self-drilling, self-threading steel drill screws. Low-profile head beneath sheathing, manufacturer's standard elsewhere.

2.6 REQUIREMENTS

- A. Welding in accordance with AWS D1.3
- B. Furnish members and accessories by one manufacturer only.

PART 3 - EXECUTION

3.1 FABRICATION

- A. Framing components may be preassembled into panels. Panels shall be square with components attached.
- B. Cut framing components squarely or as required for attachment. Cut framing members by sawing or shearing; do not torch cut.
- C. Hold members in place until fastened.
- D. Fasten cold-formed metal framing members by welding or screw fastening, as standard with fabricator. Wire tying of framing members is not permitted.
 - 1. Comply with AWS requirements and procedures for welding, appearance and quality of welds, and methods used in correcting welding work.
 - 2. Locate mechanical fasteners and install according to cold-formed metal framing manufacturer's instructions with screw penetrating joined members by not less than 3 exposed screw threads.
- E. Where required, provide specified insulation in double header members and double jamb studs which will not be accessible after erection.

01-01-21

3.2 ERECTION

- A. Handle and lift prefabricated panels in a manner as to not distort any member.
- B. Securely anchor tracks to supports as shown.
- C. At butt joints, securely anchor two pieces of track to same supporting member or butt-weld or splice together.
- D. Plumb, align, and securely attach studs to flanges or webs of both upper and lower tracks.
- E. All axially loaded members shall be aligned vertically to allow for full transfer of the loads down to the foundation. Vertical alignment shall be maintained at floor/wall intersections.
- F. Install jack studs above and below openings and as required to furnish support. Securely attach jack studs to supporting members.
- G. Install headers in all openings that are larger than the stud spacing in that wall.
- H. Attach bridging for studs in a manner to prevent stud rotation. Space bridging rows as shown.
- I. Studs in one piece for their entire length, splices will not be permitted.
- J. Provide a load distribution member at top track where joist is not located directly overbearing stud.
- K. Provide joist bridging and web stiffeners at reaction points where shown.
- L. Provide end blocking where joist ends are not restrained from rotation.
- M. Provide an additional joist under parallel partitions, unless otherwise shown, when partition length exceeds one-half joist span and when floor and roof openings interrupt one or more spanning members.
- N. Provide temporary bracing and leave in place until framing is permanently stabilized.
- O. Do not bridge building expansion joints with cold-formed metal framing. Independently frame both sides of joints.
- P. Fasten reinforcement plate over web penetrations that exceed size of manufacturer's standard punched openings.

3.3 TOLERANCES

- A. Vertical alignment (plumbness) of studs shall be within 1/960th of the span.

01-01-21

- B. Horizontal alignment (levelness) of walls shall be within 1/960th of their respective lengths.
- C. Spacing of studs shall not be more than 3 mm (1/8 inch) +/- from the designed spacing providing that the cumulative error does not exceed the requirements of the finishing materials.
- D. Prefabricated panels shall be not more than 3 mm (1/8 inch) +/- out of square within the length of that panel.

3.4 FIELD REPAIR

- A. Touch-up damaged galvanizing with galvanizing repair paint.

- - - E N D - - -

08-01-18

SECTION 05 50 00
METAL FABRICATIONS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies items and assemblies fabricated from structural steel shapes and other materials as shown and specified.
- B. Items specified.
 - 1. Support for Wall and Ceiling Mounted Items: (SD055000-01, SD055000-02, SD102113-01, SD102600-01, SD123100-01 & SD123100-02)
 - 2. Frames
 - 3. Guards
 - 4. Gratings
 - 5. Gas Racks
 - 6. Plate Door Sill
 - 7. Ladders
 - 8. Railings
 - 9. Steel Counter or Bench Top Frame and Leg
 - 10. Steel Pipe Bollards

1.2 RELATED WORK

- A. Railings attached to steel stairs: Section 05 51 00, METAL STAIRS.
- B. Colors, finishes, and textures: Section 09 06 00, SCHEDULE FOR FINISHES.
- C. Prime and finish painting: Section 09 91 00, PAINTING.
- D. Stainless steel corner guards: Section 10 26 00, WALL AND DOOR PROTECTION.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Each item specified.
 - 2. Highlight all products, accessories, and options.
 - 3. Provide entire catalog, chapter, section, etc., as relevant for review including but not limited to installation instructions, loading diagrams, details.

08-01-18

C. Shop Drawings:

1. Each item specified, showing complete detail, location in the project, material and size of components, method of joining various components and assemblies, finish, and location, size and type of anchors.
2. Mark items requiring field assembly for erection identification and furnish erection drawings and instructions.
3. Provide templates and rough-in measurements as required.

D. Manufacturer's Certificates:

1. Anodized finish as specified.
2. Live load designs as specified.

E. Design Calculations for specified live loads including dead loads.

F. Furnish setting drawings and instructions for installation of anchors to be preset into concrete and masonry work, and for the positioning of items having anchors to be built into concrete or masonry construction.

1.4 QUALITY ASSURANCE

- A. Each manufactured product shall meet, as a minimum, the requirements specified, and shall be a standard commercial product of a manufacturer regularly presently manufacturing items of type specified.
- B. Each product type shall be the same and be made by the same manufacturer.
- C. Assembled product to the greatest extent possible before delivery to the site.
- D. Include additional features, which are not specifically prohibited by this specification, but which are a part of the manufacturer's standard commercial product.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Mechanical Engineers (ASME):
B18.6.1-97.....Wood Screws
B18.2.2-87(R2010).....Square and Hex Nuts
- C. American Society for Testing and Materials (ASTM):
A36/A36M-14.....Structural Steel
A47-99(R2014).....Malleable Iron Castings

08-01-18

- A48-03 (R2012)Gray Iron Castings
- A53-12.....Pipe, Steel, Black and Hot-Dipped, Zinc-Coated
Welded and Seamless
- A123-15.....Zinc (Hot-Dip Galvanized) Coatings on Iron and
Steel Products
- A240/A240M-15.....Standard Specification for Chromium and
Chromium-Nickel Stainless Steel Plate, Sheet
and Strip for Pressure Vessels and for General
Applications.
- A269-15.....Seamless and Welded Austenitic Stainless Steel
Tubing for General Service
- A307-14.....Carbon Steel Bolts and Studs, 60,000 PSI
Tensile Strength
- A391/A391M-07 (R2015)Grade 80 Alloy Steel Chain
- A786/A786M-15.....Rolled Steel Floor Plate
- B221-14.....Aluminum and Aluminum-Alloy Extruded Bars,
Rods, Wire, Shapes, and Tubes
- B456-11.....Electrodeposited Coatings of Copper Plus Nickel
Plus Chromium and Nickel Plus Chromium
- B632-08.....Aluminum-Alloy Rolled Tread Plate
- C1107-13.....Packaged Dry, Hydraulic-Cement Grout
(Nonshrink)
- D3656-13.....Insect Screening and Louver Cloth Woven from
Vinyl-Coated Glass Yarns
- F436-16.....Hardened Steel Washers
- F468-06 (R2015)Nonferrous Bolts, Hex Cap Screws, Socket Head
Cap Screws and Studs for General Use
- F593-13.....Stainless Steel Bolts, Hex Cap Screws, and
Studs
- F1667-15.....Driven Fasteners: Nails, Spikes and Staples
- D. American Welding Society (AWS):
- D1.1-15.....Structural Welding Code Steel
- D1.2-14.....Structural Welding Code Aluminum
- D1.3-18.....Structural Welding Code Sheet Steel
- E. National Association of Architectural Metal Manufacturers (NAAMM)
- AMP 521-01 (R2012)Pipe Railing Manual
- AMP 500-06.....Metal Finishes Manual

08-01-18

MBG 531-09(R2017).....Metal Bar Grating Manual

MBG 532-09.....Heavy Duty Metal Bar Grating Manual

F. Structural Steel Painting Council (SSPC)/Society of Protective
Coatings:

SP 1-15.....No. 1, Solvent Cleaning

SP 2-04.....No. 2, Hand Tool Cleaning

SP 3-04.....No. 3, Power Tool Cleaning

G. Federal Specifications (Fed. Spec):

RR-T-650E.....Treads, Metallic and Nonmetallic, Nonskid

PART 2 - PRODUCTS

2.1 DESIGN CRITERIA

- A. In addition to the dead loads, design fabrications to support the following live loads unless otherwise specified.
- B. Ladders and Rungs: 250 pounds at any point.
- C. Railings and Handrails: 200 pounds in any direction at any point.
- D. Floor Plates, Gratings, Covers, Trap Doors, Catwalks, and Platforms: 100 pounds per square foot. Use 1,000 pounds for concentrated loads.

2.2 MATERIALS

- A. Structural Steel: ASTM A36.
- B. Stainless Steel: ASTM A240, Type 302 or 304.
- C. Aluminum, Extruded: ASTM B221, Alloy 6063-T5 unless otherwise specified. For structural shapes use alloy 6061-T6 and alloy 6061-T4511.
- D. Floor Plate:
 - 1. Steel ASTM A786.
 - 2. Aluminum: ASTM B632.
- E. Steel Pipe (Bollard): ASTM A53.
 - 1. Galvanized for exterior locations.
 - 2. Type S, Grade A unless specified otherwise.
 - 3. NPS (inside diameter) as shown.
- F. Cast-Iron: ASTM A48, Class 30, commercial pattern.
- G. Malleable Iron Castings: A47.
- H. Primer Paint: As specified in Section 09 91 00, PAINTING.
- I. Stainless Steel Tubing: ASTM A269, type 302 or 304.
- J. Modular Channel Units:
 - 1. Factory fabricated, channel shaped, cold formed sheet steel shapes, complete with fittings bolts and nuts required for assembly.

08-01-18

2. Form channel within turned pyramid shaped clamping ridges on each side.
3. Provide case hardened steel nuts with serrated grooves in the top edges designed to be inserted in the channel at any point and be given a quarter turn so as to engage the channel clamping ridges. Provide each nut with a spring designed to hold the nut in place.
4. Factory finish channels and parts with oven baked primer when exposed to view. Channels fabricated of ASTM A525, G90 galvanized steel may have primer omitted in concealed locations. Finish screws and nuts with zinc coating.
5. Fabricate snap-in closure plates to fit and close exposed channel openings of not more than 0.3 mm (0.0125 inch) thick stainless steel.

K. Grout: ASTM C1107, pourable type.

L. Insect Screening: ASTM D3656.

2.3 HARDWARE

A. Rough Hardware:

1. Furnish rough hardware with a standard plating, applied after punching, forming and assembly of parts; galvanized, cadmium plated, or zinc-coated by electro-galvanizing process. Galvanized G-90 where specified.
2. Use G90 galvanized coating on ferrous metal for exterior work unless non-ferrous metal or stainless is used.

B. Fasteners:

1. Bolts with Nuts:
 - a. ASME B18.2.2.
 - b. ASTM A307 for 415 MPa (60,000 psi) tensile strength bolts.
 - c. ASTM F468 for nonferrous bolts.
 - d. ASTM F593 for stainless steel.
2. Screws: ASME B18.6.1.
3. Washers: ASTM F436, type to suit material and anchorage.
4. Nails: ASTM F1667, Type I, style 6 or 14 for finish work.

2.4 FABRICATION GENERAL

A. Material

1. Use material as specified. Use material of commercial quality and suitable for intended purpose for material that is not named or its standard of quality not specified.

08-01-18

2. Use material free of defects which could affect the appearance or service ability of the finished product.

B. Size:

1. Size and thickness of members as shown.
2. When size and thickness is not specified or shown for an individual part, use size and thickness not less than that used for the same component on similar standard commercial items or in accordance with established shop methods.

C. Connections

1. Except as otherwise specified, connections may be made by welding, riveting or bolting.
2. Field riveting will not be approved.
3. Design size, number and placement of fasteners, to develop a joint strength of not less than the design value.
4. Holes, for rivets and bolts: Accurately punched or drilled and burrs removed.
5. Size and shape welds to develop the full design strength of the parts connected by welds and to transmit imposed stresses without permanent deformation or failure when subject to service loadings.
6. Use Rivets and bolts of material selected to prevent corrosion (electrolysis) at bimetallic contacts. Plated or coated material will not be approved.
7. Use stainless steel connectors for removable members machine screws or bolts.

D. Fasteners and Anchors

1. Use methods for fastening or anchoring metal fabrications to building construction as shown or specified.
2. Where fasteners and anchors are not shown, design the type, size, location and spacing to resist the loads imposed without deformation of the members or causing failure of the anchor or fastener, and suit the sequence of installation.
3. Use material and finish of the fasteners compatible with the kinds of materials which are fastened together and their location in the finished work.
4. Fasteners for securing metal fabrications to new construction only, may be by use of threaded or wedge type inserts or by anchors for

08-01-18

welding to the metal fabrication for installation before the concrete is placed or as masonry is laid.

5. Fasteners for securing metal fabrication to existing construction or new construction may be expansion bolts, toggle bolts, power actuated drive pins, welding, self-drilling and tapping screws or bolts.

E. Workmanship

1. General:

- a. Fabricate items to design shown.
- b. Furnish members in longest lengths commercially available within the limits shown and specified.
- c. Fabricate straight, true, free from warp and twist, and where applicable square and in same plane.
- d. Provide holes, sinkages and reinforcement shown and required for fasteners and anchorage items.
- e. Provide openings, cut-outs, and tapped holes for attachment and clearances required for work of other trades.
- f. Prepare members for the installation and fitting of hardware.
- g. Cut openings in gratings and floor plates for the passage of ducts, sumps, pipes, conduits and similar items. Provide reinforcement to support cut edges.
- h. Fabricate surfaces and edges free from sharp edges, burrs and projections which may cause injury.

2. Welding:

- a. Weld in accordance with AWS.
- b. Welds shall show good fusion, be free from cracks and porosity and accomplish secure and rigid joints in proper alignment.
- c. Where exposed in the finished work, continuous weld for the full length of the members joined and have depressed areas filled and protruding welds finished smooth and flush with adjacent surfaces.
- d. Finish welded joints to match finish of adjacent surface.

3. Joining:

- a. Miter or butt members at corners.
- b. Where frames members are butted at corners, cut leg of frame member perpendicular to surface, as required for clearance.

08-01-18

4. Anchors:

- a. Where metal fabrications are shown to be preset in concrete, weld 32 x 3 mm (1-1/4 by 1/8 inch) steel strap anchors, 150 mm (6 inches) long with 25 mm (one inch) hooked end, to back of member at 600 mm (2 feet) on center, unless otherwise shown.
- b. Where metal fabrications are shown to be built into masonry use 32 x 3 mm (1-1/4 by 1/8 inch) steel strap anchors, 250 mm (10 inches) long with 50 mm (2 inch) hooked end, welded to back of member at 600 mm (2 feet) on center, unless otherwise shown.

5. Cutting and Fitting:

- a. Accurately cut, machine and fit joints, corners, copes, and miters.
- b. Fit removable members to be easily removed.
- c. Design and construct field connections in the most practical place for appearance and ease of installation.
- d. Fit pieces together as required.
- e. Fabricate connections for ease of assembly and disassembly without use of special tools.
- f. Joints firm when assembled.
- g. Conceal joining, fitting and welding on exposed work as far as practical.
- h. Do not show rivets and screws prominently on the exposed face.
- i. The fit of components and the alignment of holes shall eliminate the need to modify components or to use exceptional force in the assembly of items and eliminate the need to use other than common tools.

F. Finish:

1. Finish exposed surfaces in accordance with NAAMM AMP 500 Metal Finishes Manual.
2. Aluminum: NAAMM AMP 501.
 - a. Mill finish, AA-M10, as fabricated, use unless specified otherwise.
 - b. Clear anodic coating, AA-C22A41, chemically etched medium matte, with Architectural Class 1, 0.7 mils or thicker.
 - c. Colored anodic coating, AA-C22A42, chemically etched medium matte with Architectural Class 1, 0.7 mils or thicker.
 - d. Painted: AA-C22R10.

08-01-18

3. Steel and Iron: NAAMM AMP 504.
 - a. Zinc coated (Galvanized): ASTM A123, G90 unless noted otherwise.
 - b. Surfaces exposed in the finished work:
 - 1) Finish smooth rough surfaces and remove projections.
 - 2) Fill holes, dents and similar voids and depressions with epoxy type patching compound.
 - c. Shop Prime Painting:
 - 1) Surfaces of Ferrous metal:
 - a) Items not specified to have other coatings.
 - b) Galvanized surfaces specified to have prime paint.
 - c) Remove all loose mill scale, rust, and paint, by hand or power tool cleaning as defined in SSPC-SP2 and SP3.
 - d) Clean of oil, grease, soil and other detrimental matter by use of solvents or cleaning compounds as defined in SSPC-SP1.
 - e) After cleaning and finishing apply one coat of primer as specified in Section 09 91 00, PAINTING.
 - 2) Non ferrous metals: Comply with MAAMM-500 series.
4. Stainless Steel: NAAMM AMP-504 Finish No. 4.
5. Chromium Plating: ASTM B456, satin or bright as specified, Service Condition No. SC2.

G. Protection:

1. Insulate aluminum surfaces that will come in contact with concrete, masonry, plaster, or metals other than stainless steel, zinc or white bronze by giving a coat of heavy-bodied alkali resisting bituminous paint or other approved paint in shop.
2. Spot prime all abraded and damaged areas of zinc coating which expose the bare metal, using zinc rich paint on hot-dip zinc coat items and zinc dust primer on all other zinc coated items.

2.5 SUPPORTS

A. General:

1. Fabricate ASTM A36 structural steel shapes as shown.
2. Use clip angles or make provisions for welding hangers and braces to overhead construction.
3. Field connections may be welded or bolted.

B. For Ceiling Hung Toilet Stall:

08-01-18

1. Use a continuous steel channel above pilasters with hangers centered over pilasters.
2. Make provision for installation of stud bolts in lower flange of channel.
3. Provide a continuous steel angle at wall and channel braces spaced as shown.
4. Use threaded rod hangers.
5. Provide diagonal angle brace where the suspended ceiling over toilet stalls does not extend to side wall of room.
6. Provide supports for ceiling hung pilasters at dressing booths and entrance screen to toilet room similar to support for toilet stall pilasters.

C. For Wall Mounted Items:

1. For items supported by metal stud partitions.
2. Steel strip or hat channel minimum of 1.5 mm (0.0598 inch) thick.
3. Steel strip minimum of 150 mm (6 inches) wide, length extending one stud space beyond end of item supported.
4. Steel hat channels where shown. Flange cut and flattened for anchorage to stud.
5. Structural steel tube or channel for grab bar at water closets floor to structure above with clip angles or end plates formed for anchors.
6. Use steel angles for thru wall counters. Drill angle for fasteners at ends and not over 100 mm (4 inches) on center between ends.

D. For Trapeze Bars:

1. Construct assembly above ceilings as shown and design to support not less than a 340 kg (750 pound) working load at any point.
2. Fabricate trapeze supports as shown, with all exposed members, including screws, nuts, bolts and washers, fabricated of stainless steel.
3. Fabricate concealed components of structural steel shapes unless shown otherwise.
4. Stainless steel ceiling plate drilled for eye bolt.
5. Continuously weld connections where welds shown.
6. Use modular channel where shown with manufacturers bolts and fittings.

08-01-18

- a. Weld ends of steel angle braces to steel plates and secure to modular channel units as shown. Drill plates for anchor bolts.
 - b. Fabricate eye bolt, special clamp bolt, and plate closure full length of modular channel at ceiling line and secure to modular channel unit with manufacturers standard fittings.
- E. For Intravenous Track and Cubical Curtain Track:
- 1. Fabricate assembly of steel angle as shown.
 - 2. Drill angle bent ends for anchor screws to acoustical suspension system and angle for hanger wires.
 - 3. Provide pipe sleeve welded to angle.
- F. Supports at Ceiling for Radiographic (x-ray) Equipment:
- 1. Fabricate hangers braces, and track of modular channel units assembly as shown.
 - 2. Fabricate steel plates for anchor to structure above.
 - 3. Drill bent plates for bolting at mid height at concrete beams.
- G. For Operating Room Light:
- 1. Fabricate as shown to suit equipment furnished.
 - 2. Drill leveling plate for light fixture bolts.
- H. Supports in Orthopedic Brace Shop:
- 1. Fabricate from 25 mm (one inch) steel pipe, fasten to steel angles above and extend to a point 150 mm (6 inches) below finished ceiling.
 - 2. Lower end of the pipe shall have a standard pipe thread.
 - 3. Provide an escutcheon plate at ceiling.
- I. Supports for Accordion Partition Tracks, Exercise Equipment, and Items at Various Conditions at Suspended Ceilings:
- 1. Fabricate of structural steel shapes as shown.
 - 2. Drill for anchor bolts of suspended item.
- J. Supports for Communion Rail Posts in Chapel:
- 1. Fabricate one steel plate support for each post as shown.
 - 2. Drill for fasteners.

2.6 FRAMES

- A. Elevator Entrance Wall Opening.
- 1. Fabricate of channel shapes, plates, and angles as shown.
 - 2. Weld or bolt head to jamb as shown.
 - 3. Weld clip angles to bottom of frame and top of jamb members extended to structure above for framed construction.

08-01-18

- a. Provide holes for anchors.
 - b. Weld head to jamb members.
- B. Channel Door Frames:
1. Fabricate of structural steel channels of size shown.
 2. Miter and weld frames at corners.
 3. Where anchored to masonry or embedded in concrete, weld to back of frame at each jamb, 5 mm (3/16 inch) thick by 44 mm (1-3/4 inch) wide steel strap anchors with ends turned 50 mm (2 inches), and of sufficient length to extend at least 300 mm (12 inches) into wall. Space anchors 600 mm (24 inches) above bottom of frame and 600 mm (24 inches) o.c. to top of jamb. Weld clip angles to bottom of jambs and provide holes for expansion bolts.
 4. Where anchored to concrete or masonry in prepared openings, drill holes at jambs for anchoring with expansion bolts. Weld clip angles to bottom of frame and provide holes for expansion bolt anchors as shown. Drill holes starting 600 mm (24 inches) above bottom of frame and 600 mm (24 inches) o.c. to top of jamb and at top of jamb. Provide pipe spacers at holes welded to channel.
 5. Where closure plates are shown, continuously weld them to the channel flanges.
 6. Weld continuous 19 x 19 x 3 mm (3/4 x 3/4 x 1/8 inch) thick steel angles to the interior side of each channel leg at the head and jambs to form a caulking groove.
 7. Prepare frame for installation of hardware specified in Section 08 71 00, DOOR HARDWARE.
 - a. Cut a slot in the lock jamb to receive the lock bolt.
 - b. Where shown use continuous solid steel bar stops at perimeter of frame, weld or secure with countersunk machine screws at not more than 450 mm (18 inches) on center.
- C. Frames for Breech Opening:
1. Fabricate from steel channels, or combination of steel plates and angles to size and contour shown.
 2. Weld strap anchors on back of frame at not over 600 mm (2 feet) on centers for concrete or masonry openings.
- D. Frames for Lead Lined Doors:
1. Obtain accurate dimensions and templates from suppliers of lead lined doors, finish hardware, and hollow steel door frames.

08-01-18

2. Fabricate as shown for use in connection with lead lined doors.
3. Deliver assembled frames with removable shipping spreaders at top and bottom.
4. Extend angles at jambs from floor to structural slab above. At floors of interstitial spaces, terminate jamb sections and provide anchors as shown.
5. Continuously weld plates and reinforcements to frame members and head members of angle frames between jambs.
6. Weld strap anchors, not over 600 mm (24 inches) on centers, to the back of angles for embedment in masonry or concrete unless shown otherwise.
7. Type 15 Door Frames:
 - a. Structural steel angle frames with plate or bar full height to heads. Extend reinforcing at hinge cutouts two inches beyond cutout.
 - b. Fabricate top anchorage to beam side at mid height.
 - c. Weld clip angles to both legs of angle at top and bottom.
 - d. Drill clips and plates, at top and bottom for anchoring jamb angles with two 9 mm (3/8 inch) expansion bolts at each location.
 - e. Cut rabbet for pivot hinges and lock strike.

2.7 GUARDS

- A. Wall Corner Guards:
 1. Fabricate from steel angles and furnish with anchors as shown.
 2. Continuously weld anchor to angle.
- B. Guard Angles for Overhead Doors:
 1. Cut away top portion of outstanding leg of angle and extend remaining portion of angle up wall.
 2. Weld filler piece across head of opening to jamb angles.
 3. Make provisions for fasteners and anchorage.
- C. Channel Guard at Loading Platform:
 1. Fabricate from steel channel of size shown.
 2. Weld anchors to channels as shown.
 3. Drill channel for bumper anchor bolts.
- D. Edge Guard Angles for Openings in slabs.
 1. Fabricate from steel angles of sizes and with anchorage shown.

08-01-18

2. Where size of angle is not shown, provide 50 x 50 x 6 mm (2 x 2 x 1/4 inch) steel angle with 32 x 5 mm (1-1/4 x 3/16 inch) strap anchors, welded to back.
3. Miter or butt angles at corners and weld.
4. Use one anchor near end and three feet on centers between end anchors.

E. Wheel Guards:

1. Construct wheel guards of not less than 16 mm (5/8 inch) thick cast iron.
2. Provide corner type, with flanges for bolting to walls.

2.8 GRATINGS

- A. Fabricate gratings to support live loads specified and a concentrated load as specified.
- B. Provide clearance at all sides to permit easy removal of grating.
- C. Make cutouts in gratings with 6 mm (1/4 inch) minimum to 25 mm (one inch) maximum clearance for penetrations or passage of pipes and ducts. Edge band cutouts.
- D. Fabricate in sections not to exceed 2.3 m² (25 square feet) in area and 90 kg (200 pounds) in weight.
- E. Fabricate sections of grating with end-banding bars.
- F. Fabricate angle frames and supports, including anchorage as shown.
 1. Fabricate intermediate supporting members from "T's" or angles.
 2. Locate intermediate supports to support grating section edges.
 3. Fabricate frame to finish flush with top of grating.
 4. Locate anchors at ends and not over 600 mm (24 inches) o.c.
 5. Butt or miter, and weld angle frame at corners.
- G. Steel Bar Gratings:
 1. Fabricate grating using steel bars, frames, supports and other members shown in accordance with Metal Bar Grating Manual.
 2. Galvanize steel members after fabrication in accordance with ASTM A123, G-90 for exterior gratings, gratings in concrete floors, and interior grating where specified.
 3. Use serrated bars for exterior gratings.
- H. Aluminum Bar Gratings:

2.9 PLATE DOOR SILL

- A. Fabricate of checkered plate as detailed.
 1. Aluminum Plate: ASTM B632, 3 mm (0.125 inch) thick.

08-01-18

2. Steel Plate: ASTM A786, 3 mm (0.125 inch thick), galvanized G90.

B. Fabricate for anchorage with flat head countersunk bolts at each end and not over 300 mm (12 inches), o.c.

2.10 LADDERS

A. Steel Ladders:

1. Fixed-rail type with steel rungs shouldered and headed into and welded to rails.
2. Fabricate angle brackets of 50 mm (2 inch) wide by 13 mm (1/2 inch) thick steel; brackets spaced maximum of 1200 mm (4 feet) apart and of length to hold ladder 175 mm (7 inches) from wall to center of rungs. Provide turned ends or clips for anchoring.
3. Provide holes for anchoring with expansion bolts through turned ends and brackets.
4. Where shown, fabricate side rails curved, twisted and formed into a gooseneck.
5. Galvanize exterior ladders after fabrication, ASTM A123, G-90.

B. Ladder Rungs:

1. Fabricate from 25 mm (one inch) diameter steel bars.
2. Fabricate so that rungs will extend at least 100 mm (4 inches) into wall with ends turned 50 mm (2 inches), project out from wall 175 mm (7 inches), be 400 mm (16 inches) wide and be designed so that foot cannot slide off end.
3. Galvanized after fabrication, ASTM A123, G-90 rungs for exterior use and for access to pits.

2.11 RAILINGS

A. In addition to the dead load design railing assembly to support live load specified.

B. Fabrication General:

1. Provide continuous welded joints, dressed smooth and flush.
2. Standard flush fittings, designed to be welded, may be used.
3. Exposed threads will not be approved.
4. Form handrail brackets to size and design shown.
5. Exterior Post Anchors.
 - a. Fabricate tube or pipe sleeves with closed ends or plates as shown.

08-01-18

- b. Where inserts interfere with reinforcing bars, provide flanged fittings welded or threaded to posts for securing to concrete with expansion bolts.
 - c. Provide heavy pattern sliding flange base plate with set screws at base of pipe or tube posts.
6. Interior Post Anchors:
- a. Provide flanged fittings for securing fixed posts to floor with expansion bolts, unless shown otherwise.
 - b. Weld or thread flanged fitting to posts at base.
 - c. For securing removable posts to floor, provide close fitting sleeve insert or inverted flange base plate with stud bolts or rivets concrete anchor welded to the base plate.
 - d. Provide sliding flange base plate on posts secured with set screws.
 - e. Weld flange base plate to removable posts set in sleeves.
- C. Handrails:
- 1. Close free ends of rail with flush metal caps welded in place except where flanges for securing to walls with bolts are shown.
 - 2. Make provisions for attaching handrail brackets to wall, posts, and handrail as shown.
- D. Steel Pipe Railings:
- 1. Fabricate of steel pipe with welded joints.
 - 2. Number and space of rails as shown.
 - 3. Space posts for railings not over 1800 mm (6 feet) on centers between end posts.
 - 4. Form handrail brackets from malleable iron.
 - 5. Fabricate removable sections with posts at end of section.
6. Removable Rails:
- a. Provide "U" shape brackets at each end to hold removable rail as shown. Use for top and bottom horizontal rail when rails are joined together with vertical members.
 - b. Secure rail to brackets with 9 mm (3/8 inch) stainless steel through bolts and nuts at top rail only when rails joined with vertical members.
 - c. Continuously weld brackets to post.
 - d. Provide slotted bolt holes in rail bracket.
 - e. Weld bolt heads flush with top of rail.

08-01-18

- f. Weld flanged fitting to post where posts are installed in sleeves.
- 7. Opening Guard Rails:
 - a. Fabricate rails with flanged fitting at each end to fit between wall opening jambs.
 - b. Design flange fittings for fastening with machine screws to steel plate anchored to jambs.
 - c. Fabricate rails for floor openings for anchorage in sleeves.
- 8. Gates:
 - a. Fabricate from steel pipe as specified for railings.
 - b. Fabricate gate fittings from either malleable iron or wrought steel.
 - c. Hang each gate on suitable spring hinges of clamp on or through bolted type. Use bronze hinges for exterior gates.
 - d. Provide suitable stops, so that gate will swing as shown.
- 9. Chains:
 - a. Chains: ASTM A391, Grade 63, straight link style, normal size chain bar 8 mm (5/16 inch) diameter, eight links per 25 mm (foot) and with boat type snap hook on one end, and through type eye bolt on other end.
 - b. Fabricate eye bolt for attaching chain to pipe posts, size not less than 9 mm (3/8 inch) diameter.
 - c. Fabricate anchor at walls, for engagement of snap hook of either a 9 mm (3/8 inch) diameter eye bolt or punched angle.
 - d. Galvanize chain and bolts after fabrication.

2.12 STEEL COUNTER OR BENCH TOP FRAME AND LEGS

- A. Fabricate channel or angle frame with mitered and welded corners as shown.
- B. Drill top of frame with 6 mm (1/4inch) holes spaced 200 mm (8 inches) on center for securing countertop.
- C. Fabricate legs of angle or pipe shapes and continuously weld to frame.
- D. Finish frame with backed on enamel prime coat.

2.13 STEEL PIPE BOLLARD

- A. Provide bollard in accordance with ASTM A53 with dimensions as shown in standard detail SD320523-04. Anchor posts in concrete and fill solidly with concrete with a minimum compressive strength of 17 MPa 2500psi.

08-01-18

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Set work accurately, in alignment and where shown, plumb, level, free of rack and twist, and set parallel or perpendicular as required to line and plane of surface.
- B. Items set into concrete or masonry.
 - 1. Provide temporary bracing for such items until concrete or masonry is set.
 - 2. Place in accordance with setting drawings and instructions.
 - 3. Build strap anchors, into masonry as work progresses.
- C. Set frames of gratings, covers, corner guards, trap doors and similar items flush with finish floor or wall surface and, where applicable, flush with side of opening.
- D. Field weld in accordance with AWS.
 - 1. Design and finish as specified for shop welding.
 - 2. Use continuous weld unless specified otherwise.
- E. Install anchoring devices and fasteners as shown and as necessary for securing metal fabrications to building construction as specified. Power actuated drive pins may be used except for removable items and where members would be deformed or substrate damaged by their use.
- F. Spot prime all abraded and damaged areas of zinc coating as specified and all abraded and damaged areas of shop prime coat with same kind of paint used for shop priming.
- G. Isolate aluminum from dissimilar metals and from contact with concrete and masonry materials as required to prevent electrolysis and corrosion.
- H. Secure escutcheon plate with set screw.

3.2 INSTALLATION OF SUPPORTS

- A. Anchorage to structure.
 - 1. Secure angles or channels and clips to overhead structural steel by continuous welding unless bolting is shown.
 - 2. Secure supports to concrete inserts by bolting or continuous welding as shown.
 - 3. Secure supports to mid height of concrete beams when inserts do not exist with expansion bolts and to slabs, with expansion bolts. unless shown otherwise.
 - 4. Secure steel plate or hat channels to studs as detailed.

08-01-18

B. Ceiling Hung Toilet Stalls:

1. Securely anchor hangers of continuous steel channel above pilasters to structure above.
2. Bolt continuous steel angle at wall to masonry or weld to face of each metal stud.
3. Secure brace for steel channels over toilet stall pilasters to wall angle supports with bolts at each end spaced as shown.
4. Install diagonal angle brace where the suspended ceiling over toilet stalls does not extend to side wall of room.
5. Install stud bolts in lower flange of channel before installing furred down ceiling over toilet stalls.
6. Install support for ceiling hung pilasters at entrance screen to toilet room similar to toilet stall pilasters.

C. Supports for Wall Mounted items:

1. Locate center of support at anchorage point of supported item.
2. Locate support at top and bottom of wall hung cabinets.
3. Locate support at top of floor cabinets and shelving installed against walls.
4. Locate supports where required for items shown.

D. Support at Ceiling for X-ray Tube Stand and Radiographic Equipment:

1. Bolt modular steel channel frames to hangers as shown, anchored to structure above.
2. Fasten frames with modular channel manufacturers fittings, bolts, and nuts. Space modular channel supports and hangers as shown and as required to suit equipment furnished.
3. Install closure plates in channels at ceiling where channel opening is visible. Coordinate and cut plates to fit tight against equipment anchors after equipment anchors are installed.

E. Ceiling Support for Operating Light:

1. Anchor support to structure above as shown.
2. Set leveling plate as shown level with ceiling.
3. Secure operating light to leveling plate in accordance with light manufacturer's requirements.

F. Supports for intravenous (IV) Track and Cubicle Curtain Track:

1. Install assembly where shown after ceiling suspension grid is installed.

08-01-18

2. Drill angle for bolt and weld nut to angle prior to installation of tile.

G. Support for cantilever grab bars:

1. Locate channels or tube in partition for support as shown, and extend full height from floor to underside of structural slab above.
2. Anchor at top and bottom with angle clips bolted to channels or tube with two, 9 mm (3/8 inch) diameter bolts.
3. Anchor to floors and overhead construction with two 9 mm (3/8 inch) diameter bolts.
4. Fasten clips to concrete with expansion bolts, and to steel with machine bolts or welds.

H. Supports for Trapeze Bars:

1. Secure plates to overhead construction with fasteners as shown.
2. Secure angle brace assembly to overhead construction with fasteners as shown and bolt plate to braces.
3. Fit modular channel unit flush with finish ceiling, and secure to plate with modular channel unit manufacturer's standard fittings through steel shims or spreaders as shown.
 - a. Install closure plates in channel between eye bolts.
 - b. Install eyebolts in channel.

I. Support for Communion Rail Posts:

1. Anchor steel plate supports for posts as shown.
2. Use four bolts per plate, locate two at top and two at bottom.
3. Use lag bolts.

3.3 DOOR FRAMES

- A. Secure clip angles at bottom of frames to concrete slab with expansion bolts as shown.
- B. Level and plumb frame; brace in position required.
- C. At masonry, set frames in walls so anchors are built-in as the work progresses unless shown otherwise.
- D. Set frames in formwork for frames cast into concrete.
- E. Where frames are set in prepared openings, bolt to wall with spacers and expansion bolts.

3.4 OTHER FRAMES

- A. Set frame flush with surface unless shown otherwise.
- B. Anchor frames at ends and not over 450 mm (18 inches) on centers unless shown otherwise.

08-01-18

C. Set in formwork before concrete is placed.

3.5 GUARDS

A. Steel Angle Corner Guards:

1. Build into masonry as the work progress.
2. Set into formwork before concrete is placed.
3. Set angles flush with edge of opening and finish floor or wall or as shown.
4. At existing construction fasten angle and filler piece to adjoining construction with 16 mm (5/8 inch) diameter by 75 mm (3 inch) long expansion bolts 450 mm (18 inches) on center.

3.6 GRATINGS

- A. Set grating flush with finish floor; top of curb, or areaway wall. Set frame so that horizontal leg of angle frame is flush with face of wall except when frame is installed on face of wall.
- B. Set frame in formwork before concrete is placed.
- C. Where grating terminates at a wall bolt frame to concrete or masonry with expansion bolts unless shown otherwise.
- D. Secure removable supporting members in place with stainless steel bolts.
- E. Bolt gratings to supports.

3.7 PLATE DOOR SILL

- A. Install after roofing base flashing and counter flashing work is completed.
- B. Set in sealant and bolt to curb.

3.8 LADDERS

- A. Anchor ladders to walls and floors with expansion bolts through turned lugs or angle clips or brackets.
- B. In elevator pits, set ladders to clear all elevator equipment where shown on the drawings.
 1. Where ladders are interrupted by division beams, anchor ladders to beams by welding, and to floors with expansion bolts.
 2. Where ladders are adjacent to division beams, anchor ladders to beams with bent steel plates, and to floor with expansion bolts.
- C. Ladder Rungs:
 1. Set ladder rungs into formwork before concrete is placed.
 2. Set step portion of rung 150 mm (6 inches) from wall.
 3. Space rungs approximately 300 mm (12 inches) on centers.

08-01-18

4. Where only one rung is required, locate it 400 mm (16 inches) above the floor.

3.9 RAILINGS

A. Steel Posts:

1. Secure fixed posts to concrete with expansion bolts through flanged fittings except where sleeves are shown with pourable grout.
2. Install sleeves in concrete formwork.
3. Set post in sleeve and pour grout to surface. Apply beveled bead of urethane sealant at perimeter of post or under flange fitting as specified in Section 07 92 00, JOINT SEALANTS—on exterior posts.
4. Secure removable posts to concrete with either machine screws through flanged fittings which are secured to inverted flanges embedded in and set flush with finished floor, or set posts in close fitting pipe sleeves without grout.
5. Secure sliding flanged fittings to posts at base with set screws.
6. Secure fixed flanged fittings to concrete with expansion bolts.
7. Secure posts to steel with welds.

B. Removable Rails:

1. Rest rails in brackets at each end and secure to bracket with stainless steel bolts and nuts where part of a continuous railing.
2. Rest rail posts in sleeves where not part of a continuous railing. Do not grout posts.

C. Gates:

1. Hang gate to swing as shown.
2. Bolt gate hinges to jamb post with clamp on or through bolts.

D. Chains:

1. Eye bolt chains to pipe posts.
2. Eye bolt anchoring at walls.
 - a. Expansion bolt to concrete or solid masonry.
 - b. Toggle bolt to hollow masonry of frame wall installed support.

E. Handrails:

1. Anchor brackets for metal handrails as detailed.
2. Install brackets within 300 mm (12 inches) of return of walls, and at evenly spaced intermediate points not exceeding 1200 mm (4 feet) on centers unless shown otherwise.
3. Expansion bolt to concrete or solid masonry.

08-01-18

4. Toggle bolt to installed supporting frame wall and to hollow masonry unless shown otherwise.

3.10 STEEL COMPONENTS FOR MILLWORK ITEMS

- A. Coordinate and deliver to Millwork fabricator for assembly where millwork items are secured to metal fabrications.

3.11 INSTALLATION OF STEEL PIPE BOLLARD

- A. Set bollards vertically in concrete piers. Compressive strength of concrete piers shall be 21MPa 3000psi. For dimensions of concrete piers See standard detail SD320523-04.

3.12 CLEAN AND ADJUSTING

- A. Adjust movable parts including hardware to operate as designed without binding or deformation of the members centered in the opening or frame and, where applicable, contact surfaces fit tight and even without forcing or warping the components.
- B. Clean after installation exposed prefinished and plated items and items fabricated from stainless steel, aluminum and copper alloys, as recommended by the metal manufacture and protected from damage until completion of the project.

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

08-01-18

Page Intentionally Left Blank

10-01-17

SECTION 06 10 00
ROUGH CARPENTRY

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies wood blocking, framing, sheathing, furring, nailers, sub-flooring, rough hardware, and light wood construction.

1.2 RELATED WORK:

- A. Milled woodwork: Section 06 20 00, FINISH CARPENTRY.
- B. Gypsum sheathing: Section 09 29 00, GYPSUM BOARD.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings showing framing connection details, fasteners, connections and dimensions.
- C. Manufacturer's Literature and Data:
 - 1. Submit data for lumber, panels, hardware and adhesives.
 - 2. Submit data for wood-preserved treatment from chemical treatment manufacturer and certification from treating plants that treated materials comply with requirements. Indicate type of preservative used and net amount of preservative retained.
 - 3. Submit data for fire retardant treatment from chemical treatment manufacturer and certification by treating plant that treated materials comply with requirements. Include physical properties of treated materials based on testing by a qualified independent testing agency.
 - 4. For products receiving a waterborne treatment, submit statement that moisture content of treated materials was reduced to levels specified before shipment to project site.
- D. Manufacturer's certificate for unmarked lumber.

1.4 PRODUCT DELIVERY, STORAGE AND HANDLING:

- A. Protect lumber and other products from dampness both during and after delivery at site.
- B. Pile lumber in stacks in such manner as to provide air circulation around surfaces of each piece.
- C. Stack plywood and other board products so as to prevent warping.

10-01-17

- D. Locate stacks on well drained areas, supported at least 152 mm (6 inches) above grade and cover with well-ventilated sheds having firmly constructed over hanging roof with sufficient end wall to protect lumber from driving rain.

1.5 QUALITY ASSURANCE:

- A. Installer: A firm with a minimum of three (3) years' experience in the type of work required by this section.

1.6 GRADING AND MARKINGS:

- A. Any unmarked lumber or plywood panel for its grade and species will not be allowed on VA Construction sites for lumber and material not normally grade marked, provide manufacturer's certificates (approved by an American Lumber Standards approved agency) attesting that lumber and material meet the specified the specified requirements.

1.7 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in the text by basic designation only.
- B. American Forest and Paper Association (AFPA):
- NDS-15.....National Design Specification for Wood
Construction
- WCD1-01.....Details for Conventional Wood Frame
Construction
- C. American Institute of Timber Construction (AITC):
- A190.1-07.....Structural Glued Laminated Timber
- D. American Society of Mechanical Engineers (ASME):
- B18.2.1-12 (R2013).....Square and Hex Bolts and Screws
- B18.2.2-10.....Square and Hex Nuts
- B18.6.1-81 (R2008).....Wood Screws
- E. American Plywood Association (APA):
- E30-11.....Engineered Wood Construction Guide
- F. ASTM International (ASTM):
- A653/A653M-13.....Steel Sheet Zinc-Coated (Galvanized) or Zinc-
Iron Alloy Coated (Galvannealed) by the Hot Dip
Process
- C954-11.....Steel Drill Screws for the Application of
Gypsum Board or Metal Plaster Bases to Steel

10-01-17

- Studs from 0.033 inch (2.24 mm) to 0.112-inch
(2.84 mm) in thickness
- C1002-14.....Steel Self-Piercing Tapping Screws for the
Application of Gypsum Panel Products or Metal
Plaster Bases to Wood Studs or Metal Studs
- D198-14.....Test Methods of Static Tests of Lumber in
Structural Sizes
- D2344/D2344M-13.....Test Method for Short-Beam Strength of Polymer
Matrix Composite Materials and Their Laminates
- D2559-12a.....Adhesives for Structural Laminated Wood
Products for Use Under Exterior (Wet Use)
Exposure Conditions
- D3498-03 (R2011).....Adhesives for Field-Gluing Plywood to Lumber
Framing for Floor Systems
- D6108-13.....Test Method for Compressive Properties of
Plastic Lumber and Shapes
- D6109-13.....Test Methods for Flexural Properties of
Unreinforced and Reinforced Plastic Lumber and
Related Products
- D6111-13a.....Test Method for Bulk Density and Specific
Gravity of Plastic Lumber and Shapes by
Displacement
- D6112-13.....Test Methods for Compressive and Flexural Creep
and Creep-Rupture of Plastic Lumber and Shapes
- F844-07a (R2013).....Washers, Steel, Plan (Flat) Unhardened for
General Use
- F1667-13.....Nails, Spikes, and Staples
- G. American Wood Protection Association (AWPA):
AWPA Book of Standards
- H. Commercial Item Description (CID):
A-A-55615.....Shield, Expansion (Wood Screw and Lag Bolt Self
Threading Anchors)
- I. Forest Stewardship Council (FSC):
FSC-STD-01-001 (Ver. 4-0) FSC Principles and Criteria for Forest
Stewardship
- J. Military Specification (Mil. Spec.):

10-01-17

MIL-L-19140E.....Lumber and Plywood, Fire-Retardant Treated

K. Environmental Protection Agency (EPA):

40 CFR 59(2014).....National Volatile Organic Compound Emission
Standards for Consumer and Commercial Products

L. Truss Plate Institute (TPI):

TPI-85.....Metal Plate Connected Wood Trusses

M. U.S. Department of Commerce Product Standard (PS)

PS 1-95.....Construction and Industrial Plywood

PS 20-10.....American Softwood Lumber Standard

N. ICC Evaluation Service (ICC ES):

AC09.....Quality Control of Wood Shakes and Shingles

AC174.....Deck Board Span Ratings and Guardrail Systems
(Guards and Handrails)

PART 2 - PRODUCTS

2.1 LUMBER:

A. Unless otherwise specified, each piece of lumber must bear grade mark, stamp, or other identifying marks indicating grades of material, and rules or standards under which produced.

1. Identifying marks are to be in accordance with rule or standard under which material is produced, including requirements for qualifications and authority of the inspection organization, usage of authorized identification, and information included in the identification.

2. Inspection agency for lumber approved by the Board of Review, American Lumber Standards Committee, to grade species used.

B. Lumber Other Than Structural:

1. Unless otherwise specified, species graded under the grading rules of an inspection agency approved by Board of Review, American Lumber Standards Committee.

2. Furring, blocking, nailers and similar items 101 mm (4 inches) and narrower Standard Grade; and, members 152 mm (6 inches) and wider, Number 2 Grade.

C. Sizes:

1. Conforming to PS 20.

10-01-17

2. Size references are nominal sizes, unless otherwise specified, actual sizes within manufacturing tolerances allowed by standard under which produced.

D. Moisture Content:

1. Maximum moisture content of wood products is to be as follows at the time of delivery to site.
 - a. Boards and lumber 50 mm (2 inches) and less in thickness: 19 percent or less.
 - b. Lumber over 50 mm (2 inches) thick: 25 percent or less.

E. Fire Retardant Treatment:

1. Comply with Mil Spec. MIL-L-19140.
2. Treatment and performance inspection, by an independent and qualified testing agency that establishes performance ratings.

F. Preservative Treatment:

1. Do not treat Heart Redwood and Western Red Cedar.
2. Treat wood members and plywood exposed to weather or in contact with plaster, masonry or concrete, including framing of open roofed structures; sills, sole plates, furring, and sleepers that are less than 610 mm (24 inches) from ground; nailers, edge strips, blocking, crickets, curbs, cant, vent strips and other members provided in connection with roofing and flashing materials.
3. Treat other members specified as preservative treated (PT).
4. Preservative treat by the pressure method complying with AWPA Book use category system standards U1 and T1, except any process involving the use of Chromated Copper Arsenate (CCA) or other agents classified as carcinogenic for pressure treating wood is not permitted.

2.2 ROUGH HARDWARE AND ADHESIVES:

A. Washers

1. ASTM F844.
2. Provide zinc or cadmium coated steel or cast iron for washers exposed to weather.

B. Screws:

1. Wood to Wood: ASME B18.6.1 or ASTM C1002.
2. Wood to Steel: ASTM C954, or ASTM C1002.

C. Nails:

10-01-17

1. Size and type best suited for purpose unless noted otherwise.
Provide aluminum-alloy nails, plated nails, or zinc-coated nails,
for nailing wood work exposed to weather and on roof blocking.
2. ASTM F1667:
 - a. Common: Type I, Style 10.
 - b. Concrete: Type I, Style 11.
 - c. Barbed: Type I, Style 26.
 - d. Underlayment: Type I, Style 25.
 - e. Masonry: Type I, Style 27.
 - f. Provide special nails designed for use with ties, strap anchors,
framing connectors, joists hangers, and similar items. Nails not
less than 32 mm (1-1/4 inches) long, 8d and deformed or annular
ring shank.

D. Framing and Timber Connectors:

1. Joint Plates:
 - a. Steel plate punched for nails.
 - b. Steel plates formed with teeth or prongs for mechanically
clamping plates to wood.
 - c. Size for axial eccentricity, and fastener loads.

E. Adhesives:

1. For field-gluing plywood to lumber framing floor or roof systems:
ASTM D3498.

PART 3 - EXECUTION

3.1 INSTALLATION OF FRAMING AND MISCELLANEOUS WOOD MEMBERS:

- A. Conform to applicable requirements of the following:
1. AFPA NDS for timber connectors.
 2. AITC A190.1 Timber Construction Manual for heavy timber
construction.
 3. AFPA WCD1 for nailing and framing unless specified otherwise.
 4. APA for installation of plywood or structural use panels.
 5. TPI for metal plate connected wood trusses.
 6. Space plastic lumber boards to allow for lengthwise expansion and
contraction in accordance with manufacturer recommendations.
- B. Fasteners:
1. Nails.

10-01-17

- a. Nail in accordance with the Recommended Nailing Schedule as specified in AFPA WCD1 where detailed nailing requirements are not specified in nailing schedule. Select nail size and nail spacing sufficient to develop adequate strength for the connection without splitting the members.
- b. Use special nails with framing connectors.
- c. Use 8d or larger nails for nailing through 25 mm (1 inch) thick lumber and for toe nailing 50 mm (2 inch) thick lumber.
- d. Use 16d or larger nails for nailing through 50 mm (2 inch) thick lumber.
- e. Select the size and number of nails in accordance with the Nailing Schedule except for special nails with framing anchors.
- f. Nailing Schedule; Using Common Nails:
 - 1) Joist bearing on sill or girder, toe nail three (3) 8d nails or framing anchor.
 - 2) Bridging to joist, toe nail each end two (2) 8d nails.
 - 3) Ledger strip to beam or girder three (3) 16d nails under each joint.
 - 4) Subflooring or Sheathing:
 - a) 152 mm (6 inch) wide or less to each joist face nail two (2) 8d nails.
 - b) Subflooring, more than 152 mm (6 inches) wide, to each stud or joint, face nail three (3) 8d nails.
 - c) Plywood or structural use panel to each stud or joist face nail 8d, at supported edges 152 mm (6 inches) on center and at intermediate supports 254 mm (10 inches) on center. When gluing plywood to joint framing increase nail spacing to 305 mm (12 inches) at supported edges and 508 mm (20 inches) o.c. at intermediate supports.
 - 5) Sole plate to joist or blocking, through sub floor face nail 20d nails, 406 mm (16 inches) on center.
 - 6) Top plate to stud, end nail two (2) 16d nails.
 - 7) Stud to sole plate, toe nail or framing anchor. Four (4) 8d nails.
 - 8) Doubled studs, face nail 16d at 610 mm (24 inches) on center.

10-01-17

- 9) Built-up corner studs 16d at 610 mm (24 inches) (24 inches) on center.
 - 10) Doubled top plates, face nails 16d at 406 mm (16 inches) on center.
 - 11) Top plates, laps, and intersections, face nail two (2) 16d.
 - 12) Continuous header, two pieces 16d at 406 mm (16 inches) on center along each edge.
 - 13) Ceiling joists to plate, toenail three (3) 8d or framing anchor.
 - 14) Continuous header to stud, four (4) 16d.
 - 15) Ceiling joists, laps over partitions, face nail three (3) 16d or framing anchor.
 - 16) Ceiling joists, to parallel rafters, face nail three (3) 16d.
 - 17) Rafter to plate, toe nail three (3) 8d or framing anchor.
Brace 25 mm (1 inch) thick board to each stud and plate, face nail three (3) 8d.
 - 18) Built-up girders and beams 20d at 812 mm (32 inches) on center along each edge.
2. Bolts:
- a. Fit bolt heads and nuts bearing on wood with washers.
 - b. Countersink bolt heads flush with the surface of nailers.
 - c. Embed in concrete and solid masonry or provide expansion bolts. Special bolts or screws designed for anchor to solid masonry or concrete in drilled holes may be used.
 - d. Provide toggle bolts to hollow masonry or sheet metal.
 - e. Provide bolts to steel over 2.84 mm (0.112 inch, 11 gage) in thickness. Secure wood nailers to vertical structural steel members with bolts, placed one at ends of nailer and 610 mm (24 inch) intervals between end bolts. Provide clips to beam flanges.
3. Drill Screws to steel less than 2.84 mm (0.112 inch) thick.
- a. ASTM C1002 for steel less than 0.84 mm (0.033 inch) thick.
 - b. ASTM C954 for steel over 0.84 mm (0.033 inch) thick.
4. Power actuated drive pins may be provided where practical to anchor to solid masonry, concrete, or steel.

10-01-17

5. Do not anchor to wood plugs or nailing blocks in masonry or concrete. Provide metal plugs, inserts or similar fastening.
6. Screws to Join Wood:
 - a. Where shown or option to nails.
 - b. ASTM C1002, sized to provide not less than 25 mm (1 inch) penetration into anchorage member.
 - c. Spaced same as nails.
- C. Cut notch, or bore in accordance with AFPA WCD1 passage of ducts wires, bolts, pipes, conduits and to accommodate other work. Repair or replace miscut, misfit or damaged work.
- D. Blocking Nailers, and Furring:
 1. Install furring, blocking, nailers, and grounds where shown.
 2. Provide longest lengths practicable.
 3. Provide fire retardant treated wood blocking where shown at openings and where shown or specified.
 4. Layers of Blocking or Plates:
 - a. Stagger end joints between upper and lower pieces.
 - b. Nail at ends and not over 610 mm (24 inches) between ends.
 - c. Stagger nails from side to side of wood member over 127 mm (5 inches) in width.

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

10-01-17

Page Intentionally Left Blank

01-01-21

SECTION 06 20 00
FINISH CARPENTRY

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Interior millwork and casework.
- B. Items specified:
 - 1. Counter or Work Tops.
 - 2. Mounting Strips, Shelves, and Rods.

1.2 RELATED REQUIREMENTS

- A. Fabricated Metal brackets, bench supports and countertop legs: Section 05 50 00, METAL FABRICATIONS.
- B. Framing, furring and blocking: Section 06 10 00, ROUGH CARPENTRY.
- C. Wood Doors: Section 08 14 00, INTERIOR WOOD DOORS.
- D. Woodwork Finish and Color: Section 09 06 00, SCHEDULE FOR FINISHES.
- E. Color and Texture of Finish: Section 09 06 00, SCHEDULE FOR FINISHES.
- F. Other Countertops: Division 11, EQUIPMENT and Division 12, FURNISHINGS.
- G. Electrical light fixtures and duplex outlets: Division 26, ELECTRICAL.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. ASTM International:
 - A36/A36M-19.....Carbon Structural Steel.
 - A53/A53M-20.....Pipe, Steel, Black and Hot-Dipped Zinc Coated,
Welded and Seamless.
 - A240/A240M-20.....Chromium and Chromium-Nickel Stainless Steel
Plate, Sheet, and Strip for Pressure Vessels
and for General Applications.
 - B26/B26M-18e1.....Aluminum-Alloy Sand Castings.
 - B221-14.....Aluminum and Aluminum-Alloy Extruded Bars,
Rods, Wire, Profiles, and Tubes.
 - E84-20.....Surface Burning Characteristics of Building
Materials.
- C. American Hardboard Association (AHA):
 - A135.4-12.....Basic Hardboard.
- D. Architectural Woodwork Institute (AWI):
 - AWI-14.....Architectural Woodwork Standards, 2nd ed.

01-01-21

- E. Builders Hardware Manufacturers Association (BHMA):
 - A156.9-15.....Cabinet Hardware.
 - A156.11-14.....Cabinet Locks.
 - A156.16-18.....Auxiliary Hardware.
- F. Federal Specifications (Fed. Spec.):
 - A-A-1922A.....Shield Expansion (Calking Anchors, Single Lead).
 - A-A-1936A.....Adhesive, Contact, Neoprene Rubber.
 - FF-N-836E.....Nut: Square, Hexagon, Cap, Slotted, Castle, Knurled, Welding.
 - FF-S-111D(1).....Screw, Wood (Notice 1 inactive for new design).
 - MM-L-736C(1).....Lumber, Hardwood.
- G. Hardwood Plywood and Veneer Association (HPVA):
 - HP1-16.....Hardwood and Decorative Plywood.
- H. Military Specification (Mil. Spec):
 - MIL-L-19140E.....Lumber and Plywood, Fire-Retardant Treated.
- I. National Particleboard Association (NPA):
 - A208.1-09.....Wood Particleboard.
- J. National Electrical Manufacturers Association (NEMA):
 - LD 3-05.....High-Pressure Decorative Laminates.
- K. U.S. Department of Commerce, Product Standard (PS):
 - PS1-07.....Construction and Industrial Plywood.
 - PS20-10.....American Softwood Lumber Standard.

1.4 PREINSTALLATION MEETINGS

- A. Conduct pre-installation meeting at project site minimum 30 days before beginning Work of this section.
 - 1. Required Participants:
 - a. Contracting Officer's Representative.
 - b. VA Interior Designer.
 - c. Contractor.
 - d. Installer.
 - 2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
 - a. Installation schedule.
 - b. Installation sequence.
 - c. Preparatory work.

01-01-21

- d. Protection before, during, and after installation.
- e. Installation.
- f. Terminations.
- g. Transitions and connections to other work.
- h. Other items affecting successful completion.
- 3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
 - 1. Show size, configuration, and fabrication and installation details.
 - 2. Millwork items - Half full-size scale for sections and details 1: 50 (1/4 inch) for elevations and plans.
- C. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - a. Finish hardware.
 - b. Sinks with fittings.
 - c. Electrical components.
 - 2. List of acceptable sealers for fire retardant materials.
 - 3. Installation instructions.
- D. Samples:
 - 1. Plastic Laminate Finished Plywood and Particleboard: 150 mm by 300 mm (6 by 12 inches) long, each type and color.
 - a. Submit quantity required to show full color and texture range.
 - 2. Approved samples may be incorporated into work.
- E. Certificates: Certify products comply with specifications.
 - 1. Fire retardant treatment of materials.
 - 2. Moisture content of materials.
- F. Qualifications: Substantiate qualifications comply with specifications.
 - 1. Fabricator with project experience list.
 - 2. Installer with project experience list.

1.6 QUALITY ASSURANCE

- A. Fabricator Qualifications:
 - 1. Regularly fabricates specified products.

01-01-21

2. Fabricated specified products with satisfactory service on five similar installations for minimum five years.

a. Project Experience List: Provide contact names and addresses for completed projects.

B. Installer Qualifications:

1. Regularly installs specified products.

2. Installed specified products with satisfactory service on five similar installations for minimum five years.

a. Project Experience List: Provide contact names and addresses for completed projects.

1.7 DELIVERY, STORAGE AND HANDLING

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

D. Store products indoors in dry, weathertight conditioned facility.

E. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

A. Environment:

1. Product Temperature: Minimum 21 degrees C (70 degrees F) for minimum 48 hours before installation.

2. Work Area Ambient Conditions: HVAC systems are complete, operational, and maintaining facility design operating conditions continuously, beginning 48 hours before installation until Government occupancy.

3. Install products when building is permanently enclosed and when wet construction is completed, dried, and cured.

4. Do not install finish lumber or millwork in any room or space where wet process systems such as concrete, masonry, or plaster work is not complete and dry.

B. Field Measurements: Verify field conditions affecting fabrication and installation. Show field measurements on Submittal Drawings.

1. Coordinate field measurement and fabrication schedule to avoid delay.

01-01-21

1.9 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Grading and Marking: Factory mark with grade stamp lumber and plywood of inspection agency approved by the Board of Review, American Lumber Standard Committee.
- B. Lumber:
1. Sizes:
 - a. Lumber Size references, unless otherwise specified, are nominal sizes, and actual sizes within manufacturing tolerances allowed by the standard under which product is produced.
 - b. Millwork, standing and running trim, and rails: Actual size as shown or specified.
 2. Hardwood: MM-L-736, species as specified for each item.
 3. Softwood: PS-20, exposed to view appearance grades:
 - a. Use C select or D select, vertical grain for transparent finish including stain transparent finish.
 - b. Use Prime for painted or opaque finish.
 4. Use edge grain Wood members exposed to weather.
 5. Moisture Content:
 - a. 32 mm (1-1/4 inches) or less nominal thickness: 12 percent on 85 percent of the pieces and 15 percent on the remainder.
 - b. Other materials: According to standards under which the products are produced.
 6. Fire Retardant Treatment: Mil. Spec. MIL-L-19140E.
 - a. Treatment and performance inspection by an independent and qualified testing agency that establishes performance ratings.
 - b. Each piece of treated material bear identification of the testing agency and indicate performance according to such rating of flame spread and smoke developed.
 - c. Treat wood for maximum flame spread of 25 and smoke developed of 25.
 - d. Fire Resistant Softwood Plywood:
 - 1) Grade A, Exterior, plywood for treatment.

01-01-21

- 2) Surface Burning Characteristics: When tested according to ASTM E84.
 - a) Flame spread: 0 to 25.
 - b) Smoke developed: 100 maximum.
- e. Fire Resistant Hardwood Plywood:
 - 1) Core: Fire retardant treated softwood plywood.
 - 2) Hardwood face and back veneers untreated.
 - 3) Factory seal panel edges.
- C. Plywood:
 - 1. Softwood Plywood: DOC PS1.
 - a. Plywood, 13 mm (1/2 inch) and thicker; minimum five ply construction, except 32 mm (1-1/4 inch) thick plywood minimum seven ply.
 - b. Plastic Laminate Plywood Cores:
 - 1) Exterior Type, and species group.
 - 2) Veneer Grade: A-C.
 - c. Shelving Plywood:
 - 1) Interior Type, any species group.
 - 2) Veneer Grade: A-B or B-C.
 - d. Other: As specified for item.
- D. Particleboard: NPA A208.1.
 - 1. Plastic Laminate Particleboard Cores:
 - a. Type 1, Grade 1-M-3, Type 2, Grade 2-M-2, unless otherwise specified.
 - b. Type 2, Grade 2-M-2, exterior bond, for tops with sinks.
- E. Plastic Laminate: NEMA LD-3.
 - 1. Exposed Laminate Surfaces including Countertops, and Sides of Cabinet Doors: Grade HGL.
 - 2. Cabinet Interiors including Shelving: NEMA, CLS as a minimum, with the following:
 - a. Plastic laminate clad plywood or particle board.
 - b. Resin impregnated decorative paper thermally fused to particle board.
- F. Stainless Steel: ASTM A240, Type 302 or 304.
- G. Cast Aluminum: ASTM B26.
- H. Extruded Aluminum: ASTM B221.

01-01-21

2.2 PRODUCTS - GENERAL

- A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Provide each product from one manufacturer and from one production run.

2.3 FABRICATION

- A. General:
 - 1. AWI Custom Grade for interior millwork.
 - 2. Finish woodwork, free from pitch pockets.
 - 3. Trim, standard stock molding and members of same species, except where special profiles are shown.
 - 4. Plywood, minimum 13 mm (1/2 inch), unless otherwise shown on Drawings or specified.
 - 5. Edges of members in contact with concrete or masonry having a square corner caulking rebate.
 - 6. Fabricate members less than 4 m (14 feet) in length from one piece of lumber, back channeled and molded as shown.
 - 7. Fabricate interior trim and items of millwork to be painted from jointed, built-up, or laminated members, unless otherwise shown on Drawings or specified.
 - 8. Plastic Laminate Work:
 - a. Factory glued to either a plywood or a particle board core, thickness as shown on Drawings or specified.
 - b. Cover exposed edges with plastic laminate, except where aluminum, stainless steel, or plastic molded edge strips are shown on drawings or specified. Use plastic molded edge strips on 19 mm (3/4 inch) thick or thinner core material.
 - c. Provide plastic backing sheet on underside of countertops, vanity tops, thru-wall counter and sills including back splashes and end splashes of countertops.
 - d. Use backing sheet on concealed large panel surface when decorative face does not occur.
- B. Thru-Wall Counter or Pass-Thru Counter.
 - 1. Fabricate counter as shown on Drawings. Return hardwood edge to metal frame at ends. Fabricate to join other counters where shown.
 - 2. Cut to fit metal frame profile.
 - 3. Fabricate to receive sliding pass window track when shown; specified in Section 08 56 19, PASS WINDOWS.

01-01-21

4. Provide angle and fabricated shelf bracket supports.

C. Plastic Laminate Counter or Work Tops:

1. Thickness: 32 mm (1-1/4 inch) thick core unless shown otherwise.

a. Edges:

1) Decorative laminate for exposed edges of tops, back, and end splash, 38 mm (1-1/2 inches) wide.

2) Plastic or metal edges for top edges less than 38 mm (1-1/2 inches) wide.

b. Assemble backsplash and end splash to counter top.

c. Use one piece counters for straight runs.

d. Miter corners for field joints with overlapping blocking on underside of joint.

2. Fabricate wood counter for work benches as shown on Drawings.

2.4 ACCESSORIES

A. Hardware:

1. Rough Hardware:

a. Provide rough hardware with a standard plating, applied after punching, forming and assembly of parts; galvanized, cadmium plated, or zinc-coated by electric-galvanizing process. Galvanized where specified.

b. Fasteners:

1) Bolts with Nuts: FF-N-836.

2) Expansion Bolts: A-A-1922A.

3) Screws: Fed. Spec. FF-S-111.

2. Finish Hardware:

a. Cabinet Hardware: ANSI A156.9.

1) Door/Drawer Pulls: B02011. Door in seismic zones: B03182.

2) Drawer Slides: B05051 for drawers over 150 mm (6 inches) deep, B05052 for drawers 75 mm to 150 mm (3 to 6 inches) deep, and B05053 for drawers less than 75 mm (3 inches) deep.

3) Sliding Door Tracks: B07063.

4) Adjustable Shelf Standards: B4061 with shelf rest B04083.

5) Concealed Hinges: B1601, minimum 110 degree opening.

6) Butt Hinges: B01361, for flush doors, B01381 for inset lipped doors, and B01521 for overlay doors.

7) Cabinet Door Catch: B0371 or B03172.

01-01-21

- 8) Vertical Slotted Shelf Standard: B04103 with shelf brackets
B04113, sized for shelf depth.

b. Cabinet Locks: ANSI A156.11.

- 1) Drawers and Hinged Door: E07262.
- 2) Sliding Door: E07162.

c. Auxiliary Hardware: ANSI A156.16.

- 1) Shelf Bracket: B04041, japanned or enameled finish.
- 2) Combination Garment rod and Shelf Support: B04051 japanned or enamel finish.
- 3) Closet Bar: L03131 chrome finish of required length.
- 4) Handrail Brackets: L03081 or L03101.
 - a) Cast Aluminum, satin polished finish.
 - b) Cast Malleable Iron, japanned or enamel finish.

d. Steel Channel Frame and Leg supports for countertop. Fabricated under Section 05 50 00, METAL FABRICATIONS.

e. Thru-Wall Counter Brackets:

- 1) Steel angles drilled for fasteners on 100 mm (4 inches) centers.
- 2) Baked enamel prime coat finish.

f. Edge Strips Moldings:

- 1) Driven type "T" shape with serrated retaining stem; vinyl plastic to match plastic laminate color, stainless steel, or 3 mm (1/8 inch) thick extruded aluminum.
- 2) Stainless steel or extruded aluminum channels.
- 3) Stainless steel, number 4 finish; aluminum, mechanical applied medium satin finish, clear anodized 0.1 mm (0.4 mils) thick.

g. Rubber or Vinyl molding:

- 1) Rubber or vinyl standard stock and in longest lengths practicable.
- 2) Design for closures at joints with walls and adhesive anchorage.
- 3) Adhesive as recommended by molding manufacturer.

h. Primers: Manufacturer's standard primer for steel providing baked enamel finish.

B. Adhesive:

- 1. Plastic Laminate: Fed. Spec. A-A-1936.

01-01-21

2. Interior Millwork: Unextended urea resin, unextended melamine resin, phenol resin, or resorcinol resin.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
- C. Remove existing to permit new installation.
 1. Dispose of other removed materials.
- D. Clean substrates. Remove contaminants capable of affecting subsequently installed product's performance.

3.2 INSTALLATION

- A. Installation:
 1. Prime millwork receiving transparent finish and back-paint concealed surfaces.
 2. Fasten trim with fine finishing nails, screws, or glue as required.
 3. Set nails for putty stopping. Provide washers under bolt heads where no other bearing plate occurs.
 4. Seal cut edges of fire retardant treated wood materials with a certified acceptable sealer.
 5. Coordinate with plumbing and electrical work for installation of fixtures and service connections in millwork items.
 6. Plumb and level items unless shown otherwise.
 7. Nail finish at each blocking, lookout, or other nailer and intermediate points; toggle or expansion bolt in place where nails are not suitable.
 8. Apply adhesive uniformly for full contact between laminate and substrate.
- B. Shelves:
 1. Install mounting strip at back wall and end wall for shelves in closets where shown secured with toggle bolts at each end, not over 600 mm (24 inch) centers between ends.
 - a. Nail Shelf to mounting strip at ends and to back wall strip at not over 900 mm (36 inches) on center.
 - b. Install metal bracket, ANSI A156.16, B04041, not over 1200 mm (4 feet) centers when shelves exceed 1800 mm (6 feet) in length.

01-01-21

- c. Install metal bracket, ANSI A156.16, B04051, not over 1200 mm (4 feet) on centers where shelf length exceeds 1800 mm (6 feet) in length with metal rods, clothes hanger bars ANSI A156.16, L03131, of required length, full length of shelf.
- 2. Install vertical slotted shelf standards to studs with toggle bolts through each fastener opening. Double slotted shelf standards is acceptable where adjacent shelves terminate.
 - a. Install brackets providing supports for shelf not over 900 mm (36 inches) on center and within 13 mm (1/2 inch) of shelf end unless shown otherwise.
 - b. Install shelves on brackets so front edge is restrained by bracket.

3.3 CLEANING

- A. Remove excess adhesive before adhesive sets.
- B. Clean exposed surfaces. Remove contaminants and stains.
- C. Touch up damaged factory finishes.
 - 1. Repair painted surfaces with touch up primer.

3.4 PROTECTION

- A. Protect finish carpentry from traffic and construction operations.
- B. Cover finish carpentry with reinforced kraft paper, and plywood or hardboard.
- C. Remove protective materials immediately before acceptance.
- D. Repair damage.

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

01-01-21

Page Intentionally Left Blank

SECTION 06 65 00
PLASTIC SIMULATED WOOD TRIM

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Free-Foam Cellular PVC Trim Boards for:
 - 1. Frieze boards.
 - 2. Water tables.
 - 3. Architectural millwork.

1.2 RELATED SECTIONS

- A. Section 07 92 00 - JOINT SEALANTS.
- B. Section 09 29 00 - GYPSUM BOARD.
- C. Section 09 90 00 - PAINTING.

1.3 REFERENCES

- A. ASTM D 792 - Density and Specific Gravity of Plastics by Displacement.
- B. ASTM D 570 - Water Absorption of Plastics.
- C. ASTM D 638 - Tensile Properties of Plastics.
- D. ASTM D 790 - Flexural Properties of Unreinforced and Reinforced Plastics and Electrical Insulating Materials.
- E. ASTM D 1761 - Mechanical Fasteners in Wood.
- F. ASTM D 5420 - Standard Test Method for Impact Resistance of Flat, Rigid Plastic Specimen by means of a Striker Impacted by a Falling Weight.
- G. ASTM D 256 - Determining the Pendulum Impact Resistance of Plastics.
- H. ASTM D 696 - Coefficient of Linear Thermal Expansion of Plastics Between minus 30 degrees C and plus 30 degrees C with a Vitreous Silica Dilatometer.
- I. ASTM D 635 - Rate of Burning and/or Extent and Time of Burning of Plastics in a Horizontal Position.
- J. ASTM E 84 - Surface Burning Characteristics of Building Materials.
- K. ASTM D 648 - Deflection Temperature of Plastics Under Flexural Load in the Edgewise Position.
- L. ASTM D 3679 - Standard Specification for Rigid Poly Vinyl Chloride (PVC) Siding.
- M. ASTM D 2240 - Rubber Property - Durometer Hardness
- N. ASTM D 3345 - Standard Test Method for Laboratory Evaluation of Wood

and Other Cellulosic Materials for Resistance to Termites.

1.4 SUBMITTALS

- A. Submit under provisions of Section 01 30 00 - Administrative Requirements.
- B. Product Data: Manufacturer's data sheets on each product to be used, including:
 - 1. Preparation instructions and recommendations.
 - 2. Storage and handling requirements and recommendations.
 - 3. Installation methods.
- C. Verification Samples: For each product specified, two samples, minimum size 6 inches (150 mm) long, representing actual product, color, and finish.
- D. Manufacturer's Certificates: Certify products meet or exceed specified requirements.

1.5 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Manufacturer with a minimum of 5 years producing PVC trim products.
- B. Installer Qualifications: Installer with a minimum of 3 years experience with the installation of PVC trim products.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Store products on a flat and level surface on a full shipping pallet. Handle materials to prevent damage to product edges and corners.
- B. Store materials under a protective covering to prevent jobsite dirt and residue from collecting on the boards.

1.7 SEQUENCING

- A. Ensure that products of this section are supplied to affected trades in time to prevent interruption of construction progress.

1.8 PROJECT CONDITIONS

- A. Maintain environmental conditions (temperature, humidity, and ventilation) within limits recommended by manufacturer for optimum results. Do not install products under environmental conditions outside manufacturer's absolute limits.

1.9 WARRANTY

- A. Provide manufacturer's 30 year transferable warranty against defects in manufacturing that causes the products to rot, corrode, delaminate, or

excessively swell from moisture.

PART 2 PRODUCTS

2.1 MATERIALS

A. PVC: Free Foam Cellular PVC material with a small-cell microstructure and density of .55 grams/cm³.

1. Performance and physical characteristic requirements:

a. Physical:

- 1) Density: 0.55 g/cm³ when tested in accordance with ASTM D 792.
- 2) Water Absorption: Less than 0.50 percent when tested in accordance with ASTM D 570

b. Mechanical:

- 1) Tensile Strength: 3582 psi when tested in accordance with ASTM D 638.
- 2) Tensile Modulus: 107,000 psi when tested in accordance with ASTM D 638.
- 3) Flexural Strength: 5179 psi when tested in accordance with ASTM D 790.
- 4) Flexural Modulus: 215,600 psi when tested in accordance with ASTM D 790.
- 5) Modulus of Elasticity: 209,500 psi when tested in accordance with ASTM D 638.
- 6) Elongation: 9.0 percent when tested in accordance with ASTM D 638.
- 7) Nail Hold: 398 lbf/in of penetration when tested in accordance with ASTM D 1761.
- 8) Screw Hold: 240 lbf/in of penetration when tested in accordance with ASTM D 1761.
- 9) Staple Hold: 69 lbf/in of penetration when tested in accordance with ASTM D 1761.
- 10) Gardner Impact: 34 In-lbs when tested in accordance with ASTM D 5420.
- 11) Notched Izod Impact: 0.270 Ft-lbs/inch when tested in accordance with ASTM D 256.
- 12) Termite Resistance: Rating of 10 as tested in accordance with ASTM D 3345.

- 13) Hardness: 60+ when tested in accordance with ASTM D 2240.
- 14) Parking Garage Ceiling Soffit System: 225 psf when tested in accordance with UL 580.

c. Thermal:

- 1) Coefficient of Linear Expansion: 3.25×10^{-5} in/in/degrees F when tested in accordance with ASTM D 696.
- 2) Burning Rate: Failed to Ignite when tested in accordance with ASTM D 635.
- 3) Flame Spread Index: 25 when tested in accordance with ASTM E 84.
- 4) Heat Deflection Temp (264 psi): 146 degrees F when tested in accordance with ASTM D 648.
- 5) Heat Deflection Temp (66 psi): 153 degrees F when tested in accordance with ASTM D 648.
- 6) Oil Canning (@ 140 degrees F: Passed when tested in accordance with ASTM D 648.

2. Manufacturing Tolerances:

- a. Variation in component length: Minus 0.00 / plus 1.00.
- b. Variation in component width: plus or minus 1/32 inch.
- c. Variation in component thickness: plus or minus 1/32 inch.
- d. Variation in component edge cut: plus or minus 2 degrees.
- e. Variation in Density plus or minus 0.02 grams per cubic centimeter.

3. Workmanship, Finish, and Appearance:

- a. Free Foam Cellular PVC that is homogeneous and free of voids, holes, cracks, foreign inclusions and other defects. Edges must be square and top and bottom surfaces shall be flat with no convex or concave deviation.
- b. Uniform surface free from cupping, warping, and twisting.

2.2 SIMULATED WOOD TRIM

A. Sheet Board: Cut to dimensions indicated on drawings.

1. Finish:

- a. Smooth/Smooth finish.

2.3 ACCESSORIES

A. Fasteners:

1. Use 12 gauge stainless steel fasteners designed for wood trim and siding. Fastener should have sufficient flexural and tensile strength to resist bending.
2. Use fasteners with thin shanks, blunt points, and full round heads that are long enough to penetrate the substrate a minimum of 1-1/2 inches.
3. Do not use staples, small brads and wire nails. Avoid using fine threaded wood screws and ring-shank fasteners.
4. Use standard nail guns with a pressure setting between 70 psi and 100 psi. The recommended pressure depends on the type of gun, type of nail, ambient temperature, and the substrate. Care should be taken not to overdrive the nail into the material.
5. Pre-drilling is not typically required unless large fasteners are used or the product is installed during temperatures below 40 degrees F.
6. Use two fasteners for every framing member for trimboard applications. Sheet and trimboards 8 inches and wider require additional fasteners.
7. Install fasteners no more than 2 inches from the end of each board.
8. Avoid fastening simulated wood trim over hollow or uneven areas. Fasten onto flat, solid substrates.
9. 3/8 inch and 1/2 inch thick Sheet and Beadboard is not designed to be ripped and used for trim applications. These products must be glued and mechanically fastened to the substrate.

B. Adhesives: Finishing System.

1. All bonded surfaces must be smooth, clean, and in complete contact with each other for best results.
2. Adhere simulated wood trim to itself with PVC cement or cellular PVC adhesives to prevent joint separation. Acceptable adhesives are PVC Trim Welder, IPS Weld-On 705 (white), and Zevo PVC Trim adhesive.
3. PVC cements cure quickly (3-5 minutes or less), and have a limited working time.
4. Scarf cut joints are recommended where applicable.
5. Bonded joints should be secured with fasteners and fastened with two rows on each side of the joint.

6. When bonding simulated wood trim to other substrates, consult the adhesive manufacturer to determine suitability.

C. Nail Hole Filler: Cortex plug system by Fasten Master.

D. Sealants:

1. Use urethane, polyurethane, polymer blends or acrylic based sealants that do not contain silicone as specified in Section 07 91 16 - Joint Gaskets.

PART 3 EXECUTION

3.1 EXAMINATION

A. Do not begin installation until substrates have been properly prepared.

B. If substrate preparation is the responsibility of another installer, notify Architect of unsatisfactory preparation before proceeding.

3.2 PREPARATION

A. Clean surfaces thoroughly prior to installation.

B. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.

3.3 INSTALLATION

A. Install in accordance with manufacturer's instructions.

B. Cutting:

1. Simulated wood trim can be cut using standard woodworking saws. Conventional carbide-tipped blades designed for cutting wood are preferred. Avoid using fine-tooth metal-cutting blades.

2. Rough-cut edges are typically caused by excessive friction, poor board support, or worn or improper tooling.

C. Drilling:

1. Simulated wood trim can be drilled using standard woodworking drill bits. Do not use drill bits made for rigid PVC.

2. Avoid frictional heat build-up.

3. Remove shavings periodically from a drill hole as necessary.

D. Edge Finishing:

1. Traditional sanding, grinding or filing tools used for woodworking are preferred.

E. Nail Location:

1. For trimboard applications use two fasteners per framing member.

2. Use additional fasteners are required for trimboard 8 inches and wider.

3. Install fasteners a maximum of 2 inches from the end of each board.

F. Expansion and Contraction:

1. Simulated wood trim expands and contracts with changes in temperature. Properly fastening along the entire length is required to minimize expansion and contraction.

2. Allow 3/16 inch space per 18-foot run of trim for expansion and contraction.

3. Bond joints between pieces of simulated wood trim to eliminate separation.

4. Allow expansion and contraction space at the ends of long runs.

G. Cleaning:

1. Clean simulated wood trim with mild detergent and water.

2. Products with pumice, such as Soft Scrub, may be applied with a nylon brush.

3. For more stubborn stains use a mild household cleaner and degreaser like Clorox Cleanup, Clorox Outdoors, Denatured Alcohol, Bleach, Mr. Clean Magic Eraser or Corte Clean with nylon brush.

H. Painting:

1. Be sure surface to be painted is clean, dry, and free of dirt, loose or peeling paint, mildew, chalk, grease and any other surface contaminants before paint application.

2. Finish nail holes with nail hole filler or a UV resistant acrylic caulk.

3. Paint as specified in Section 09 90 00 - PAINTING.

a. Use 100 percent acrylic latex or 100 percent acrylic latex with urethane additive paint with a light reflective value (LRV) equal to or greater than 55 units.

b. Follow the paint manufacturer's application recommendations.

3.4 PROTECTION

A. Protect installed products until completion of project.

B. Touch-up, repair or replace damaged products before Substantial Completion.

- - - END - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

Page Intentionally Left Blank

01-01-21

SECTION 07 21 13
THERMAL INSULATION

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Thermal insulation.
 - a. Board insulation at exterior framed walls
 - b. Spray foam insulation at exterior roof framing
2. Acoustical insulation.
 - a. Batt and blanket insulation at interior framed partitions.

1.2 RELATED WORK

- A. Section 07 84 00, FIRESTOPPING: Safing Insulation.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

- C516-19.....Vermiculite Loose Fill Thermal Insulation.
- C549-18.....Perlite Loose Fill Insulation.
- C552-17e1Cellular Glass Thermal Insulation.
- C553-13(2019).....Mineral Fiber Blanket Thermal Insulation for
Commercial and Industrial Applications.
- C578-19.....Rigid, Cellular Polystyrene Thermal Insulation.
- C591-20.....Unfaced Preformed Rigid Cellular
Polyisocyanurate Thermal Insulation.
- C612-14(2019).....Mineral Fiber Block and Board Thermal
Insulation.
- C665-17.....Mineral-Fiber Blanket Thermal Insulation for
Light Frame Construction and Manufactured
Housing.
- C728-17a.....Perlite Thermal Insulation Board.
- C954-18.....Steel Drill Screws for the Application of
Gypsum Panel Products or Metal Plaster Base to
Steel Studs From 0.033 (0.84 mm) inch to 0.112
inch (2.84 mm) in thickness.
- C1002-18.....Steel Self-Piercing Tapping Screws for
Application of Gypsum Panel Products or Metal
Plaster Bases to Wood Studs or Steel Studs.

01-01-21

D312/D312M-16a.....Asphalt Used in Roofing.

E84-20.....Surface Burning Characteristics of Building
Materials.

F1667-18a.....Driven Fasteners: Nails, Spikes, and Staples.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
 - 1. Show insulation type, thickness, and R-value for each location.
- C. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Adhesive indicating manufacturer recommendation for each application.

1.5 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.6 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight facility.
- B. Protect products from damage during handling and construction operations.
- C. Protect foam plastic insulation from UV exposure.

1.7 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 INSULATION - GENERAL

- A. Insulation Thickness:
 - 1. Provide thickness required by R-value shown on drawings.
 - 2. Provide thickness indicated when R-value is not shown on drawings.
- B. Insulation Types:
 - 1. Provide one insulation type for each application.

2.2 THERMAL INSULATION

- A. Exterior Framing or Furring Insulation:
 - 1. Polyisocyanurate Thermal Insulation .

01-01-21

2.3 ACOUSTICAL INSULATION

A. Semi Rigid, Batts and Blankets:

1. Widths and lengths to fit tight against framing.
2. Mineral Fiber Batt or Blankets: ASTM C665 unfaced .
3. Maximum Surface Burning Characteristics: ASTM E84.
 - a. Flame Spread Rating: 25.
 - b. Smoke Developed Rating: 450.

2.4 ACCESSORIES

A. Fasteners:

1. Staples or Nails: ASTM F1667, zinc-coated, size and type to suit application.
2. Screws: ASTM C954 or ASTM C1002, size and length to suit application with washer minimum 50 mm (2 inches) diameter.
3. Impaling Pins: Steel pins with head minimum 50 mm (2 inches) diameter.
 - a. Length: As required to extend beyond insulation and retain cap washer when washer is placed on pin.
 - b. Adhesive: Type recommended by manufacturer to suit application.

B. Insulation Adhesive: Nonflammable type recommended by insulation manufacturer to suit application.

C. Tape: Pressure sensitive adhesive on one face.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
- C. Clean substrates. Remove contaminants capable of affecting subsequently installed product's performance.

3.2 INSTALLATION - GENERAL

- A. Install products according to manufacturer's instructions and approved submittal drawings.
 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
- B. Install insulation with vapor barrier facing the heated side, unless indicated otherwise.
- C. Install board insulation with joints close and flush, in regular courses, and with end joints staggered.

01-01-21

- D. Install batt and blanket insulation with joints tight. Fill framing voids completely. Seal facing cuts, tears, and unlapped joints with tape.
- E. Fit insulation tight against adjoining construction and penetrations, unless indicated otherwise.

3.3 THERMAL INSULATION

A. Exterior Framing or Furring Insulation:

1. General:

- a. Open voids are not acceptable.
- b. Pack insulation around door frames and windows, in building expansion joints, door soffits, and other voids.
- c. Pack behind outlets, around pipes, ducts, and services encased in walls.
- d. Hold insulation in place with pressure sensitive tape.
- e. Lap facing flanges together over framing for continuous surface. Seal penetrations through insulation and facings.

- 2. Metal Studs: Fasten insulation between metal studs, framing, and furring with pressure sensitive tape continuous along flanged edges.

3. Ceilings and Soffits:

a. Metal Framing:

- 1) Fasten insulation between metal framing with pressure sensitive tape continuous along flanged edges.
- 2) At metal framing and ceilings suspension systems, install insulation above suspended ceilings and metal framing at right angles to main runners and framing.
- 3) Tape insulation tightly together without gaps. Cover metal framing members with insulation.

b. Ceiling Transitions:

- 1) In areas where suspended ceilings transition to structural ceiling, install blanket or batt insulation.
- 2) Extend insulation from suspended ceiling to underside of structure above.
- 3) Secure blanket and batt with continuous cleats to structure above.

3.4 ACOUSTICAL INSULATION

A. General:

- 1. Install insulation without voids.

01-01-21

2. Pack insulation around door frames and windows, in building expansion joints, door soffits, and other voids.
3. Pack behind outlets, around pipes, ducts, and services encased in walls.
4. Hold insulation in place with pressure sensitive tape.
5. Lap facer flanges together over framing for continuous surface. Seal all penetrations through the insulation and facers.
6. Do not compress insulation below required thickness except where embedded items prevent required thickness.

B. Semi Rigid, Batts and Blankets:

1. When insulation is not full thickness of cavity, adhere insulation to one side of cavity, maintaining continuity of insulation and covering penetrations or embedments.
 - a. Wood Framing:
 - 1) Fasten blanket insulation between wood framing and joists with nails or staples through flanged edges of insulation.
 - 2) Space fastenings maximum 150 mm (6 inches) on center.
 - b. Metal Framing:
 - 1) Fasten insulation between metal framing with pressure sensitive tape continuous along flanged edges.
 - 2) At metal framing or ceilings suspension systems, install blanket insulation above suspended ceilings or metal framing at right angles to the main runners or framing.
 - 3) Tape insulation tightly together so no gaps occur and metal framing members are covered by insulation.

3.5 CLEANING

- A. Remove excess adhesive before adhesive sets.

3.6 PROTECTION

- A. Protect insulation from construction operations.
- B. Repair damage.

- - E N D - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

01-01-21

Page Intentionally Left Blank

SECTION 07 21 19
SPRAY FOAM INSULATION

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Spray polyurethane foam insulation.

1.2 RELATED SECTIONS

- A. Section 06 10 00 - Rough Carpentry
- B. Section 07 92 00 - Joint Sealants
- C. Section 09 29 00 - Gypsum Board

1.3 REFERENCES

- A. American Society for Testing and Materials (ASTM):
 - 1. ASTM C 518 - Standard Test Method for Steady-State Thermal Transmission Properties by Means of the Heat Flow Meter Apparatus.
 - 2. ASTM C 1029 - Standard Specification for Spray-Applied Rigid Cellular Polyurethane Thermal Insulation.
 - 3. ASTM C 1338 - Standard Test Method for Determining Fungi Resistance of Materials and Facings.
 - 4. ASTM C 1848 - Standard Practice for Installation of High-Pressure Spray Polyurethane Foam Insulation for the Building Enclosure
 - 5. ASTM D 1621 - Standard Test Method for Compressive Properties of Rigid Cellular Plastics.
 - 6. ASTM D 1622 - Standard Test Method for Apparent Density of Rigid Cellular Plastics.
 - 7. ASTM D 1623 - Standard Test Method for Tensile and Tensile Adhesion Properties of Rigid Cellular Plastics.
 - 8. ASTM D 2126 - Standard Test Method for Response of Rigid Cellular Plastics to Thermal and Humid Aging.
 - 9. ASTM D 2842 - Standard Test Method for Water Absorption of Rigid Cellular Plastics.
 - 10. ASTM D 6226 - Standard Test Method for Open Cell Content of Rigid Cellular Plastics.
 - 11. ASTM E 119 - Standard Test Methods for Fire Test of Building Construction Materials.
 - 12. ASTM E 84 - Standard Test Method for Surface Burning Characteristics of Building Materials.

13. ASTM E 96 - Standard Test Method for Water Vapor Transmission of Materials.
14. ASTM E 283 - Standard Test Method for Determining Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen.
- B. National Fire Protection Association (NFPA):
 1. NFPA 259 (UBC 26-1) Standard Test Method for Potential Heat of Building Materials.
 2. NFPA 275, Standard Method of Fire Tests for the Evaluation of Thermal Barriers.
 3. NFPA 285, Standard Fire Test Method for Evaluation of Fire Propagation Characteristics of Exterior Non-Load-Bearing Wall Assemblies Containing Combustible Components.
 4. NFPA 286, Standard Methods of Fire Tests for Evaluating Contribution of Wall and Ceiling Interior Finish to Room Fire Growth.
- C. International Code Council Evaluation Services:
 1. AC-377 Acceptance Criteria for Spray-Applied Foam Plastic Insulation
 2. International Building Code®, 2021, 2018, 2015, 2012
 3. International Residential Code®, 2021, 2018, 2015, 2012
- D. Underwriters Laboratories (UL):
 1. UL 263, UL 723 - Standard for Test for Surface Burning Characteristics of Building Materials.
 2. UL 1715 - Fire Test of Interior Finish Material.
- E. Center for the Polyurethanes Industry - Health and Safety Product Stewardship Workbook for High Pressure Application of Spray Polyurethane Foam, June 2016. See <http://www.spraypolyurethane.org> for industry guidelines.

1.4 SUBMITTALS

- A. Product Data: Manufacturer's data on products to be installed including:
 1. Technical Data Sheets
 2. Safety Data Sheets
 3. Application or installation instructions.
- B. Certifications: If manufacturer's published data sheets do not indicate compliance with all specification requirements, provide letter of certification that all products comply with the specification

requirements; include primers (if required), foam, vapor retarder and thermal barriers.

1.5 QUALITY ASSURANCE

Installer Qualifications: A firm with experience installing insulation systems of the type specified.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Provide materials packaged in the manufacturer's original, tightly sealed containers or unopened packages, clearly labeled with the manufacturer's name, product identification, safety information, and batch or lot numbers where appropriate. Where materials are covered by a referenced specification, the labels shall bear the specification number, type and class, as applicable.
- B. Comply with the manufacturer's written instructions for the storage, handling, and protection of products, both prior to and during installation. Store materials out of the weather and out of direct sunlight in locations where the temperatures are within the limits specified by the manufacturer.

1.6 PROJECT CONDITIONS

- A. Comply with the manufacturer's instructions and industry recommendations as to handling and safety procedures.

1.7 WARRANTY

- A. Provide manufacturers standard 3-year Limited Warranty.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Foam: Sprayed-in-place two-component closed-cell polyurethane foam system utilizing an EPA-approved, zero ozone depleting blowing agent. Foam products to be designed for use in commercial insulation applications, made by combining an isocyanate (A) component with a polyol (B) component, with the following physical characteristics:
 - 1. ASTM C 1029 - Type II Compliant
 - 2. Density in Place: 2.0 to 2.3lb/cu ft, when tested in accordance with ASTM D 1622.
 - 3. Compressive Strength: 26 psi, when tested in accordance with ASTM D 1621.
 - 4. Closed Cell Content: >90%, when tested in accordance with ASTM D 6226.
 - 5. R-Value: 6.9 @ 1", 25 @ 3.5", when tested in accordance with ASTM C518.

6. Vapor Permeance (perms): 1.09 - 1.28 @ 1" thickness, when tested in accordance with ASTM E-96.
 7. Flame Spread Index: Less than or equal to 25, when tested in accordance with ASTM E 84.
 8. Smoke Developed Index: Less than or equal to 450, when tested in accordance with ASTM E 84.
 9. Air Leakage: <0.005 L/s*m² @ 75 Pa when tested in accordance with ASTM E 283
- B. Primers: (if required): -The primer to be applied must be specifically selected for the given substrate to be primed and must be compatible with the spray polyurethane foam.
1. Wood: chlorinated rubber, modified alkyds, others.
 2. Steel: modified alkyds, epoxy, acrylics, others (typically including rust inhibitors).
 3. Galvanized: vinyl copolymer acrylic, "vinyl wash primer", modified alkyds, others.
 4. Concrete/masonry: chlorinated rubber, vinyl copolymer acrylic, asphaltic, other.
- C. Fire Resistant assemblies available, tested in accordance with UL 263.

PART 3 - EXECUTION

3.1 GENERAL

- A. Comply with the instructions and recommendations of the foam and other material manufacturers.
- B. Familiarize all installers with correct and safe application and handling procedures:
1. Workbook for High Pressure application of Spray Polyurethane Foam, June 2016. See www.spraypolyurethane.org for industry guidelines.
 2. Refer to appropriate Safety Data Sheets (SDS) and Technical Product Data Sheets.
- C. Installer(s) must be able to provide documentation that they have completed the Spray Polyurethane Foam Chemical Health & Safety Training from the Center for Polyurethanes Industry, which can be found on the following website: www.spraypolyurethane.org.

3.2 PREPARATION

- A. Galvanized Steel and Unpainted Steel: Clean as recommended by primer manufacturer.

- B. Non-Ferrous Metal: Clean galvanized metal, aluminum, and stainless-steel surfaces as recommended by the manufacturer of materials to be applied.
 - 1. If metal surface is free of loose scale, rust, weathered or chalking paint, clean using compressed air jet, vacuum equipment, and hand or power broom to remove loose dirt. Remove grease, oil and other contaminants using proper cleaning solutions.
- C. Remove loose dirt, dust and debris by using compressed air, vacuum equipment or brooming. Remove oil, grease, form release agents, laitance, and other contaminants using proper cleaning solutions. Do not wash wood or porous materials with water.
- D. Grout, tape, or calk all joint openings that exceed 1/4 inch (6 mm) in width.

3.3 FOAM APPLICATION

- A. Do not begin application of foam until all preparation requirements have been completed.
- B. Do not apply foam when the temperature is below the minimum specified in the technical data sheet for the specific material selected.
- C. Apply foam in accordance with the BASF specifications and processing guidelines.
- D. Apply foam to a __8__ inch (_203__ mm) thickness, with pass thickness of 1/2 inch (13 mm) to 4 inches (50 mm). Allow cooling time of 10 minutes per inch applied between passes.

3.4 FIELD QUALITY CONTROL

- A. The installer shall complete the installation certificate documenting the foam type, manufacturer, product name, lot/batch number, as well as any fire protective products that have been used. The installation card shall be signed by the Insulation Contractor representative and delivered to the general contractor or building owner.

- - - END - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

Page Intentionally Left Blank

01-01-21

SECTION 07 27 26

FLUID-APPLIED MEMBRANE AIR BARRIERS, VAPOR PERMEABLE

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Fluid-applied vapor-permeable air barrier at exterior above grade wall assemblies.
 - 2. Connection to adjacent air barrier components providing a durable, continuous, full building air barrier.

1.2 RELATED WORK

- A. Section 01 45 29 TESTING LABORATORY SERVICES: General Quality Assurance and Quality Control Requirements.
- B. Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS: Commissioning of building envelope components.
- C. Section 07 40 00 ROOFING AND SIDING PANELS: Flashing Components of Factory Finished Roofing and Wall Systems Requiring Air Barrier Transitions.
- D. Section 07 60 00 FLASHING AND SHEET METAL: Metal Flashing Requiring Air Barrier Transitions.
- E. Section 07 92 00, JOINT SEALANTS: Joint Sealants.
- F. Section 09 29 00 GYPSUM BOARD: Wall Sheathings Air Barrier Substrates.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. Air Barrier Association of America (ABAA):
Quality Assurance Program.
- C. ASTM International (ASTM):
 - C920-18.....Elastomeric Joint Sealants.
 - C1193-16.....Use of Joint Sealants.
 - D412-16.....Vulcanized Rubber and Thermoplastic
Elastomers-Tension.
 - E96/E96M-16.....Water Vapor Transmission of Materials.
 - E162-16.....Surface Flammability of Materials Using a
Radiant Heat Energy Source.

01-01-21

E783-02(2018).....Field Measurement of Air Leakage Through
Installed Exterior Windows and Doors.
E1186-17.....Air Leakage Site Detection in Building
Envelopes and Air Barrier Systems.
E2178-13.....Air Permanence of Building Materials.
E2357-18.....Determining Air Leakage of Air Barrier
Assemblies.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
 - 1. Show size, configuration, and fabrication and installation details.
- B. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Installation instructions.
- C. Test reports:
 - 1. Submit field inspection and test reports.
- D. Certificates: Certify each product complies with specifications.
 - 1. Compatibility: Certify products are compatible with adjacent materials.
- E. Qualifications: Substantiate qualifications comply with specifications.
 - 1. Manufacturer
 - 2. Installer.
 - a. Include personnel qualifications.
 - b. Field supervisor qualifications.
 - c. Certify installer approval by air barrier manufacturer.

1.5 QUALITY ASSURANCE

- A. Coordinate work with adjacent and related work to provide continuous, unbroken, durable air barrier system.
- B. Manufacturer Qualifications:
 - 1. Regularly and presently manufactures specified products.
 - 2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.
- C. Installer Qualifications:
 - 1. Regularly and presently installs specified products.
 - 2. Approved by manufacturer.

01-01-21

3. Applicators trained and certified by manufacturer of air barrier system.
4. Full time on-site field supervisor has completed three projects of similar scope within last year.
5. Field Supervisor: Holds Sealant, Waterproofing, and Restoration Institute (SWRI) Wall Coating Validation Program Certificate, or similar qualification acceptable to Contracting Officer's Representative.

D. Testing Agency Qualifications:

1. Accredited by International Accreditation Service, Inc. or American Association for Laboratory Accreditation.
2. Staff experienced in installation of specified system and qualified to perform observation and inspection specified and determine compliance with project requirements.

1.6 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight, conditioned facility.
- B. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

- A. Environment:
 1. Work Area Ambient Temperature Range: 4 to 32 degrees C (40 to 90 degrees F) continuously, beginning 48 hours before installation.
 2. Surface Requirements: visibly dry, and complying with manufacturer's instructions.

1.9 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

01-01-21

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

- A. Air-Barrier Assembly Air Leakage: Maximum 0.2 L/s/square meter (0.04 cfm/square feet) of surface area at 75 Pa (1.57 psf) differential pressure when tested according to ASTM E2357.
- B. Provide full system of compatible materials under conditions of service and application required. Compatibility based on testing by material manufacturer.
- C. Perform as continuous vapor permeable air barrier and moisture drainage plane.
- D. Transition to adjacent flashings and discharge water to building exterior.
- E. Accommodate substrate movement and seal expansion and control joints, construction material transitions, opening transitions, penetrations, and perimeter conditions without moisture deterioration and air leakage exceeding performance requirements.

2.2 PRODUCTS - GENERAL

- A. Provide air barrier system components from one manufacturer.

2.3 AIR BARRIER

- A. Fluid-Applied, Vapor-Permeable Membrane Air Barrier:
 - 1. Elastomeric, modified bituminous or synthetic polymer membrane.
 - 2. Air Permeance: ASTM E2178: 0.02 L/s/square meter (0.004 cfm/square feet) of surface area at 75 Pa (1.57 psf) differential pressure.
 - 3. Vapor Permeance: ASTM E96/E96M: Minimum 580 ng/Pa/s/square meter (10 perms).
 - 4. Elongation: Ultimate, ASTM D412, Die C: 200 percent, minimum.
 - 5. Thickness: Minimum 1.0 mm (40 mils) dry film thickness, applied in single continuous coat.
 - 6. Surface Burning Characteristics: When tested according to ASTM E84.
 - a. Flame Spread Rating: 25 maximum.
 - b. Smoke Developed Rating: 450 maximum.

2.4 ACCESSORIES

- A. Primer: Waterborne primer complying with VOC requirements, recommended air barrier manufacturer to suit application.

01-01-21

- B. Counterflashing Sheet: Modified bituminous, minimum 1.0 mm (40 mils) thick, self-adhering composite sheet consisting of minimum 0.8 mm (33 mils) of rubberized asphalt laminated to polyethylene film.
- C. Substrate Patching Material: Manufacturer's standard trowel-grade filler material.
- D. Sprayed Polyurethane Foam Sealant: Foamed-in-place, 24 to 32 kg/cu. m (1.5 to 2.0 pcf) density, with maximum flame-spread index of 25 when tested according to ASTM E84.
- E. Flexible Opening Transition: Cured low-modulus silicone extrusion with reinforcing ribs, sized to fit opening widths, designed for adhesion to or insertion into aluminum framing extrusions, and compatible with air barrier system materials and accessories.
- F. Joint Sealant: ASTM C920, single-component, neutral-curing silicone; Class 100/50 (low modulus), Grade NS, Use NT related to exposure, approved by membrane air barrier manufacturer for adhesion and compatibility with membrane air barrier and accessories.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
- C. Correct substrate deficiencies:
 - 1. Remove projections and excess materials and fill voids with substrate patching material.
 - 2. Remove contaminants capable of affecting subsequently installed product's performance.
- D. Prepare and treat substrate joints and cracks according to ASTM C1193 and membrane air barrier manufacturer's instructions.

3.2 INSTALLATION - AIR BARRIER

- A. Install products according to manufacturer's instructions.
- B. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
- C. Apply primer.
- D. Install transition strips and accessory materials.
- E. Seal air barrier to adjacent components of building air barrier system.

01-01-21

- F. Install flexible opening transition at each opening perimeter. Extend transition onto each substrate minimum 75 mm (3 inches).
 - 1. Fill gaps at perimeter of openings with foam sealant.
- G. At penetrations, seal transition strips around penetrating objects with termination mastic.
 - 1. Fill gaps at perimeter of penetrations with sprayed polyurethane foam sealant.
- H. At top of through-wall flashings, seal with continuous transition strip of manufacturer's recommended material to suit application.
- I. Apply air barrier in full contact with substrate to produce continuous seal with transitions.
- J. Apply fluid membrane in thickness recommended by manufacturer, and minimum specified thickness.
- K. Leave air barrier exposed until tested and inspected and approved by Contracting Officer's Representative.

3.3 FIELD QUALITY CONTROL

- A. Field Inspections and Tests: Performed by testing laboratory specified in Section 01 45 29, TESTING LABORATORY SERVICES.
 - 1. Perform inspections and tests before concealing air barrier with subsequent work.
- B. Inspections:
 - 1. Compatibility of materials within air barrier system and adjacent materials.
 - 2. Suitability of substrate and support for air barrier.
 - 3. Suitability of conditions under which air barrier is applied.
 - 4. Adequacy of substrate priming.
 - 5. Application and treatment of joints and edges of transition strips, flexible opening transitions, and accessory materials.
 - 6. Continuity and gap-free installation of air barrier, transition strips, and accessory materials.
- C. Defective Work:
 - 1. Correct deficiencies, make necessary repairs, and retest as required to demonstrate compliance with specified requirements.

3.4 CLEANING

- A. Remove masking materials.

01-01-21

- B. Clean spills and overspray using cleaning agents recommended by manufacturers of affected construction.

3.5 PROTECTION

- A. Protect air barrier from construction operations.
- B. Protect air barrier from exposure to UV light exposure exceeding manufacturer's recommendation.
- C. Replace overexposed materials and retest.

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

01-01-21

Page Intentionally Left Blank

01-01-21

SECTION 07 31 13

ASPHALT SHINGLES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes: Fiberglass asphalt shingles over underlayment nailed to roof sheathing.

1.2 RELATED WORK

- A. Section 07 60 00, FLASHING AND SHEET METAL: Counterflashing and Flashing of Roof Projections.
- B. Section 09 06 00, SCHEDULE FOR FINISHES: Shingle Color.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. ASTM International (ASTM):
 - D226/D226M-17.....Asphalt-Saturated Organic Felt Used in Roofing and Waterproofing.
 - D1970/D1970M-19.....Self-Adhering Polymer Modified Bituminous Sheet Materials Used as Steep Roofing Underlayment for Ice Dam Protection.
 - D3018/D3018M-11(2017)...Class A Asphalt Shingles Surfaced with Mineral Granules.
 - D3161/D3161M-20.....Wind Resistance of Steep Slope Roofing Products (Fan-Induced Method).
 - D3462/D3462M-19.....Asphalt Shingles Made from Glass Felt and Surfaced with Mineral Granules.
 - F1667-18a.....Driven Fasteners: Nails, Spikes, and Staples.
- C. UL LLC (UL):
 - 790 (Edition 8).....Fire Tests of Roof Coverings.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Installation instructions.
 - 3. Warranty.
- C. Samples: Shingles: Full size each type, color and texture.

01-01-21

D. Sustainable Construction Submittals:

1. Solar Reflectance Index (SRI) for asphalt shingles.

1.5 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, manufacture date, and the label of Underwriters Laboratories.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.6 STORAGE AND HANDLING

- A. Store shingles according to manufacturer's instructions. Store roll goods on end in upright position.
- B. Protect products from damage during handling and construction operations.
- C. Keep materials dry, covered completely and protected from weather.

1.7 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."
- B. Manufacturer's Warranty: Warrant asphalt shingles against material and manufacturing defects.
 1. Material Warranty Period: 50 years.
 2. Wind-Speed Warranty Period: Resist wind speeds up to 180 km/h (110 mph) to 210 km/h (130 mph) for 15 years.
 3. Algae-Resistance Warranty Period: No discoloration for 15 years.

PART 2 - PRODUCTS

2.1 PRODUCTS - GENERAL

- A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Provide each product from one manufacturer.
 1. Provide each product exposed to view from one production run.

2.2 ASPHALT SHINGLES

- A. Asphalt Shingles: Fiberglass reinforced, laminated type, square butt.
 1. ASTM D3462/D3462M and ASTM D3018/D3018M, Type I, self-sealing.
 2. ASTM D3161/D3161M, Class D or F wind-resistant.
 3. UL 790 Class A fire resistance.
 4. Minimum Weight: 10.3 kg/square meter (210 lbs./100 square feet).

01-01-21

2.3 ROOFING NAILS

- A. ASTM F1667, Type I, Style 20, galvanized steel, deformed shanks, heads 10 mm to 11 mm (3/8 inch to 7/16 inch) diameter.
 - 1. Nails for Shingles: 32 mm (1-1/4 inches) long.
 - 2. Nails for Felt: 19 mm (3/4 inch) long.

2.4 ROOFING UNDERLAYMENT

- A. Organic Felt: ASTM D226/D226M, Type 1.
- B. Self-Adhering Modified Bituminous Underlayment: ASTM D1970/D1970M.

2.5 METAL FLASHING

- A. Provide metal roof flashings, including apron flashings, step
- A. flashings, valley flashings, drip edges, and vent pipe flashings
- A. specified in Section 07 60 00, FLASHING AND SHEET METAL.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for roofing installation.
 - 1. Verify roof substrates are sound, within manufacturer's tolerances, and free from defects which would interfere with roofing installation.
 - 2. Verify roof accessories, vent pipes and other projections through roof are in place and roof flashing is installed, or ready for installation, before installing shingles.
- B. Protect existing construction and completed work from damage.

3.2 INSTALLATION - GENERAL

- A. Install products according to manufacturer's instructions and approved submittal drawings.
 - 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

3.3 METAL DRIP EDGE INSTALLATION

- A. At eaves and rakes, install stainless steel drip edges specified in Section 07 60 00, FLASHING AND SHEET METAL.
 - 1. Eaves: Install metal drip edge before underlayment.
 - 2. Rakes: Install metal drip edge after underlayment.
- B. Secure metal drip edges with compatible nails spaced maximum 250 mm (10 inches) on center along inner edges.

01-01-21

3.4 FLASHING INSTALLATION

- A. Install metal flashings specified in Section 07 60 00, FLASHING AND SHEET METAL at intersections of roofs, adjoining walls, or projections through deck such as chimneys and vent stacks.
- B. Install metal valley flashing shown and as specified under Section 07 60 00, FLASHING AND SHEET METAL.
 - 1. Secure valley flashing according to shingle manufacturer's instructions.
 - 2. Expose flashing in open portion of valley 125 mm (5 inches) minimum, and lap shingles over flashing 125 mm (5 inches) minimum.

3.5 UNDERLAYMENT INSTALLATION

- A. Install self-adhering sheet underlayment, working from low point to high point. Lap sides 90 mm (3-1/2 inches) minimum, and lap ends 150 mm (6 inches) minimum. Install at the following locations:
 - 1. Eaves and Rakes: From edge of eave and rake to 600 mm (24 inches) minimum beyond inside face of exterior wall.
 - a. Lap underlayment over eave metal drip edge.
 - 2. Valleys, Hips and Roof Slope Transitions: Centered over change in slope, and extended 450 mm (18 inches) minimum on both sides.
 - 3. Sidewalls and Projections through Roof: Extended 450 mm (18 inches) from projection, and extended up projection 100 mm (4 inches) minimum.
 - 4. Firmly roll underlayment to ensure adhesion to roof deck and metal flashings.
- B. Install organic felt underlayment on roof deck not covered by self-adhering sheet underlayment, with 100 mm (4 inches) minimum end laps, 50 mm (2 inches) minimum head laps, and 300 mm (12 inches) minimum ridge laps. Nail felt 125 mm (5 inches) on centers along laps.

3.6 ROOF ACCESSORY INSTALLATION

- A. Install roof vents, specified in Section 07 71 00, ROOF SPECIALTIES before installing shingles.
- B. Lap underlayment and asphalt shingles over upslope base flanges of roof accessory flashings.
- C. Install underlayment and asphalt shingles over side slope base flanges of roof accessory flashings.

01-01-21

- D. Install downslope base flanges of roof accessories over asphalt shingles.

3.7 ASPHALT SHINGLE INSTALLATION

- A. Install shingles aligned parallel to roof eave, nailed to roof sheathing.
 - 1. Exposure: 125 mm (5 inches) maximum.
 - 2. Head lap: 50 mm (2 inches) minimum.
- B. Install asphalt-shingle starter strip with tabs removed, and overhanging lower edge of roof 13 mm (1/2 inch).

- - E N D - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

01-01-21

Page Intentionally Left Blank

SECTION 07 32 00
COMPOSITE ROOF TILE SYSTEMS

PART 1 GENERAL

1.1 SUMMARY

A. Section Includes:

1. Polymeric slate roof tile system and accessories.

1.2 RELATED WORK

- A. Section 06 10 00 - Rough Carpentry.
B. Section 07 60 00 - Flashing and Sheet Metal.
C. Section 07 71 00 - Roof Specialties.

1.3 APPLICABLE PUBLICATIONS

A. ASTM International (ASTM):

1. ASTM D 31 - Methods of Testing Woven Textiles Fabrics.
2. ASTM D 412 - Standard Test Methods for Vulcanized Rubber and Thermoplastic Elastomers - Tension.
3. ASTM D 570 - Standard Test Method for Water Absorption of Plastics.
4. ASTM D 638 - Standard Test Method for Tensile Properties of Plastics.
5. ASTM D 790 - Standard Test Methods for Flexural Properties of Unreinforced and Reinforced Plastics and Electrical Insulating Materials.
6. ASTM D 2626 - Standard Specification for Asphalt-Saturated and Coated Organic Felt Base Sheet Used in Roofing.
7. ASTM G 155 - Standard Practice for Operating Xenon Arc Light Apparatus for Exposure of Non-Metallic Materials.

B. Underwriters Laboratories, Inc. (UL):

1. UL 790 - Standard Test Methods for Fire Tests of Roof Coverings.
2. UL 580 - Tests for Uplift Resistance of Roof Assemblies.
3. UL 2218 - Impact Resistance of Prepared Roof Covering Materials.
4. UL ER 18920-01.

1.4 SUBMITTALS

A. Product Data: Manufacturer's data sheets on each product to be used, including:

1. Shingles, underlayment, flashings, fasteners, and accessories indicating composition, properties, and dimensions. Provide data showing compliance with specified requirements.

2. Preparation instructions and recommendations.
 3. Storage and handling requirements and recommendations.
 4. Installation methods.
- B. Shop Drawings: Provide shop drawings indicating details of construction and installation including but not limited to dimensions, penetrations and roof slope.
- C. Warranty: Submit manufacturer's project number indicating EcoStar Gold Star warranty is available for this project prior to ordering materials and beginning installation.
- D. Selection Samples: Submit two sets of samples showing full range of available colors, patterns, textures, and finishes.
- E. Verification Samples: For each product specified; two samples, representing colors, patterns, textures, and finishes to be installed.

1.5 QUALITY ASSURANCE

- A. Manufacturer Qualifications: Company specializing in manufacture of synthetic tiles.
- B. Installer Qualifications: Minimum 3 years experience in work of this Section.
- C. Inspection: Upon completion of the installation, an inspection shall be conducted by manufacturer's Field Service Representative to ascertain that the roofing system has been installed according to manufacturer's published specifications and details at time of bid. This is not intended to be a final inspection for the benefit of the Owner, but for the manufacturer to determine whether a warranty shall be issued.
- D. Testing Requirements: Comply with the following requirements.
1. Impact Resistance: UL 2218 Test Standard; Class 4.
 2. Wind Driven Rain: PA100 Test Standard.
 3. Wind Uplift: UL 580 Test Standard.
- E. Mockup:
1. Provide mockup of tiles, underlayment, and related flashings.
 2. Size: Minimum 8 x 8 feet.
 3. Locate where directed by COR
 4. Approved mockup may remain as part of the Work.

1.6 DELIVERY, STORAGE AND HANDLING

- A. Deliver, store and handle materials and products in strict compliance with manufacturer's instructions and recommendations and industry standards. Store materials within absolute limits for temperature and

humidity recommended by the manufacturer. Protect from damage.

1. Store tile materials above 45 degrees F (7.2 degrees C). If exposed to lower temperatures, restore product temperature to 45 degrees F (7.2 degrees C) minimum before using.
2. Store materials in a dry protected area. Damaged materials shall not be used as part of finished installation.
3. Installed materials found to be damaged shall be replaced at Gold Star Authorized Applicator's expense.

B. Deliver materials in original unopened packages. Store products in manufacturer's labeled packaging until ready for installation. Packages shall be labeled with manufacturer's name, brand name and identification of various items.

1.7 PROJECT CONDITIONS

A. Maintain environmental conditions (temperature, humidity, and ventilation) within limits recommended by manufacturer for optimum results. Do not install products under environmental conditions outside manufacturer's absolute limits.

1.8 SEQUENCING AND SCHEDULING

A. Conference: Convene a pre-installation conference to establish procedures to maintain optimum working conditions and to coordinate this work with related and adjacent work.

1.9 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."
- B. Warranty: Provide manufacturer's 50-year warranty.

PART 2 PRODUCTS

2.1 BASIS OF DESIGN

A. EcoStar LLC, Empire Slate Design - Traditional

2.2 POLYMERIC SLATE ROOF TILE SYSTEMS

- A. Roof Tiles:
1. Material: Thermoplastic polyolefin compound with colorants and UV stabilizers.
 2. Compliance:
 - a. Fire Rating: UL 790, Class A fire resistance.
 - b. Impact Resistance: UL 2218, Class 4.
 - c. UV Exposures Tested in accordance with ASTM G 155 prolonged exposure.

3. Tapered Thickness: Nominal 1/4 inch (6 mm).
4. Tile Length: 18 inches (457 mm).
5. Tile Width: 12 inches (305 mm).
6. Exposure: 6 inches (152 mm).
7. Color:
 - a. To match existing natural slate and approved by COR.

2.3 ACCESSORIES

- A. Underlayment:
 1. Provide underlayment recommended by manufacturer for Class A fire resistance.
- B. Metalwork and Flashing:
 1. Material: As indicated on Drawings.

PART 3 EXECUTION

3.1 PREPARATION

- A. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.
 1. Contact the manufacturer's Technical Department for procedures when installing tile roof system during temperatures lower than 45 degrees F (7.2 degrees C).
 2. Existing roof material must be removed and a clean substrate, free of foreign material, must be provided prior to the installation of the tile roof system.
 3. Roofing surface must be free of ice, water, or snow, prior to and during the roofing project. The building owner or owner's representative is responsible for ensuring that wet or damaged substrate has been removed in a re-roofing application.
 4. Decking materials must be dimensionally stable prior to installing the tiles. If the materials are not dry, manufacturer recommends installing the underlayment and allowing the roof to dry out before installing tiles.
- B. If preparation is the responsibility of another installer, notify Architect in writing of deviations from manufacturer's recommended installation tolerances and conditions.
- C. Do not proceed with installation until substrates have been properly prepared and deviations from manufacturer's recommended tolerances are corrected. Commencement of installation constitutes acceptance of

conditions.

- D. Roof System Preparation: Provide clearance on underside of decking or sheathing to allow for specified penetration of fasteners. Manufacturer recommends system be applied only over the following:
 - 1. Substrate: Minimum 15/32 inch (12 mm) fire resistant plywood, properly gapped for expansion.
- E. Slope of substrate for installation of slate tile roof system shall be a minimum of 3/12.

3.2 INSTALLATION

- A. Install in accordance with manufacturer's written instructions and recommendations.
- B. Flashing and Sheet Metal: Install flashing metal and sheet metal in valleys and as required for complete installation. Comply with manufacturer's recommendation for a V-type, W-type, or Double W-type metal valley flashing at valleys.
- C. Install metal edging at eaves and roof edges as required for complete installation.
- D. Installation of Underlayment:
 - 1. Install Class A underlayment over the entire deck surface per manufacturer's specification.
 - 2. Install in conjunction with Class A roof tiles for those projects requiring a UL Class A fire rating.
- E. Roof Tile Installation:
 - 1. After installing underlayment and before installing the roof tiles, clean the surface of debris and dirt.
 - 2. Place tiles so color variations are evenly distributed over entire roof area. Shade variation occurs differently from pallet to pallet and within individual pallets; blend tiles between bundles and pallets to insure even distribution of color variations.
 - a. Blending: Color "mapping" or "blotching" in appearance is not acceptable.
 - 3. Minimum Fastening: 2 ring shank fasteners per tile shall be used. Fasteners shall be installed at the designated marks on the tile. Contact manufacturer Technical Department for proper nail lengths.
 - 4. If using a pneumatic nailer, do not over drive nails, causing the tiles to curl upward. Remove overdriven tiles and re-fasten in accordance with manufacturer's recommendations.

5. Do not install tiles with an upward curve. Bend each tile in a downward arc before nailing. Do not hold tiles from behind while nailing, as this will cause an upward curl of the tile.
 6. Do not install tiles butted against each other. Maintain a minimum gap of 3/8 inches (9.5 mm) between installed tiles. Maintain a minimum 3/8 inches (9.5 mm) gap between installed tiles and sidewalls or roof protrusion.
 7. Beginning at the eave, install a starter row of roof tiles gapped a minimum of 3/8 inches (9.5 mm) between tiles and protrusion while achieving a 3/4 inches (19 mm) overhang with two ring shank fasteners per tile (in location shown on tiles). This layer of tiles will become the starter row. The final tile at roof edges to be a minimum of 3 inches (76 mm) wide. This may involve cutting the roof tile to fit. Cut tile per manufacturer's instructions.
 8. Install first course of tiles in the same manner as the starter row with the exception of the second layer having an offset to the starter row. The first course of tiles shall be installed flush with the starter row with no exposure.
 9. Continue installing tile courses up the roof slope to achieve specified exposure. Place chalk lines horizontally up the roof slope for every tile course, per manufacturer's instructions.
- F. Phased Roofing: The weathering process of the tiles begins immediately upon installation and exposure to the elements. Install at a continuous rate to completion. Avoid lengthy delays which may result in appearance differences.

3.3 PROTECTION AND CLEANING

- A. Protect installed products until completion of project. Minimize foot traffic over completed areas of the roof.
- B. Upon completion of the roof system installation, inspect and remove debris from roof. Cleaning of soiled areas and debris is the responsibility of the applicator.
- C. Use cleaners approved by manufacturer to wash a roof assembly.
- D. Touch-up, repair or replace damaged products before Substantial Completion.

- - - END - - -

01-01-21

SECTION 07 40 00
ROOFING AND SIDING PANELS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies uninsulated metal wall as shown on contract documents.

1.2 RELATED WORK

- A. Section 07 92 00, JOINT SEALANTS: Sealant.
- B. Section 09 06 00, SCHEDULE FOR FINISHES: Color and texture of finish.

1.3 QUALITY ASSURANCE

- A. Manufacturer's Qualifications: Provide metal wall products of a manufacturer regularly engaged for not less than five (5) years in the fabrication of metal panels of the type and design indicated.
- B. Installer: A firm with three (3) years of successful experience with installation of roofing and siding panels of type and scope equivalent to Work of this Section. Submit installer qualifications.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples: Metal panel, 152 mm (6 inch) square, showing finish, each color and texture.
- C. Shop Drawings: Wall panels, showing details of construction and installation, thickness and kind of material, closures, flashing, fastenings and related components and accessories. Show interfaces and relationships to work at other trades and continuity with adjacent thermal, weather, air and vapor barriers.
- D. Manufacturer's Literature and Data: Wall panels
- E. Fire Test Report: Report of fire test by recognized testing laboratory for fire rating specified, showing details of construction.
- F. Manufacturer's Certificates: Indicating manufacturer's qualifications specified.
- G. Installer qualifications.
- H. Manufacturer warranty.

1.5 QUALITY ASSURANCE

- A. Approval by Contracting Officer Representative (COR) is required of products of proposed manufacturer.

01-01-21

- B. Certify manufacturer has five (5) years continuous documented experience in fabrication of metal roofing and siding panels.
- C. Source: For each material type required for work of this section, provide primary materials, which are products of one manufacturer. Provide secondary or accessory materials, which are acceptable to manufacturers of primary materials.
- D. Installer: A firm with a minimum of three (3) years' experience in type of work required by this section and which is acceptable to manufacturers of primary materials.

1.6 WARRANTY

- A. Construction Warranty: Comply with FAR clause 52.246-21 "Warranty of Construction".
- B. Manufacturer Warranty: Manufacturer shall warranty their metal wall panels for a minimum of ten (10) years from the date of installation and final acceptance by the Government. Submit manufacturer warranty.
- C. Warranty on Panel Finishes: Manufacturer's shall warrant their wall panel finish and provide standard agreement to repair finish or replace metal panels that show evidence of deterioration of factory-applied finishes within specified warranty period.
 - 1. Exposed Panel Finish: Deterioration includes, but is not limited to, the following:
 - a. Color fading more than 5 Hunter units when tested according to ASTM D2244.
 - b. Chalking in excess of a No. 8 rating when testing according to ASTM D4214.
 - c. Cracking, checking, peeling, or failure of paint to adhere to bare metal.
 - 2. Finish Warranty Period: 10 years from date of installation and final acceptance by the COR.

1.7 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extend referenced. The publications are referenced in the text by the basic designation only.
- B. American Architecture Manufacturers Association (AAMA):
611-14..... Anodized Architectural Aluminum

01-01-21

- 621-02 Voluntary Specifications for High Performance
Organic Coatings on Coil Coated Architectural
Hot Dipped Galvanized (HDG) and Zinc-Aluminum
Coated Steel Substrates
- 2605-13 Voluntary Specification, Performance
Requirements and Test Procedures for Superior
Performing Organic Coatings on Aluminum
Extrusions and Panels
- C. American Iron and Steel Institute (AISI):
- SG03-02 Cold-Formed Steel Design Manual
- D. ASTM International (ASTM):
- A463/A463M-15 Steel Sheet, Cold-Rolled, Aluminum-Coated, by
the Hot-Dip Process
- A653/A653M-20 Steel Sheet, Zinc-Coated (Galvanized), or Zinc-
Iron Alloy-Coated (Galvannealed) by the Hot-Dip
Process.
- A924/A924M-19 Steel Sheet, Metallic Coated by the Hot-Dip
Process
- A1008/A1008M-18 Steel, Sheet, Cold-Rolled, Carbon, Structural,
High Strength Low Alloy
- B209-14 Aluminum and Aluminum Alloy Sheet and Plate
- B209M-14 Aluminum and Aluminum Alloy Sheet and Plate
(Metric)
- C553-19 Mineral Fiber Blanket Thermal Insulation for
Commercial and Industrial Applications
- C591-20 Unfaced Preformed Rigid Cellular
Polyisocyanurate Thermal Insulation
- C612-14 (2019) Mineral Fiber Block and Board Thermal
Insulation
- C1396/C1396M-17 Gypsum Board
- D2244-16 Calculation of Color Tolerances and Color
Differences from Instrumentally Measured Color
Coordinates
- D4214-07 (2015) Test Methods for Evaluating the Degree of
Chalking of Exterior Paint Films

01-01-21

- E119-20 Fire Test of Building Construction and
Materials
- E283-19 Test Method for Determining Rate of Air Leakage
Through Exterior Windows, Curtain Walls, and
Doors Under Specified Pressure Differences
Across the Specimen
- E331-00 (2016) Test Method for Water Penetration of Exterior
Windows, Skylight, Doors, and Curtain Walls by
Uniform Static Air Pressure Difference
- E1592-05 (2017) Standard Test Method for Structural Performance
of Sheet Metal Roof and Siding Systems by
Uniform Static Air Pressure Method
- E1646-95 (2018) Test Method for Water Penetration of Exterior
Metal Roof Panel Systems by Uniform Static Air
Pressure Difference
- E1680-16 Test Method for Rate of Air Leakage Through
Exterior Metal Roof Panel Systems
- E1980-11 (2019) Calculating Solar Reflectance Index of
Horizontal and Low-Sloped Opaque Surfaces
- E2140-01 (2017) Test Method for Water Penetration of Metal Roof
Panel Systems by Static Water Pressure Head
- E. Cool Roof Rating Council (CRRC):
Standard-14
- F. FM Global:
4471-10 Class 1 Panel Roofs
- G. Underwriters Laboratories (UL):
580-05 (R2018) Tests for Uplift Resistance of Roof Assemblies
Fire Resistance Directory

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS FOR WALL PANELS

- A. Structural Performance: Provide metal panel systems capable of
withstanding the effects of the following loads, based on testing
according to ASTM E1592.
1. Wind Loads: As indicated.
 2. Other Design Loads: As indicated.

01-01-21

3. Deflection Limits: For wind loads, no greater than 1/180 of the span.
4. Minimum Panel rib depth: 1".
5. Panel width: 12 inches.
- B. Air Infiltration: Air leakage of not more than 0.3 liter/second per square meter (0.06 cfm/square foot) when tested according to ASTM E283 at the following test-pressure difference:
 1. Test-Pressure Difference: 75 Pa (1.57 pound/square foot).
- C. Water Penetration under Static Pressure: No water penetration when tested according to ASTM E331 at the following test-pressure difference:
 1. Test-Pressure Difference: 137 Pa (2.86 pound force/square foot).
- D. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes by preventing buckling, opening of joints, overstressing of components, failure of joints sealants, failure of connections, and other detrimental effects. Base calculations on surface temperatures of materials due to both solar heat gain and nighttime-sky heat loss.
 1. Temperature Change (Range): 67 degrees C (120 degrees F), ambient; 100 degrees C (180 degrees F), material surfaces.

2.2 ALUMINUM PLATE AND SHEET

- A. ASTM B209M (B209).

2.3 FASTENERS

- A. Fasteners of size, type and holding strength as recommended by panel manufacturer.

2.4 GYPSUM BACKING BOARD

- A. ASTM C1396/C1396M, Type X, Plain face, Square edge.

2.5 THERMAL INSULATING MATERIALS

- A. Urethane or Isocyanurate Board: ASTM C591, Type I.
- B. Mineral Fiber Blankets: ASTM C553, Type I.
- C. Mineral Fiber Board: ASTM C612, Class I.

2.6 FABRICATION

- A. General:
 1. Furnish panels in one continuous length for full height, with no horizontal joints, except at cut-outs or openings as required for the passage of pipes, conduits, vents and the like.

01-01-21

2. Construct panels by pressing members together to form a structural unit with closed ends.
3. Overall thickness of panels is shown of the contract documents.
4. Provide connection between panels by interlocking male and female joints. Seal joints between related components as required to make the work water-tight. Refer to Section 07 92 00, JOINT SEALANTS for sealing compounds.
 - a. Accessories, fastenings, and flashings to be the same material and finish as the panels. Thickness and installation of accessories and flashing to be as recommended by the panel manufacturer.

B. Uninsulated Metal Panels:

1. Panels to consist of a structurally reinforced air-space fastened between two metal face sheets.
2. Panels:
 - a. 0.040 inch thick aluminum.

2.7 FINISH

- A. For insulated and uninsulated wall and roof panels, provide finishes as follows for face sheets. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.
- B. Provide aluminum alloy for color coating as required to produce specified color. Provide color as specified in Section 09 06 00, SCHEDULE FOR FINISHES. Color for sheet aluminum to not deviate more than the colors of extrusion samples.
 1. Two-Coat Fluoropolymer: AAMA 2605. Fluoropolymer finish containing not less than 70 percent PVDF resin by weight in color coat.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. General: Install panels in accordance with the manufacturer's approved erection instructions and diagrams, except as specified otherwise.
- B. Install panels in full and firm contact with supports and with each other at side and end laps.
- C. Where panels are cut in the field, or where factory applied coverings or coatings are abraded or damaged in handling or installation, make

01-01-21

finish repairs with material of the same type and color as the weather coating, before being installed.

- D. Seal cut ends and edges, including those at openings through the sheets.
- E. Correct defects or errors in the materials in a manner approved by the COR.
- F. Replace defective materials which cannot be corrected with nondefective material.
- G. Provide molded closure strips where indicated and whenever sheets terminate with open ends after installation.
- H. Wall Panels:
 - 1. Apply panels with the configuration in a vertical position.
 - 2. Provide panels in the longest obtainable lengths, with end laps occurring only at structural members.
 - 3. Seal side and end laps with joint sealing material.
 - 4. Flash and seal walls at the base, at the top, around windows, door frames, framed louvers, and other similar openings. Install closure strips, flashings, and sealing material in an approved manner that will assure complete weather tightness.
 - 5. Flashing is not required where approved "self-flashing" panels are used.
- I. Flashing:
 - 1. Provide flashing and related closures and accessories in connection with the preformed metal panels as indicated and as necessary to provide a watertight installation.
 - 2. Install details of installation, which are not indicated, in accordance with the panel manufacturer's printed instruction and details, or the approved shop drawings.
 - 3. Allow for expansion and contraction of flashing.
- J. Fasteners:
 - 1. Space fasteners in accordance with the manufacturer's recommendations, and as necessary to withstand the design loads indicated.
 - 2. Install fasteners in valleys or crowns as recommended by the manufacturer of the panel being used.

01-01-21

3. Install fasteners in straight lines within a tolerance of 13 mm (1/2-inch) in the length of a bay.
4. Drive exposed penetrating type fasteners normal to the surface, and to a uniform depth to seat gasketed washers properly, and drive so as not to damage factory applied coating.
5. Exercise care in drilling pilot holes for fastenings to keep drills perpendicular and centered in valleys, or crowns, as applicable. After drilling, remove metal filings and burrs from holes prior to installing fasteners and washers. Do not torque fasteners to exceed values recommended by the manufacturer.
6. Remove panels deformed or otherwise damaged by over-torqued fastenings, and provide new panels.
7. Remove metal shavings and filings from roofs on completion to prevent rusting and discoloration of the panels.

3.2 ISOLATION OF ALUMINUM

- A. Isolate aluminum in contact with or fastened to dissimilar metals other than stainless steel, white bronze, or other metal compatible with aluminum by one of the following:
 1. Painting the dissimilar metal with a prime coat of Zinc-Molybdate followed by two coats of aluminum paint.
 2. Placing a non-abrasive tape or gasket between the aluminum and the dissimilar metal.
- B. Paint aluminum in contact with, or built into mortar, concrete, plaster, or other masonry materials with a coat of alkali-resistant bituminous paint.
- C. Paint aluminum in contact with wood or other absorptive materials that may become repeatedly wet, with two coats of bituminous paint, or two coats of aluminum paint. Seal joints with caulking material.

3.3 PROTECTION AND CLEANING

- A. Protect panels and other components from damage during and after erection, and until project is accepted by the COR.
- B. After completion of work, all exposed finished surfaces of panels are to be cleaned of soil, discoloration and disfiguration. Touch-up abraded surfaces of panels.

- - - E N D - - -

07 42 43

COMPOSITE WALL PANELS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Exterior, panelized fiber cement cladding system and accessories to complete a drained and back-ventilated rainscreen.

1.2 RELATED SECTIONS

- A. Section 05 41 00 - Structural Metal Stud Framing
- B. Section 06 10 00 - Rough Carpentry
- C. Section 07 21 13 - Thermal Insulation
- D. Section 07 27 26 - Fluid-Applied Membrane Air Barrier, Vapor Permeable
- E. F. Section 07 60 00 - Flashing and Sheet Metal
- F. G. Section 07 92 00 - Joint Sealants

1.3 REFERENCES

- A. American Architectural Manufacturers Association (AAMA):
 - 1. AAMA 509 - Voluntary Test and Classification Method of Drained and Back Ventilated Rain Screen Wall Cladding Systems
- B. ASTM International (ASTM):
 - 1. ASTM C518 - Standard Test Method for Steady-State Thermal Transmission Properties by Means of the Heat Flow Meter Apparatus.
 - 2. ASTM C1186 - Standard Specification for Flat Fiber-Cement Sheets.
 - a. ASTM C1185 - Standard Test Methods for Sampling and Testing Non-Asbestos Fiber Cement.
 - 3. ASTM E84 - Standard Test for Surface Burning Characteristics of Building Materials.
 - 4. ASTM E119 - Standard Test Methods for Fire Tests of Building Construction and Materials.
 - 5. ASTM E228 - Standard Test Method for Linear Thermal Expansion of Solid Materials with a Vitreous Silica Dilatometer.
 - 6. ASTM E330 - Standard Test Method for Structural Performance of Exterior Windows, Curtain Walls, and Doors by Uniform Static Air Pressure Difference.
 - 7. ASTM E331 - Standard Test Method for Water Penetration of Exterior Windows, Curtain Walls, and Doors by Uniform Static Air Pressure Difference.
- C. Florida Building Code - Test Protocol HVHZ

1. Testing Application Standard (TAS) 202, 203 - HVHZ Test Procedures
- D. National Fire Protection Association (NFPA):
 1. NFPA 285 - Fire Test Method for Exterior Wall Assemblies Containing Combustible Material.
 2. NFPA 268 - Ignition Resistance of Exterior Wall Assemblies.
- E. Standards Council of Canada & Underwriters Laboratories Canada (ULC):
 1. CAN/ULC S102 - Standard Method of Test for Surface Burning Characteristics.
 2. CAN/ULC S134 - Standard Method of Fire Test of Exterior Wall Assembly.

1.4 SUBMITTALS

- A. Submit under provisions of Section 01 33 00.
- B. Product Data: Submit manufacturer's product description, storage and handling requirements, and installation instructions.
- C. Product Test Reports and Code Compliance: Documents demonstrating product compliance with local building code, such as test reports or Evaluation Reports from qualified, independent testing agencies.
- D. Manufacturer's Details: Submit drawings (.pdf format), including plans, sections, showing installation details that demonstrate product dimensions, edge/termination conditions/treatments, compression and control joints, corners, openings, and penetrations.
- E. Samples: Submit samples of each product type proposed for use.

1.5 QUALITY ASSURANCE

- A. Manufacturer Qualifications:
 1. All fiber cement panels specified in this section must be supplied by a manufacturer with a minimum of 10 years of experience in fabricating and supplying fiber cement cladding systems.
 2. Provide technical and design support as needed regarding installation requirements and warranty compliance provisions.
- B. Installer Qualifications: All products listed in this section are to be installed by a single installer trained by manufacturer or representative.
- C. Mock-Up Wall: Provide a mock-up wall as evaluation tool for product and installation workmanship.
- D. Pre-Installation Meetings: Prior to beginning installation, conduct conference to verify and discuss substrate conditions, manufacturer's

installation instructions and warranty requirements, and project requirements.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Panels must be stored flat and kept dry before installation. A waterproof cover over panels and accessories should be used at all times prior to installation. Do not stack pallets more than two high. Refer to the information included on each pallet.
- B. If panels are exposed to water or water vapor prior to installation, allow to completely dry before installing. Failure to do so may result in panel shrinkage at ship lap joints, and such action may void warranty.
- C. Panels MUST be carried on edge. Do not carry or lift panels flat. Improper handling may cause cracking or panel damage.
- D. Direct contact between the panels and the ground should be avoided at all times. It is necessary to keep panels clean during installation process.

1.7 WARRANTY

- A. Provide manufacturer's 15-year warranty against manufactured defects in fiber cement panels. Additional 5-year extension available when refinished in year 14-15.
- B. Provide manufacturer's 15-year warranty against manufactured defects in panel finish.
- C. Warranty provides for the original purchaser. See warranty for detailed information on terms, conditions and limitations.

PART 2 - PRODUCTS

2.1 BASIS OF DESIGN

- A. Nichiha Latura V-Groove.
 - 1. Profile colors: White and Gray or designer-specified custom color (finished in US).
 - 2. Profiles:
 - a. AWP-3030 Panel: Smooth, with three, 3/8" grooves running lengthwise, spaced 5-5/8" apart. Wider, soft-U chamfered edge at horizontal joints.
 - i. Do not pair the different sizes directly together.
 - c. Accessory/Component Options:
 - i. Manufactured Corners with 3-1/2" returns for each profile size and color.

ii. Aluminum trim options: Corner Key, Open Outside Corner, H-Mold, J-Mold, Compression Joint, Inside Corner

a) Finish: Custom Color, Clear Anodized, Primed, or Stock White and Gray.

iii. Essential Flashing System: Starter, Overhang.

a) Finish: Matte black.

d. Dimensions:

i. 455mm (17-7/8") (h) x 3,030 mm (119-5/16") (l).

e. Panel Thickness: 16 mm (5/8").

f. Weight: 57.32 lbs. per panel.

g. Coverage: 14.81 sq. ft. per panel.

h. Factory sealed on six [6] sides.

D. Requests for substitutions will be considered.

2.2 MATERIALS

A. Fiber cement panels manufactured from a pressed, stamped, and autoclaved mix of Portland cement, fly ash, silica, recycled rejects, and wood fiber bundles.

B. Panel surface pre-finished and machine applied.

C. AWP-1818 profiled along all four edges, such that both horizontal and vertical joints between the installed panels are ship-lapped. Panels profiled along 3030mm edges so that the long joints between the installed panels are ship-lapped.

D. Factory-applied sealant gasket added to top panel edge; all 3030mm edge joints contain a factory sealant.

2.3 PERFORMANCE REQUIREMENTS

A. Fiber Cement Cladding - Must comply with ASTM C1186, Type A, Grade II requirements:

1. ASTM C1185 - Standard Test Methods for Sampling and Testing Non-Asbestos Fiber Cement:

a. Wet Flexural Strength: Result: 1418 psi, Lower Limit: 1015 psi.

b. Water Tightness: No water droplets observed on any specimen.

c. Freeze-thaw: No damage or defects observed.

d. Warm Water: No evidence of cracking, delamination, swelling, or other defects observed.

e. Heat-Rain: No crazing, cracking, or other deleterious effects, surface or joint changes observed in any specimen.

- B. Mean Coefficient of Linear Thermal Expansion (ASTM E228): Max 1.0×10^{-5} in./in. F.
- C. Surface Burning (CAN-ULC S102/ASTM E84): Flame Spread: 0, Smoke Developed: 0.
- D. Wind Load (ASTM E330): Contact manufacturer for ultimate test pressure data corresponding to framing type, dimensions, fastener type, and attachment clips. Project engineer(s) must determine Zone 4 and 5 design pressures based on project specifics.
 - 1. Maximum lateral deflection: L/180.
- E. Water Penetration (ASTM E331): No water leakage observed into wall cavity.
- F. Steady-State Heat Flux and Thermal Transmission Properties Test (ASTM C518): 16mm thick panel thermal resistance R Value of 0.47.
- G. Fire Resistant (ASTM E119): The wall assembly must successfully endure 60-minute fire exposure without developing excessive unexposed surface temperature or allowing flaming on the unexposed side of the assembly.
- H. Ignition Resistance (NFPA 268): No sustained flaming of panels, assembly when subjected to a minimum radiant heat flux of $12.5 \text{ kW/m}^2 \pm 5\%$ in the presence of a pilot ignition source for a 20-minute period.
- I. Fire Propagation (NFPA 285): Wall assembly of Nichiha AWP, Ultimate Clips and Starter Track, Tyvek Commercial Wrap, $\frac{1}{2}$ " Densglass Gold Sheathing, 16" o.c. 18 gauge steel studs, mineral wool in-cavity insulation, and interior 5/8" Type X gypsum met the acceptance criteria of NFPA 285.
- J. Fire Propagation (CAN/ULC S-134): Wall assembly of Nichiha AWP, Ultimate Clips and Starter Track, Tyvek Housewrap, 5/8" FRT plywood, 16" o.c. 2x wood studs, fiberglass in-cavity insulation, and interior 5/8" Type X gypsum met the acceptance criteria of CAN/ULC S-134.
- K. Drained and Back Ventilated Rainscreen (AAMA 509): System classifications: W1, V1.
- L. Florida Building Code - Test Protocol HVHZ (TAS 202, 203): Horizontal Application Design Pressure: 95 psf, Vertical Application Design Pressure: 85 psf.

2.4 INSTALLATION COMPONENTS

- A. Ultimate Clip System:
 - 1. Starter Track:

- a. Horizontal Panel Installations - FA 700 - 3,030mm (1) galvalume coated steel.
- b. Vertical Panel Installations (AWP-3030 only) - FA 710T - 3,030mm (1) galvalume coated steel.
2. Panel Clips: JEL 778 "Ultimate Clip II" (10mm rainscreen for 16mm AWP) - Zinc-Aluminum-Magnesium alloy coated steel.
3. Joint Tab Attachments (included) - used at all AWP-1818 panel to panel vertical joints, NOT used with AWP-3030 installations.
4. Corner Clips: JE 777C (10mm rainscreen for 5/8" AWP Manufactured Corners) -- Zinc-Aluminum-Magnesium alloy coated steel.
5. Single Flange Sealant Backer - FHK 1015 R (10mm) - 6.5' (1) fluorine coated galvalume.
6. Double Flange Sealant Backer - FH 1015 R (10mm) - 10' (1) fluorine coated galvalume.
7. Corrugated Spacer - FS 1005 (5mm), FS 1010 (10mm) - 4' (1).
- B. Aluminum Trim (optional): Paint primed trim as specified in finish schedule.
- C. Essential Flashing System (optional):
 1. Starter - main segments (3,030mm), inside corners, outside corners
 2. Overhang - main segments (3,030mm), inside corners, outside corners, joint clips
- D. Fasteners: Corrosion resistant fasteners, such as hot-dipped galvanized
- D. screws appropriate to local building codes and practices must be used.
- D. Use Stainless Steel fasteners in high humidity and high-moisture
- D. regions. Panel manufacturer is not liable for corrosion resistance of
- D. fasteners. Do not use aluminum fasteners, staples or fasteners that are
- D. not rated or designed for intended use. See manufacturer's instructions
- D. for appropriate fasteners for construction method used.
- E. Flashing: Flash all areas specified in manufacturer's instructions. Do not use raw aluminum flashing. Flashing must be galvanized, anodized, or PVC coated.
- F. Sealant: Sealant shall comply with ASTM C920, Class 35.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verification of Conditions:
 1. Fiber cement panels can be installed over braced wood, steel studs and sheathing including plywood, OSB, plastic foam (1" or less) or

fiberboard sheathing. Fiber cement panels can also be installed over Structural Insulated Panels (SIP's), Concrete Masonry Units (CMU's) and Concrete Block Structures (CBS's) with furring strips, and Pre-Engineered Metal Construction. Insulated Concrete Forms (ICFs) require added measures.

2. Allowable stud spacing: 16" o.c. maximum.
3. A weather resistive barrier is required when installing fiber cement panels. Use an approved weather resistive barrier (WRB) as defined by the IBC or IRC. Refer to local building codes.
4. Appropriate metal flashing should be used to prevent moisture penetration around all doors, windows, wall bottoms, material transitions and penetrations. Refer to local building codes for best practices.

- B. Examine site to ensure substrate conditions are within alignment tolerances for proper installation.
- C. Do not begin installation until unacceptable conditions have been corrected.
- D. Do not install panels or components that appear to be damaged or defective. Do not install wet panels.

3.2 TOLERANCE

- A. Wall surface plane must be plumb and level within +/- ¼ inch in 20 feet in any direction.

1. One layer of Nichiha 5mm (~3/16") Spacer may be used as shim.

3.3 INSTALLATION

- A. General: Install products in accordance with the latest installation guidelines of the manufacturer and all applicable building codes and other laws, rules, regulations and ordinances. Review all manufacturer installation, maintenance instructions, and other applicable documents before installation.

2. **Vertical Control/Expansion Joints** are required at each vertical joint, or H-Mold trim may be used instead.
3. **Horizontal/Compression Joints** are required for multi-story installations of AWP. Locate joints at floor lines. Joints are flashed minimum ½" breaks. Do not caulk. Refer to installation guide(s).

- a. Steel framed buildings (including reinforced concrete core with LGMF exterior walls) of more than three floors (or 45 feet) require a compression joint every 25 feet at a floor line.
- B. Panel Cutting
 1. Always cut fiber cement panels outside or in a well ventilated area. Do not cut the products in an enclosed area.
 2. Always wear safety glasses and NIOSH/OSHA approved respirator whenever cutting, drilling, sawing, sanding or abrading the products. Refer to manufacturer SDS for more information.
 3. Use a dust-reducing circular saw with a diamond-tipped or carbide-tipped blade.
 - a. Shears (electric or pneumatic) or jig saw can be used for complicated cuttings, such as service openings, curves, radii and scrollwork.
 4. **Silica Dust Warning:** Fiber cement products may contain some amounts of crystalline silica, a naturally occurring, potentially hazardous mineral when airborne in dust form. Consult product SDS or visit <https://www.osha.gov/dsg/topics/silicacrystalline/>.
 5. Immediately clean dust from cut panels as it may bind to the finish.

3.4 CLEANING AND MAINTENANCE

- A. Review manufacturer guidelines for detailed care instructions.

- - - E N D - - -

01-01-21

SECTION 07 53 23

ETHYLENE-PROPYLENE-DIENE-MONOMER ROOFING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Ethylene Propylene Diene Monomer (EPDM) sheet roofing adhered and mechanically fastened to insulated concrete roof deck.
2. Fire rated roof system.

1.2 RELATED WORK

- A. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS: Non-Flooring Adhesives and Sealants VOC Limits.
- B. Section 07 01 50.19, PREPARATION FOR REROOFING: Preparation of Existing Membrane Roofs and Repair Areas.
- C. Section 07 22 00, ROOF AND DECK INSULATION: Substrate Board, Vapor Retarder, Roof Insulation, and Cover Board.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. American National Standards Institute/Single-Ply Roofing Institute (ANSI/SPRI):
FX-1-16.....Standard Field Test Procedure for Determining
the Withdrawal Resistance of Roofing Fasteners.
RP-4 2019.....Wind Design Standard for Ballasted Single-ply
Roofing Systems.
- C. American Society of Civil Engineers/Structural Engineering Institute (ASCE/SEI):
7-16.....Minimum Design Loads For Buildings and Other
Structures.
- D. American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc. (ASHRAE):
90.1-13.....Energy Standard for Buildings Except Low-Rise
Residential Buildings.
- E. ASTM International (ASTM):
A276/A276M-17.....Stainless Steel Bars and Shapes.
B209-14.....Aluminum and Aluminum-Alloy Sheet and Plate.

01-01-21

- B209M-14.....Aluminum and Aluminum-Alloy Sheet and Plate
(Metric).
- C67-20.....Sampling and Testing Brick and Structural Clay
Tile.
- C140/C140M-20a.....Sampling and Testing Concrete Masonry Units and
Related Units.
- C936/C936M-20.....Solid Concrete Interlocking Paving Units.
- C1371-15.....Determination of Emittance of Materials Near
Room Temperature Using Portable Emissometers.
- C1549-16.....Determination of Solar Reflectance Near Ambient
Temperature Using a Portable Solar
Reflectometer.
- D751-19.....Standard Test Methods for Coated Fabrics.
- D1248-16.....Polyethylene Plastics Extrusion Materials for
Wire and Cable.
- D1876-08(2015)e1.....Peel Resistance of Adhesives (T-Peel Test).
- D2103-15.....Polyethylene Film and Sheeting.
- D2240-15e1.....Rubber Property-Durometer Hardness.
- D3884-09(2017).....Abrasion Resistance of Textile Fabrics (Rotary
Platform, Double-Head Method).
- D4263-83(2018).....Indicating Moisture in Concrete by the Plastic
Sheet Method.
- D4586/D4586M-07(2018)...Asphalt Roof Cement, Asbestos-Free.
- D4637/D4637M-15.....EPDM Sheet Used In Single-Ply Roof Membrane.
- E96/E96M-16.....Water Vapor Transmission of Materials.
- E408-13(2019).....Total Normal Emittance of Surfaces Using
Inspection-Meter Techniques.
- E1918-16.....Measuring Solar Reflectance of Horizontal and
Low-Sloped Surfaces in the Field.
- E1980-11(2019).....Measuring Solar Reflectance of Horizontal and
Low-Sloped Surfaces in the Field.
- G21-15.....Resistance of Synthetic Polymeric Materials to
Fungi.
- F. Cool Roof Rating Council (CRRC):
- 1-20.....Product Rating Program.
- G. Federal Specifications (Fed. Spec.):

01-01-21

UU-B-790A.....Building Paper, Vegetable Fiber: (Kraft,
Waterproofed, Water Repellent and Fire
Resistant).

H. Florida Department of Business and Professional Regulation (FL):
Approved Product Approval.

I. National Roofing Contractors Association (NRCA):
Manual-19.....The NRCA Roofing Manual: Membrane Roof Systems.

J. U.S. Department of Agriculture (USDA): USDA BioPreferred Catalog.

K. UL LLC (UL):
580-06..... Tests for Uplift Resistance of Roof
Assemblies.

1897-20.....Uplift Tests for Roof Covering Systems.

L. U.S. Department of Commerce National Institute of Standards and
Technology (NIST):
DOC PS 1-19.....Structural Plywood.
DOC PS 2-18.....Performance Standard for Wood-Based
Structural-Use Panels.

M. U.S. Environmental Protection Agency (EPA):
Energy Star.....ENERGY STAR Program Requirements for Roof
Products Version 3.0.

1.4 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting at the Project site minimum 30 days
A. before beginning Work of this section.

1. Required Participants:

- a. Contracting Officer's Representative.
- b. Contractor.
- c. Installer.
- d. Manufacturer's field representative.
- e. Other installers responsible for adjacent and intersecting work,
e. including roof deck, flashings, roof specialties, roof
e. accessories, utility penetrations, rooftop curbs and equipment,
e. lightning protection.

2. Meeting Agenda: Distribute agenda to participants minimum 3 days
before meeting.

- a. Installation schedule.
- b. Installation sequence.

01-01-21

- c. Preparatory work.
 - d. Protection before, during, and after installation.
 - e. Installation.
 - f. Terminations.
 - g. Transitions and connections to other work.
 - h. Inspecting and testing.
 - i. Other items affecting successful completion.
 - j. Pull out test of fasteners.
 - k. Material storage, including roof deck load limitations.
3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
 - 1. Roofing membrane layout.
 - 2. Roofing membrane seaming and joint details.
 - 3. Roof membrane penetration details.
 - 4. Base flashing and termination details.
- C. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Minimum fastener pull out resistance.
 - 3. Installation instructions.

1.6 WARRANTY.QUALITY ASSURANCE

- A. Installer Qualifications:
 - 1. Approved by roofing system manufacturer as installer for roofing system with specified warranty.
 - 2. Regularly installs specified products.
 - 3. Installed specified products with satisfactory service on five similar installations for minimum five years.
 - 4. Employs full-time supervisors experienced installing specified system and able to communicate with Contracting Officer's Representative and installer's personnel.
- B. Manufacturer's Field Representative:
 - 1. Manufacturer's full-time technical employee or independent roofing inspector.

01-01-21

2. Individual certified by Roof Consultants Institute as Registered Roof Observer.

1.7 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.8 STORAGE AND HANDLING

- A. Comply with NRCA Manual storage and handling requirements.
- B. Store products indoors in dry, weathertight facility.
- C. Store adhesives according to manufacturer's instructions.
- D. Protect products from damage during handling and construction operations.
- E. Products stored on the roof deck must not cause permanent deck deflection.

1.9 FIELD CONDITIONS

- A. Environment:
 1. Product Temperature: Minimum 4 degrees C (40 degrees F) and rising before installation.
 2. Weather Limitations: Install roofing only during dry current and forecasted weather conditions.

1.10 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."
- B. Manufacturer's Warranty: Warrant roofing system with existing roof warranty against material and manufacturing defects and agree to repair any leak caused by a defect in the roofing system materials or workmanship of the installer.
 1. Warranty Period: 10 years.

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

- A. Roofing System: Adhered and mechanically fastened at connection to rain screen construction roofing membrane, base flashing, roof insulation, fasteners, cover boards, substrate boards.

01-01-21

2.2 SYSTEM PERFORMANCE

A. Design roofing system meeting specified performance:

1. Load Resistance: ASCE/SEI 7; Design criteria

2.3 PRODUCTS - GENERAL

A. Basis of Design: To match existing roof membrane.

B. Provide roof system components from one manufacturer.

2.4 EPDM ROOFING MEMBRANE

A. EPDM Sheet: ASTM D4637/D4637M, Type I - non-reinforced.

1. Thickness: 1.5 mm (60 mils).
2. Color: To match existing roof membrane.

B. Additional Properties:

PROPERTY	TEST METHOD	REQUIREMENT
Shore A Hardness	ASTM D2240	55 to 75 Durometer
Water Vapor Permeance	ASTM E96/E96M	Minimum 8 ng/Pa/s/sq. m (0.14 perms) Water Method
Fungi Resistance	ASTM G21	After 21 days, no sustained growth or discoloration.

1. Use fire retardant membrane when not protected by ballast or pavers.
Verify for UL or approval.

2.5 MEMBRANE ACCESSORY MATERIALS

A. Sheet roofing manufacturer's specified products.

B. Flashing Sheet: Manufacturer's standard; same material, and color as roofing membrane.

1. Self-curing EPDM flashing adaptable to irregular shapes and surfaces.
2. Minimum Thickness: 1.5 mm (0.060 inch).

C. Factory Formed Flashings: Inside and outside corners, pipe boots, and other special flashing shapes to minimize field fabrication.

D. Splice Adhesive or Tape: Manufacturer's standard for roofing membrane and flashing sheet.

E. Splice Lap Sealant: Liquid EPDM rubber for exposed lap edge.

F. Bonding Adhesive: Manufacturer's standard, water solvent based, to suit substrates.

01-01-21

- G. Pipe Compression Clamp:
 - 1. Stainless steel drawband.
 - 2. Worm drive clamp device.
- H. Fasteners: Manufacturer's standard coated steel with metal or plastic plates, to suit application.
- I. Fastener Sealer: One part elastomeric adhesive sealant.
- J. Temporary Closure Sealers (Night Sealant): Polyurethane two part sealer.
- K. Primers, Splice Tapes, Cleaners, and Butyl Rubber Seals: As specified by roof membrane manufacturer.
- L. Asphalt Roof Cement: ASTM D4586/D4586M.

2.6 SEPARATION SHEET

- A. Polyethylene Film: ASTM D2103, 0.2 mm (6 mils) thick.
- B. Building Paper: Fed. Spec. UU-B-790.
 - 1. Water Vapor Resistance: Type I, Grade A, Style 4, reinforced.
 - 2. Water Vapor Permeable: Type I, Grade D, Style 4, reinforced.

2.7 FLEXIBLE TUBING

- A. Closed cell neoprene, butyl polyethylene, vinyl, or polyethylene tube or rod.
- B. Diameter approximately 1-1/2 times joint width.

2.8 ACCESSORIES

- A. Temporary Protection Materials:
 - 1. Expanded Polystyrene (EPS) Insulation: ASTM C578.
 - 2. Plywood: NIST DOC PS 1, Grade CD Exposure 1.
 - 3. Oriented Strand Board (OSB): NIST DOC PS 2, Exposure 1.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine and verify substrate suitability for product installation with
 - A. roofing installer and roofing inspector present.
 - 1. Verify roof penetrations are complete, secured against movement, and firestopped.
 - B. Correct unsatisfactory conditions before beginning roofing work.

3.2 PREPARATION

- A. Complete roof deck construction before beginning roofing work:

01-01-21

1. Curbs, blocking, edge strips, and other components to which roofing and base flashing is attached in place ready to receive insulation and roofing.
 2. Coordinate roofing membrane installation with flashing work and roof insulation work so insulation and flashing are installed concurrently to permit continuous roofing operations.
 3. Complete installation of flashing, insulation, and roofing in same day except for the area where temporary protection is required when work is stopped for inclement weather or end of work day.
- B. Dry out surfaces that become wet from any cause during progress of the work before roofing work is resumed. Apply materials to dry substrates, only.
- C. Broom clean roof decks. Remove dust, dirt and debris.
- D. Remove projections capable of damaging roofing materials.
- E. Concrete Decks, except Insulating Concrete:
1. Test concrete decks for moisture according to ASTM D4263 before installing roofing materials.
 2. Prime concrete decks. Keep primer back 100 mm (four inches) from precast concrete deck joints.
 3. Allow primer to dry before application of bitumen.

3.3 TEMPORARY PROTECTION

- A. Install temporary protection consisting of a temporary seal and water cut-offs at the end of each day's work and when work is halted for an indefinite period or work is stopped when precipitation is imminent.
- B. Install temporary cap flashing over top of base flashings where permanent flashings are not in place to protect against water intrusion into roofing system. Securely anchor in place to prevent blow off and damage by construction activities.
- C. Temporarily seal exposed insulation surfaces within roofing membrane.
1. Apply temporary seal and water cut off by extending roofing membrane beyond insulation and securely embedding edge of the roofing membrane in 6 mm (1/4 inch) thick by 50 mm (2 inches) wide strip of temporary closure sealant. Weight roofing membrane edge with sandbags, to prevent displacement; space sandbags maximum 2400 mm (8 feet) on center.

01-01-21

2. Direct water away from work. Provide drainage, preventing water accumulation.
3. Check daily to ensure temporary seal remains watertight. Reseal open areas and weight down.
- D. Before the work resumes, cut off and discard portions of roof membrane in contact with temporary seal.
 1. Cut minimum 150 mm (6 inches) back from sealed edges and surfaces.
- E. Remove sandbags and store for reuse.

3.4 INSTALLATION, GENERAL

- A. Install products according to manufacturer's instructions and approved submittal drawings.
 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
- B. Comply with NRCA Manual installation requirements.
- C. Do not allow membrane and flashing to contact surfaces contaminated with asphalt, coal tar, oil, grease, or other substances incompatible with EPDM.

3.5 ROOFING INSTALLATION

- A. Install membrane perpendicular to long dimension of insulation boards.
- B. Begin membrane installation at roof low point and work towards high point. Lap membrane shingled in water flow direction.
- C. Position membrane free of buckles and wrinkles.
- D. Roll membrane out; inspect for defects as membrane is unrolled. Remove defective areas:
 1. Allow 30 minutes for membrane to relax before proceeding.
 2. Lap edges and ends minimum 75 mm (3 inches). Clean lap surfaces.
 3. Install seam adhesive or tape, unless furnished with factory applied adhesive strips. Apply pressure to develop full adhesion.
 4. Check seams to ensure continuous adhesion and correct defects.
 5. Finish seam edges with beveled bead of lap sealant.
 6. Finish seams same day as membrane is installed.
 7. Anchor membrane perimeter to roof deck and parapet wall as indicated on drawings.
- E. Membrane Perimeter Anchorage:

01-01-21

1. Install batten with fasteners at perimeter of each roof area, curb flashing, expansion joints and similar penetrations on top of roof membrane as indicated on drawings.

2. Mechanical Fastening:

- a. Space fasteners maximum 300 mm (12 inches) on center, starting
- a. 25 mm (1 inch) from ends.
- b. Set fasteners in lap sealant and cover fastener head with fastener sealer, including batten.
- c. At parapet walls intersecting building walls and curbs, secure
- c. roofing membrane to structural deck with fasteners 150 mm
- c. (6 inches) on center or as shown in NRCA Manual.

F. Adhered System Installation:

1. Apply bonding adhesive in quantities required by roofing membrane manufacturer.
2. Fold sheet back on itself, clean and coat the bottom side of the membrane and the top of substrate with adhesive. Do not coat the lap joint area.
3. After adhesive has set according to adhesive manufacturer's instructions, roll roofing membrane into adhesive minimizing voids and wrinkles.
4. Repeat for other half of sheet.
5. Cut voids and wrinkles to lay flat. Clean and patch cut area.

3.6 FLASHING INSTALLATION

A. Installing Base Flashing and Pipe Flashing:

1. Install flashing sheet to pipes, walls and curbs to minimum 200 mm (8 inches) height above roof surfaces and extend roofing manufacturer's standard lap dimension onto roofing membranes.
 - a. Adhere flashing with bonding adhesive.
 - b. Form inside and outside corners of flashing sheet according to NRCA Manual. Form pipe flashing according to NRCA Manual.
 - c. Lap ends roofing manufacturer's standard dimension.
 - d. Adhesively splice flashing sheets together, and adhesively splice flashing sheets to roofing membranes. Finish exposed edges with lap sealant.
2. Anchor top of flashing to walls and curbs with fasteners spaced maximum 150 mm (6 inches) on center. Use surface mounted fastening

01-01-21

strip with sealant on ducts. Use pipe clamps on pipes or other round penetrations.

3. Apply sealant to top edge of flashing.

3.7 FIELD QUALITY CONTROL

A. Field Tests: Performed by testing laboratory specified in Section

A. 01 45 29, TESTING LABORATORY SERVICES.

B. Manufacturer Services:

1. Inspect initial installation, installation in progress, and completed work.
2. Issue supplemental installation instructions necessitated by field conditions.
3. Prepare and submit inspection reports.
4. Certify completed installation complies with manufacturer's instructions and warranty requirements.

3.8 CLEANING

A. Remove excess adhesive before adhesive sets.

B. Clean exposed roofing surfaces. Remove contaminants and stains to comply with specified solar reflectance performance.

3.9 PROTECTION

A. Protect roofing system from traffic and construction operations.

1. Protect roofing system when used for subsequent work platform, materials storage, or staging.
2. Distribute scaffolding loads to exert maximum 50 percent roofing system materials compressive strength.

B. Loose lay temporary insulation board overlaid with plywood or OSB.

1. Weight boards to secure against wind uplift.

C. Remove protection when directed by Contracting Officer's Representative.

D. Repair damage.

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

01-01-21

Page Intentionally Left Blank

01-01-21

SECTION 07 60 00
FLASHING AND SHEET METAL

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Formed sheet metal work for wall and roof flashing, copings, roof edge metal, fasciae, drainage specialties, and formed expansion joint covers are specified in this section.

1.2 RELATED WORK

- A. Division 07 ROOFING AND WALL SYSTEM: Flashing components of factory finished roofing and wall systems.
- B. Section 07 92 00, JOINT SEALANTS: Joint Sealants.
- C. Section 09 06 00, SCHEDULE FOR FINISHES: Color of factory coated exterior architectural metal and anodized aluminum items.
- D. Section 09 91 00, PAINTING: Paint materials and application.

1.3 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only. Editions of applicable publications current on date of issue of bidding documents apply unless otherwise indicated.
- B. Aluminum Association (AA):
- AA-C22A41.....Aluminum Chemically etched medium matte, with clear anodic coating, Class I Architectural, 0.7-mil thick
- AA-C22A42.....Chemically etched medium matte, with integrally colored anodic coating, Class I Architectural, 0.7 mils thick
- AA-C22A44.....Chemically etched medium matte with electrolytically deposited metallic compound, integrally colored coating Class I Architectural, 0.7-mil thick finish
- C. American National Standards Institute/Single-Ply Roofing Institute/Factory Mutual (ANSI/SPRI/FM):
- 4435/ES-1-11.....Wind Design Standard for Edge Systems Used with Low Slope Roofing Systems
- D. American Architectural Manufacturers Association (AAMA):

01-01-21

AAMA 620-02.....Voluntary Specification for High Performance
Organic Coatings on Coil Coated Architectural
Aluminum

AAMA 621-02.....Voluntary Specification for High Performance
Organic Coatings on Coil Coated Architectural
Hot Dipped Galvanized (HDG) and Zinc-Aluminum
Coated Steel Substrates

E. ASTM International (ASTM):

A240/A240M-20.....Standard Specification for Chromium and
Chromium-Nickel Stainless Steel Plate, Sheet
and Strip for Pressure Vessels and for General
Applications.

A653/A653M-20.....Steel Sheet Zinc-Coated (Galvanized) or Zinc
Alloy Coated (Galvanized) by the Hot- Dip
Process

B32-08(2014).....Solder Metal

B209-14.....Aluminum and Aluminum-Alloy Sheet and Plate

B370-12(2019).....Copper Sheet and Strip for Building
Construction

D173/D173M-03(2018).....Bitumen-Saturated Cotton Fabrics Used in
Roofing and Waterproofing

D412-16.....Vulcanized Rubber and Thermoplastic Elastomers-
Tension

D1187/D1187M-97(2018)...Asphalt Base Emulsions for Use as Protective
Coatings for Metal

D1784-20.....Rigid Poly (Vinyl Chloride) (PVC) Compounds and
Chlorinated Poly (Vinyl Chloride) (CPVC)
Compounds

D3656/D3656M-13.....Insect Screening and Louver Cloth Woven from
Vinyl-Coated Glass Yarns

D4586/D4586M-07(2018)...Asphalt Roof Cement, Asbestos Free

F. Sheet Metal and Air Conditioning Contractors National Association
(SMACNA): Architectural Sheet Metal Manual.

G. National Association of Architectural Metal Manufacturers (NAAMM):
AMP 500-06.....Metal Finishes Manual

H. Federal Specification (Fed. Spec):

01-01-21

A-A-1925A.....Shield, Expansion; (Nail Anchors)

UU-B-790A.....Building Paper, Vegetable Fiber

- I. International Code Commission (ICC): International Building Code,
Current Edition

1.4 PERFORMANCE REQUIREMENTS

- A. Wind Uplift Forces: Resist the following forces per FM Approvals 1-49:
1. Wind Zone 1: 0.48 to 0.96 kPa (10 to 20 pound force/square foot):
1.92-kPa (40 pound force/square foot) perimeter uplift force, 2.87-
kPa (60 pound force/square foot pound force/square foot) corner
uplift force, and 0.96-kPa (20- pound force/square foot) outward
force.
- B. Wind Design Standard: Fabricate and install copings and roof-edge
flashings tested per ANSI/SPRI/FM ES-1 to resist design pressure
indicated on Drawings.

1.5 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT
A. DATA, AND SAMPLES.
- B. Shop Drawings: For all specified items, including:
1. Flashings
 2. Copings
 3. Fascia-cant
- C. Manufacturer's Literature and Data: For all specified items, including:
1. Two-piece counterflashing
 2. Thru wall flashing
 3. Nonreinforced, elastomeric sheeting
 4. Copper clad stainless steel
 5. Polyethylene coated copper
 6. Bituminous coated copper
 7. Copper covered paper
 8. Fascia-cant
- D. Certificates: Indicating compliance with specified finishing
requirements, from applicator and contractor.

PART 2 - PRODUCTS

2.1 FLASHING AND SHEET METAL MATERIALS

- A. Stainless Steel: ASTM A240, Type 302B, dead soft temper.
- B. Copper ASTM B370, cold-rolled temper.

01-01-21

- C. Bituminous Coated Copper: Minimum copper ASTM B370, weight not less than 1 kg/m² (3 oz/sf). Bituminous coating shall weigh not less than 2 kg/m² (6 oz/sf); or, copper sheets may be bonded between two layers of coarsely woven bitumen-saturated cotton fabric ASTM D173. Exposed fabric surface shall be crimped.
- D. Copper Covered Paper: Fabricated of electro-deposit pure copper sheets ASTM B 370, bonded with special asphalt compound to both sides of creped, reinforced building paper, UU-B-790, Type I, style 5, or to a three ply sheet of asphalt impregnated crepe paper. Grooves running along the width of sheet.
- E. Polyethylene Coated Copper: Copper sheet ASTM B370, weighing 1 Kg/m² (3 oz/sf) bonded between two layers of (two mil) thick polyethylene sheet.
- F. Aluminum Sheet: ASTM B209, alloy 3003-H14 except alloy used for color anodized aluminum shall be as required to produce specified color. Alloy required to produce specified color shall have the same structural properties as alloy 3003-H14.
- G. Galvanized Sheet: ASTM, A653.
- H. Nonreinforced, Elastomeric Sheeting: Elastomeric substances reduced to thermoplastic state and extruded into continuous homogenous sheet (0.056 inch) thick. Sheeting shall have not less than 7 MPa (1,000 psi) tensile strength and not more than seven percent tension-set at 50 percent elongation when tested in accordance with ASTM D412. Sheeting shall show no cracking or flaking when bent through 180 degrees over a 1 mm (1/32 inch) diameter mandrel and then bent at same point over same size mandrel in opposite direction through 360 degrees at temperature of -30°C (-20 °F).

2.2 FLASHING ACCESSORIES

- A. Solder: ASTM B32; flux type and alloy composition as required for use with metals to be soldered.
- B. Rosin Paper: Fed-Spec. UU-B-790, Type I, Grade D, Style 1b, Rosin-sized sheathing paper, weighing approximately 3 Kg/10 m² (6 pounds/100 square feet).
- C. Bituminous Paint: ASTM D1187, Type I.
- D. Fasteners:
 - 1. Use copper, copper alloy, bronze, brass, or stainless steel for copper and copper clad stainless steel, and stainless steel for

01-01-21

stainless steel and aluminum alloy. Use galvanized steel or stainless steel for galvanized steel.

2. Nails:

- a. Minimum diameter for copper nails: 3 mm (0.109 inch).
- b. Minimum diameter for aluminum nails 3 mm (0.105 inch).
- c. Minimum diameter for stainless steel nails: 2 mm (0.095 inch) and annular threaded.
- d. Length to provide not less than 22 mm (7/8 inch) penetration into anchorage.

3. Rivets: Not less than 3 mm (1/8 inch) diameter.

4. Expansion Shields: Fed Spec A-A-1925A.

E. Sealant: As specified in Section 07 92 00, JOINT SEALANTS for exterior locations.

F. Roof Cement: ASTM D4586.

2.3 SHEET METAL THICKNESS

A. Except as otherwise shown or specified use thickness or weight of sheet metal as follows:

B. Concealed Locations (Built into Construction):

- 1. Copper: 30g (10 oz) minimum 0.33 mm (0.013 inch thick).
- 2. Stainless steel: 0.25 mm (0.010 inch) thick.
- 3. Copper clad stainless steel: 0.25 mm (0.010 inch) thick.
- 4. Galvanized steel: 0.5 mm (0.021 inch) thick.

C. Exposed Locations:

- 1. Copper: 0.4 Kg (16 oz).
- 2. Stainless steel: 0.4 mm (0.015 inch).
- 3. Copper clad stainless steel: 0.4 mm (0.015 inch).

D. Thickness of aluminum or galvanized steel is specified with each item.

2.4 FABRICATION, GENERAL

A. Jointing:

- 1. In general, copper, stainless steel and copper clad stainless steel joints, except expansion and contraction joints, shall be locked and soldered.
- 2. Jointing of copper over 0.5 Kg (20 oz) weight or stainless steel over 0.45 mm (0.018 inch) thick shall be done by lapping, riveting and soldering.
- 3. Joints shall conform to following requirements:

01-01-21

- a. Flat-lock joints shall finish not less than 19 mm (3/4 inch) wide.
 - b. Lap joints subject to stress shall finish not less than 25 mm (one inch) wide and shall be soldered and riveted.
 - c. Unsoldered lap joints shall finish not less than 100 mm (4 inches) wide.
4. Flat and lap joints shall be made in direction of flow.
5. Edges of bituminous coated copper, copper covered paper, nonreinforced elastomeric sheeting and polyethylene coated copper shall be jointed by lapping not less than 100 mm (4 inches) in the direction of flow and cementing with asphalt roof cement or sealant as required by the manufacturer's printed instructions.
6. Soldering:
 - a. Pre tin both mating surfaces with solder for a width not less than 38 mm (1 1/2 inches) of uncoated copper, stainless steel, and copper clad stainless steel.
 - b. Wire brush to produce a bright surface before soldering lead coated copper.
 - c. Treat in accordance with metal producers recommendations other sheet metal required to be soldered.
 - d. Completely remove acid and flux after soldering is completed.
- B. Cleats:
 1. Fabricate cleats to secure flashings and sheet metal work over 300 mm (12 inches) wide and where specified.
 2. Provide cleats for maximum spacing of 300 mm (12 inch) centers unless specified otherwise.
 3. Form cleats of same metal and weights or thickness as the sheet metal being installed unless specified otherwise.
 4. Fabricate cleats from 50 mm (2 inch) wide strip. Form end with not less than 19 mm (3/4 inch) wide loose lock to item for anchorage. Form other end of length to receive nails free of item to be anchored and end edge to be folded over and cover nail heads.
- C. Edge Strips or Continuous Cleats:
 1. Fabricate continuous edge strips where shown and specified to secure loose edges of the sheet metal work.

01-01-21

2. Except as otherwise specified, fabricate edge strips or minimum 1.25 mm (0.050 inch) thick aluminum.
3. Use material compatible with sheet metal to be secured by the edge strip.
4. Fabricate in 3000 mm (10 feet) maximum lengths with not less than 19 mm (3/4 inch) loose lock into metal secured by edge strip.
5. Fabricate Strips for fascia anchorage to extend below the supporting wood construction to form a drip and to allow the flashing to be hooked over the lower edge at least 19 mm (3/4-inch).
6. Fabricate anchor edge maximum width of 75 mm (3 inches) or of sufficient width to provide adequate bearing area to insure a rigid installation using 1.6 mm (0.0625 inch) thick aluminum.

D. Drips:

1. Form drips at lower edge of sheet metal counter-flashings (cap flashings), fascias, gravel stops, wall copings, by folding edge back 13 mm (1/2 inch) and bending out 45 degrees from vertical to carry water away from the wall.
2. Form drip to provide hook to engage cleat or edge strip for fastening for not less than 19 mm (3/4 inch) loose lock where shown.

E. Edges:

1. Edges of flashings concealed in masonry joints opposite drain side shall be turned up 6 mm (1/4 inch) to form dam, unless otherwise specified or shown otherwise.
2. Finish exposed edges of flashing with a 6 mm (1/4 inch) hem formed by folding edge of flashing back on itself when not hooked to edge strip or cleat. Use 6 mm (1/4 inch) minimum penetration beyond wall face with drip for through-wall flashing exposed edge.
3. All metal roof edges shall meet requirements of IBC, current edition.

F. Metal Options:

1. Where options are permitted for different metals use only one metal throughout.
2. Stainless steel may be used in concealed locations for fasteners of other metals exposed to view.
- 3.

01-01-21

2.5 FINISHES

- A. Use same finish on adjacent metal or components and exposed metal surfaces unless specified or shown otherwise.
- B. In accordance with NAAMM Metal Finishes Manual AMP 500, unless otherwise specified.
- C. Finish exposed metal surfaces as follows, unless specified otherwise:
 - 1. Copper: Mill finish.
 - 2. Stainless Steel: Finish No. 2B or 2D.
 - 3. Aluminum:
 - a. Clear Finish: AA-C22A41 medium matte, clear anodic coating, Class 1 Architectural, 18 mm (0.7 mils) thick.
 - b. Colored Finish: AA-C22A42 (anodized) or AA-C22A44 (electrolytically deposited metallic compound) medium matte, integrally colored coating, Class 1 Architectural, 18 mm (0.7 mils) thick. Dyes will not be accepted.
 - c. Fluorocarbon Finish: AAMA 620, high performance organic coating.
 - d. Mill finish.
 - 4. Steel and Galvanized Steel:
 - a. Finish painted under Section 09 91 00, PAINTING unless specified as prefinished item.
 - b. Manufacturer's finish:
 - 1) Baked on prime coat over a phosphate coating.
 - 2) Baked-on prime and finish coat over a phosphate coating.
 - 3) Fluorocarbon Finish: AAMA 621, high performance organic coating.

2.6 THROUGH-WALL FLASHINGS

- A. Form through-wall flashing to provide a mechanical bond or key against lateral movement in all directions. Install a sheet having 2 mm (1/16 inch) deep transverse channels spaced four to every 25 mm (one inch), or ribbed diagonal pattern, or having other deformation unless specified otherwise.
 - 1. Fabricate in not less than 2400 mm (8 feet) lengths; 3000 mm (10 feet) maximum lengths.
 - 2. Fabricate so keying nests at overlaps.
- B. For Masonry Work When Concealed Except for Drip:
 - 1. Either copper, stainless steel, or copper clad stainless steel.

01-01-21

2. Form an integral dam at least 5 mm (3/16 inch) high at back edge.
3. Form exposed portions of flashing with drip, approximately 6 mm (1/4 inch) projection beyond wall face.

C. For Masonry Work When Exposed Edge Forms a Receiver for Counter Flashing:

1. Use same metal and thickness as counter flashing.
2. Form an integral dam at least 5 mm (3/16 inch) high at back edge.
3. Form exposed portion as snap lock receiver for counter flashing upper edge.

D. Window Sill Flashing and Lintel Flashing:

1. Use either copper, stainless steel, copper clad stainless-steel plane flat sheet, or nonreinforced elastomeric sheeting, bituminous coated copper, copper covered paper, or polyethylene coated copper.
2. Fabricate flashing at ends with folded corners to turn up 5 mm (3/16 inch) in first vertical masonry joint beyond masonry opening.
3. Turn up back edge as shown.
4. Form exposed portion with drip as specified or receiver.
- 5.

2.7 BASE FLASHING

A. Use metal base flashing at vertical surfaces intersecting built-up roofing without cant strips or where shown.

1. Use either copper, or stainless steel, thickness specified unless specified otherwise.
2. When flashing is over 250 mm (10 inches) in vertical height or horizontal width use either 0.5 Kg (20 oz) copper or 0.5 mm (0.018 inch) stainless steel.
3. Use stainless steel at aluminum roof curbs where flashing contacts the aluminum.
4. Use either copper, or stainless steel at pipe flashings.

B. Fabricate metal base flashing up vertical surfaces not less than 200 mm (8 inch) nor more than 400 mm (16 inch).

C. Fabricate roof flange not less than 100 mm (4 inches) wide unless shown otherwise. When base flashing length exceeds 2400 mm (8 feet) form flange edge with 13 mm (1/2 inch) hem to receive cleats.

01-01-21

D. Form base flashing bent from strip except pipe flashing. Fabricate ends for riveted soldered lap seam joints. Fabricate expansion joint ends as specified.

E. Pipe Flashing: (Other than engine exhaust or flue stack)

1. Fabricate roof flange not less than 100 mm (4 inches) beyond sleeve on all sides.
2. Extend sleeve up and around pipe and flange out at bottom not less than 13 mm (1/2 inch) and solder to flange and sleeve seam to make watertight.
3. At low pipes 200 mm (8 inch) to 450 mm (18 inch) above roof:
 - a. Form top of sleeve to turn down into the pipe at least 25 mm (one inch).
 - b. Allow for loose fit around and into the pipe.
4. At high pipes and pipes with goosenecks or other obstructions which would prevent turning the flashing down into the pipe:
 - a. Extend sleeve up not less than 300 mm (12 inch) above roofing.
 - b. Allow for loose fit around pipe.

2.8 COUNTERFLASHING (CAP FLASHING OR HOODS)

A. Either copper or stainless steel, unless specified otherwise.

B. Fabricate to lap base flashing a minimum of 100 mm (4 inches) with drip:

1. Form lock seams for outside corners. Allow for lap joints at ends and inside corners.
2. In general, form flashing in lengths not less than 2400 mm (8 feet) and not more than 3000 mm (10 feet).
3. Two-piece, lock in type flashing may be used in-lieu-of one piece counter-flashing.
4. Manufactured assemblies may be used.
5. Where counterflashing is installed at new work use an integral flange at the top designed to be extended into the masonry joint or reglet in concrete.
6. Where counterflashing is installed at existing work use surface applied type, formed to provide a space for the application of sealant at the top edge.

C. One-piece Counterflashing:

1. Back edge turned up and fabricate to lock into reglet in concrete.

01-01-21

2. Upper edge formed to extend full depth of masonry unit in mortar joint with back edge turned up 6 mm (1/4 inch).

D. Two-Piece Counterflashing:

1. Receiver to extend into masonry wall depth of masonry unit with back edge turned up 6 mm (1/4 inch) and exposed edge designed to receive and lock counterflashing upper edge when inserted.
2. Counterflashing upper edge designed to snap lock into receiver.

E. Surface Mounted Counterflashing; one or two piece:

1. Use at existing or new surfaces where flashing cannot be inserted in vertical surface.
2. One piece fabricate upper edge folded double for 65 mm (2 1/2 inches) with top 19 mm (3/4 inch) bent out to form "V" joint sealant pocket with vertical surface. Perforate flat double area against vertical surface with horizontally slotted fastener holes at 400 mm (16 inch) centers between end holes. Option: One piece surface mounted counter-flashing (cap flashing) may be used. Fabricate as detailed on Plate 51 of SMACNA Architectural Sheet Metal Manual.
3. Two pieces: Fabricate upper edge to lock into surface mounted receiver. Fabricate receiver joint sealant pocket on upper edge and lower edge to receive counterflashing, with slotted fastener holes at 400 mm (16 inch) centers between upper and lower edge.
4. 0.8mm (0.032 inch) thick aluminum.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General:

1. Install flashing and sheet metal items as shown in Sheet Metal and Air Conditioning Contractors National Association, Inc., publication, ARCHITECTURAL SHEET METAL MANUAL, except as otherwise shown or specified.
2. Apply Sealant as specified in Section 07 92 00, JOINT SEALANTS.
3. Apply sheet metal and other flashing material to surfaces which are smooth, sound, clean, dry and free from defects that might affect the application.
4. Remove projections which would puncture the materials and fill holes and depressions with material compatible with the substrate. Cover

01-01-21

- holes or cracks in wood wider than 6 mm (1/4 inch) with sheet metal compatible with the roofing and flashing material used.
5. Coordinate with masonry work for the application of a skim coat of mortar to surfaces of unit masonry to receive flashing material before the application of flashing.
 6. Apply a layer of 7 Kg (15 pound) saturated felt followed by a layer of rosin paper to wood surfaces to be covered with copper. Lap each ply 50 mm (2 inch) with the slope and nail with large headed copper nails.
 7. Confine direct nailing of sheet metal to strips 300 mm (12 inch) or less wide. Nail flashing along one edge only. Space nail not over 100 mm (4 inches) on center unless specified otherwise.
 8. Install bolts, rivets, and screws where indicated, specified, or required in accordance with the SMACNA Sheet Metal Manual. Space rivets at 75 mm (3 inch) on centers in two rows in a staggered position. Use neoprene washers under fastener heads when fastener head is exposed.
 9. Coordinate with roofing work for the installation of metal base flashings and other metal items having roof flanges for anchorage and watertight installation.
 10. Nail continuous cleats on 75 mm (3 inch) on centers in two rows in a staggered position.
 11. Nail individual cleats with two nails and bend end tab over nail heads. Lock other end of cleat into hemmed edge.
 12. Install flashings in conjunction with other trades so that flashings are inserted in other materials and joined together to provide a water tight installation.
 13. Where required to prevent galvanic action between dissimilar metal isolate the contact areas of dissimilar metal with sheet lead, waterproof building paper, or a coat of bituminous paint.
 14. Isolate aluminum in contact with dissimilar metals others than stainless steel, white bronze or other metal compatible with aluminum by:
 - a. Paint dissimilar metal with a prime coat of zinc-chromate or other suitable primer, followed by two coats of aluminum paint.
 - b. Paint dissimilar metal with a coat of bituminous paint.

01-01-21

- c. Apply an approved caulking material between aluminum and dissimilar metal.
- 15. Paint aluminum in contact with or built into mortar, concrete, plaster, or other masonry materials with a coat of bituminous paint.
- 16. Paint aluminum in contact with absorptive materials that may become repeatedly wet with two coats of bituminous paint or two coats of aluminum paint.
- 17. Bitumen Stops:
 - a. Install bitumen stops for built-up roof opening penetrations through deck and at formed sheet metal gravel stops.
 - b. Nail leg of bitumen stop at 300 mm (12 inch) intervals to nailing strip at roof edge before roofing material is installed.

3.2 THROUGH-WALL FLASHING

A. General:

- 1. Install continuous through-wall flashing between top of concrete foundation walls and bottom of masonry building walls; at top of concrete floors; under masonry, concrete, or stone copings and elsewhere as shown.
- 2. Where exposed portions are used as a counterflashings, lap base flashings at least 100 mm (4 inches) and use thickness of metal as specified for exposed locations.
- 3. Exposed edge of flashing may be formed as a receiver for two piece counter flashing as specified.
- 4. Terminate exterior edge beyond face of wall approximately 6 mm (1/4 inch) with drip edge where not part of counter flashing.
- 5. Turn back edge up 6 mm (1/4 inch) unless noted otherwise where flashing terminates in mortar joint or hollow masonry unit joint.
- 6. Terminate interior raised edge in masonry backup unit approximately 38 mm (1 1/2 inch) into unit unless shown otherwise.
- 7. Under copings terminate both edges beyond face of wall approximately 6 mm (1/4 inch) with drip edge.
- 8. Lap end joints at least two corrugations, but not less than 100 mm (4 inches). Seal laps with sealant.
- 9. Where dowels, reinforcing bars and fastening devices penetrate flashing, seal penetration with sealing compound. Sealing compound is specified in Section 07 92 00, JOINT SEALANTS.

01-01-21

10. Coordinate with other work to set in a bed of mortar above and below flashing so that total thickness of the two layers of mortar and flashing are same as regular mortar joint.
11. Where ends of flashing terminate turn ends up 25 mm (1 inch) and fold corners to form dam extending to wall face in vertical mortar or veneer joint.
12. Turn flashing up not less than 200 mm (8 inch) between masonry or behind exterior veneer.
13. When flashing terminates in reglet extend flashing full depth into reglet and secure with lead or plastic wedges spaced 150 mm (6 inch) on center.
14. Continue flashing around columns:
 - a. Where flashing cannot be inserted in column reglet hold flashing vertical leg against column.
 - b. Counterflash top edge with 75 mm (3 inch) wide strip of saturated cotton unless shown otherwise. Secure cotton strip with roof cement to column. Lap base flashing with cotton strip 38 mm (1 1/2 inch).
- B. Flashing at Top of Concrete Foundation Walls Where concrete is exposed. Turn up not less than 200 mm (8 inch) high and into masonry backup mortar joint or reglet in concrete backup as specified.
- C. Flashing at Top of Concrete Floors (except where shelf angles occur): Place flashing in horizontal masonry joint not less than 200 mm (8 inch) below floor slab and extend into backup masonry joint at floor slab 38 mm (1 1/2 inch).
- D. Flashing at Cavity Wall Construction: Where flashing occurs in cavity walls turn vertical portion up against backup under waterproofing, if any, into mortar joint. Turn up over insulation, if any, and horizontally through insulation into mortar joint.
- E. Flashing at Veneer Walls:
 1. Install near line of finish floors over shelf angles or where shown.
 2. Turn up against sheathing.
 3. At stud framing, hem top edge 19 mm (3/4 inch) and secure to each stud with stainless steel fasteners through sheathing.
 4. At concrete backing, extend flashing into reglet as specified.

01-01-21

5. Coordinate with installation of waterproofing or asphalt felt for lap over top of flashing.

F. Lintel Flashing when not part of shelf angle flashing:

1. Install flashing full length of lintel to nearest vertical joint in masonry over veneer.
2. Turn ends up 25 mm (one inch) and fold corners to form dam and extend end to face of wall.
3. Turn back edge up to top of lintel; terminate back edge as specified for back-up wall.

G. Window Sill Flashing:

1. Install flashing to extend not less than 100 mm (4 inch) beyond ends of sill into vertical joint of masonry or veneer.
2. Turn back edge up to terminate under window frame.
3. Turn ends up 25 mm (one inch) and fold corners to form dam and extend to face of wall.

H. Door Sill Flashing:

1. Install flashing under bottom of plate sills of doors over curbs opening onto roofs. Extend flashing out to form counter flashing or receiver for counter flashing over base flashing. Set in sealant.
2. Extend sill flashing 200 mm (8 inch) beyond jamb opening. Turn ends up one inch in vertical masonry joint, extend end to face of wall. Join to counter flashing for water tight joint.
3. Where doors thresholds cover over waterproof membranes install sill flashing over water proof membrane under thresholds. Extend beyond opening to cover exposed portion of waterproof membrane and not less than 150 mm (6 inch) beyond door jamb opening at ends. Turn up approximately 6 mm (1/4 inch) under threshold.

3.3 BASE FLASHING

A. Install where roof membrane type base flashing is not used and where shown.

1. Install flashing at intersections of roofs with vertical surfaces or at penetrations through roofs, to provide watertight construction.
2. Install metal flashings and accessories having flanges extending out on top of the built-up roofing before final bituminous coat and roof aggregate is applied.

01-01-21

3. Set flanges in heavy trowel coat of roof cement and nail through flanges into wood nailers over bituminous roofing.
4. Secure flange by nailing through roofing into wood blocking with nails spaced 75 mm (3 inch) on centers or, when flange over 100 mm (4 inch) wide terminate in a 13 mm (1/2 inch) folded edge anchored with cleats spaced 200 mm (8 inch) on center. Secure one end of cleat over nail heads. Lock other end into the seam.
- B. For long runs of base flashings install in lengths of not less than 2400 mm (8 feet) nor more than 3000 mm (ten feet). Install a 75 mm (3 inch) wide slip type, loose lock expansion joint filled with sealant in joints of base flashing sections over 2400 mm (8 feet) in length. Lock and solder corner joints at corners.
- C. Extend base flashing up under counter flashing of roof specialties and accessories or equipment not less than 75 mm (3 inch).

3.4 COUNTERFLASHING (CAP FLASHING OR HOODS)

A. General:

1. Install counterflashing over and in conjunction with installation of base flashings, except as otherwise specified or shown.
2. Install counterflashing to lap base flashings not less than 100 mm (4 inch).
3. Install upper edge or top of counterflashing not less than 225 mm (9 inch) above top of the roofing.
4. Lap joints not less than 100 mm (4 inch). Stagger joints with relation to metal base flashing joints.
5. Use surface applied counterflashing on existing surfaces and new work where not possible to integrate into item.
6. When fastening to concrete or masonry, use screws driven in expansion shields set in concrete or masonry. Use screws to wood and sheet metal. Set fasteners in mortar joints of masonry work.

B. One Piece Counterflashing:

1. Where flashing is installed at new masonry, coordinate to insure proper height, embed in mortar, and end lap.
2. Where flashing is installed in reglet in concrete insert upper edge into reglet. Hold flashing in place with lead wedges spaced not more than 200 mm (8 inch) apart. Fill joint with sealant.
3. Where flashing is surface mounted on flat surfaces.

01-01-21

- a. When top edge is double folded anchor flat portion below sealant "V" joint with fasteners spaced not over 400 mm (16 inch) on center:
 - 1) Locate fasteners in masonry mortar joints.
 - 2) Use screws to sheet metal or wood.
- b. Fill joint at top with sealant.
- 4. Where flashing or hood is mounted on pipe.
 - a. Secure with draw band tight against pipe.
 - b. Set hood and secure to pipe with a one by 25 mm x 3 mm (1 x 1/8 inch) bolt on stainless steel draw band type clamp, or a stainless worm gear type clamp.
 - c. Completely fill joint at top with sealant.
- C. Two-Piece Counterflashing:
 - 1. Where receiver is installed at new masonry coordinate to insure proper height, embed in mortar, and lap.
 - 2. Surface applied type receiver:
 - a. Secure to face construction in accordance, with manufacturers' instructions.
 - b. Completely fill space at the top edge of receiver with sealant.
 - 3. Insert counter flashing in receiver in accordance with fabricator or manufacturer's instructions and to fit tight against base flashing.
- D. Where vented edge occur install so lower edge of counterflashing is against base flashing.
- E. When counter flashing is a component of other flashing install as shown.

3.5 REGLETS

- A. Install reglets in a manner to provide a watertight installation.
- B. Locate reglets not less than 225 mm (9 inch) nor more than 400 mm (16 inch) above roofing, and not less than 125 mm (5 inch) nor more than 325 mm (13 inch) above cant strip.
- C. Butt and align end joints or each section of reglet and securely hold in position until concrete or mortar are hardened:
 - 1. Coordinate reglets for anchorage into concrete with formwork construction.
 - 2. Coordinate reglets for masonry to locate horizontally into mortar joints.

01-01-21

3.6 GRAVEL STOPS

A. General:

1. Install gravel stops and fascias with allowance for expansion at each joint; minimum of 6 mm (1/4 inch).
2. Extend roof flange of gravel stop and splice plates not less than four inches out over roofing and nail or screw to wood nailers. Space fasteners on 75 mm (3 inch) centers in staggered pattern.
3. Install continuous cleat for fascia drip edge. Secure with fasteners as close to lower edge as possible on 75 mm (3 inch) centers.
4. Where ends of gravel stops and fascias abut a vertical wall, provide a watertight, flashed and sealant filled joint.
5. Set flange in roof cement when installed over built-up roofing.
6. Edge securement for low-slope roofs: Low-slope membrane roof systems metal edge securement, except gutters, shall be designed in accordance with ANSI/SPRI/FM ES-1, except the basic wind speed shall be determined from Figure 1609, of IBC 2003.

B. Sheet metal gravel stops and fascia:

1. Install with end joints of splice plates sheets lapped three inches.
2. Hook the lower edge of fascia into a continuous edge strip.
3. Lock top section to bottom section for two-piece fascia.

C. Corrugated sheet gravel stops and fascia:

1. Install 300 mm (12 inch) wide sheet flashing centered under joint. A combination bottom and cover plate, extending above and beneath the joint, may be used.
2. Hook lower edge of fascia into a continuous edge strip.

D. Scuppers:

1. Install scupper with flange behind gravel stops; leave 6 mm (1/4 inch) joint to gravel stop.
2. Set scupper at roof water line and fasten to wood blocking.
3. Use sealant to seal joint with fascia gravel stops at ends.
4. Coordinate to lap over conductor head and to discharge water into conductor head.

3.7 COPINGS

A. General:

01-01-21

1. On walls topped with a wood plank, install a continuous edge strip on the front and rear edge of the plank. Lock the coping to the edge strip with a 19 mm (3/4 inch) loose lock seam.
2. Where shown turn down roof side of coping and extend down over base flashing as specified for counter-flashing. Secure counter-flashing to lock strip in coping at continuous cleat.
3. Install ends adjoining existing construction so as to form space for installation of sealants. Sealant is specified in Section 07 92 00, JOINT SEALANTS.

B. Aluminum Coping:

1. Install with 6 mm (1/4 inch) joint between ends of coping sections.
2. Install joint covers, centered at each joint, and securely lock in place.

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

01-01-21

Page Intentionally Left Blank

01-01-21

SECTION 07 71 00
ROOF SPECIALTIES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies fascias.

1.2 RELATED WORK

- A. Section 07 92 00, JOINT SEALANTS: Sealant Material and Installation.
- B. Section 09 06 00, SCHEDULE FOR FINISHES: Color and Texture of Finish

1.3 QUALITY CONTROL

- A. Provide roof accessories that products of manufacturers regularly engaged in producing the kinds of products specified.
- B. For each accessory type provide products made by the same manufacturer.
- C. Assemble each accessory to the greatest extent possible before delivery to the site.
- D. Provide each accessory with FM approval listing for class specified.

1.4 PERFORMANCE REQUIREMENTS

- A. Provide roof accessories that withstand exposure to weather and resist thermal movement without failure, rattling, leaking, or fastener disengagement due to defective manufacture, fabrication, or installation.
- B. Provide roof accessories listed in FM Approvals "RoofNav". Identify materials with FM Approval markings.
- C. Manufacture and install roof accessories to allow for thermal movements from ambient and surface temperature changes to prevent buckling, opening of joints, hole elongation, overstressing of components, failure of joint sealants, failure of connections, and other detrimental effects.
 - 1. Provide clips that resist rotation and avoid shear stress as a result of thermal movements.
 - 2. For design purposes, base provisions for thermal movement on assumed ambient temperature (range) from minus 18 degrees C (0 degrees F), ambient to 82 degrees C (180 degrees F).

1.5 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

01-01-21

- B. Samples: Representative sample panel of color-anodized aluminum not less than 101 x 101 mm (4 x 4 inches), except extrusions are to be of a width not less than section to be used. Submit sample that shows coating with integral color and texture. Include manufacturer's identifying label.
- C. Shop Drawings: Each item specified showing design, details of construction, installation and fastenings.
- D. Manufacturer's Literature and Data: Each item specified.
- E. Certificates: Stating that aluminum has been given specified thickness of anodizing.

1.6 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. ASTM International (ASTM):
 - A240/A240M-20.....Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications
 - A653/A653M-20.....Steel Sheet Zinc-Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvannealed) by the Hot Dip Process
 - A666-15.....Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar
 - B209-14.....Aluminum and Aluminum Alloy-Sheet and Plate
 - B209M-14.....Aluminum and Aluminum Alloy-Sheet and Plate (Metric)
 - B221-14.....Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes
 - B221M-13.....Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes (Metric)
 - B32-08 (2014).....Solder Metal
 - B370-12 (2019).....Copper Sheet and Strip for Building Construction
 - B882-10 (2018).....Pre-Patinated Copper for Architectural Applications

01-01-21

- C612-14(2019).....Mineral Fiber Block and Board Thermal
Insulation
- D1187/D1187M-97(2018)...Asphalt-Base Emulsions for Use as Protective
Coatings for Metal
- D1970/D1970M-20.....Self-Adhering Polymer Modified Bituminous Sheet
Materials Used as Steep Roofing Underlayment
for Ice Dam Protection
- D226/D226M-17.....Asphalt-Saturated Organic Felt Used in Roofing
and Waterproofing
- D4869/D4969M-16a.....Asphalt-Saturated Organic Felt Underlayment
Used In Steep Slope Roofing
- C. National Association of Architectural Metal Manufacturers (NAAMM):
AMP 500-06.....Metal Finishes Manual
- D. American Architectural Manufacturers Association (AAMA):
2605-11.....High Performance Organic Coatings on
Architectural Extrusions and Panels.
611-14.....Anodized Architectural Aluminum
- E. FM Global (FM):
RoofNav.....Approved Roofing Assemblies and Products

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Aluminum, Extruded: ASTM B221M (B221).
- B. Aluminum Sheet: ASTM B209M (B209).

2.2 EXTRUDED ALUMINUM GRAVEL STOPS AND FASCIAS

- A. Fabricate of aluminum not less than 2 mm (0.078 inch) thick.
- B. Turn fascia down face of wall and up above roof as shown in
construction documents.
- C. Maximum lengths of 3.05 M (10-feet).
- D. Shop fabricate external and internal corners as one (1)-piece
assemblies with not less than 305 mm (12 inch) leg lengths.
- E. Provide 101 mm (4 inch) wide 2 mm (0.078 inch) thick watertight joint
covers with 152 mm (6 inch) wide 0.8 mm (0.030 inch) thick underside
joint flashing.
- F. Finish: Two-coat fluoropolymer Color - Medium Bronze

2.3 FINISH

- A. In accordance with NAAMM AMP 500-505.

01-01-21

B. Fluoropolymer Finishes: High performance organic coating. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.

1. Two-Coat Fluoropolymer: AAMA 2605. Fluoropolymer finish containing not less than 70 percent PVDF resin by weight in color coat.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Examine substrates, areas, and conditions, to verify actual locations, dimensions, and other conditions affecting performance of the Work.
- B. Verify that substrate is sound, dry, smooth, clean, sloped for drainage where applicable, and securely anchored.
- C. Install roof accessories where indicated in construction documents.
- D. Secure with fasteners in accordance with manufacture's printed installation instructions and approved shop drawings unless shown otherwise. Provide fasteners suitable for application, for metal types being secured and designed to meet performance requirements.
- E. Coordinate with roofing work for installation of items in sequence to prevent water infiltration.
- F. Gravel Stops and Fascias:
 1. Install gravel stops and fascia with butt joints with approximately 6 mm (1/4 inch) space for expansion.
 2. Over each joint provide cover plates of sheet aluminum, complete with concealed sheet aluminum flashing, centered under each joint.
 3. Provide lap cover plates and concealed flashing over the gravel stop and fascia not less than 101 mm (4 inches).
 4. Extend concealed flashing over built-up roofing, embed in roof cement and turn down over face of blocking at roof edge.

3.2 PROTECTION OF ALUMINUM

- A. Provide protection for aluminum against galvanic action wherever dissimilar materials are in contact, by painting the contact surfaces of the dissimilar material with two (2) coats of asphalt coating (complete coverage), or by separating the contact surfaces with a preformed neoprene tape having pressure sensitive adhesive coating on one (1) side.

01-01-21

- B. Paint aluminum in contact with wood, concrete and masonry, or other absorptive materials, that may become repeatedly wet, with two (2) coats of asphalt coating.

3.3 ADJUSTING

- A. Adjust expansion joints to close tightly and be watertight; insuring maximum allowance for building movement.

3.4 PROTECTION

- A. Protect roof accessories from damage during installation and after completion of the work from subsequent construction.

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

01-01-21

Page Intentionally Left Blank

07-01-23

SECTION 07 81 00
APPLIED FIREPROOFING

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies spray-applied cementitious coverings to provide fire resistance to interior structural steel members shown. Sprayed-applied mineral fiber fireproofing is not permitted.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Installer qualifications.
- C. Testing laboratory accreditations.
- D. Manufacturer's Literature and Data:
 - 1. Manufacturer's complete and detailed application instructions and specifications.
 - 2. Manufacturer's repair and patching instructions.
- E. Certificates:
 - 1. Certificate from testing laboratory attesting fireproofing material and application method meet the specified fire ratings.
 - a. List thickness and density of material required to meet fire ratings.
 - b. Accompanied by complete test report and test record.
 - 2. Manufacturer's certificate indicating sprayed-on fireproofing material supplied under the Contract is same within manufacturing tolerance as fireproofing material tested.
- F. Miscellaneous:
 - 1. Manufacturer's written approval of surfaces to receive sprayed-on fireproofing.
 - 2. Manufacturer's written approval of completed installation.
 - 3. Manufacturer's written approval of the applicators of fireproofing material.

1.3 PRODUCT DELIVERY, STORAGE AND HANDLING:

- A. Deliver to job-site in sealed containers marked and labeled to show manufacturer's name and brand and UL certification markings of compliance with the specified requirements.

07-01-23

- B. Remove damaged or opened containers from the site.
- C. Store the materials off the ground, under cover, away from damp surfaces.
- D. Keep dry until ready for use.
- E. Remove materials that have been exposed to water before installation from the site.

1.4 FIELD CONDITIONS:

- A. Temperature: Do not apply fireproofing when substrate or ambient temperature is below 4 degrees C (40 degrees F) unless temporary protection and heat are provided to maintain temperature at or above stated value during application and for 24 hours before and after application.
- B. Humidity: Maintain relative humidity levels within limits recommended by fireproofing manufacturer.
- C. Ventilation: Provide ventilation to properly dry the fireproofing after application. Provide a minimum of four (4) air exchanges per hour by forced air circulation. When permitted by Contracting Officer Representative (COR), ventilate by natural circulation.

1.5 QUALITY ASSURANCE:

- A. Installer Qualifications: A firm or individual certified, licensed, or otherwise qualified by fireproofing manufacturer as experienced and with sufficient trained staff to install manufacturer's products according to specified requirements. Submit manufacturer's certification that each installer is trained and qualified to install the specified fireproofing. Submit evidence that each installer has a minimum of three (3) years' experience and a minimum of four (4) installations using the specified fireproofing.
- B. Testing Laboratory Accreditation Requirements: Construction materials testing laboratories must be accredited by a laboratory accreditation authority. Submit a copy of the Certificate of Accreditation and Scope of Accreditation.
- C. Test for fire endurance in accordance with ASTM E119, for fire rating specified, in a nationally recognized laboratory.
- D. Manufacturer's inspection and approval of surfaces to receive fireproofing.
- E. Manufacturer's approval of fireproofing applications.

07-01-23

- F. Manufacturer's approval of completed installation.
- G. Manufacturer's representative is to observe and advise at the commencement of application, and is required to visit the site as required thereafter for the purpose of ascertaining proper application.
- H. Pre-Application Test Area.
 - 1. Apply a test area consisting of a typical overhead fireproofing installation, including not less than 4.5 m (15 feet) of beam and deck.
 - a. Apply to one (1) column.
 - b. Apply for the hourly ratings required in the construction documents.
 - 2. Install in location selected by the COR, for approval by the representative of the fireproofing material manufacturer and the COR.
 - 3. Perform Bond test for cohesive and adhesive strength in accordance with ASTM E736 for each applied fireproofing design used.
 - 4. Perform density test in accordance with ASTM E736 for each applied fireproofing design used.
 - 5. Do not proceed in other areas until installation of test area has been completed and approved.
 - 6. Keep approved installation area open for observation as criteria for sprayed-on fireproofing.

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. ASTM International (ASTM):
 - C841-03(R2013).....Installation of Interior Lathing and Furring
 - C847-14.....Metal Lath
 - E84-14.....Surface Burning Characteristics of Building Materials
 - E119-12a.....Fire Tests of Building Construction and Materials
 - E605-93(R2011).....Thickness and Density of Sprayed Fire-Resistive Materials Applied to Structural Members

07-01-23

E736-00 (R2011)Cohesion/Adhesion of Sprayed Fire-Resistive
Materials Applied to Structural Members
E759-92 (R2011)The Effect of Deflection on Sprayed Fire-
Resistive Material Applied to Structural
Members
E760-92 (R2011)Impact on Bonding of Sprayed Fire-Resistive
Material Applied to Structural Members
E761-92 (R2011)Compressive Strength of Fire-Resistive Material
Applied to Structural Members
E859-93 (R2011)Air Erosion of Sprayed Fire-Resistive Materials
Applied to Structural Members
E937-93 (R2011)Corrosion of Steel by Sprayed Fire-Resistive
Material Applied to Structural Members
E1042-02 (R2014)Acoustically, Absorptive Materials Applied by
Trowel or Spray.
G21-13.....Determining Resistance of Synthetic Polymeric
Materials to Fungi

C. Underwriters Laboratories, Inc. (UL):

Fire Resistance Directory...Latest Edition including Supplements

D. Warnock Hersey (WH):

Certification Listings..Latest Edition

E. Factory Mutual System (FM):

Approval Guide.....Latest Edition including Supplements

F. Environmental Protection Agency (EPA):

40 CFR 59 (2014).....National Volatile Organic Compound Emission
Standards for Consumer and Commercial Products

PART 2 - PRODUCTS

2.1 SPRAYED-ON FIREPROOFING:

A. ASTM E1042, Class (a), Category A.

1. Factory mixed cementitious materials with approved aggregate.

B. Materials containing asbestos are not permitted.

C. Fireproofing characteristics when applied in the thickness and density
required to achieve the fire-rating specified.

	Characteristic	Test	Results
1.	Deflection	ASTM E759	No cracking, spalling, or delamination when backing to

07-01-23

	Characteristic	Test	Results
			which it is applied has a deflection up to 1/120 in 3 m (10 ft.)
2.	Corrosion-Resistance	ASTM E937	No promotion of corrosion of steel.
3.	Bond Impact	ASTM E760	No cracking, spalling, or delamination.
4.	Cohesion/Adhesion (Bond Strength)	ASTM E736	Minimum cohesive/adhesive strength of 9.57 kPa (200 lbf per sq. ft.) for protected areas. 19.15 kPa (400 lbf per sq. ft.) for exposed areas.
5.	Air Erosion	ASTM E859	Maximum gain weight of the collecting filter 0.27 gm per sq. meter (0.025 gm per sq. ft.).
6.	Compressive Strength	ASTM E761	Minimum compressive strength 48 kPa (1000 psf).
7.	Surface Burning Characteristics with adhesive and sealer to be used	ASTM E84	Flame spread 25 or less smoke developed 50 or less
8.	Fungi Resistance	ASTM G21	Resistance to mold growth when inoculated with aspergillus niger (28 days for general application)

2.2 ADHESIVE:

- A. Adhesive may be an integral part of the material or applied separately to surface receiving fireproofing material.

2.3 SEALER:

- A. Surface burning characteristics as specified for fireproofing material.
- B. Fungus resistant.
- C. Sealer may be an integral part of the material or applied separately to the exposed surface. When applied separately use contrasting color pigmented sealer, white preferred.

07-01-23

2.4 WATER:

- A. Clean, fresh, and free from organic and mineral impurities.
- B. pH of 6.9 to 7.1.

2.5 MECHANICAL BOND MATERIAL:

- A. Expanded Metal Lath: ASTM C847, minimum weight of 0.92 kg per square meter (1.7 pounds per square yard) or as required, according to fire-resistance designs indicated and fire proofing manufacturer's written instructions.
- B. Fasteners: ASTM C841.
- C. Reinforcing Fabric: Glass- or carbon-fiber fabric of type, weight, and form required to comply with fire-resistance designs indicated; approved and provided by fireproofing manufacturer.
- D. Reinforcing Mesh: Metallic mesh reinforcement of type, weight, and form required to comply with fire-resistance design indicated; approved and provided by fireproofing manufacturer. Include pins and attachments.

PART 3 - EXECUTION

3.1 EXAMINATION:

- A. Verify surfaces to receive fireproofing are clean and free of dust, soot, oil, grease, water soluble materials or any foreign substance which would prevent adhesion of the fireproofing material.
- B. Verify hangers, inserts and clips are installed before the application of fireproofing material.
- C. Verify ductwork, piping, and other obstructing material and equipment is not installed that will interfere with fireproofing installation.
- D. Verify concrete work on steel decking and concrete encased steel is completed.
- E. When applied in conjunction with roof structures or roof decks, verify that roofing, installation of rooftop HVAC equipment, and other related work are complete.
- F. Verify temperature and enclosure conditions required by fire-proofing material manufacturer.
- G. Conduct tests according to fireproofing manufacturer's written instructions to verify that substrates are free of substances capable of interfering with bond. Submit test report.

07-01-23

3.2 APPLICATION:

- A. Do not start application until written approval has been obtained from manufacturer of fireproofing materials that surfaces have been inspected by the manufacturer or his representative, and are suitable to receive sprayed-on fireproofing.
- B. Coordinate application of fireproofing material with other trades.
- C. Cover other work and exterior openings subject to damage from fallout or overspray of fireproofing materials during application.
- D. Application of Metal Lath:
 - 1. Apply to beam and columns having painted surfaces which fail ASTM E736 Bond Test requirements in pre-application test area.
 - 2. Apply to beam flanges 305 mm (12-inches) or more in width.
 - 3. Apply to column flanges 406 mm (16-inches) or more in width.
 - 4. Apply to beam or column web 406 mm (16-inches) or more in depth.
 - 5. Tack weld or mechanically fasten on maximum of 305 mm (12-inch) center.
 - 6. Lap and tie lath member in accordance with ASTM C841.
- E. Mix and apply in accordance with manufacturer's instructions.
 - 1. Mechanically control material and water ratios.
 - 2. Apply adhesive and sealer, when not an integral part of the materials, in accordance with the manufacturer's instructions.
 - 3. Apply to density and thickness indicated in UL Fire Resistance Directory, FM Approval Guide, or WH Certification Listings unless specified otherwise. Test in accordance with ASTM E119.
- F. Complete application is to be completed in one area. Inspection and approval by COR is required before removal of application equipment and proceeding with further work.

3.3 FIELD TESTS:

- A. The applied fireproofing to be tested by a COR approved independent testing laboratory and paid for by the Contractor. Submit test reports documenting results of tests on the applied material in the project.
- B. COR will select area to be tested in specific bays on each floor using a geometric grid pattern. Apply test sample every 929 square meters (10,000 square feet) of floor area or two (2) for each floor, whichever produces the greatest number of test areas.

07-01-23

- C. Test for thickness and density in accordance with ASTM E605. Areas showing thickness less than that required as a result of fire endurance test are not acceptable.
- D. Areas showing less than required fireproofing characteristics are not suitable for the following field tests.
 - 1. Test for cohesion/adhesion: ASTM E736.
 - 2. Test for bond impact strength: ASTM E760.

3.4 PATCHING AND REPAIRING:

- A. Inspect after mechanical, electrical and other trades have completed work in contact with fireproofing material, but before sprayed material is covered by subsequent construction.
- B. Perform corrective measures in accordance with fireproofing material manufacturer's recommendations.
 - 1. Respray areas requiring additional fireproofing material to provide the required thickness, and replace dislodged or removed material.
 - 2. Spray material for patching by machine directly on point to be patched, or into a container and then hand apply.
 - 3. Do not hand mix material.
- C. Repair:
 - 1. Respray test and rejected areas.
 - 2. Patch fireproofing material which is removed or disturbed after approval.
- D. Perform final inspection of sprayed areas after patching and repair.

3.5 SCHEDULE:

- A. Apply fireproofing material in interior structural steel members and on underside of interior steel floor and roof decks, except on following surfaces:
 - 1. Structural steel and underside of steel decks in elevator or dumbwaiter machine rooms.
 - 2. Steel members in elevator hoist ways.
 - 3. Areas used as air handling plenums.
 - 4. Steel to be encased in concrete or designated to receive other type of fireproofing.

Fire Rating Schedule

07-01-23

	Element	Hourly Rating	UL Design Reference
	Columns supporting one floor	2	
	Columns supporting more than one floor	3	
	Columns supporting roof	2	
	Floor decks	2	
	Floor supports	2	
	Roof decks	1.5	
	Roof supports	2	

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

07-01-23

Page Intentionally Left Blank

01-01-21

SECTION 07 84 00
FIRESTOPPING

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Provide UL or equivalent approved firestopping system for the closures of openings in walls, floors, and roof decks against penetration of flame, heat, and smoke or gases in fire resistant rated construction.
- B. Provide UL or equivalent approved firestopping system for the closure of openings in walls against penetration of gases or smoke in smoke partitions.

1.2 RELATED WORK

- A. Section 07 84 00, FIRESTOPPING.
- B. Section 07 92 00, JOINT SEALANTS: Sealants and application.
- C. Section 23 31 00, HVAC DUCTS AND CASINGS: Fire and smoke damper assemblies in ductwork.
- D. Section 23 37 00, AIR OUTLETS AND INLETS: Fire and smoke damper assemblies in ductwork.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Installer qualifications.
- C. Inspector qualifications.
- D. Manufacturers literature, data, and installation instructions for types of firestopping and smoke stopping used.
- E. List of FM, UL, or WH classification number of systems installed.
- F. Certified laboratory test reports for ASTM E814 tests for systems not listed by FM, UL, or WH proposed for use.
- G. Submit certificates from manufacturer attesting that firestopping materials comply with the specified requirements.

1.4 DELIVERY AND STORAGE

- A. Deliver materials in their original unopened containers with manufacturer's name and product identification.
- B. Store in a location providing protection from damage and exposure to the elements.

01-01-21

1.5 QUALITY ASSURANCE

- A. FM, UL, or WH or other approved laboratory tested products will be acceptable.
- B. Installer Qualifications: A firm that has been approved by FM Global according to FM Global 4991 or been evaluated by UL and found to comply with UL's "Qualified Firestop Contractor Program Requirements." Submit qualification data.
- C. Inspector Qualifications: Contractor to engage a qualified inspector to perform inspections and final reports. The inspector to meet the criteria contained in ASTM E699 for agencies involved in quality assurance and to have a minimum of two years' experience in construction field inspections of firestopping systems, products, and assemblies. The inspector to be completely independent of, and divested from, the Contractor, the installer, the manufacturer, and the supplier of material or item being inspected. Submit inspector qualifications.

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. ASTM International (ASTM):
 - E84-20.....Surface Burning Characteristics of Building Materials
 - E699-16.....Standard Specification for Agencies Involved in Testing, Quality Assurance, and Evaluating of Manufactured Building Components
 - E814-13a(2017).....Fire Tests of Penetration Firestop Systems
 - E2174-20a.....Standard Practice for On-Site Inspection of Installed Firestop Systems
 - E2393-20.....Standard Practice for On-Site Inspection of Installed Fire Resistive Joint Systems and Perimeter Fire Barriers
- C. FM Global (FM):
 - Annual Issue Approval Guide Building Materials
 - 4991-13.....Approval of Firestop Contractors
- D. Underwriters Laboratories, Inc. (UL):
 - Annual Issue Building Materials Directory

01-01-21

- E. Annual Issue Fire Resistance Directory
723-Edition 11(2018)....Standard for Test for Surface Burning
Characteristics of Building Materials
1479-04(2015).....Fire Tests of Penetration Firestops
- F. Intertek Testing Services - Warnock Hersey (ITS-WH):
Annual Issue Certification Listings
- G. Environmental Protection Agency (EPA):
40 CFR 59(2014).....National Volatile Organic Compound Emission
Standards for Consumer and Commercial Products

PART 2 - PRODUCTS

2.1 FIRESTOP SYSTEMS

- A. Provide either factory built (Firestop Devices) or field erected (through-Penetration Firestop Systems) to form a specific building system maintaining required integrity of the fire barrier and stop the passage of gases or smoke. Firestop systems to accommodate building movements without impairing their integrity.
- B. Through-penetration firestop systems and firestop devices tested in accordance with ASTM E814 or UL 1479 using the "F" or "T" rating to maintain the same rating and integrity as the fire barrier being sealed. "T" ratings are not required for penetrations smaller than or equal to 101 mm (4 inches) nominal pipe or 0.01 square meter (16 square inches) in overall cross sectional area.
- C. Firestop sealants used for firestopping or smoke sealing to have the following properties:
 - 1. Contain no flammable or toxic solvents.
 - 2. Release no dangerous or flammable out gassing during the drying or curing of products.
 - 3. Water-resistant after drying or curing and unaffected by high humidity, condensation or transient water exposure.
 - 4. When installed in exposed areas, capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.
- D. Firestopping system or devices used for penetrations by glass pipe, plastic pipe or conduits, unenclosed cables, or other non-metallic materials to have following properties:

01-01-21

1. Classified for use with the particular type of penetrating material used.
 2. Penetrations containing loose electrical cables, computer data cables, and communications cables protected using firestopping systems that allow unrestricted cable changes without damage to the seal.
- E. Maximum flame spread of 25 and smoke development of 50 when tested in accordance with ASTM E84 or UL 723. Material to be an approved firestopping material as listed in UL Fire Resistance Directory or by a nationally recognized testing laboratory.
- F. FM, UL, or WH rated or tested by an approved laboratory in accordance with ASTM E814.
- G. Materials to be nontoxic and noncarcinogen at all stages of application or during fire conditions and to not contain hazardous chemicals. Provide firestop material that is free from Ethylene Glycol, PCB, MEK, and asbestos.
- H. For firestopping exposed to view, traffic, moisture, and physical damage, provide products that do not deteriorate when exposed to these conditions.
1. For piping penetrations for plumbing and wet-pipe sprinkler systems, provide moisture-resistant through-penetration firestop systems.
 2. For floor penetrations with annular spaces exceeding 101 mm (4 inches) or more in width and exposed to possible loading and traffic, provide firestop systems capable of supporting the floor loads involved either by installing floor plates or by other means acceptable to the firestop manufacturer.
 3. For penetrations involving insulated piping, provide through-penetration firestop systems not requiring removal of insulation.

2.2 SMOKE STOPPING IN SMOKE PARTITIONS

- A. Provide silicone sealant in smoke partitions as specified in Section 07 92 00, JOINT SEALANTS.
- B. Provide mineral fiber filler and bond breaker behind sealant.
- C. Sealants to have a maximum flame spread of 25 and smoke developed of 50 when tested in accordance with ASTM E84.

01-01-21

- D. When used in exposed areas capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Submit product data and installation instructions, as required by article, submittals, after an on-site examination of areas to receive firestopping.
- B. Examine substrates and conditions with installer present for compliance with requirements for opening configuration, penetrating items, substrates, and other conditions affecting performance of firestopping. Do not proceed with installation until unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Remove dirt, grease, oil, laitance and form-release agents from concrete, loose materials, or other substances that prevent adherence and bonding or application of the firestopping or smoke stopping materials.
- B. Remove insulation on insulated pipe for a distance of 150 mm (6 inches) on each side of the fire rated assembly prior to applying the firestopping materials unless the firestopping materials are tested and approved for use on insulated pipes.
- C. Prime substrates where required by joint firestopping system manufacturer using that manufacturer's recommended products and methods. Confine primers to areas of bond; do not allow spillage and migration onto exposed surfaces.
- D. Masking Tape: Apply masking tape to prevent firestopping from contacting adjoining surfaces that will remain exposed upon completion of work and that would otherwise be permanently stained or damaged by such contact or by cleaning methods used to remove smears from firestopping materials. Remove tape as soon as it is possible to do so without disturbing seal of firestopping with substrates.

3.3 INSTALLATION

- A. Do not begin firestopping work until the specified material data and installation instructions of the proposed firestopping systems have been submitted and approved.

01-01-21

- B. Install firestopping systems with smoke stopping in accordance with FM, UL, WH, or other approved system details and installation instructions.
- C. Install smoke stopping seals in smoke partitions.

3.4 CLEAN-UP

- A. As work on each floor is completed, remove materials, litter, and debris.
- B. Clean up spills of liquid type materials.
- C. Clean off excess fill materials and sealants adjacent to openings and joints as work progresses by methods and with cleaning materials approved by manufacturers of firestopping products and of products in which opening and joints occur.
- D. Protect firestopping during and after curing period from contact with contaminating substances or from damage resulting from construction operations or other causes so that they are without deterioration or damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out and remove damaged or deteriorated firestopping immediately and install new materials to provide firestopping complying with specified requirements.

3.5 INSPECTIONS AND ACCEPTANCE OF WORK

- A. Do not conceal or enclose firestop assemblies until inspection is complete and approved by the Contracting Officer Representative (COR).
- B. Furnish service of approved inspector to inspect firestopping in accordance with ASTM E2393 and ASTM E2174 for firestop inspection, and document inspection results. Submit written reports indicating locations of and types of penetrations and type of firestopping used at each location; type is to be recorded by UL listed printed numbers.

- - - E N D - - -

10-01-17

SECTION 07 92 00
JOINT SEALANTS

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section covers interior and exterior sealant and their application, wherever required for complete installation of building materials or systems.

1.2 RELATED WORK (INCLUDING BUT NOT LIMITED TO THE FOLLOWING):

- A. Firestopping Penetrations: Section 07 84 00, FIRESTOPPING.
- B. Glazing: Section 08 80 00, GLAZING.
- C. Sound Rated Gypsum Partitions/Sound Sealants: Section 09 29 00, GYPSUM BOARD.
- D. Mechanical Work: Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING; Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

1.3 QUALITY ASSURANCE:

- A. Installer Qualifications: An experienced installer with a minimum of three (3) years' experience and who has specialized in installing joint sealants similar in material, design, and extent to those indicated for this Project and whose work has resulted in joint-sealant installations with a record of successful in-service performance. Submit qualification.
- B. Source Limitations: Obtain each type of joint sealant through one (1) source from a single manufacturer.
- C. Product Testing: Obtain test results from a qualified testing agency based on testing current sealant formulations within a 12-month period.
 - 1. Testing Agency Qualifications: An independent testing agency qualified according to ASTM C1021.
 - 2. Test elastomeric joint sealants for compliance with requirements specified by reference to ASTM C920, and where applicable, to other standard test methods.
 - 3. Test elastomeric joint sealants according to SWRI's Sealant Validation Program for compliance with requirements specified by reference to ASTM C920 for adhesion and cohesion under cyclic movement, adhesion-in peel, and indentation hardness.
 - 4. Test other joint sealants for compliance with requirements indicated by referencing standard specifications and test methods.

10-01-17

D. Lab Tests: Submit samples of materials that will be in contact or affect joint sealants to joint sealant manufacturers for tests as follows:

1. Adhesion Testing: Before installing elastomeric sealants, test their adhesion to protect joint substrates according to the method in ASTM C794 to determine if primer or other specific joint preparation techniques are required.
2. Compatibility Testing: Before installing elastomeric sealants, determine compatibility when in contact with glazing and gasket materials.
3. Stain Testing: Perform testing per ASTM C1248 on interior and exterior sealants to determine if sealants or primers will stain adjacent surfaces. No sealant work is to start until results of these tests have been submitted to the Contracting Officer Representative (COR) and the COR has given written approval to proceed with the work.

1.4 CERTIFICATION:

- A. Contractor is to submit to the COR written certification that joints are of the proper size and design, that the materials supplied are compatible with adjacent materials and backing, that the materials will properly perform to provide permanent watertight, airtight or vapor tight seals (as applicable), and that materials supplied meet specified performance requirements.

1.5 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Installer qualifications.
- C. Contractor certification.
- D. Manufacturer's installation instructions for each product used.
- E. Cured samples of exposed sealants for each color.
- F. Manufacturer's Literature and Data:
1. Primers
 2. Sealing compound, each type, including compatibility when different sealants are in contact with each other.
- G. Manufacturer warranty.

10-01-17

1.6 PROJECT CONDITIONS:

A. Environmental Limitations:

1. Do not proceed with installation of joint sealants under following conditions:
 - a. When ambient and substrate temperature conditions are outside limits permitted by joint sealant manufacturer or are below 4.4 degrees C (40 degrees F).
 - b. When joint substrates are wet.

B. Joint-Width Conditions:

1. Do not proceed with installation of joint sealants where joint widths are less than those allowed by joint sealant manufacturer for applications indicated.

C. Joint-Substrate Conditions:

1. Do not proceed with installation of joint sealants until contaminants capable of interfering with adhesion are removed from joint substrates.

1.7 DELIVERY, HANDLING, AND STORAGE:

- A. Deliver materials in manufacturers' original unopened containers, with brand names, date of manufacture, shelf life, and material designation clearly marked thereon.
- B. Carefully handle and store to prevent inclusion of foreign materials.
- C. Do not subject to sustained temperatures exceeding 32 degrees C (90 degrees F) or less than 5 degrees C (40 degrees F).

1.8 DEFINITIONS:

- A. Definitions of terms in accordance with ASTM C717 and as specified.
- B. Backing Rod: A type of sealant backing.
- C. Bond Breakers: A type of sealant backing.
- D. Filler: A sealant backing used behind a back-up rod.

1.9 WARRANTY:

- A. Construction Warranty: Comply with FAR clause 52.246-21 "Warranty of Construction".
- B. Manufacturer Warranty: Manufacturer shall warranty their sealant for a minimum of five (5) years from the date of installation and final acceptance by the Government. Submit manufacturer warranty.

10-01-17

1.10 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. ASTM International (ASTM):
- C509-06.....Elastomeric Cellular Preformed Gasket and Sealing Material
 - C612-14.....Mineral Fiber Block and Board Thermal Insulation
 - C717-14a.....Standard Terminology of Building Seals and Sealants
 - C734-06 (R2012).....Test Method for Low-Temperature Flexibility of Latex Sealants after Artificial Weathering
 - C794-10.....Test Method for Adhesion-in-Peel of Elastomeric Joint Sealants
 - C919-12.....Use of Sealants in Acoustical Applications.
 - C920-14a.....Elastomeric Joint Sealants.
 - C1021-08 (R2014).....Laboratories Engaged in Testing of Building Sealants
 - C1193-13.....Standard Guide for Use of Joint Sealants.
 - C1248-08 (R2012).....Test Method for Staining of Porous Substrate by Joint Sealants
 - C1330-02 (R2013).....Cylindrical Sealant Backing for Use with Cold Liquid Applied Sealants
 - C1521-13.....Standard Practice for Evaluating Adhesion of Installed Weatherproofing Sealant Joints
 - D217-10.....Test Methods for Cone Penetration of Lubricating Grease
 - D1056-14.....Specification for Flexible Cellular Materials—Sponge or Expanded Rubber
 - E84-09.....Surface Burning Characteristics of Building Materials
- C. Sealant, Waterproofing and Restoration Institute (SWRI).
The Professionals' Guide
- D. Environmental Protection Agency (EPA):

10-01-17

40 CFR 59(2014).....National Volatile Organic Compound Emission
Standards for Consumer and Commercial Products

PART 2 - PRODUCTS

2.1 SEALANTS:

A. Floor Joint Sealant:

1. ASTM C920, Type S or M, Grade P, Class 25, Use T.
2. Provide location(s) of floor joint sealant as follows.
 - a. Control and expansion joints in floors, slabs, ceramic tile, and walkways.

B. Interior Sealants:

1. Provide location(s) of interior sealant as follows:
 - a. Typical narrow joint 6 mm, (1/4 inch) or less at walls and adjacent components.
 - b. Perimeter of doors, windows, access panels which adjoin concrete or masonry surfaces.
 - c. Interior surfaces of exterior wall penetrations.
 - d. Joints at masonry walls and columns, piers, concrete walls or exterior walls.
 - e. Perimeter of lead faced control windows and plaster or gypsum wallboard walls.
 - f. Exposed isolation joints at top of full height walls.
 - g. Joints between bathtubs and ceramic tile; joints between shower receptors and ceramic tile; joints formed where nonplanar tile surfaces meet.
 - h. Joints formed between tile floors and tile base cove; joints between tile and dissimilar materials; joints occurring where substrates change.
 - i. Behind escutcheon plates at valve pipe penetrations and showerheads in showers.

C. Acoustical Sealant:

1. Conforming to ASTM C919; flame spread of 25 or less; and a smoke developed rating of 50 or less when tested in accordance with ASTM E84. Acoustical sealant have a consistency of 250 to 310 when tested in accordance with ASTM D217; remain flexible and adhesive after 500 hours of accelerated weathering as specified in ASTM C734; and be non-staining.

10-01-17

2. Provide location(s) of acoustical sealant as follows:

- a. Exposed acoustical joint at sound rated partitions.
- b. Concealed acoustic joints at sound rated partitions.
- c. Joints where item pass-through sound rated partitions.

2.2 COLOR:

- A. Sealants used with exposed masonry are to match color of mortar joints.
- B. Sealants used with unpainted concrete are to match color of adjacent concrete.
- C. Color of sealants for other locations to be light gray or aluminum, unless otherwise indicated in construction documents.

2.3 JOINT SEALANT BACKING:

- A. General: Provide sealant backings of material and type that are nonstaining; are compatible with joint substrates, sealants, primers, and other joint fillers; and are approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.
- B. Cylindrical Sealant Backings: ASTM C1330, of type indicated below and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance:
 - 1. Type C: Closed-cell material with a surface skin.
- C. Elastomeric Tubing Sealant Backings: Neoprene, butyl, EPDM, or silicone tubing complying with ASTM D1056 or synthetic rubber (ASTM C509), nonabsorbent to water and gas, and capable of remaining resilient at temperatures down to minus 32 degrees C (minus 26 degrees F). Provide products with low compression set and of size and shape to provide a secondary seal, to control sealant depth, and otherwise contribute to optimum sealant performance.
- D. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint surfaces at back of joint where such adhesion would result in sealant failure. Provide self-adhesive tape where applicable.

2.4 FILLER:

- A. Mineral fiberboard: ASTM C612, Class 1.
- B. Thickness same as joint width.
- C. Depth to fill void completely behind back-up rod.

10-01-17

2.5 PRIMER:

- A. As recommended by manufacturer of caulking or sealant material.
- B. Stain free type.

2.6 CLEANERS-NON POROUS SURFACES:

- A. Chemical cleaners compatible with sealant and acceptable to manufacturer of sealants and sealant backing material. Cleaners to be free of oily residues and other substances capable of staining or harming joint substrates and adjacent non-porous surfaces and formulated to promote adhesion of sealant and substrates.

PART 3 - EXECUTION

3.1 INSPECTION:

- A. Inspect substrate surface for bond breaker contamination and unsound materials at adherent faces of sealant.
- B. Coordinate for repair and resolution of unsound substrate materials.
- C. Inspect for uniform joint widths and that dimensions are within tolerance established by sealant manufacturer.

3.2 PREPARATIONS:

- A. Prepare joints in accordance with manufacturer's instructions and SWRI (The Professionals' Guide).
- B. Clean surfaces of joint to receive caulking or sealants leaving joint dry to the touch, free from frost, moisture, grease, oil, wax, lacquer paint, or other foreign matter that would tend to destroy or impair adhesion.
 - 1. Clean porous joint substrate surfaces by brushing, grinding, blast cleaning, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants.
 - 2. Remove loose particles remaining from above cleaning operations by vacuuming or blowing out joints with oil-free compressed air. Porous joint surfaces include but are not limited to the following:
 - a. Concrete.
 - b. Masonry.
 - c. Unglazed surfaces of ceramic tile.
 - 3. Remove laitance and form-release agents from concrete.
 - 4. Clean nonporous surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of

10-01-17

interfering with adhesion of joint sealants. Nonporous surfaces include but are not limited to the following:

- a. Metal.
 - b. Glass.
 - c. Porcelain enamel.
 - d. Glazed surfaces of ceramic tile.
- C. Do not cut or damage joint edges.
- D. Apply non-staining masking tape to face of surfaces adjacent to joints before applying primers, caulking, or sealing compounds.
1. Do not leave gaps between ends of sealant backings.
 2. Do not stretch, twist, puncture, or tear sealant backings.
 3. Remove absorbent sealant backings that have become wet before sealant application and replace them with dry materials.
- E. Apply primer to sides of joints wherever required by compound manufacturer's printed instructions or as indicated by pre-construction joint sealant substrate test.
1. Apply primer prior to installation of back-up rod or bond breaker tape.
 2. Use brush or other approved means that will reach all parts of joints. Avoid application to or spillage onto adjacent substrate surfaces.

3.3 BACKING INSTALLATION:

- A. Install backing material, to form joints enclosed on three sides as required for specified depth of sealant.
- B. Where deep joints occur, install filler to fill space behind the backing rod and position the rod at proper depth.
- C. Cut fillers installed by others to proper depth for installation of backing rod and sealants.
- D. Install backing rod, without puncturing the material, to a uniform depth, within plus or minus 3 mm (1/8 inch) for sealant depths specified.
- E. Where space for backing rod does not exist, install bond breaker tape strip at bottom (or back) of joint so sealant bonds only to two opposing surfaces.

3.4 SEALANT DEPTHS AND GEOMETRY:

- A. At widths up to 6 mm (1/4 inch), sealant depth equal to width.

10-01-17

- B. At widths over 6 mm (1/4 inch), sealant depth 1/2 of width up to 13 mm (1/2 inch) maximum depth at center of joint with sealant thickness at center of joint approximately 1/2 of depth at adhesion surface.

3.5 INSTALLATION:

A. General:

1. Apply sealants and caulking only when ambient temperature is between 5 degrees C and 38 degrees C (40 degrees and 100 degrees F).
 2. Do not install polysulfide base sealants where sealant may be exposed to fumes from bituminous materials, or where water vapor in continuous contact with cementitious materials may be present.
 3. Do not install sealant type listed by manufacture as not suitable for use in locations specified.
 4. Apply caulking and sealing compound in accordance with manufacturer's printed instructions.
 5. Avoid dropping or smearing compound on adjacent surfaces.
 6. Fill joints solidly with compound and finish compound smooth.
 7. Tool exposed joints to form smooth and uniform beds, with slightly concave surface conforming to joint configuration per Figure 5A in ASTM C1193 unless shown or specified otherwise in construction documents. Remove masking tape immediately after tooling of sealant and before sealant face starts to "skin" over. Remove any excess sealant from adjacent surfaces of joint, leaving the working in a clean finished condition.
 8. Finish paving or floor joints flush unless joint is otherwise detailed.
 9. Apply compounds with nozzle size to fit joint width.
 10. Test sealants for compatibility with each other and substrate. Use only compatible sealant. Submit test reports.
 11. Replace sealant which is damaged during construction process.
- B. For application of sealants, follow requirements of ASTM C1193 unless specified otherwise. Take all necessary steps to prevent three-sided adhesion of sealants.
- C. Interior Sealants: Where gypsum board partitions are of sound rated, fire rated, or smoke barrier construction, follow requirements of ASTM C919 only to seal all cut-outs and intersections with the adjoining construction unless specified otherwise.

10-01-17

1. Apply a 6 mm (1/4 inch) minimum bead of sealant each side of runners (tracks), including those used at partition intersections with dissimilar wall construction.
2. Coordinate with application of gypsum board to install sealant immediately prior to application of gypsum board.
3. Partition intersections: Seal edges of face layer of gypsum board abutting intersecting partitions, before taping and finishing or application of veneer plaster-joint reinforcing.
4. Openings: Apply a 6 mm (1/4 inch) bead of sealant around all cutouts to seal openings of electrical boxes, ducts, pipes and similar penetrations. To seal electrical boxes, seal sides and backs.
5. Control Joints: Before control joints are installed, apply sealant in back of control joint to reduce flanking path for sound through control joint.

3.6 FIELD QUALITY CONTROL:

- A. Field-Adhesion Testing: Field-test joint-sealant adhesion to joint substrates according to Method A, Field-Applied Sealant Joint Hand Pull Tab, in Appendix X1 in ASTM C1193 or Method A, Tail Procedure, in ASTM C1521.
 1. Extent of Testing: Test completed elastomeric sealant joints as follows:
 - a. Perform 10 tests for first 305 m (1000 feet) of joint length for each type of elastomeric sealant and joint substrate.
 - b. Perform one test for each 305 m (1000 feet) of joint length thereafter or one test per each floor per elevation.
- B. Inspect joints for complete fill, for absence of voids, and for joint configuration complying with specified requirements. Record results in a field adhesion test log.
- C. Inspect tested joints and report on following:
 1. Whether sealants in joints connected to pulled-out portion failed to adhere to joint substrates or tore cohesively. Include data on pull distance used to test each type of product and joint substrate.
 2. Compare these results to determine if adhesion passes sealant manufacturer's field-adhesion hand-pull test criteria.
 3. Whether sealants filled joint cavities and are free from voids.

10-01-17

4. Whether sealant dimensions and configurations comply with specified requirements.

- D. Record test results in a field adhesion test log. Include dates when sealants were installed, names of persons who installed sealants, test dates, test locations, whether joints were primed, adhesion results and percent elongations, sealant fill, sealant configuration, and sealant dimensions.
- E. Repair sealants pulled from test area by applying new sealants following same procedures used to originally seal joints. Ensure that original sealant surfaces are clean and new sealant contacts original sealant.
- F. Evaluation of Field-Test Results: Sealants not evidencing adhesive failure from testing or noncompliance with other indicated requirements, will be considered satisfactory. Remove sealants that fail to adhere to joint substrates during testing or to comply with other requirements. Retest failed applications until test results prove sealants comply with indicated requirements.

3.7 CLEANING:

- A. Fresh compound accidentally smeared on adjoining surfaces: Scrape off immediately and rub clean with a solvent as recommended by manufacturer of the adjacent material or if not otherwise indicated by the caulking or sealant manufacturer.
- B. Leave adjacent surfaces in a clean and unstained condition.

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

10-01-17

Page Intentionally Left Blank

01-01-21

SECTION 08 11 13
HOLLOW METAL DOORS AND FRAMES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Hollow metal door frames for wood doors and borrowed lights at
1. interior locations.

1.2 RELATED WORK

- A. Section 05 50 00, METAL FABRICATIONS: Frames fabricated of structural
- A. steel.
- B. Section 08 71 00, DOOR HARDWARE: Door Hardware:
- C. Section 08 80 00, GLAZING: Glazing.
- D. Section 28 13 00, PHYSICAL ACCESS CONTROL SYSTEM: Card Readers and
- D. Biometric Devices.
- E. Section 28 23 00, VIDEO SURVEILLANCE: Security Monitors.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. American National Standard Institute (ANSI):
- A250.8-2014.....Standard Steel Doors and Frames
- C. ASTM International (ASTM):
- A240/A240M-15b.....Chromium and Chromium-Nickel Stainless Steel
Plate, Sheet, and Strip for Pressure Vessels
and for General Applications
- A653/A653M-15.....Steel Sheet, Zinc-Coated (Galvanized) or
Zinc-Iron Alloy-Coated (Galvannealed) by the
Hot-Dip
- A1008/A1008M-15.....Steel, Sheet, Cold-Rolled, Carbon, Structural,
High Strength Low Alloy and High Strength Low
Alloy with Improved Formability, Solution
Hardened, and Bake Hardenable
- B209-14.....Aluminum and Aluminum-Alloy Sheet and Plate
- B209M-14.....Aluminum and Aluminum-Alloy Sheet and Plate
(Metric)
- B221-14.....Aluminum and Aluminum-Alloy Extruded Bars,
Rods, Wire, Profiles, and Tubes

01-01-21

- B221M-13.....Aluminum and Aluminum-Alloy Extruded Bars,
Rods, Wire, Profiles, and Tubes (Metric)
- D3656/D3656M-13.....Insect Screening and Louver Cloth Woven from
Vinyl Coated Glass Yarns
- E90-09.....Laboratory Measurement of Airborne Sound
Transmission Loss of Building Partitions and
Elements
- D. Federal Specifications (Fed. Spec.):
- L-S-125B.....Screening, Insect, Nonmetallic
- E. Master Painters Institute (MPI):
- No. 18.....Primer, Zinc Rich, Organic
- F. National Association of Architectural Metal Manufacturers (NAAMM):
- AMP 500-06.....Metal Finishes Manual
- G. National Fire Protection Association (NFPA):
- 80-16.....Fire Doors and Other Opening Protectives
- H. UL LLC (UL):
- 10C-09.....Positive Pressure Fire Tests of Door Assemblies
- 1784-15.....Air Leakage Tests of Door Assemblies and Other
Opening Protectives

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA,
AND SAMPLES.
- B. Submittal Drawings:
1. Show size, configuration, and fabrication and installation details.
- C. Manufacturer's Literature and Data:
1. Description of each product.
2. Include schedule showing each door and frame requirements fire label
for openings.
3. Installation instructions.
- D. Sustainable Construction Submittals:
1. Recycled Content: Identify post-consumer and pre-consumer recycled
content percentage by weight.
- E. Qualifications: Substantiate qualifications comply with specifications.

1.5 QUALITY ASSURANCE

- A. Manufacturer Qualifications:
1. Regularly manufactures specified products.

01-01-21

2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.

1.6 DELIVERY

- A. Fasten temporary steel spreaders across the bottom of each door frame before shipment.
- B. Deliver products in manufacturer's original sealed packaging.
- C. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.
- D. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight conditioned facility.
- B. Protect products from damage during handling and construction operations.

1.8 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

- A. Design hollow metal doors and frames complying with specified performance:
 1. Fire Doors and Frames: UL 10C; NFPA 80 labeled.
 - a. Fire Ratings: See drawings.

2.2 MATERIALS

- A. Stainless Steel: ASTM A240/A240M; Type 304.
- B. Sheet Steel: ASTM A1008/A1008M, cold-rolled.
- C. Galvanized Sheet Steel: ASTM A653.

2.3 PRODUCTS - GENERAL

- A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Provide hollow metal doors and frames from one manufacturer.

2.4 HOLLOW METAL FRAMES

- A. Hollow Metal Frames: ANSI A250.8; face welded. See drawings for sizes and designs.
 1. Interior Frames:
 - a. Wood Doors and Borrowed Lights: 1.3 mm (0.053 inch) thick.
 2. Interior Borrowed Light Frames: 1.3 mm (0.053 inch) thick.

01-01-21

3. Interior Frames for Lead Lined Doors:

- a. Openings with Structural Steel Subframe: 1.3 mm (0.053 inch) thick.
- b. Lead Lining: See Section 13 49 00, RADIATION PROTECTION.
- c. Interior Automatic Operator Door Frames: 1.7 mm (0.067 inch) thick.

B. Frame Materials:

- 1. Interior Frames: Galvanized sheet steel minimum Z120 or ZF120 (G40 or A40) coating.

2.5 FABRICATION

- A. Hardware Preparation: ANSI A250.8; for hardware specified in Section 08 71 00, DOOR HARDWARE.

B. Hollow Metal Frame Fabrication:

- 1. Fasten mortar guards to back of hardware reinforcements, except on lead-lined frames.

- 2. Terminated Stops: ANSI A250.8.

3. Borrowed Light Frames:

- a. Provide integral stop on exterior, corridor, or secure side of door.
- b. Design rabbet width and depth to receive glazing material or panel shown on drawings.

4. Frame Anchors:

a. Floor anchors:

- 1) Provide extension type floor anchors to compensate for depth of floor fills.
- 2) Provide 1.3 mm (0.053 inch) thick steel clip angles welded to jamb and drilled to receive floor fasteners.
- 3) Provide 50 mm by 50 mm by 9 mm (2 inch by 2 inch by 3/8 inch) clip angle for lead lined frames, drilled for floor fasteners.
- 4) Provide mullion 2.3 mm (0.093 inch) thick steel channel anchors, drilled for two floor fasteners and frame anchor screws.
- 5) Provide continuous 1 mm (0.042 inch) thick steel rough bucks drilled for floor fasteners and frame anchor screws for sill sections.
 - a) Space floor bolts 50 mm (2 inches) on center.

01-01-21

b. Jamb anchors:

- 1) Place anchors on jambs:
 - a) Near top and bottom of each frame.
 - b) At intermediate points at maximum 600 mm (24 inches) spacing.
- 2) Form jamb anchors from steel minimum 1 mm (0.042 inch) thick.
- 3) Anchors for stud partitions: Provide tabs for securing anchor to sides of studs. Provide one of the following:
 - a) Welded type.
 - b) Lock-in snap-in type.
- 4) Anchors for observation windows and other continuous frames set in stud partitions.
 - a) Weld clip anchors to sills and heads of continuous frames over 1200 mm (4 feet) long.
 - b) Space maximum 600 mm (24 inches) on centers.
- 5) Modify frame anchors to fit special frame and wall construction.
- 6) Provide special anchors where shown on drawings and where required to suit application.

2.6 FINISHES

- A. Finish exposed surfaces after fabrication.

2.7 ACCESSORIES

- A. Primers: ANSI A250.8.
- B. Barrier Coating: ASTM D1187/D1187M.
- C. Welding Materials: AWS D1.1/D1.1M, type to suit application.
- D. Clips Connecting Members and Sleeves: Match door faces.
- E. Fasteners: Galvanized steel.
1. Metal Framing: Steel drill screws.
- F. Anchors: Galvanized steel.
- G. Galvanizing Repair Paint: MPI No. 18.
- H. Insulation: Unfaced mineral wool.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.

01-01-21

- C. Apply barrier coating to metal surfaces in contact with cementitious materials to minimum 0.7 mm (30 mils) dry film thickness.

3.2 INSTALLATION - GENERAL

- A. Install products according to manufacturer's instructions and approved submittal drawings.
 - 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
 - 2. Install fire doors and frames according to NFPA 80.
 - 3. Install smoke control doors and frames according to NFPA 105.

3.3 FRAME INSTALLATION

- A. Plumb, align, and brace frames until permanent anchors are set.
 - 1. Use triangular bracing near each corner on both sides of frames with temporary wood spreaders at midpoint.
 - 2. Use wood spreaders at bottom of frame when shipping spreader is removed.
 - 3. Where construction permits concealment, leave shipping spreaders in place after installation, otherwise remove spreaders when frames are set and anchored.
 - 4. Remove wood spreaders and braces when walls are built and jamb anchors are secured.
- B. Floor Anchors:
 - 1. Anchor frame jambs to floor with two expansion bolts.
 - a. Lead Lined Frames: Use 9 mm (3/8 inch) diameter bolts.
 - b. Other Frames: Use 6 mm (1/4 inch) diameter bolts.
 - 2. Power actuated drive pins are acceptable to secure frame anchors to concrete floors.
- C. Jamb Anchors:
 - 1. Metal Framed Walls: Secure anchors to sides of studs with two fasteners through anchor tabs.
- D. Lead Lined Frames:
 - 1. Extend jambs and anchor with clip angles to structure above.
 - a. Fasteners to Concrete: Minimum two, 9 mm (3/8 inch) diameter expansion bolts or power actuated drive pins.
 - b. Connection to Structural Steel: Welded.
- E. Touch up damaged factory finishes.

01-01-21

1. Repair galvanized surfaces with galvanized repair paint.
2. Repair painted surfaces with touch up primer.

3.4 DOOR INSTALLATION

- A. Install doors plumb and level.
- B. Adjust doors for smooth operation.
- C. Touch up damaged factory finishes.
 1. Repair galvanized surfaces with galvanized repair paint.
 2. Repair painted surfaces with touch up primer.

3.5 CLEANING

- A. Clean exposed door and frame surfaces. Remove contaminants and stains.

3.6 PROTECTION

- A. Protect doors and frames from construction operations.
- B. Remove protective materials immediately before acceptance.
- C. Repair damage.

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

01-01-21

Page Intentionally Left Blank

01-01-21

SECTION 08 14 00
INTERIOR WOOD DOORS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Interior flush wood doors transparent finish.
 - a. Fire rated doors.
 - b. Acoustical doors.

1.2 RELATED WORK

- A. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS: Paints and Coatings and Composite Wood and Agrifiber VOC Limits.
- B. Section 08 71 00, DOOR HARDWARE: Door Hardware including hardware location (height).
- C. Section 08 11 13, HOLLOW METAL DOORS AND FRAMES: Installation of Doors.
- D. Section 08 71 00, DOOR HARDWARE: Installation of Door Hardware.
- E. Section 09 06 00, SCHEDULE FOR FINISHES: Door Finish.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. American National Standards Institute/Window and Door Manufacturers Association (ANSI/WDMA):
 1. I.S. 1A-13 - Architectural Wood Flush Doors.
 2. I.S. 6A-13 - Interior Architectural Stile and Rails Doors.
- C. National Fire Protection Association (NFPA):
 1. 80-16 - Fire Doors and Other Opening Protectives.
 2. 252-12 - Fire Tests of Door Assemblies.
- D. UL LLC (UL):
 1. 10C-09 - Positive Pressure Fire Tests of Door Assemblies.
- E. Window and Door Manufacturers Association (WDMA):
 1. TM 7-14 - Cycle-Slam Test.
 2. TM 8-14 - Hinge Loading Test.
 3. TM 10-14 - Screw Holding Capacity.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
 1. Show size, configuration, and fabrication and installation details.

01-01-21

2. Include details of glazing.
3. Indicate project specific requirements not included in Manufacturer's Literature and Data submittal.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Fire rated doors showing conformance with NFPA 80.

D. Samples:

1. Corner section of flush veneered door 300 mm (12 inches) square, showing details of construction, labeled to show grade and type number and conformance to specified standard.
2. Veneer sample 200 mm by 275 mm (8 inch by 11 inch) showing specified wood species sanded to receive a transparent finish. Factory finish veneer sample where the prefinished option is accepted.

E. Sustainable Construction Submittals:

1. Low Pollutant-Emitting Materials:
 - a. Show volatile organic compound types and quantities.

F. Test Reports: Indicate products comply with specifications.

1. Screw Holding Capacity Test.
2. Cycle-Slam Test.
3. Hinge-Loading Test.

G. Operation and Maintenance Data:

1. Care instructions for each exposed finish product.

1.5 QUALITY ASSURANCE

A. Manufacturer Qualifications:

1. Regularly and presently manufactures specified products.
2. Manufactures specified products with satisfactory service on five similar installations for minimum five years.

1.6 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

1. Minimum 0.15 mm (6 mil) polyethylene bags or cardboard packaging to remain unbroken during delivery and storage.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, and manufacture date.

1. Identify door opening corresponding to Door Schedule.

01-01-21

- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging. Retain packaging for door protection after installation.

1.7 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight conditioned facility.
 - 1. Store doors according to ANSI/WDMA I.S. 1A.
- B. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

- A. Environment:
 - 1. Product Temperature: Minimum 21 degrees C (70 degrees F) for minimum 48 hours before installation.
 - 2. Work Area Ambient Temperature Range: 21 to 27 degrees C (70 to 80 degrees F) continuously, beginning 48 hours before installation.
 - a. Install products when building is permanently enclosed and when wet construction is completed, dried, and cured. Comply with door manufacturer's instructions for relative humidity.

1.9 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."
- B. Manufacturer's Warranty: Warrant interior factory finished flush wood doors against material and manufacturing defects.
 - 1. Warranty Period: Lifetime of original installation.

PART 2 - PRODUCTS

2.1 PRODUCTS - GENERAL

- A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Provide each product from one manufacturer.
- C. Sustainable Construction Requirements:
 - 1. Low Pollutant-Emitting Materials: Comply with VOC limits specified in Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for the following products:
 - 2. Paints and coatings.
 - 3. Composite wood and agrifiber.

2.2 FLUSH WOOD DOORS

- A. General:
 - 1. ANSI/WDMA I.S. 1A, Extra Heavy Duty.

01-01-21

2. Adhesive: Type II.
3. Core: Structural composite lumber, except when mineral core is required for fire rating.
4. Thickness: 44 mm (1-3/4 inches) unless otherwise shown or specified.

B. Faces:

1. ANSI/WDMA I.S. 1A.
2. One species throughout project unless scheduled or otherwise shown.
3. Transparent Finished Faces: Match existing door veneer.
4. Match face veneers for doors for uniform effect of color and grain at joints.
5. Door Edges: Same species as door face veneer, except maple is acceptable for stile face veneer on birch doors.
6. In existing buildings, where doors are required to have transparent finish, use wood species, grade, and assembly of face veneers to match adjacent existing doors.
7. Painted Finishes: Custom Grade, mill option close grained hardwood, premium or medium density overlay.
8. Factory sand doors for finishing.

C. Wood For Stops, Louvers, Muntins and Moldings For Flush Doors Required to Have Transparent Finish:

1. Solid wood of same species as face veneer, except maple is acceptable on birch doors.
2. Glazing:
 - a. On non-fire-rated doors, use applied wood stops nailed tightly on room side and attached on opposite side with flathead, countersunk wood screws, spaced approximately 125 mm (5 inches) on center.

D. Fire-Rated Wood Doors:

1. Fire Resistance Rating:
 - a. B Label: 1-1/2 hours.
 - b. C Label: 3/4 hour.
2. Provide 20-minute smoke-rated doors in smoke-rated barriers.
3. Labels:
 - a. Comply with NFPA 252, UL 10C, and labeled by qualified testing and inspection agency showing fire resistance rating.
 - 1) Metal labels with raised or incised markings.

01-01-21

4. Performance Criteria for Stiles of Doors Utilizing Standard Mortise Leaf Hinges:
 - a. Hinge Loading: WDMA TM 8. Average of 10 test samples for Extra Heavy Duty doors.
 - b. Direct Screw Withdrawal: WDMA TM 10 for Extra Heavy Duty doors. Average of 10 test samples using a steel, fully threaded #12 wood screw.
 - c. Cycle-Slam: 1,000,000 cycles with no loose hinge screws or other visible signs of failure when tested according to WDMA TM 7.
5. Hardware Reinforcement:
 - a. Provide fire rated doors with hardware reinforcement blocking.
 - b. Size of lock blocks as required to secure hardware specified.
 - c. Top, Bottom and Intermediate Rail Blocks: Minimum 125 mm (5 inches) by full core width.
 - d. Reinforcement blocking in compliance with labeling requirements. Mineral material similar to core is not acceptable.
6. Other Core Components: Manufacturer's standard as allowed by labeling requirements.
7. Glazed Vision Panel Frame: Steel approved for use in labeled doors.
8. Astragal: Steel type for pairs of doors.
- E. Smoke Barrier Doors:
 1. Glazed Vision Panel Frame: Steel approved for use in labeled doors.
 2. Astragal: Steel type for pairs of doors, including double egress doors.

2.3 FABRICATION

- A. Factory machine interior wood doors to receive hardware, bevels, undercuts, cutouts, accessories and fitting for frame.
 1. Factory fit fire rated doors according to NFPA 80.
- B. Rout doors for hardware using templates and location heights specified in Section 08 71 00, DOOR HARDWARE.
- C. Factory fit doors to frame, bevel lock edge of doors 3 mm (1/8 inch) for each 50 mm (2 inches) of door thickness undercut where shown.
- D. Clearances between Doors and Frames and Floors:
 1. Fire Rated Doors: Comply with NFPA 80.
 - a. Doors with Automatic Bottom Seal: Maximum clearance 10 mm (3/8 inch) at threshold.

01-01-21

- b. Other Door Bottoms: Maximum 3 mm (1/8 inch) clearance at the jambs, heads, and meeting stiles, and a 19 mm (3/4 inch) clearance at bottom, except as otherwise specified.
- 2. Door Jambs, Heads, and Meeting Stiles: Maximum 3 mm (1/8 inch).
- E. Provide cutouts for glazed openings.
- F. Finish surfaces, including both faces, top and bottom and edges of the doors smooth to touch.
- G. Identify each door on top edge.
 - 1. Mark with stamp, brand or other indelible mark, giving manufacturer's name, door's trade name, construction of door, date of manufacture and quality.
 - 2. Mark door or provide separate certification including name of inspection organization.
 - 3. Identify door manufacturing standard, including glue type.
 - 4. Identify veneer and quality certification.
 - 5. Identification of preservative treatment for stile and rail doors.

2.4 FINISHES

- A. Field Finished Doors: Seal top and bottom edges of doors with two coats of catalyzed polyurethane or water resistant sealer.
- B. Factory Transparent Finish:
 - 1. Factory finish flush wood doors.
 - a. ANSI/WDMA I.S. 1A Section F-3 Finish System Descriptions for System 5, Conversion Varnish or System 7, Catalyzed Vinyl.
 - b. Use stain when required to produce finish specified in Section 09 06 00, SCHEDULE FOR FINISHES.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
 - 1. Verify door frames are properly anchored.
 - 2. Verify door frames are plumb, square, in plane, and within tolerances for door installation.
- B. Protect existing construction and completed work from damage.
- C. Install astragal on active leaf of pair of smoke doors and one leaf of double egress smoke doors.

01-01-21

3.2 INSTALLATION

- A. Install products according to manufacturer's instructions and approved submittal drawings.
 - 1. Install fire rated doors according to NFPA 80.
 - 2. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

3.3 PROTECTION

- A. After installation, place shipping container over door and tape in place.
 - 1. Do not apply tape to door faces and edges.
- B. Provide protective covering over exposed hardware in addition to covering door.
- C. Maintain covering in good condition until removal is directed by Contracting Officer's Representative.

- - E N D - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

01-01-21

Page Intentionally Left Blank

01-01-21

SECTION 08 17 10
INTEGRATED DOOR ASSEMBLIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Integrated door assemblies including metal door frame, wood door, and hardware, unless specified in another Section, installed at cross-corridor locations.

B. Smoke and draft control seals, unless specified in another Section.

1.2 RELATED WORK

A. Section 08 14 00 Interior Wood Doors.

B. Section 08 71 00, DOOR HARDWARE: Lock Cylinders

C. Section 08 71 13, AUTOMATIC DOOR OPERATORS: Automatic Door Operators.

D. DIVISION 26, ELECTRICAL: Electrical Power.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. Builders Hardware Manufacturers Association (BHMA):

A156.3-14.....Exit Devices.

A156.26-06.....Continuous Hinges.

A156.32-14.....Integrated Door Opening Assemblies.

C. ASTM International (ASTM):

A1011/A1011M-18a.....Steel, Sheet and Strip, Hot-Rolled, Carbon,
Structural, High-Strength Low-Alloy,
High-Strength Low-Alloy with Improved
Formability, and Ultra-High Strength.

E2180-18.....Determining the Activity of Incorporated
Antimicrobial Agents in Polymeric or
Hydrophobic Materials.

D. Door and Hardware Institute (DHI):

1. Recommended Locations for Architectural Hardware for Standard Doors & Frames (2004).
2. Recommended Locations for Builders' Hardware Custom Steel Doors & Frames (1996).

E. National Fire Protection Association (NFPA):

105-16.....Smoke Door Assemblies and Other Opening
Protectives.

01-01-21

252-12.....Fire Tests of Door Assemblies.

F. Steel Door Institute (SDI):

A250.3-11.....Test Procedure and Acceptance Criteria for
Factory Applied Finish Coatings for Steel Doors
and Frames.

A250.8-14.....Specifications for Standard Steel Doors and
Frames.

A250.10-11.....Test Procedure and Acceptance Criteria for
Prime Painted Steel Surfaces for Steel Doors
and Frames.

G. UL LLC (UL):

10C-09.....Positive Pressure Fire Tests of Door
Assemblies.

1784-15.....Air Leakage Tests of Door Assemblies and Other
Opening Protectives.

1.4 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting at project site minimum 30 days before
beginning Work of this section.

1. Required Participants:

- a. Contracting Officer's Representative.
- b. Contractor.
- c. Installer.
- d. Other installers responsible for adjacent and intersecting work,
including electrical.

2. Meeting Agenda: Distribute agenda to participants minimum 3 days
before meeting.

- a. Installation schedule.
- b. Installation sequence.
- c. Preparatory work.
- d. Protection before, during, and after installation.
- e. Installation.
- f. Transitions and connections to other work.
- g. Other items affecting successful completion.

3. Document and distribute meeting minutes to participants to record
decisions affecting installation.

01-01-21

1.5 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
 - 1. Show size, configuration, and fabrication and installation details.
 - 2. For each opening, list finish hardware items included in assembly, finish, degree of opening, and electrical rough-in requirements according to Door Schedule.
 - 3. Submit templates to door and frame manufacturers to ensure proper size and location of hardware.
- C. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Installation instructions.
- D. Sustainable Construction Submittals:
 - 1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
 - 2. Low Pollutant-Emitting Materials:
 - a. Show volatile organic compound types and quantities.
- E. Certificates: Indicate integrated door assemblies comply with specifications.
 - 1. Show fire rated integrated door assembly is UL Listed for specified application.
- F. Qualifications: Substantiate qualifications comply with specifications.
 - 1. Installer.
- G. Operation and Maintenance Data:
 - 1. Care instructions for each exposed finish product.
 - 2. Maintenance and adjustment instructions for integrated door assemblies.

1.6 QUALITY ASSURANCE

- A. Installer Qualifications:
 - 1. Regularly installs specified products.
 - 2. Installed specified products with satisfactory service on five similar installations for minimum five years.
 - a. Provide contact names and addresses for completed projects when requested by Contracting Officer's Representative.

01-01-21

1.7 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.8 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight facility.
- B. Protect products from damage during handling and construction operations.

1.9 FIELD CONDITIONS

- A. Field Measurements: Verify field conditions affecting integrated door assembly fabrication and installation. Show field measurements on Submittal Drawings.
 - 1. Coordinate field measurement and fabrication schedule to avoid delay.
 - 2. Coordinate electrical work for electrified hardware installation.

1.10 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."
- B. Manufacturer's Warranty: Warrant door closers and hinges against material and manufacturing defects.
 - 1. Warranty Periods:
 - a. Door Closers: 10 years.
 - b. Steel Pinned Continuous Hinges: 10 years.

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

- A. Design integrated door assemblies complying with specified performance:
 - 1. BHMA A156.32: Grade 1: 1,000,000 cycles.
- B. Fire Rated Doors:
 - 1. Fire Resistance Rating: As shown in Door Schedule.
 - 2. Label: Comply with NFPA 252, UL 10C, and labeled by qualified testing and inspection agency showing fire resistance rating.
- C. Smoke Rated Doors:
 - 1. Smoke Resistance Rating: As shown in Door Schedule.
 - 2. Label: Comply with NFPA 105, UL 1784, and labeled by qualified testing and inspection agency showing smoke resistance rating.

01-01-21

2.2 PRODUCTS - GENERAL

- A. Provide each integrated door assembly from one manufacturer.

2.3 INTEGRATED DOOR ASSEMBLY

- A. Wood Doors: 08 14 00 Interior Wood Doors

- B. Metal Frames: SDI A250.8 Level 2.

1. Metal: ASTM A1011/A1011M; cold rolled steel, 1.3 mm (0.05 inches) thick, minimum.
2. Construction: Continuously welded.
3. Reinforce frame for hardware.
 - a. Continuous Hinges: 2.3 mm (0.09 inches) thick.
 - b. Other Hardware: Comply with SDI A250.8.
4. Frame Anchors: Provide adjustable type anchors coordinated with wall construction, minimum 4 per jamb.

- C. Integrated Hardware:

1. Exit Device: BHMA A156.3; Grade 1, passage function, inset in door face, clean and unobtrusive in design.
 - a. Push Bar End Caps: Metal, plated satin nickel (BHMA 619) finish.
 - b. Exit Device Trim: Lever matching door hardware specified in Section 08 71 00, DOOR HARDWARE.
2. Continuous Hinges: BHMA A156.26.
 - a. Plastic Laminate Clad Doors: Wrap-around style hinge guards and provide stainless steel wrap-around edge guards at strike edge of door.
3. Other Hardware: As scheduled in this section.

2.4 FINISHES

- A. Hardware Finish Symbols:

TABLE I - Hardware Finish Symbols

US	BHMA 156.18	Description
USP	600	Primed for field painting
US15	619	Dull Nickel Plated
US26D	626/652	Satin Chrome Plated
US28	628	Satin Aluminum
US32	629	Bright Stainless
US32D	630	Satin Stainless
N/A	689	Aluminum Painted

01-01-21

B. Finish Requirements:

1. Door Faces: 08 14 00 Interior Wood Doors.
2. Frames: Prime painted, SDI A250.10.
3. Door Hardware:
 - a. Continuous Hinges: BHMA 630.
 - b. Push Bar: BHMA 630 clad with BHMA 619 end caps.
 - c. Exit Device Trim: BHMA 630.
 - d. Push/Pull Trim: BHMA 626.
 - e. Door Closers: BHMA 689.
 - f. Miscellaneous: To match other finishes.
4. Anti-Microbial Coating: ASTM E2180; ionic silver coating.
5. Apply coating to hand-operated hardware including levers, pulls, push bars, push plates, and paddles.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.

3.2 INSTALLATION - INTEGRATED DOOR ASSEMBLIES

- A. Install products according to manufacturer's instructions and approved submittal drawings.
- B. Install door hardware at locations indicated in DHI Recommended Locations for Architectural Hardware for Standard Steel Doors & Frames and DHI Recommended Locations for Builders' Hardware Custom Steel Doors & Frames, unless otherwise indicated, or to comply with requirements of governing regulations, or if otherwise directed by Contracting Officer's Representative.
- C. Install door hardware in compliance with manufacturers' instructions, and templates. Comply with specified degree of opening for doors with automatic operators and overhead door closers. Securely fasten hardware. Confirm operating parts move freely and smoothly without binding, sticking, and excessive clearance.
- D. Coordinate installation and interface wiring with fire alarm and smoke detection systems. Provide auxiliary contacts, relays, and interface for fire alarm and security systems.
- E. Remove or protect door hardware, before painting and finishing performed after integrated door assembly installation.

01-01-21

F. Adjust and check door assembly and each operating hardware item to ensure correct operation and function. Replace products which cannot be adjusted to operate as intended.

G. Final Adjustment: Perform final hardware check and adjustment maximum one month before building acceptance or partial building occupancy.

3.3 CLEANING

A. Clean exposed surfaces, including hardware. Do not use cleaners that will harm finishes.

3.4 PROTECTION

A. Protect integrated door assemblies from construction operations.

3.5 SCHEDULES

The following is a general listing of the Integrated Door Assembly requirements and is not intended for use as a final door submittal. Provide hardware items required by established standards and practices, and to meet IBC and NFPA 101 whether specified or not in the following listed groups.

HW-12D	
Each [ADO] Pair Integrated Double Egress Doors to Have:	RATED
1 Steel Frame	-
1 Integrated Pair Doors w/Elec Exit Exit Devices	Q2331 x TYPE 8 (E04) ELECTRIC EXIT DEVICES (F01)
2 Continuous Transfer Hinges	A51031B x 8-THRUWIRE TRANSFER x IN-HINGE ACCESS PANEL
1 Power Supply	BY EXIT DEVICE MFR. FOR E04 FUNCTION
1 Overlapping Astragal with Self-Adhesive Seal	R5Y634 x R0E154 x THRU-BOLTS
2 Armor Plates	J101 x 1.275 mm (0.050 inch) THICKNESS
2 Floor Stops	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154
Power, wiring, conduit, and fire alarm connection by Division 26.	
Power transfer shared by electric panic and re-activation sensor wiring (re-activation sensors provided by Section 08 71 13).	

01-01-21

Auto door operator and controls by Section 08 71 13, AUTOMATIC DOOR OPERATORS.	
HW-SH-10A	
Each [AC, ADO, EL, REX, DPS] Pair Integrated Doors to Have:	RATED
1 Steel Frame	-
1 Integrated Pair Doors w/Elec. Exit Devices	Q2231 x TYPE 8 (E01, E04) ELECTRIC EXIT DEVICES (F01/F08)
2 Continuous Transfer Hinges	A51031B x 12-THRUWIRE TRANSFER x IN-HINGE ACCESS PANEL
1 Power Supply	BY EXIT DEVICE MFR. FOR E04 FUNCTION
1 Self-Adhesive Astragal	R0Y_14
2 Armor Plates	J101 x 1.275 mm (0.050 inch) THICKNESS
2 Floor Stops	L02121 x 3 FASTENERS
1 Set Self-Adhesive Seals	R0E154
Power, wiring, conduit, and fire alarm connection by Division 26.	
Power transfer shared by electric panic and re-activation sensor wiring (re-activation sensors provided by Section 08 71 13, AUTOMATIC DOOR OPERATORS).	
Lock cylinder by Section 08 71 00, DOOR HARDWARE.	
Auto door operator and controls by Section 08 71 13, AUTOMATIC DOOR OPERATORS.	

- - - E N D - - -

01-01-21

SECTION 08 31 13
ACCESS DOORS AND FRAMES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Access doors and panels installed in walls and ceilings.

1.2 RELATED WORK

- A. Section 09 06 00, SCHEDULE FOR FINISHES: Finish Color.
- B. Section 09 91 00, PAINTING: Field Painting.
- C. Section 21 13 13, WET-PIPE SPRINKLER SYSTEMS: Access Doors for Control or Drain Valves.
- D. Section 22 40 00, PLUMBING FIXTURES: Access Doors for Plumbing Valves.
- E. Section 23 31 00, HVAC DUCTS AND CASINGS: Locations of Access Doors for Ductwork Cleanouts.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. American Welding Society (AWS):
D1.3/D1.3M-2018.....Structural Welding Code - Sheet Steel
(6th Edition.
- C. ASTM International (ASTM):
A653/A653M-20.....Steel Sheet, Zinc-Coated (Galvanized) or
Zinc-Iron Alloy-Coated (Galvannealed) by the
Hot-Sip Process.
A1008/A1008M-18.....Steel, Sheet, Cold-Rolled, Carbon, Structural,
High-Strength Low-Alloy, High-Strength
Low-Alloy with Improved Formability, Solution
Hardened, and Bake Hardenable.
A666-15.....Annealed or Cold-Worked Austenitic Stainless
Steel sheet, Strip, Plate, and Flat Bar.
E119-20.....Fire Test of Building Construction and
Materials.
- D. National Fire Protection Association (NFPA):
80-2019 Edition.....Fire Doors and Other Opening Protectives.
252-2017 Edition.....Fire Tests of Door Assemblies.
- E. National Association of Architectural Metal Manufacturers (NAAMM):
AMP 500-06.....Metal Finishes Manual.
- F. UL LLC (UL):

01-01-21

Listed.....Online Certifications Directory.
10B-08 (Edition 10).....Standard for Fire Tests of Door Assemblies.
263-11 (Edition 14).....Fire Tests of Building Construction and
Materials.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
 - 1. Show size, configuration, and fabrication and installation details.
- C. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Installation instructions.
- D. Sustainable Construction Submittals:
 - 1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.

1.5 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.6 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight facility.
- B. Protect products from damage during handling and construction operations.

1.7 FIELD CONDITIONS

- A. Field Measurements: Verify field conditions affecting access door fabrication and installation. Show field measurements on Submittal Drawings.
 - 1. Coordinate field measurement and fabrication schedule to avoid delay.

1.8 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

01-01-21

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Steel Sheet: ASTM A1008/A1008M.
- B. Galvanized Steel: ASTM A653/A653M.
- C. Stainless Steel: ASTM A666; Type 302 or Type 304.

2.2 PRODUCTS - GENERAL

- A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Provide each product from one manufacturer.
- C. Sustainable Construction Requirements:
 - 1. Steel Access Doors Recycled Content: 30 percent total recycled content, minimum.
 - 2. Stainless Steel Access Doors Recycled Content: 70 percent total recycled content, minimum.

2.3 ACCESS DOORS, FIRE-RATED

- A. Door Construction:
 - 1. Wall Access Doors: NFPA 252 or UL 10B.
- B. Label: Class B opening according to UL 10B or test by another nationally recognized laboratory. 1-1/2 hour fire-rated, with maximum temperature rise of 120 degrees C (216 degrees F).
- C. Door Panel: Minimum 0.9 mm (0.0359 inch) thick steel sheet, with mineral-fiber insulation core, insulated sandwich type construction.
- D. Frame: Minimum 1.5 mm (0.0598 inch) thick steel sheet, depth and configuration to suit material and construction type where installed.
 - 1. Frame Flange: Provide at units installed in concrete, masonry, or gypsum board.
 - 2. Exposed Joints in Flange: Weld and grind smooth.
- E. Provide automatic closing device.
- F. Hinge: Continuous stainless steel hinge with stainless steel pin.
- G. Lock: Self-latching, mortise type with provision for fitting flush a standard screw-in type lock cylinder.
 - 1. Lock cylinder specified in Section 08 71 00, DOOR HARDWARE.
 - 2. Latch release device operable from inside of door.
- H. Anchors for Fire-Rated Access Doors: Comply with requirements of applicable fire test.

2.4 WALL ACCESS DOORS, FLUSH PANEL, NON-RATED

- A. Door Panel:

01-01-21

1. 1.9 mm (0.07 inch) thick steel sheet.
2. Reinforce to maintain flat surface.

B. Frame:

1. 1.5 mm (0.06 inch) thick steel sheet, depth and configuration to suit material and construction type where installed.
2. Frame Flange: Provide at units installed in concrete, masonry, and gypsum board.
3. Exposed Joints in Flange: Weld and grind smooth.

C. Hinge:

1. Concealed spring hinge, 175 degrees of opening.
2. Removable hinge pin to allow removal of door panel from frame.

D. Lock:

1. Flush, screwdriver-operated cam lock.

2.5 CEILING ACCESS DOOR, RECESSED PANEL, NON-RATED

A. Door Panel:

1. 1.2 mm (0.05 inch) thick steel sheet to form a ½ inch deep recessed pan to accommodate installation of gypsum wall board where shown in ceiling.
2. Reinforce to prevent sagging.

B. Frame:

1. 1.5 mm (0.06 inch) thick steel sheet of depth and configuration to suit installation in suspension system of ceiling or wall framing.
2. Extend sides of frame to protect edge of acoustical units when door panel is in open position.
3. Provide shims, bushings, clips and other devices necessary for installation.

C. Hinge: Continuous stainless steel hinge with stainless steel pin, or concealed hinge.

D. Lock:

1. Flush screwdriver-operated cam lock.
2. Plastic sleeve or stainless steel grommet to protect hole made in acoustical unit for screwdriver access to lock.

2.6 FABRICATION - GENERAL

- A. Size: Minimum 600 mm (24 inches) square door unless otherwise shown.
- B. Component Fabrication: Straight, square, flat and in same plane where required.

01-01-21

1. Exposed Edges: Slightly rounded, without burrs, snags and sharp edges.

2. Exposed Welds: Continuous, ground smooth.

3. Welding: AWS D1.3/D1.3M.

C. Locks and Non-Continuous Hinges: Provide in numbers required to maintain alignment of door panel with frame.

D. Anchoring: Make provisions in frame for anchoring to adjacent construction. Provide anchors in size, number and location on four sides to secure access door to substrate.

2.7 FINISHES

A. Steel Paint Finish:

1. Powder-Coat Finish: Manufacturer's standard two-coat finish system consisting of the following:

a. One coat primer.

b. One coat thermosetting topcoat.

c. Dry-film Thickness: 0.05 mm (2 mils) minimum.

d. Color: Refer to Section 09 06 00, SCHEDULE FOR FINISHES.

2.8 ACCESSORIES

A. Fasteners: Type and size recommended by access door manufacturer, to suit application.

1. Other Access Doors: Galvanized steel fasteners.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.

1. Verify access door locations and sizes provide required maintenance access to installed building services components.

B. Protect existing construction and completed work from damage.

3.2 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions and approved submittal drawings.

1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

B. Install access doors and panels permitting access to service valves, traps, dampers, cleanouts, and other mechanical, electrical and

01-01-21

conveyor control items concealed in walls and partitions, and concealed above gypsum board and plaster ceilings.

- C. Install fire rated access door according to NFPA 80.
- D. Install fire-rated doors in fire-rated partitions and ceilings.
- E. Install flush access panels in partitions.
- F. Install recessed panel access doors in the following locations in gypsum board ceilings.

3.3 ACCESS DOOR AND FRAME INSTALLATION

- A. Wall Installations: Install access doors in openings with sides vertical.
- B. Ceiling Installations: Install access doors parallel to ceiling suspension grid or room partitions.
- C. Frames without Flanges: Install frame flush with surrounding finish surfaces.
- D. Frames with Flanges: Overlap opening, with face uniformly spaced from finish surface.
- E. Recessed Panel Access Doors: Install with face of surrounding materials flush with door panel installed finish.
- F. Secure frames to adjacent construction with fasteners.
- G. Install type, size and quantity of anchoring device suitable for material surrounding opening to maintain alignment, and resist displacement, during normal use of access door.
- H. Field Painting Primed Access Doors: Comply with the requirements of Section 09 91 00, PAINTING.

3.4 ADJUSTMENT

- A. Adjust hardware so door panel opens freely.
- B. Adjust door when closed so door panel is centered in frame.

- - - E N D - - -

01-01-21

SECTION 08 32 13
ICU SLIDING GLASS DOORS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Interior, single slide, manual sliding ICU/CCU entrances; trackless, for individual special-care rooms.

1.2 RELATED WORK

- A. Drawings and general provisions of the Contract, including General and
A. Supplementary Conditions and Division 1 Specification Sections, apply
A. to this Section.
- B. Section 08 71 00, DOOR HARDWARE: Hardware.
- C. Section 08 80 00, GLAZING. Glass and Glazing:
- D. Section 09 06 00, SCHEDULE FOR FINISHES Door Finish and Color.
- E. Section 09 06 00, SCHEDULE FOR FINISHES: Aluminum Finish and Color.

1.3 COORDINATION

- A. Field Measurements: Verify actual dimensions of openings to receive ICU/CCU entrances by field measurements before fabrication.
- B. Templates: Distribute for doors, frames, and other work specified to be factory prepared for installing ICU/CCU entrances.

1.4 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section. Refer to the version year adopted by the Authority Having Jurisdiction or the latest edition.
- B. American Welding Society (AWS):
D1.2/D1.2M-2014.....Structural Welding Code - Aluminum
- C. ASTM International (ASTM):
B209-14.....Aluminum and Aluminum-Alloy Sheet and Plate
B209M-14.....Aluminum and Aluminum-Alloy Sheet and Plate
(Metric)
B221-14.....Aluminum and Aluminum-Alloy Extruded Bars,
Rods, Wire, Profiles, and Tubes
B221M-13.....Aluminum and Aluminum-Alloy Extruded Bars,
Rods, Wire, Profiles, and Tubes (Metric)
- D. National Association of Architectural Metal Manufacturers (NAAMM):

01-01-21

AMP 500-04.....Metal Finishes Manual for Architectural Metal
Products

E. National Fenestration Rating Council (NFRC):

500-17.....Determining Fenestration Product Condensation
Resistance Values

F. National Fire Protection Association (NFPA):

NFPA 70-20.....National Electric Code

NFPA 105-19.....Standard for the Installation of Smoke Door
Assemblies

G. Underwriters Laboratories UL:

UL 1784-20.....Air Leakage Tests for Door Assemblies

1.5 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA,
AND SAMPLES.

B. Submittal Drawings:

1. Show size, configuration, and fabrication and installation details.
2. Show anchorage and reinforcement.
3. Show interface and relationship to adjacent work.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Doors, each type.
3. Entrance and Storefront construction.
4. Installation instructions.
5. Warranty.

D. Test reports: Certify products comply with specifications.

E. Certificates: Certify products comply with specifications.

1. Certify anodized finish thickness.

F. Qualifications: Substantiate qualifications comply with specifications.

1. Manufacturer.
2. Installer.
3. Welders and welding procedures.

G. Operation and Maintenance Data:

1. Care instructions for each exposed finish product.

1.6 QUALITY ASSURANCE

A. Manufacturer Qualifications:

1. Regularly manufactures specified products.

01-01-21

2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.

B. Installer Qualifications:

1. Regularly installs specified products.
2. Installed specified products with satisfactory service on five similar installations for minimum five years.

C. Welders and Welding Procedures Qualifications: AWS D1.2/D1.2M.

1.7 DELIVERY, STORAGE AND HANDLING

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.
- D. Store products indoors in dry, weathertight conditioned facility.
- E. Protect products from damage during handling and construction operations.

1.8 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction." Warranty Period for Two years for but not limited to, the following: Structural failure including excessive deflection
 1. Faulty operation of hardware
 2. Excessive deterioration/failure of metals, metal finishes, glass and other materials.
- B. Manufacturer's Warranty: Warrant painted finish against material and manufacturing defects.
 1. Warranty Period: 20 years.

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

- A. ICU/CCU Entrance Assemblies
 1. General: Provide manufacturer's standard ICU/CCU entrance assemblies including doors, sidelites, framing, headers, carrier assemblies, roller tracks, pivots, and accessories required for a complete installation. All components are to be from a single source from a single manufacturer.
 2. Performance Requirements:

01-01-21

- a. Opening Force: Not more than 5 pound force (22.2 N) to fully open door.
- b. Air Leakage: Entrance assemblies for pressurized rooms shall be
 - b. listed and labeled for smoke and draft control by qualified
 - b. testing agency acceptable to authorities having jurisdiction,.
- 3. Breakaway Hardware: Release hardware that allows indicated panels to
 - 3. swing out in direction of egress to full 90 degrees from closed door
 - 3. position.
- 4. Maximum Force to Open Panel: 50 pound force (222 N) value.
- 5. Release Position: Sliding door fully open.
- B. Sliding ICU/CCU Entrances:
 - 1. Configuration: As indicated on the drawings.
 - 2. Performance: Pressurized-entrance assembly.
 - 3. Breakaway Capability: Sliding panels and sidelites, from fully open position.
 - 4. Mounting: Between jambs.
 - 5. Floor Track: Trackless across sliding-door opening.
 - 6. Stile Design: Medium stile; 3-1/2-inch (90-mm).
 - 7. Top Rail Design: 3-1/2-inch (90-mm) nominal height.
 - 8. Bottom Rail Design: 5-inch (125-mm) nominal height; 10-inch (255-mm) nominal height. Insert requirement with weather sweep.
 - 9. Muntin Bars: None.
 - 10. Glazing Stops and Gaskets: Beveled.
 - 11. Glazing: Clear tempered.

Finish framing and door(s) with Class I, clear anodic finish.
- C. Delegated Design: Prepare submittal documents including design calculations and drawings signed and sealed by registered design professional, licensed in state where work is located.
 - 1. Minor deviations to details shown on drawings to accommodate manufacturer's standard products may be accepted by Contracting Officer's Representative when deviations do not affect design concept and specified performance.
- D. Design aluminum framed entrances and storefronts complying with specified performance:
 - 1. General: Provide ICU/CCU entrances capable of withstanding structural loads and thermal movements based on testing

01-01-21

manufacturer's standard units in assemblies similar to those indicated for this Project.

2. Fixed Framing Air Infiltration Resistance: ASTM E283;
0.30 liter/second/square meter (0.06 cubic feet/minute/square foot),
maximum at 300 Pa (6.24 psf), minimum, pressure differential.

2.2 MATERIALS

A. Aluminum:

1. Sheet Metal: ASTM B209M (ASTM B209), minimum 1.6 mm (0.063 inch) thick.
2. Extrusions: ASTM B221M (ASTM B221).
 - a. Framing: Minimum 3 mm (0.125 inch) wall thickness.
 - b. Glazing Beads, Moldings, and Trim: Minimum 1.25 mm (0.050 inch) thick.
3. Alloy 6063 temper T5 for doors, door frames.
4. Color Anodized Aluminum: Provide aluminum alloy required to produce specified color.

B. Stainless Steel: ASTM A240/A240M; Type 302 or Type 304.

2.3 PRODUCTS - GENERAL

- A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Sustainable Construction Requirements:

1. Aluminum Recycled Content: 50 percent total recycled content, minimum.

2.4 FRAMES

- A. Framing Members: Extruded aluminum.
- B. Stops: Provide integral fixed stops and glass rebates and snap-on removable stops.
- C. Provide concealed screws, bolts and other fasteners.
- D. Secure cover boxes to frames in back of lock strike cutouts.

2.5 STILE AND RAIL DOORS

- A. Stiles and Rails: Extruded aluminum.
 1. Thickness: 45 mm (1-3/4 inch).
 2. Stiles and Head Rails: 90 mm (3-1/2 inches) wide.
 3. Bottom Rails: 250 mm (10 inches) wide.
- B. Glass Rebates: Integral with stiles and rails.
- C. Glazing Beads: Extruded aluminum, 1.3 mm (0.050 inch) thick. Integral with stiles and rails or applied type, snap-fit secured.

01-01-21

D. Stile and Rail Joints: Welded or interlocking dovetail joints between stiles and rails.

1. Clamp door together through top and bottom rails with 9 mm (3/8 inch) primed steel tie rod extending into stiles and having self-locking nut and washer at both ends.
2. Reinforce stiles and rails to prevent door distortion when tie rods are tightened.
3. Provide compensating spring-type washer under each nut for stress relief.
4. Construct joints to remain rigid and tight when door is operated.

E. Weather-stripping: Replaceable type

1. Compression Type: ASTM D2000, molded neoprene or ASTM D2287, molded PVC.
2. Sliding Type: AAMA 701/702, wool, polypropylene, or nylon woven pile with nylon-fabric or aluminum-strip backing or vinyl holder.
3. Make slots for applying weather-stripping integral with doors.
4. Apply continuous weather-stripping to heads, jambs, bottom, and meeting stiles of doors and frames so doors move freely and close positively.

F. Headers: Fabricated from minimum 0.125-inch- (3.2-mm-) thick, extruded aluminum, and extending full width of ICU/CCU entrance units to conceal carrier assemblies and roller tracks. Provide hinged or removable access panels for service and adjustment. Secure panels to prevent unauthorized access.

1. Capacity: Capable of supporting doors up to [100 pounds (45 kg) per leaf over spans up to 14 feet (4.3 meter)] <Insert load and span> without intermediate supports.
2. Provide sag rods for spans exceeding 14 feet (4.3 m).

G. Carrier Assemblies and Overhead Roller Tracks: Assembly that allows vertical adjustment; consisting of nylon- or polyoxymethylene (POM)-covered, ball-bearing-center steel wheels operating on a continuous roller track or of ball-bearing-center steel wheels operating on a nylon- or POM-covered, continuous roller track. Support doors from carrier assembly by cantilever and pivot assembly. Provide minimum of two ball-bearing roller wheels and two antirise rollers for each active leaf.

01-01-21

- H. Brackets and Reinforcements: High-strength aluminum with nonstaining, nonferrous shims for aligning system components.
- I. Fasteners and Accessories: Corrosion-resistant, nonstaining, nonbleeding, flush fasteners and accessories compatible with adjacent materials.

2.6 COLUMN COVERS AND TRIM

- A. Column Covers and Trim: Sheet aluminum fabrications shown from sheet aluminum of longest available lengths.
- B. Provide concealed fasteners.
- C. Provide aluminum stiffeners and supporting members shown on drawings and as required to maintain component integrity and shape.

2.7 HARDWARE

- A. General: Provide units in sizes and types recommended by ICU/CCU entrance and hardware manufacturers for entrances and uses indicated. See Section 08 71 13, AUTOMATIC DOOR OPERATORS. Where exposed fasteners are required use countersunk Phillips flat-head or Allen flat-head machine screws, finish to match adjacent material.
- B. Breakaway Feature: Provide release hardware that allows sliding panel and sidelites to swing out in direction of egress to full 90 degrees, only from the fully open position.
 - 1. Latching system shall allow both panels to swing out after disengaging semi-automatic flush bolt from a single release point.
 - 2. When returning panels from breakaway position, panels shall self-latch.
- C. Positive Latch: Manufacturer's standard non-keyed, spring loaded, latch and strike that can secure sliding door panels to adjacent panels or jambs. Strike shall mount flush to surface of framing. Latch shall engage by closing action of door.
 - 1. Dead latch hook bolt shall be concealed to prevent snagging.
 - 2. Handle shall be circumferential design without exposed edges or open ends.
 - 3. Handle action shall be linear, unlatching in the direction of slide.
- D. Locking Hardware:
 - 1. Locking hardware at interior doors not requiring physical security is not required.

01-01-21

E. Smoke Seal Components: Provide manufactures standard smoke and draft control components as required to meet performance specifications.

Components included but are not limited to:

1. High temperature seals.
2. Stiles shall be slotted for seal mounting.

2.8 FABRICATION

A. Form metal parts and fit and assemble joints, except joints designed to accommodate movement.

B. Welding:

1. Make welds without distorting and discoloring exposed surfaces.
2. Clean and dress welds. Remove welding flux and weld spatter.

C. Prepare and reinforce doors and frames for hardware and accessories.

1. Coordinate preparation with specified hardware. See Section 08 71 00, DOOR HARDWARE.
2. Fabricate reinforcement from stainless steel plates.
 - a. Hinge and pivot reinforcing: Minimum 4.5 mm (0.179 inch) thick.
 - b. Lock Face, Flush Bolts, Concealed Holders, Concealed and Surface Mounted Closers Reinforcing: Minimum 2.6 mm (0.104 inch) thick.
 - c. Other Surface Mounted Hardware Reinforcing: Minimum 1.5 mm (0.059 inch) thick.
3. Where concealed hardware is specified, provide space, cutouts, and reinforcement for installation and secure fastening.

D. Factory assemble doors.

2.9 FINISHES

A. Aluminum Anodized Finish: NAAMM AMP 500.

1. Clear Anodized Finish: AA-C22A41; Class I Architectural, 0.018 mm (0.7 mil) thick.

2.10 ACCESSORIES

A. Dielectric Tape: Plastic, non-absorptive, with pressure sensitive adhesive; 0.18 to 0.25 mm (7 to 10 mils) thick.

B. Barrier Coating: ASTM D1187/D1187M.

C. Welding Materials: AWS D1.2/D1.2M, type to suit application.

D. Fasteners:

1. Aluminum: ASTM F468, Alloy 2024.
2. Stainless Steel: ASTM F593, Alloy Groups 1, 2 and 3.

01-01-21

3. Install surface mounted hardware using concealed fasteners to greatest extent possible.

E. Anchors: Aluminum or stainless steel; type to suit application.

F. Galvanizing Repair Paint: MPI No. 18.

G. Touch-Up Paint: Match shop finish.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
 1. Coordinate floor closer installation recessed into concrete slabs.
 2. Coordinate anchor installation built into masonry and concrete.
 3. Mounting Surfaces: General Contractor shall verify all surfaces to be plumb, straight and secure; substrates to be of proper dimension and material.
 4. Other trades: General Contract shall advise of any inadequate conditions or equipment.
- B. Protect existing construction and completed work from damage.
- C. Clean substrates. Remove contaminants capable of affecting subsequently installed product's performance.
- D. Apply dielectric tape or barrier coating to aluminum surfaces in contact with dissimilar metals to minimum 0.7 mm (30 mils) dry film thickness.

3.2 INSTALLATION - GENERAL

- A. Project Conditions
 1. Field Measurements: Verify actual dimensions of openings to receive ICU/CCU entrances by field measurements before fabrication and indicate on shop drawings.
- B. Coordination
 1. Coordinate sizes and locations of recesses in concrete floors for recessed tracks and thresholds if applicable. Concrete work is specified in Division 03.
 2. Templates: Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing ICU/CCU entrances to comply with indicated requirements.
 3. Electrical System Roughing-in: Coordinate layout and installation of automatic entrance door assemblies with connections to power supplies.

01-01-21

- C. Install products according to manufacturer's instructions and approved submittal drawings.
 - 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
- D. Install aluminum framed entrances and storefronts plumb and true, in alignment and to lines shown on drawings.
- E. Anchor frames to adjoining construction at heads, jambs and sills.
- F. Provide concealed aluminum clips to connect adjoining frame sections.
- G. Install door hardware and hang doors. See Section 08 71 00, DOOR HARDWARE.
- H. Adjust doors and hardware uniform clearances and proper operation.
- I. Level recesses for recessed floor tracks using shrinkage-resistant I. grout.
- J. Air Leakage: Install entrance assemblies for pressurized rooms according to NFPA 105 and as indicated.
- K. Touch up damaged factory finishes.
 - 1. Repair galvanized surfaces with galvanized repair paint.
 - 2. Repair painted surfaces with touch up primer.
- L. Tolerances:
 - 1. Variation from Plumb, Level, Warp, and Bow: Maximum 3 mm in 3 meters (1/8 inch in 10 feet).
 - 2. Variation from Plane: Maximum 3 mm in 3.65 meter (1/8 inch in 12 feet); 6 mm (1/4 inch) over total length.
 - 3. Variation from Alignment: Maximum 1.5 mm (1/16 inch) in-line offset and maximum 3 mm (1/8 inch) corner offset.
 - 4. Variation from Square: Maximum 3 mm (1/8 inch) diagonal measurement differential.

3.3 PROTECTION, CLEANING AND REPAIRING

- A. Clean exposed aluminum and glass surfaces. Remove contaminants and stains.
- B. Protect aluminum-framed entrances and storefronts from construction operations.
- C. Remove protective materials immediately before acceptance.
- D. Repair damage.

01-01-21

3.4 ADJUSTING

- A. Adjust alignment of entrances and hardware for smooth, safe operation with minimum air infiltration.
- B. Verify installation and alignment of all entrance gasketing as required for minimum air infiltration and compliance with specified standards.

3.5 DEMONSTRATION

- A. Engage a factory-authorized representative to train Owner's maintenance personnel to adjust, operate, and maintain safe operation of the door.

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

01-01-21

Page Intentionally Left Blank

01-01-21

SECTION 08 41 13
ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
1. Aluminum-framed storefronts.

1.2 RELATED REQUIREMENTS

- A. Door Finish and Color: Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Glass and Glazing: Section 08 80 00, GLAZING.
- C. Aluminum Finish and Color: Section 09 06 00, SCHEDULE FOR FINISHES.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. American Architectural Manufacturers Associations (AAMA):
- 2603-15.....Performance Requirements and Test Procedures
for Pigmented Organic Coatings on Aluminum
Extrusions and Panels
 - 2604-13.....Performance Requirements and Test Procedures or
High Performance Organic Coatings on
Architectural Extrusions and Panels
 - 2605-13.....Performance Requirements and Test Procedures
for Superior Performing Organic Coatings on
Aluminum Extrusions and Panels
- C. American Welding Society (AWS):
- D1.2/D1.2M-14.....Structural Welding Code - Aluminum
- D. ASTM International (ASTM):
- A240/A240M-20.....Chromium and Chromium-Nickel Stainless Steel
Plate, Sheet, and Strip for Pressure Vessels
and for General Applications
 - B209-14.....Aluminum and Aluminum-Alloy Sheet and Plate.
 - B209M-14.....Aluminum and Aluminum-Alloy Sheet and Plate
(Metric)
 - B221-14.....Aluminum and Aluminum-Alloy Extruded Bars,
Rods, Wire, Profiles, and Tubes
 - B221M-13.....Aluminum and Aluminum-Alloy Extruded Bars,
Rods, Wire, Profiles, and Tubes (Metric)

01-01-21

D1187/D1187M-97(2018)...Asphalt-Base Emulsions for Use as Protective
Coatings for Metal
E283/E283M-19.....Rate of Air Leakage Through Exterior Windows,
Curtain Walls, and Doors Under Specified
Pressure Differences Across the Specimen
E330/E330M-14.....Structural Performance of Exterior Windows,
Doors, Skylights and Curtain Walls by Uniform
Static Air Pressure Difference
E331-00(2016).....Water Penetration of Exterior Windows, Curtain
Walls, and Doors by Uniform Static Air Pressure
Difference
E1886-19.....Performance of Exterior Windows, Curtain Walls,
Doors, and Impact Protective Systems Impacted
by Missiles and Exposed to Cyclic Pressure
Differentials
E1996-17.....Performance of Exterior Windows, Curtain Walls,
Doors, and impact Protective Systems Impacted
by Windborne Debris in Hurricanes
F468-16.....Nonferrous Bolts, Hex Cap Screws, and Studs for
General Use
F593-17.....Stainless Steel Bolts, Hex Cap Screws, and
Studs

E. National Association of Architectural Metal Manufacturers (NAAMM):
AMP 500-06.....Metal Finishes Manual

F. National Fenestration Rating Council (NFRC):
500-14(E1A0).....Determining Fenestration Product Condensation
Resistance Values

G. Department of Veterans Affairs(VA):

1. VA Physical Security and Resiliency Design Manual October 1, 2020

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA,
AND SAMPLES.

B. Submittal Drawings: Minimum 1 to 2 (half size) scale.

1. Show size, configuration, and fabrication and installation details.
2. Show anchorage and reinforcement.

01-01-21

3. Show interface and relationship to adjacent work, including thermal, air, and water barrier continuity.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Doors, each type.
3. Entrance and Storefront construction.
4. Installation instructions.
5. Warranty.

D. Samples:

1. Aluminum Paint Finish: Minimum 150 mm (6 inches) long for each specified color.

E. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.

F. Test reports: Certify products comply with specifications.

G. Certificates: Certify products comply with specifications.

1. Certify anodized finish thickness.

H. Qualifications: Substantiate qualifications comply with specifications.

1. Manufacturer.
2. Installer.
3. Welders and welding procedures.

I. Delegated Design Drawings and Calculations: Signed and sealed by responsible design professional.

1. Show location and magnitude of loads applied to building structural frame.
2. Identify deviations from details shown on drawings.

J. Operation and Maintenance Data:

1. Care instructions for each exposed finish product.

1.5 QUALITY ASSURANCE

A. Manufacturer Qualifications:

1. Regularly manufactures specified products.
2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.

B. Installer Qualifications: Manufacturer authorized representative.

1. Regularly installs specified products.

01-01-21

2. Installed specified products with satisfactory service on five similar installations for minimum five years.

C. Welders and Welding Procedures Qualifications: AWS D1.2/D1.2M.

1.6 DELIVERY, STORAGE AND HANDLING

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.
- D. Store products indoors in dry, weathertight conditioned facility.
- E. Protect products from damage during handling and construction operations.

1.7 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."
- B. Manufacturer's Warranty: Warrant painted finish against material and manufacturing defects.
 1. Warranty Period: 20 years.

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

- A. Delegated Design: Prepare submittal documents including design calculations and drawings signed and sealed by registered design professional, licensed in state where work is located.
 1. Minor deviations to details shown on drawings to accommodate manufacturer's standard products may be accepted by Contracting Officer's Representative when deviations do not affect design concept and specified performance.
- B. Design aluminum framed entrances and storefronts complying with specified performance:
 1. Wind and Seismic Load Resistance: ASCE/SEI 7; Design criteria as required by code.
 - a. Maximum Deflection: 1/175 of span, maximum with minimum 1.65 safety factor.
 2. Thermal Movement: Accommodate ambient temperature range of 67 degrees C (120 degrees Fahrenheit).
 3. Windborne-Debris Impact Resistance: Pass ASTM E1886.

01-01-21

- a. Openings within 9144 mm (30 feet) of Grade: ASTM E1996 large missile test.
 - b. Other Openings: ASTM 1996 small missile test.
- 4. Condensation Resistance: NFRC 500.
 - a. Fixed Framing: 45 CRF, minimum.
- 5. Water Resistance: ASTM E331; No uncontrolled penetration at 380 Pa (8 pounds/square foot), minimum, pressure differential.
- 6. Fixed Framing Air Infiltration Resistance: ASTM E283; 0.30 liter/second/square meter (0.06 cubic foot/minute/square foot), maximum at 300 Pa (6.24 pounds/square foot), minimum, pressure differential.

2.2 MATERIALS

- A. Aluminum:
 - 1. Sheet Metal: ASTM B209M (ASTM B209), minimum 1.6 mm (0.063 inch) thick.
 - 2. Extrusions: ASTM B221M (ASTM B221).
 - a. Framing: Minimum 3 mm (0.125 inch) wall thickness.
 - b. Glazing Beads, Moldings, and Trim: Minimum 1.25 mm (0.050 inch) thick.
 - 3. Alloy 6063 temper T5 for storefronts.
- B. Stainless Steel: ASTM A240/A240M; Type 302 or Type 304.
- C. Thermal Break: Manufacturer standard low conductive material retarding heat flow in the framework, where insulating glass is scheduled.

2.3 PRODUCTS - GENERAL

- A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Provide aluminum-framed storefronts from one.
- C. Provide aluminum storefront systems from same manufacturer.
- D. Sustainable Construction Requirements:
 - 1. Aluminum Recycled Content: 50 percent total recycled content, minimum.

2.4 FRAMES

- A. Framing Members: Extruded aluminum, thermally broken.
- B. Stops: Provide integral fixed stops and glass rebates and snap-on removable stops.
- C. Provide concealed screws, bolts and other fasteners.
- D. Secure cover boxes to frames in back of lock strike cutouts.

01-01-21

E. Size: 2' x 4½".

F. Front glazed.

2.5 FABRICATION

A. Form metal parts and fit and assemble joints, except joints designed to accommodate movement. Seal joints to resist air infiltration and water penetration.

B. Welding:

1. Make welds without distorting and discoloring exposed surfaces.
2. Clean and dress welds. Remove welding flux and weld spatter.

2.6 FINISHES

A. Aluminum Anodized Finish: NAAMM AMP 500.

B. Aluminum Paint Finish:

1. Fluorocarbon Finish: AAMA 2604; 50 percent fluoropolymer resin, 2-coat system.

2.7 ACCESSORIES

A. Dielectric Tape: Plastic, non-absorptive, with pressure sensitive adhesive; 0.18 to 0.25 mm (7 to 10 mils) thick.

B. Barrier Coating: ASTM D1187/D1187M.

C. Welding Materials: AWS D1.2/D1.2M, type to suit application.

D. Fasteners:

1. Aluminum: ASTM F468, Alloy 2024.
2. Stainless Steel: ASTM F593, Alloy Groups 1, 2 and 3.

E. Anchors: Aluminum or stainless steel; type to suit application.

F. Galvanizing Repair Paint: MPI No. 18.

G. Touch-Up Paint: Match shop finish.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.

1. Coordinate floor closer installation recessed into concrete slabs.
2. Coordinate anchor installation built into masonry and concrete.

B. Protect existing construction and completed work from damage.

C. Clean substrates. Remove contaminants capable of affecting subsequently installed product's performance.

D. Apply dielectric tape or barrier coating to aluminum surfaces in contact with dissimilar metals and cementitious materials to minimum 0.7 mm (30 mils) dry film thickness.

01-01-21

3.2 INSTALLATION - GENERAL

- A. Install products according to manufacturer's instructions and approved submittal drawings.
 - 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
- B. Install aluminum framed storefronts plumb and true, in alignment and to lines shown on drawings.
- C. Anchor frames to adjoining construction at heads, jambs and sills.
- D. Provide concealed aluminum clips to connect adjoining frame sections.
- E. Touch up damaged factory finishes.
 - 1. Repair galvanized surfaces with galvanized repair paint.
 - 2. Repair painted surfaces with touch up primer.
- F. Tolerances:
 - 1. Variation from Plumb, Level, Warp, and Bow: Maximum 3 mm in 3 meters (1/8 inch in 10 feet).
 - 2. Variation from Plane: Maximum 3 mm in 3.65 meters (1/8 inch in 12 feet); 6 mm (1/4 inch) over total length.
 - 3. Variation from Alignment: Maximum 1.5 mm (1/16 inch) in-line offset and maximum 3 mm (1/8 inch) corner offset.
 - 4. Variation from Square: Maximum 3 mm (1/8 inch) diagonal measurement differential.

3.3 PROTECTION, CLEANING AND REPAIRING

- A. Clean exposed aluminum and glass surfaces. Remove contaminants and stains.
- B. Protect aluminum-framed entrances and storefronts from construction operations.
- C. Remove protective materials immediately before acceptance.
- D. Repair damage.

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

01-01-21

Page Intentionally Left Blank

01-01-21

SECTION 08 56 59
SERVICE AND TELLER WINDOW UNITS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Service window units within framed partitions indicated on Drawings.

1.2 RELATED WORK

A. Section 08 80 00, GLAZING.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

A240/A240M-20.....Chromium and Chromium-Nickel Stainless Steel
Plate, Sheet, and Strip for Pressure Vessels
and for General Applications.

F593-17.....Stainless Steel Bolts, Hex Cap Screws, and
Studs.

F594-09(2020).....Stainless Steel Nuts.

F1233-08(2019).....Security Glazing Materials and Systems.

C. National Association of Architectural Metal Manufacturers (NAAMM):

AMP 500-06.....Metal Finishes Manual.

D. UL LLC (UL):

752-05.....Bullet-Resisting Equipment.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA,
AND SAMPLES.

B. Submittal Drawings: Service windows, showing design, construction and
installation.

1. Indicate size, configuration, and fabrication and installation details.

C. Manufacturer's Literature and Data: Service windows.

1. Description of each product.

D. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.

E. Test reports: Report bullet resistance level.

01-01-21

F. Certificates: Certify products comply with specified bullet resistance rating.

1.5 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

A. Service Window Units: Factory fabricated, assembled, and glazed unit; bullet resistant type.

1. Frame: Stainless steel.

2. Glass: Tempered, as specified in Section 08 80 00 GLAZING.

B. Teller Window Units: Factory fabricated, assembled, and glazed unit; bullet resistant type.

1. Frame: Stainless steel with integral counter, deal tray, and jamb openings to permit voice communication through window.

2. Glass: Bullet resistive assembly specified in Section 08 80 00 GLAZING.

2.2 MATERIALS

A. Stainless Steel: ASTM A240/A240M; Type 304, 3 mm (0.12 inch) thick, minimum.

2.3 PRODUCTS - GENERAL

A. Sustainable Construction Requirements:

1. Stainless Steel Recycled Content: 70 percent total recycled content, minimum.

2.4 FABRICATION

A. Form stainless steel fabrications to sizes, profiles, and configurations indicated on Drawings.

B. Frames: Stainless steel.

1. Jambs and Heads: Continuous with integral glazing stop on corridor side of window unit.

2. Removable Glazing Stops: Applied to room side of window unit.

a. Miter and weld removable stops at corners.

b. Secure removable stops to frames with countersunk screws, spaced as required for specified performance requirements.

C. Frame Anchors: Stainless steel; framed partition type, compatible with partition construction.

01-01-21

1. Provide minimum three frame anchors for each jamb.

D. Sill: Stainless steel.

1. Fabricate sill full opening width to receive both jambs.

E. Glazing:

1. Glazing Channel: Stainless steel; configuration as required to accommodate glass installation, and expansion and contraction.
2. Secure glazing channel to window unit frame.
3. Factory glaze window unit.

2.5 FINISHES

- A. Stainless Steel: NAAMM AMP 500; No. 4 polished finish.
- B. Blend welds to match adjacent finish.

2.6 ACCESSORIES

- A. Fasteners: ASTM F593 and ASTM F594, stainless steel.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
 1. Verify opening is correctly sized and located.
 2. Verify partition is prepared to receive frame anchors.
- B. Protect existing construction and completed work from damage.

3.2 INSTALLATION

- A. Install products according to manufacturer's instructions and approved submittal drawings.
- B. Install service and teller window units according to manufacturer's installation instructions.
- C. Set units accurately, plumb, and level.
- D. Securely anchor to partition framing as shown on submittal drawings.

3.3 CLEANING

- A. Clean exposed window unit surfaces. Remove temporary labels, contaminants, and stains.
- B. Polish stainless steel surfaces for uniform appearance.

3.4 PROTECTION

- A. Protect window units from construction operations.
- B. Remove protective materials immediately before acceptance.
- C. Repair damage.

- - E N D - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

01-01-21

Page Intentionally Left Blank

01-01-21

SECTION 08 71 00
DOOR HARDWARE

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Door hardware and related items necessary for complete installation and operation of doors.

1.2 RELATED WORK

- A. Section 07 92 00 JOINT SEALANTS: Caulking.
- B. Section 08 11 13, HOLLOW METAL DOORS AND FRAMES; Section 08 14 00, INTERIOR WOOD DOORS; Section 08 71 13, AUTOMATIC DOOR OPERATORS; Section 13 49 00, RADIATION PROTECTION. Application of Hardware.
- C. Section 09 91 00, PAINTING: Painting.
- D. Section 28 13 11, PHYSICAL ACCESS CONTROL SYSTEMS: Card Readers.
- E. Section 28 31 00, FIRE DETECTION AND ALARM. Fire Detection
- F. Division 26, ELECTRICAL: Electrical.

1.3 GENERAL

- A. All hardware shall comply with ABAAS, (Architectural Barriers Act Accessibility Standard) unless specified otherwise.
- B. Provide rated door hardware assemblies where required by most current version of the International Building Code (IBC).
- C. Hardware for Labeled Fire Doors and Exit Doors: Conform to requirements of NFPA 80 for labeled fire doors and to NFPA 101 for exit doors, as well as to other requirements specified. Provide hardware listed by UL, except where heavier materials, large size, or better grades are specified herein under paragraph HARDWARE SETS. In lieu of UL labeling and listing, test reports from a nationally recognized testing agency may be submitted showing that hardware has been tested in accordance with UL test methods and that it conforms to NFPA requirements.
- D. Hardware for application on metal and wood doors and frames shall be made to standard templates. Furnish templates to the fabricator of these items in sufficient time so as not to delay the construction.
- E. The following items shall be of the same manufacturer, except as otherwise specified:
 - 1. Mortise locksets.
 - 2. Hinges for hollow metal and wood doors.
 - 3. Surface applied overhead door closers.
 - 4. Exit devices.

01-01-21

1.4 WARRANTY

- A. Automatic door operators shall be subject to the terms of FAR Clause 52.246-21, except that the Warranty period shall be two years in lieu of one year for all items except as noted below:
1. Locks, latchsets, and panic hardware: 5 years.
 2. Door closers and continuous hinges: 10 years.

1.5 MAINTENANCE MANUALS

- A. In accordance with Section 01 00 00, GENERAL REQUIREMENTS Article titled "INSTRUCTIONS", furnish maintenance manuals and instructions on all door hardware. Provide installation instructions with the submittal documentation.

1.6 SUBMITTALS

- A. Submittals shall be in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. Submit 6 copies of the schedule per Section 01 33 23. Submit 2 final copies of the final approved schedules to VAMC Locksmith as record copies (VISN Locksmith if the VAMC does not have a locksmith).
- B. Hardware Schedule: AHC certified hardware consultant to prepare and submit hardware schedule in the following form:

Hardware Item	Quantity	Size	Reference Publication Type No.	Finish	Mfr. Name and Catalog No.	Key Control Symbols	UL Mark (if fire rated and listed)	ANSI/BHMA Finish Designation

- C. Samples and Manufacturers' Literature:

1. Samples: All hardware items (proposed for the project) that have not been previously approved by Builders Hardware Manufacturers Association shall be submitted for approval. Tag and mark all items with manufacturer's name, catalog number and project number.
2. Samples are not required for hardware listed in the specifications by manufacturer's catalog number, if the contractor proposes to use the manufacturer's product specified.

01-01-21

D. Certificate of Compliance and Test Reports: Submit certificates that hardware conforms to the requirements specified herein. Certificates shall be accompanied by copies of reports as referenced. The testing shall have been conducted either in the manufacturer's plant and certified by an independent testing laboratory or conducted in an independent laboratory, within four years of submittal of reports for approval.

1.7 DELIVERY AND MARKING

A. Deliver items of hardware to job site in their original containers, complete with necessary appurtenances including screws, keys, and instructions. Tag one of each different item of hardware and deliver to COR for reference purposes. Tag shall identify items by Project Specification number and manufacturer's catalog number. These items shall remain on file in COR's office until all other similar items have been installed in project, at which time the COR will deliver items on file to Contractor for installation in predetermined locations on the project.

1.8 PREINSTALLATION MEETING

A. Convene a preinstallation meeting not less than 30 days before start of installation of door hardware. Require attendance of parties directly affecting work of this section, including Contractor and Installer, Architect, Project Engineer and VA Locksmith, Hardware Consultant, and Hardware Manufacturer's Representative. Review the following:

1. Inspection of door hardware.
2. Job and surface readiness.
3. Coordination with other work.
4. Protection of hardware surfaces.
5. Substrate surface protection.
6. Installation.
7. Adjusting.
8. Repair.
9. Field quality control.
10. Cleaning.

1.9 INSTRUCTIONS

A. Hardware Set Symbols on Drawings: Except for protective plates, door stops, mates, thresholds and the like specified herein, hardware

01-01-21

requirements for each door are indicated on drawings by symbols.

Symbols for hardware sets consist of letters (e.g., "HW") followed by a number. Each number designates a set of hardware items applicable to a door type.

- B. Keying: All cylinders shall be keyed into existing Great Grand Master Key System. Provide removable core cylinders that are removable only with a special key or tool without disassembly of knob or lockset. Cylinders shall be 7 pin type. Keying information shall be furnished at a later date by the COR.

1.10 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. In text, hardware items are referred to by series, types, etc., listed in such specifications and standards, except as otherwise specified.

- B. ASTM International (ASTM):

F883-13..... Padlocks

E2180-18.....Standard Test Method for Determining the
Activity of Incorporated Antimicrobial Agent(s)
In Polymeric or Hydrophobic Materials

- C. American National Standards Institute/Builders Hardware Manufacturers Association (ANSI/BHMA):

A156.1-06.....Butts and Hinges

A156.2-03.....Bored and Pre-assembled Locks and Latches

A156.3-08.....Exit Devices, Coordinators, and Auto Flush
Bolts

A156.4-08.....Door Controls (Closers)

A156.5-14.....Cylinders and Input Devices for Locks.

A156.6-05.....Architectural Door Trim

A156.8-05.....Door Controls-Overhead Stops and Holders

A156.11-14.....Cabinet Locks

A156.12-05Interconnected Locks and Latches

A156.13-05.....Mortise Locks and Latches Series 1000

A156.14-07Sliding and Folding Door Hardware

A156.15-06.....Release Devices-Closer Holder, Electromagnetic
and Electromechanical

01-01-21

A156.16-08.....Auxiliary Hardware
A156.17-04Self-Closing Hinges and Pivots
A156.18-06.....Materials and Finishes
A156.20-06Strap and Tee Hinges, and Hasps
A156.21-09..... Thresholds
A156.22-05.....Door Gasketing and Edge Seal Systems
A156.23-04.....Electromagnetic Locks
A156.24-03.....Delayed Egress Locking Systems
A156.25-07Electrified Locking Devices
A156.26-06.....Continuous Hinges
A156.28-07Master Keying Systems
A156.29-07Exit Locks and Alarms
A156.30-03High Security Cylinders
A156.31-07Electric Strikes and Frame Mounted Actuators
A156.36-10.....Auxiliary Locks
A250.8-03.....Standard Steel Doors and Frames

D. National Fire Protection Association (NFPA):

80-10.....Fire Doors and Other Opening Protectives
101-09.....Life Safety Code

E. Underwriters Laboratories, Inc. (UL):

Building Materials Directory (2008)

PART 2 - PRODUCTS

2.1 BUTT HINGES

A. ANSI A156.1. Provide only three-knuckle hinges, except five-knuckle where the required hinge type is not available in a three-knuckle version (e.g., some types of swing-clear hinges). The following types of butt hinges shall be used for the types of doors listed, except where otherwise specified:

1. Interior Doors: Type A8112/A5112 for doors 900 mm (3 feet) wide or less and Type A8111/A5111 for doors over 900 mm (3 feet) wide. Hinges for doors exposed to high humidity areas (shower rooms, toilet rooms, kitchens, janitor rooms, etc. shall be of stainless steel material.

B. Provide quantity and size of hinges per door leaf as follows:

1. Doors up to 1210 mm (4 feet) high: 2 hinges.

01-01-21

2. Doors 1210 mm (4 feet) to 2260 mm (7 feet 5 inches) high: 3 hinges minimum.
3. Doors greater than 2260 mm (7 feet 5 inches) high: 4 hinges.
4. Doors up to 900 mm (3 feet) wide, standard weight: 114 mm x 114 mm (4-1/2 inches x 4-1/2 inches) hinges.
5. Doors over 900 mm (3 feet) to 1065 mm (3 feet 6 inches) wide, standard weight: 127 mm x 114 mm (5 inches x 4-1/2 inches).
6. Doors over 1065 mm (3 feet 6 inches) to 1210 mm (4 feet), heavy weight: 127 mm x 114 mm (5 inches x 4-1/2 inches).
7. Provide heavy-weight hinges where specified.
8. At doors weighing 330 kg (150 pounds) or more, furnish 127 mm (5 inch) high hinges.

C. See Articles "MISCELLANEOUS HARDWARE" and "HARDWARE SETS" for pivots and hinges other than butts specified above and continuous hinges specified below.

2.2 CONTINUOUS HINGES

A. ANSI/BHMA A156.26, Grade 1-600.

1. Listed under Category N in BHMA's "Certified Product Directory."

B. General: Minimum 0.120-inch- (3.0-mm-) thick, hinge leaves with minimum overall width of 4 inches (102 mm); fabricated to full height of door and frame and to template screw locations; with components finished after milling and drilling are complete

C. Continuous, Barrel-Type Hinges: Hinge with knuckles formed around a Teflon-coated 6.35mm (0.25-inch) minimum diameter pin that extends entire length of hinge.

1. Base Metal for Interior Hinges: Stainless steel.
2. Base Metal for Hinges for Fire-Rated Assemblies: Stainless steel.
3. Provide with non-removable pin (hospital tip option) at lockable outswing doors.
4. Where required to clear adjacent casing, trim, and wall conditions and allow full door swing, provide wide throw hinges of minimum width required.
5. Provide with manufacturer's cut-outs for separate mortised power transfers and/or mortised automatic door bottoms where they occur.

01-01-21

6. Where thru-wire power transfers are integral to the hinge, provide hinge with easily removable portion to allow easy access to wiring connections.
7. Where models are specified that provide an integral wrap-around edge guard for the hinge edge of the door, provide manufacturer's adjustable threaded stud and machine screw mechanism to allow the door to be adjusted within the wrap-around edge guard.

2.3 DOOR CLOSING DEVICES

- A. Closing devices shall be products of one manufacturer for each type specified.

2.4 OVERHEAD CLOSERS

- A. Conform to ANSI A156.4, Grade 1.
- B. Closers shall conform to the following:
 1. The closer shall have minimum 50 percent adjustable closing force over minimum value for that closer and have adjustable hydraulic back check effective between 60 degrees and 85 degrees of door opening.
 2. Where specified, closer shall have hold-open feature.
 3. Size Requirements: Provide multi-size closers, sizes 1 through 6, except where multi-size closer is not available for the required application.
 4. Material of closer body shall be forged or cast.
 5. Arm and brackets for closers shall be steel, malleable iron or high strength ductile cast iron.
 6. Where closers are exposed to the exterior or are mounted in rooms that experience high humidity, provide closer body and arm assembly of stainless steel material.
 7. Closers shall have full size metal cover; plastic covers will not be accepted.
 8. Closers shall have adjustable hydraulic back-check, separate valves for closing and latching speed, adjustable back-check positioning valve, and adjustable delayed action valve.
 9. Provide closers with any accessories required for the mounting application, including (but not limited to) drop plates, special soffit plates, spacers for heavy-duty parallel arm fifth screws, bull-nose or other regular arm brackets, longer or shorter arm

01-01-21

- assemblies, and special factory templating. Provide special arms, drop plates, and templating as needed to allow mounting at doors with overhead stops and/or holders.
10. Closer arms or backcheck valve shall not be used to stop the door from overswing, except in applications where a separate wall, floor, or overhead stop cannot be used.
 11. Provide parallel arm closers with heavy duty rigid arm.
 12. Where closers are to be installed on the push side of the door, provide parallel arm type except where conditions require use of top jamb arm.
 13. Provide all surface closers with the same body attachment screw pattern for ease of replacement and maintenance.
 14. All closers shall have a 1 ½" (38mm) minimum piston diameter.

2.5 DOOR STOPS

- A. Conform to ANSI A156.16.
- B. Provide door stops wherever an opened door or any item of hardware thereon would strike a wall, column, equipment or other parts of building construction. For concrete, masonry or quarry tile construction, use expansion shields for mounting door stops.
- C. Where cylindrical locks with turn pieces or pushbuttons occur, equip wall bumpers Type L02251 (rubber pads having concave face) to receive turn piece or button.
- D. Where drywall partitions occur, use floor stops, Type L02141 or L02161 in office areas, Type L02121 elsewhere.
- E. Omit stops where floor mounted door holders are required and where automatic operated doors occur.
- F. Provide appropriate roller bumper for each set of doors (except where closet doors occur) where two doors would interfere with each other in swinging.
- G. Provide overhead surface applied stop Type C02541, ANSI A156.8 on patient toilet doors in bedrooms where toilet door could come in contact with the bedroom door.
- H. Provide door stops on doors where combination closer magnetic holders are specified, except where wall stops cannot be used or where floor stops cannot be installed within 4-inches of the wall.

01-01-21

- I. Where the specified wall or floor stop cannot be used, provide concealed overhead stops (surface-mounted where concealed cannot be used).

2.6 OVERHEAD DOOR STOPS AND HOLDERS

- A. Conform to ANSI Standard A156.8. Overhead holders shall be of sizes recommended by holder manufacturer for each width of door. Set overhead holders for 110 degree opening, unless limited by building construction or equipment. Provide Grade 1 overhead concealed slide type: stop-only at rated doors and security doors, hold-open type with exposed hold-open on/off control at all other doors requiring overhead door stops.

2.7 FLOOR DOOR HOLDERS

- A. Conform to ANSI Standard A156.16. Provide extension strikes for Types L01301 and L01311 holders where necessary.

2.8 LOCKS AND LATCHES

- A. Conform to ANSI A156.2. Locks and latches for doors 45 mm (1-3/4 inch) thick or over shall have beveled fronts. Lock cylinders shall have not less than seven pins. Cylinders for all locksets shall be removable core type. Cylinders shall be furnished with construction removable cores and construction master keys. Cylinder shall be removable by special key or tool. Construct all cores so that they will be interchangeable into the core housings of all mortise locks, rim locks, cylindrical locks, and any other type lock included in the Great Grand Master Key System. Disassembly of lever or lockset shall not be required to remove core from lockset. All locksets or latches on double doors with fire label shall have latch bolt with 19 mm (3/4 inch) throw, unless shorter throw allowed by the door manufacturer's fire label. Provide temporary keying device or construction core to allow opening and closing during construction and prior to the installation of final cores.

- B. In addition to above requirements, locks and latches shall comply with following requirements:

1. Mortise Lock and Latch Sets: Conform to ANSI/BHMA A156.13. Mortise locksets shall be series 1000, minimum Grade 2. All locksets and latchsets, shall have lever handles fabricated from cast stainless steel. Provide sectional (lever x rose) lever design matching existing. No substitute lever material shall be accepted. All locks

01-01-21

and latchsets shall be furnished with 122.55 mm (4-7/8-inch) curved lip strike and wrought box. At outswing pairs with overlapping astragals, provide flat lip strip with 21mm (7/8-inch) lip-to-center dimension. Lock function F02 shall be furnished with emergency tools/keys for emergency entrance. All lock cases installed on lead lined doors shall be lead lined before applying final hardware finish. Furnish armored fronts for all mortise locks. Where mortise locks are installed in high-humidity locations or where exposed to the exterior on both sides of the opening, provide non-ferrous mortise lock case.

2.9 ELECTRIC STRIKES

- A. ANSI/ BHMA A156.31 Grade 1.
- B. General: Use fail-secure electric strikes at fire-rated doors.

2.10 KEYS

- A. Stamp all keys with change number and key set symbol. Furnish keys in quantities as follows:

Locks/Keys	Quantity
Cylinder locks	2 keys each
Cylinder lock change key blanks	100 each different key way
Master-keyed sets	6 keys each
Grand Master sets	6 keys each
Great Grand Master set	5 keys
Control key	2 keys

2.11 ARMOR PLATES, KICK PLATES, MOP PLATES AND DOOR EDGING

- A. Conform to ANSI Standard A156.6.
- B. Provide protective plates and door edging as specified below:
 - 1. Kick plates, mop plates and armor plates of metal, Type J100 series.
 - 2. Provide kick plates and mop plates where specified. Kick plates shall be 254 mm (10 inches) or 305 mm (12 inches) high. Mop plates shall be 152 mm (6 inches) high. Both kick and mop plates shall be minimum 1.27 mm (0.050 inches) thick. Provide kick and mop plates beveled on all 4 edges (B4E). On push side of doors where jamb stop extends to floor, make kick plates 38 mm (1-1/2 inches) less than width of door, except pairs of metal doors which shall have plates

01-01-21

- 25 mm (1 inch) less than width of each door. Extend all other kick and mop plates to within 6 mm (1/4 inch) of each edge of doors. Kick and mop plates shall butt astragals. For jamb stop requirements, see specification sections pertaining to door frames.
3. Kick plates and/or mop plates are not required on following door sides:
 - a. Armor plate side of doors;
 - b. Closet side of closet doors;
 4. Armor plates for doors are listed under Article "Hardware Sets".

Armor plates shall be thickness as noted in the hardware set, 875 mm (35 inches) high and 38 mm (1-1/2 inches) less than width of doors. Provide armor plates beveled on all 4 edges (B4E). Where top of intermediate rail of door is less than 875 mm (35 inches) from door bottom, extend armor plates to within 13 mm (1/2 inch) of top of intermediate rail. On doors equipped with panic devices, extend armor plates to within 13 mm (1/2 inch) of panic bolt push bar.
 5. Provide stainless steel edge guards where so specified at wood doors. Provide mortised type instead of surface type except where door construction and/or ratings will not allow. Provide edge guards of bevel and thickness to match wood door. Provide edge guards with factory cut-outs for door hardware that must be installed through or extend through the edge guard. Provide full-height edge guards except where door rating does not allow; in such cases, provide edge guards to height of bottom of typical lockset armor front. Forward edge guards to wood door manufacturer for factory installation on doors.

2.12 EXIT DEVICES

- A. Conform to ANSI Standard A156.3. Exit devices shall be Grade 1; type and function are specified in hardware sets. Provide flush with finished floor strikes for vertical rod exit devices in interior of building. Trim shall have cast satin stainless steel lever handles of design similar to locksets, unless otherwise specified. Provide key cylinders for keyed operating trim and, where specified, cylinder dogging.

01-01-21

- B. Surface vertical rod panics shall only be provided less bottom rod; provide fire pins as required by exit device and door fire labels. Do not provide surface vertical rod panics at exterior doors.
- C. Concealed vertical rod panics shall be provided less bottom rod at interior doors, unless lockable or otherwise specified; provide fire pins as required by exit device and door fire labels. Where concealed vertical rod panics are specified at exterior doors, provide with both top and bottom rods.
- D. At non-rated openings with panic hardware, provide panic hardware with key cylinder dogging feature.
- E. Exit devices for fire doors shall comply with Underwriters Laboratories, Inc., requirements for Fire Exit Hardware. Submit proof of compliance.

2.13 FLUSH BOLTS (AUTOMATIC)

- A. Conform to ANSI A156.3. Dimension of flush bolts shall conform to ANSI A115. Bolts shall conform to Underwriters Laboratories, Inc., requirements for fire door hardware. Flush bolts shall automatically latch and unlatch. Furnish dustproof strikes conforming to ANSI A156.16 for bottom flushbolt. Face plates for dustproof strike shall be rectangular and not less than 38 mm by 90 mm (1-1/2 by 3-1/2 inches).
- B. At interior doors, provide auto flush bolts less bottom bolt, unless otherwise specified, except at wood pairs with fire-rating greater than 20 minutes; provide fire pins as required by auto flush bolt and door fire labels.

2.14 DOOR PULLS WITH PLATES

- A. Conform to ANSI A156.6. Pull Type J401, 152 mm CTC (6 inches CTC) length by 19 mm (3/4 inches) diameter minimum with plate Type J302, 90 mm by 381 mm (3-1/2 inches by 15 inches), unless otherwise specified. Provide pull with projection of 57.2 mm (2 1/4 inches) minimum and a clearance of 38.1 mm (1 1/2 inches) minimum. Cut plates of door pull plate for cylinders, or turn pieces where required.

2.15 PUSH PLATES

- A. Conform to ANSI A156.6. Metal, Type J302, 203 mm (8 inches) wide by 406.4 mm (16 inches) high. Provide metal Type J302 plates 102 mm (4 inches) wide by 406.4 mm (16 inches) high where push plates are

01-01-21

specified for doors with stiles less than 203 mm (8 inches) wide. Cut plates for cylinders, and turn pieces where required.

2.16 COMBINATION PUSH AND PULL PLATES

- A. Conform to ANSI 156.6. Type J303, stainless steel 3 mm (1/8 inch) thick, 80 mm (3-1/3 inches) wide by 800 mm (16 inches) high), top and bottom edges shall be rounded. Secure plates to wood doors with 38 mm (1-1/2 inch) long No. 12 wood screws. Cut plates for turn pieces, and cylinders where required. Pull shall be mounted down.

2.17 COORDINATORS

- A. Conform to ANSI A156.16. Coordinators, when specified for fire doors, shall comply with Underwriters Laboratories, Inc., requirements for fire door hardware. Coordinator may be omitted on exterior pairs of doors where either door will close independently regardless of the position of the other door. Coordinator may be omitted on interior pairs of non-labeled open where open back strike is used. Open back strike shall not be used on labeled doors. Paint coordinators to match door frames, unless coordinators are plated. Provide bar type coordinators, except where gravity coordinators are required at acoustic pairs. For bar type coordinators, provide filler bars for full width and, as required, brackets for push-side surface mounted closers, overhead stops, and vertical rod panic strikes.

2.18 AUTOMATIC DOOR BOTTOM SEAL AND RUBBER GASKET FOR LIGHT PROOF OR SOUND CONTROL DOORS

- A. Conform to ANSI A156.22. Provide mortise or under-door type, except where not practical. For mortise automatic door bottoms, provide type specific for door construction (wood or metal).

2.19 MISCELLANEOUS HARDWARE

- A. Access Doors (including Sheet Metal, Screen and Woven Wire Mesh Types): Except for fire-rated doors and doors to Temperature Control Cabinets, equip each single or double metal access door with Lock Type E07213, conforming to ANSI A156.11. Key locks as directed. Ship lock prepaid to the door manufacturer. Hinges shall be provided by door manufacturer.
- B. Mutes: Conform to ANSI A156.16. Provide door mutes or door silencers Type L03011 or L03021, depending on frame material, of white or light gray color, on each steel or wood door frame, except at fire-rated

01-01-21

frames, lead-lined frames and frames for sound-resistant, lightproof and electromagnetically shielded doors. Furnish 3 mutes for single doors and 2 mutes for each pair of doors, except double-acting doors. Provide 4 mutes or silencers for frames for each Dutch type door. Provide 2 mutes for each edge of sliding door which would contact door frame.

2.20 FINISHES

- A. Exposed surfaces of hardware shall have ANSI A156.18, finishes as specified below. Finishes on all hinges, pivots, closers, thresholds, etc., shall be as specified below under "Miscellaneous Finishes." For field painting (final coat) of ferrous hardware, see Section 09 91 00, PAINTING.
- B. 626 or 630: All surfaces on exterior and interior of buildings, except where other finishes are specified.
- C. Miscellaneous Finishes:
1. Hinges -interior doors: 652 or 630.
 2. Pivots: Match door trim.
 3. Door Closers: Factory applied paint finish. Dull or Satin Aluminum color.
 4. Cover plates for floor hinges and pivots: 630.
 5. Other primed steel hardware: 600.
- D. Hardware Finishes for Existing Buildings: U.S. Standard finishes shall match finishes of hardware in (similar) existing spaces except where otherwise specified.
- E. Anti-microbial Coating: All hand-operated hardware (levers, pulls, push bars, push plates, paddles, and panic bars) shall be provided with an anti-microbial/anti-fungal coating that has passed ASTM E2180 tests. Coating to consist of ionic silver (Ag+). Silver ions surround bacterial cells, inhibiting growth of bacteria, mold, and mildew by blockading food and respiration supplies.

2.21 BASE METALS

- A. Apply specified U.S. Standard finishes on different base metals as following:

Finish	Base Metal
652	Steel
626	Brass or bronze

01-01-21

Finish	Base Metal
630	Stainless steel

PART 3 - EXECUTION

3.1 HARDWARE HEIGHTS

- A. For existing buildings locate hardware on doors at heights to match existing hardware. The Contractor shall visit the site, verify location of existing hardware and submit locations to VA COR for approval.
- B. Hardware Heights from Finished Floor:
- 1.Exit devices centerline of strike (where applicable) 1024 mm (40-5/16 inches).
 - 2.Locksets and latch sets centerline of strike 1024 mm (40-5/16 inches).
 - 3.Deadlocks centerline of strike 1219 mm (48 inches).
 - 4.Hospital arm pull 1168 mm (46 inches) to centerline of bottom supporting bracket.
 - 5.Centerline of door pulls to be 1016 mm (40 inches).
 - 6.Push plates and push-pull shall be 1270 mm (50 inches) to top of plate.
 - 7.Push-pull latch to be 1024 mm (40-5/16 inches) to centerline of strike.
 - 8.Locate other hardware at standard commercial heights. Locate push and pull plates to prevent conflict with other hardware.

3.2 INSTALLATION

- A. Closer devices, including those with hold-open features, shall be equipped and mounted to provide maximum door opening permitted by building construction or equipment. Closers shall be mounted on side of door inside rooms, inside stairs, and away from corridors. Where closers are mounted on doors they shall be mounted with hex nuts and bolts; foot shall be fastened to frame with machine screws.

- B. Hinge Size Requirements:

Door Thickness	Door Width	Hinge Height
45 mm (1-3/4 inch)	900 mm (3 feet) and less	113 mm (4-1/2 inches)

01-01-21

Door Thickness	Door Width	Hinge Height
45 mm (1-3/4 inch)	Over 900 mm (3 feet) but not more than 1200 mm (4 feet)	125 mm (5 inches)
35 mm (1-3/8 inch) (hollow core wood doors)	Not over 1200 mm (4 feet)	113 mm (4-1/2 inches)

- C. Hinge leaves shall be sufficiently wide to allow doors to swing clear of door frame trim and surrounding conditions.
- D. Where new hinges are specified for new doors in existing frames or existing doors in new frames, sizes of new hinges shall match sizes of existing hinges; or, contractor may reuse existing hinges provided hinges are restored to satisfactory operating condition as approved by COR. Existing hinges shall not be reused on door openings having new doors and new frames. Coordinate preparation for hinge cut-outs and screw-hole locations on doors and frames.
- E. Hinges Required Per Door:

Door Description	Number butts
Doors 1500 mm (5 ft) or less in height	2 butts
Doors over 1500 mm (5 ft) high and not over 2280 mm (7 ft 6 in) high	3 butts
Doors over 2280 mm (7 feet 6 inches) high	4 butts
Dutch type doors	4 butts
Doors with spring hinges 1370 mm (4 feet 6 inches) high or less	2 butts
Doors with spring hinges over 1370 mm (4 feet 6 inches)	3 butts

- F. Fastenings: Suitable size and type and shall harmonize with hardware as to material and finish. Provide machine screws and lead expansion shields to secure hardware to concrete, ceramic or quarry floor tile, or solid masonry. Fiber or rawl plugs and adhesives are not permitted. All fastenings exposed to weather shall be of nonferrous metal.
- G. After locks have been installed; show in presence of COR that keys operate their respective locks in accordance with keying requirements. (All keys, Master Key level and above shall be sent Registered Mail to the Medical Center Director along with the bitting list. Also a copy of

01-01-21

the invoice shall be sent to the COR for his records.) Installation of locks which do not meet specified keying requirements shall be considered sufficient justification for rejection and replacement of all locks installed on project.

3.3 FINAL INSPECTION

A. Installer to provide letter to VA Resident/Project Engineer that upon completion, installer has visited the Project and has accomplished the following:

1. Re-adjust hardware.
2. Evaluate maintenance procedures and recommend changes or additions, and instruct VA personnel.
3. Identify items that have deteriorated or failed.
4. Submit written report identifying problems.

3.4 DEMONSTRATION

A. Demonstrate efficacy of mechanical hardware and electrical, and electronic hardware systems, including adjustment and maintenance procedures, to satisfaction of Resident/Project Engineer and VA Locksmith.

3.5 HARDWARE SETS

A. Following sets of hardware correspond to hardware symbols shown on drawings. Only those hardware sets that are shown on drawings will be required. Disregard hardware sets listed in specifications but not shown on drawings.

B. Hardware Consultant working on a project will be responsible for providing additional information regarding these hardware sets. The numbers shown in the following sets come from BHMA standards.

ELECTRIC HARDWARE ABBREVIATIONS LEGEND:

ADO = Automatic Door Operator

EMCH = Electro-Mechanical Closer-Holder

MHO = Magnetic Hold-Open (wall- or floor-mounted)

C. INTERIOR SINGLE DOORS

HW-1E

Each door to have:

1 Continuous Hinge

X INTEGRAL HINGE GUARD CHANNEL X
SWING-CLEAR X ADJUSTA-SCREWS

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

01-01-21

1 Hospital Latch	F01 X PADDLES POINTING DOWN
1 Closer	C02011/C02021
1 Armor Plate	J101 X 1.275 MM (0.050 INCH) THICKNESS
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Wall Stop (@ Inswing Doors)	L02101 CONVEX
1 Set Self-Adhesive Seals	R0Y154

01-01-21

	HW-1F
Each door to have:	NON-RATED
1 Continuous Hinge	-
1 Latchset	F04
1 Kick Plate	J102
1 Wall Stop	L02101 CONVEX
3 Silencers	L03011
	HW-2
Each door to have:	RATED/NON-RATED
Hinges	QUANTITY AND TYPE AS REQUIRED
1 Keyed Privacy Indicator Lock	F13 X OCCUPANCY INDICATOR
1 Closer	C02011/C02021
1 Kick Plate	J102
1 Mop Plate (2 Inswing Doors)	J103
1 Wall Stop	L02101 CONVEX
1 Set Self-Adhesive Seals	R06154
	HW-2B
Each door to have:	NON-RATED
1 Continuous Hinge, Double Swing	HT DSHP01C-DOOR HEIGHT
1 Privacy Lock	F02 X OCCUPANCY INDICATOR
1 Rescue Stop	A1882
1 Kick Plate	J102
1 Mop Plate (@ Inswing Doors)	J103
1 Wall Stop	L02101 CONVEX
	HW-3E
Each door to have:	NON-RATED
Hinges	QUANTITY AND TYPE AS REQUIRED
1 Office Lock	F04
1 Floor Stop	L02121 X 3 FASTENERS
1 Set Self-Adhesive Seals	R0Y154
1 Coat Hook	L03121

01-01-21

Each door to have:	HW-4P
1 Continuous Hinge	NON-RATED/RATED
	X INTEGRAL HINGE GUARD CHANNEL X
	ADJUSTA-SCREWS
1 Passage Hospital Lock	F75 X PADDLES POINTING DOWN
1 Armor Plate	J101 X 1.275 MM (0.050 INCH)
	THICKNESS
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT:
	HARDWARE
1 Overhead Stop	C01541-ADJUSTABLE
1 Threshold	J32300 X 57 MM WIDTH (2¼ INCHES)
1 Auto Door Bottom	ROY346 - HEAVY-DUTY
1 Closer (@ Rated Doors)	C02011/C02021 (delete overhead stop)

Each door to have:	HW-4Q
1 Pivot Set	NON-RATED
	C07162 xX 454KG (1000 LBS) WEIGHT
	CAPACITY
1 Intermediate Pivot	C07311
1 Utility Hospital Lock	F09 x LEAD-LINED x PADDLES POINTING
	DOWN
1 Armor Plate	J101 x 1.275 MM (0.050 INCH)
	THICKNESS
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Overhead Stop	C01541-ADJUSTABLE
1 Set Self-Adhesive Seal	ROY154

Each door to have:	HW-5
Hinges	RATED
	QUANTITY AND TYPE AS REQUIRED
1 Storeroom Lock	F07
1 Closer	C02011/C02021
1 Kick Plate	J102 (@ STORAGE, EVM AND HAC ROOMS
	ONLY)
1 Floor Stop	L02121 X 3 FASTENERS
1 Set Self-Adhesive Seal	ROY154

01-01-21

	HW-5B
Each door to have:	RATED
1 Continuous Hinge	X INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1 Storeroom Lock	F07
1 Closer	C02011/C02021
1 Armor Plate	J101 X 1.275 MM (0.050 INCH) THICKNESS
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Floor Stop	L02121 X 3 FASTENERS
1 Set Self-Adhesive Seal	R0Y154

	HW-5D
Each door to have:	RATED
Hinges	QUANTITY AND TYPE AS REQUIRED
1 Storeroom Lock	F07
1 Kick Plate	J102 (@ STORAGE, EVM AND HAC ROOMS ONLY)
1 Floor Stop (@ Inswing Doors)	L02121 X 3 FASTENERS
1 Wall Stop (@ Outswing Doors)	L02102-CONVEX
3 Silencers	L03011

	HW-5F
Each door to have:	RATED/NON-RATED
1 Continuous Hinge	X INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1 Storeroom Lock	F07
1 Closer (@ Rated Doors)	C02011/C02021
1 Heavy-Duty Armor Plate	J101 X 3.175 MM (0.125 INCH) THICKNESS
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Wall Stop	L02101-CONVEX
1 Set Self-Adhesive Seals	R0Y154

01-01-21

	HW-8B
Each door to have:	NON-RATED
2 Continuous Hinges	-
2 Push Plates	J304 8" X 16"
2 Hospital Grips	J401
2 Kick Plates	J102
2 Mop Plates (@ Inswing Doors)	J103
2 Closers	C02011/C02021
2 Overhead Stops	C01541-ADJUSTABLE
2 Silencers	L03011

	HW-8E
Each (ADO) pair to have:	NON-RATED
2 Continuous Hinges	X INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS X 4-THRUWIRE TRANSFERS X IN-HINGE ACCESS PANEL
2 Wave-to-Open Plates	J304 8" X 16"
2 Hospital Grips	J401
2 Kick Plates	J102
2 Edge Guards (@ Wood Doors)	J208 / J211 (VERIFY), CUT: HARDWARE
2 Floor Tops	L02121 X 3 FASTENERS
2 Silencers	L03011

AUTOMATIC DOOR OPERATORS AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

POWER TRANSFERS FOR RE-ACTIVATION SENSOR WIRING (RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

01-01-21

	HW-10H
Each (ADO) lead-lined pair to have:	RATED/NON-RATED
2 Bottom Pivots	C07162 LESS TOP PIVOT X 454KG (1000 LBS) WEIGHT CAPACITY
1 Intermediate Pivot	C07311 (MIDDLE OF ACTIVE LEAF)
1 Intermediate Transfer Pivot	C07311 X 4 WIRE TRANSFER (MIDDLE OF INACTIVE LEAF)
1 Intermediate Transfer Pivots	C07311 X 4 WIRE TRANSFER (NEAR TOP OF EACH LEAF)
1 Set Auto-Flush Bolts	TYPE 25 LESS BOTTOM BOLT X LEAD-LINED
1 Hospital Utility Lock	F09 X PADDLES POINTING DOWN X LEAD-LINED
1 Electric Unlatch Strike	E09321 (FAIL SECURE) (LEAD-LINED)
1 Power Supply	REGULATED, FILTERED, 24 VDC, AMPERAGE AS REQUIRED
1 Coordinator	TYPE 21A
1 Overlapping Astragal with Self-Adhesive Seal	ROY634 X RO6154 X THRU-BOLTS X LEAD-LINED
2 Armor Plates	J101 X 1.275 MM (0.050 INCH) THICKNESS
2 Edge Guards (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
2 Overhead Stops	C01541-ADJUSTABLE
1 Set Self-Adhesive Seals	ROY154
1 Wave-to-Open Plate	J304

AUTOMATIC DOOR OPERATORS AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

POWER TRANSFER PIVOTS NEAR TOP OF EACH DOOR FOR RE-ACTIVATION SENSOR WIRING BY SECTION 08 71 13, RE-ACTIVATION SENSORS PROVIDED.

01-01-21

	HW-10J
Each (ADO) pair to have:	RATED/NON-RATED
1 Continuous Transfer Hinge	X INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS X 8-THRUWIRE TRANSFER X IN-HINGE ACCESS PANEL
1 Continuous Transfer Hinge	X INTEGRAL HINGE GUGARD CHANNEL X ADJUSTA-SCREWS X 4-THRUWIRE TRANSFER X IN-HINGE ACCESS PANEL
1 Set Auto-Flush Bolts	TYPE 25 LESS BOTTOM BOLT
1 Classroom Hospital Lock	F05 X PADDLES POINTING DOWN
1 Electric Unlatch Strike	E09321 (FAIL-SECURE)
1 Power Supply	REGULATRED, FILTERED, 24 VDC, AMPERAGE AS REQUIRED
1 Coordinator	TYPE 21A
1 Overlapping Astragal with Self-Adhesive Seal	ROY634 X RO6154 X THRU-BOLTS
2 Armor Plates	J101 X 1.275 MM (0.050 INCH) THICKNESS
4 Edge Guards (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
2 Overhead Stops	C01541-ADJUSTABLE
1 Set Self-Adhesive Seals	ROY154
1 Wave-to-Open Plate	J304

AUTOMATIC DOOR OPERATORS AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

POWER TRANSFER PIVOTS NEAR TOP OF EACH DOOR FOR RE-ACTIVATION SENSOR WIRING BY SECTION 08 71 13, RE-ACTIVATION SENSORS PROVIDED.

*AT WOOD PAIRS RATED 45-MINUTES OR MORE, PROVIDE ELECTRIC STRIKE 310-2-3/4 (FOLGER ADAM OR EQUAL) IN LIEU OF SPECIFIC UNLATCH STRIKE.

01-01-21

HW-12D

Each (ADO) pair integrated
double egress doors to have:

ALL HARDWARE BY SECTION 08 17 10, INTEGRATED DOOR ASSEMBLIES.

AUTOMATIC DOOR OPERATORS AND CONTROLS BY SECTION 08 71 13, AUTOMATIC
DOOR OPERATORS.

D. INTERIOR SINGLE SECURITY DOORS

HW-SH-3

Each (AC, EL, REX, DPS) door to
have:

Hinges	QUANTITY AND TYPE AS REQUIRED
1 Transfer Hinge	4-WIRE TYPE AS REQUIRED
1 Electrified Lock	F07 (E01-REX, E06) 24 VDC
1 Power Supply	REGULATED, FILTERED, 24 VDC, AMPERAGE AS REQUIRED
1 Closer	C02011/C02021
1 Floor Stop	L02121 X 3 FASTENERS
1 Alarm Contact	120 VAC POWER, CONDUIT AND WIRING BY DIVISION 26. CARD READER BY DIVISION 28.

01-01-21

HW-SH-3D

Each {AC, EL, REX, DPS) door to
have: RATED

1 Continuous Transfer Hinge	X INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS X 4-THRUWIRE TRANSFER X IN-HINGE ACCESS PANEL
1 Electrified Lock	F07 (E010-REX, E06) 24 VDC
1 Power Supply	REGULATED, FILTERED, 24 VDC, AMPERAGE AS REQUIRED
1 Closer	C02011/C02021
1 Armor Plate	J101 X 1.275 MM (0.050 INCH) THICKNESS
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
2 Sets Self-Adhesive Seals	ROY154
1 Alarm Contact	120 VAC POWER, CONDUIT AND WIRING BY DIVISION 26. CARD READER BY DIVISION 28.

01-01-21

E. INTERIOR PAIRS OF SECURITY DOORS

	HW-SH-9
Each {AC, EL, REX, DPS) door to	RATED
have:	
Hinges	QUANTITY AND TYPE AS REQUIRED
1 Transfer Hinge	4-WIRE TYPE AS REQUIRED
1 Set of Flush Bolts	TYPE 25
1 Dust-Proof Strike	L04021
1 Electrified Lock	F07 (301-REX, E06) 24 VDC
1 Power Supply	REGULATED, FILTERED, 24 VDC, AMPERAGE AS REQUIRED
1 Coordinator	TYPE 21A
1 Overlapping Astragal with Self-Adhesive Seal	R0Y634 X R0Y154 X THRU-BOLTS
2 Closers	C02011/C02021
2 Kick Plates	J102 (@ STORAGE ROOMS ONLY)
2 Floor Stops	L02121 X 3 FASTENERS
1 Set Self-Adhesive Seals	ROY154
2 Alarm Contacts	120 VAC POWER, CONDUIT AND WIRING BY DIVISION 26. CARD READER BY DIVISION 28.

	HW-SH-10A
Each {AC, ADO, EL, REX, DPS)	RATED
pair integrated doors to have:	
1 Key Cylinders	TYPE AS REQUIRED
BALANCE OF HARDWARE BY SECTION 08 17 10, INTEGRATED DOOR ASSEMBLIES.	
AUTOMATIC DOOR OPERATORS AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.	

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

01-01-21

Page Intentionally Left Blank

01-01-21

SECTION 08 71 13
AUTOMATIC DOOR OPERATORS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Automatic operators for swinging doors.

1.2 RELATED WORK

- A. Section 08 71 00, DOOR HARDWARE: Door Hardware.
- B. Division 26, ELECTRICAL Electric General Wiring, Connections and Equipment Requirements.
- C. Division 28, ELECTRONIC SAFETY AND SECURITY: Access Control Devices.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. ASTM International (ASTM):
1. B209-14 - Aluminum and Aluminum-Alloy Sheet and Plate.
 2. A1008/A1008M-20 - Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, Solution Hardened, and Baked Hardenable.
- C. Builders Hardware Manufacturers Association (BHMA):
1. BHMA A156.10-11 - Power Operated Pedestrian Doors.
- D. National Fire Protection Association (NFPA):
1. 101-15 - Life Safety Code.
- E. Underwriters Laboratories (UL):
1. 325-13 - Standard for Doors, Drapery, Gate, Louver, and Window Operators and Systems.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
1. Show size, configuration, and fabrication and installation details.
- C. Manufacturer's Literature and Data:
1. Description of each product.
 2. Installation instructions.
 3. Warranty.
- D. Sustainable Construction Submittals:

01-01-21

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
- E. Test reports: Certify each product complies with specifications.
- F. Qualifications: Substantiate qualifications comply with specifications.
 1. Manufacturer.
 2. Installer.
- G. Operation and Maintenance Data:
 1. Care instructions for each exposed finish product.
 2. Start-up, maintenance, troubleshooting, emergency, and shut-down instructions for each operational product.

1.5 QUALITY ASSURANCE

- A. Manufacturer's Qualifications:
 1. Regularly manufactures specified products.
 2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.
 - a. Provide contact names and addresses for completed projects when requested by Contracting Officer's Representative.
- B. Installer's Qualifications: Experienced installer, approved by the manufacturer.

1.6 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."
- B. Manufacturer's Warranty: Warrant automatic door operators against material and manufacturing defects.
 1. Warranty Period: Two years.

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

- A. Comply with requirements of BHMA A156.10. Unless otherwise indicated on Drawings, provide operators that move doors from fully closed to fully opened position in seven seconds maximum time interval, when speed adjustment is at maximum setting.
- B. Equipment: Conforming to UL 325. Provide key operated power disconnect wall switch for each door installation.
- C. Electrical Wiring, Connections and Equipment: Motors, starters, controls, associated devices, and interconnecting wiring required for

01-01-21

installation. Equipment and wiring as specified in Division 26,
ELECTRICAL.

2.2 PRODUCTS - GENERAL

- A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Provide door operators from one manufacturer.
- C. Provide one type of operator throughout project.
- D. Sustainable Construction Requirements:
 - 1. Steel Recycled Content: 30 percent total recycled content, minimum.
 - 2. Aluminum Recycled Content: 80 percent total recycled content, minimum.

2.3 SWING DOOR OPERATORS

- A. General:
 - 1. Type: Institutional type.
 - 2. Size: As recommended by manufacturer for door weight and sizes.
- B. Function:
 - 1. Provide operators, enclosed in housing, permitting opening of door by energizing motor and stopped by electrically reducing Voltage and stalling motor against mechanical stop.
 - 2. Door to close by means of spring energy, and closing force controlled by gear system and motor being used as dynamic brake without power, or controlled by hydraulic closer in electro-hydraulic operators.
 - 3. Opening and Closing Speeds: Field adjustable.
 - 4. Operators with checking mechanism providing cushioning action at last part of door travel, in both opening and closing cycle.
 - 5. Operators capable of recycling doors instantaneously to full open position from any point in closing cycle when control switch is activated.
 - 6. When automatic power is interrupted or shut-off, permit doors to easily open manually without damage to automatic operator system.
- C. Connect hardware with drive arm attached to door with pin linkage rotating in a self-lubricating bearing. Prevent doors from pivoting on shaft of operator.
- D. Operator Housing:
 - 1. ASTM B209, Type 6063-T5 aluminum alloy, 112 mm (4-1/2 inches) wide by 140 mm (5.5 inches) high by 3.2 mm (0.125 inch) thick, aluminum

01-01-21

extrusions with enclosed end caps for application to 100 mm
(4 inches) and larger frame systems.

E. Power Operator:

1. Completely assembled and sealed unit including gear drive transmission, mechanical spring and bearings, located in aluminum case and filled with special lubricant for extreme temperature conditions. Rubber mounted units with provisions for easy maintenance and replacement, without removing door from pivots or frame.

F. Motors:

1. Provide with interlock to prevent operation when doors are electrically locked from opening.

G. Electrical Control:

1. Self-contained electrical control unit, including necessary transformers, relays, rectifiers, and other electronic components for proper operation and switching of power operator.
2. Connecting Harnesses: Interlocking plugs.

H. Accessories:

1. Metal mounting supports, brackets and other accessories necessary for installation of operators at head of door frames.

I. Microprocessor Controls:

1. Multi-function microprocessor control providing adjustable hold open time (1-30 seconds) with fully adjustable opening speed, LED indications for sensor input signals and operator status and power assist close options. Control capable of receiving activation signals from any device with normally open dry contact output.
2. Hold doors held open by low Voltage applied to the continuous duty motor.
3. Controls:
 - a. Adjustable safety circuit that monitors door operation and stops opening direction of door if obstruction is sensed.
 - b. Recycle feature that reopens door if obstruction is sensed at any point during closing cycle.
 - c. Standard three position key switch with functions for ON, OFF, and HOLD OPEN, mounted on operator enclosure, door frame, or wall, as indicated on drawings.

01-01-21

2.4 POWER UNITS

- A. Self-contained, electric operated and independent of door operator.
 - 1. Capacity and size of power circuits according to automatic door operator manufacturer's specifications and Division 26 - ELECTRICAL.

2.5 DOOR CONTROLS

- A. Control Devices: BHMA A156.10; control opening and closing functions.
- B. Open doors when control device is actuated; hold doors in open positions; then, close doors after an adjustable time period, unless safety device or reactivated control interrupts operation.
- C. Manual Controls:
 - 1. Sensor Plate: Touchless, 2-3/4 inch x 4-1/2 inch (4-1/2 inch square) activation sensor plates, black polycarbonate, with white letters. Microwave technology has an adjustable range of 2 inches to 24 inches.

2.6 SAFETY DEVICES

- A. Swing Doors: Install presence sensor on pull side of door to detect any person standing in door swing path and prevent door from opening.
 - 1. Time delay Switches: Adjustable between 3 to 60 seconds and control closing cycle of doors.
- B. Install decal signs with "In" or "Do Not Enter" on both faces of each door where shown.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
 - 1. Verify door opening is correctly sized and within acceptable tolerances.
- B. Protect existing construction and completed work from damage.

3.2 INSTALLATION

- A. Install products according to manufacturer's instructions and approved submittal drawings.
 - 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
- B. Coordinate door installation with other related work.
- C. Install manual controls and power disconnect switches recessed or semi-flush mounted in partitions.

01-01-21

- D. Secure operator components to adjacent construction with suitable fastenings.
- E. Conceal conduits, piping, and electric equipment, in finish work.
- F. Install power units in locations shown.
 - 1. Where units are mounted on walls, provide metal supports or shelves for units.
 - 2. Ensure equipment, including time delay switches, are accessible for maintenance and adjustment.
- G. Ensure operators are adjusted and function properly for type of expected traffic.
- H. Synchronize each leaf of pair doors to open and close simultaneously. Permit each door leaf to be opened manually, independent of other door leaf.
- I. Install controls at positions shown and ensuring convenience for expected traffic.
- J. Push Plate Wall Switches Mounting Height: 1000 mm (40 inches) maximum, unless otherwise approved by Contracting Officer's Representative.

3.3 DEMONSTRATION AND TRAINING

- A. Instruct VA personnel in proper automatic door operator operation and maintenance.
 - 1. Trainer: Manufacturer approved instructor.
 - 2. Training Time: 2 hours minimum.
- B. Coordinate instruction to VA personnel with VA Contracting Officer's Representative.

- - E N D - -

01-01-21

SECTION 08 80 00
GLAZING

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the following:

1. Glass.
2. Glazing materials and accessories for both factory and field glazed assemblies.

1.2 RELATED WORK

A. Section 08 11 13, HOLLOW METAL DOORS AND FRAMES, and Section 08 14 00, INTERIOR WOOD DOORS: Vision lites.

B. Section 13 49 00, RADIATION PROTECTION: Lead glass.

1.3 LABELS

A. Temporary labels:

1. Provide temporary label on each light of glass identifying manufacturer or brand and glass type, quality and nominal thickness.
2. Label in accordance with NFRC label requirements.
3. Temporary labels are to remain intact until glass is approved by Contracting Officer Representative (COR).

B. Permanent labels:

1. Locate in corner for each pane.

1.4 PERFORMANCE REQUIREMENTS

A. General: Design glazing system consistent with guidance and practices presented in the GANA Glazing Manual, GANA Laminated Glazing Manual, and GANA Sealant Manual, as applicable to project. Installed glazing is to withstand applied loads, thermal stresses, thermal movements, building movements, permitted tolerances, and combinations of these conditions without failure, including loss or glass breakage attributable to defective manufacture, fabrication, or installation; failure of sealants or gaskets to remain watertight and airtight; deterioration of glazing materials; unsafe engagement of the framing system; deflections beyond specified limits; or other defects in construction.

1.5 SUBMITTALS

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

01-01-21

B. Manufacturer's Certificates:

1. Certificate stating that fire-protection and fire-resistive glazing units meet code requirements for fire-resistance-rated assembly and applicable safety glazing requirements.

C. Manufacturer Warranty.

D. Manufacturer's Literature and Data:

1. Glass, each kind required.
2. Insulating glass units.
3. Glazing cushion.
4. Sealing compound.

E. Samples:

1. Size: 305 mm by 305 mm (12 inches by 12 inches).

1.6 DELIVERY, STORAGE AND HANDLING

- A. Delivery: Schedule delivery to coincide with glazing schedules so minimum handling of crates is required. Do not open crates except as required for inspection for shipping damage.
- B. Storage: Store cases according to printed instructions on case, in areas least subject to traffic or falling objects. Keep storage area clean and dry.
- C. Handling: Unpack cases following printed instructions on case. Stack individual windows on edge leaned slightly against upright supports with separators between each.

1.7 PROJECT CONDITIONS:

- A. Field Measurements: Field measure openings before ordering tempered glass products to assure for proper fit of field measured products.

1.8 WARRANTY:

- A. Construction Warranty: Comply with the FAR clause 52.246-21 "Warranty of Construction".
- B. Manufacturer Warranty: Manufacturer shall warranty their glazing from the date of installation and final acceptance by the Government as follows. Submit manufacturer warranty.

1.9 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

01-01-21

- B. American Architectural Manufacturers Association (AAMA):
800.....Test Methods for Sealants
810.1-77.....Expanded Cellular Glazing Tape
- C. American National Standards Institute (ANSI):
Z97.1-14.....Safety Glazing Material Used in
Building - Safety Performance Specifications
and Methods of Test
- D. American Society of Civil Engineers (ASCE):
7-10.....Wind Load Provisions
- E. ASTM International (ASTM):
C542-05(2017).....Lock-Strip Gaskets
C716-06(2020).....Installing Lock-Strip Gaskets and Infill
Glazing Materials
C794-18.....Adhesion-in-Peel of Elastomeric Joint Sealants
C864-05(2019).....Dense Elastomeric Compression Seal Gaskets,
Setting Blocks, and Spacers
C920-18.....Elastomeric Joint Sealants
C964-20.....Standard Guide for Lock-Strip Gasket Glazing
C1036-16.....Flat Glass
C1048-18.....Heat-Treated Flat Glass-Kind HS, Kind FT Coated
and Uncoated Glass.
C1172-19.....Laminated Architectural Flat Glass
C1349-17.....Standard Specification for Architectural Flat
Glass Clad Polycarbonate
C1376-15.....Pyrolytic and Vacuum Deposition Coatings on
Flat Glass
D635-18.....Rate of Burning and/or Extent and Time of
Burning of Self-Supporting Plastic in a
Horizontal Position
D4802-16.....Poly (Methyl Methacrylate) Acrylic Plastic
Sheet
E84-20.....Surface Burning Characteristics of Building
Materials
E119-20.....Standard Test Methods for Fire Test of Building
Construction and Material
E1300-16.....Load Resistance of Glass in Buildings

01-01-21

- E1886-19.....Standard Test Method for Performance of
Exterior Windows, Curtain Walls, Doors, and
Impact Protective Systems Impacted by
Missile(s) and Exposed to Cyclic Pressure
Differentials
- E1996-17.....Standard Specification for Performance of
Exterior Windows, Curtain Walls, Doors, and
Impact Protective Systems Impacted by Windborne
Debris in Hurricanes
- E2141-14.....Test Methods for Assessing the Durability of
Absorptive Electrochromic Coatings on Sealed
Insulating Glass Units
- E2190-19.....Insulating Glass Unit
- E2240-06.....Test Method for Assessing the Current-Voltage
Cycling Stability at 90 Degree C (194 Degree F)
of Absorptive Electrochromic Coatings on Sealed
Insulating Glass Units
- E2241-06.....Test Method for Assessing the Current-Voltage
Cycling Stability at Room Temperature of
Absorptive Electrochromic Coatings on Sealed
Insulating Glass Units
- E2354-10.....Assessing the Durability of Absorptive
Electrochromic Coatings within Sealed
Insulating Glass Units
- E2355-10.....Test Method for Measuring the Visible Light
Transmission Uniformity of an Absorptive
Electrochromic Coating on a Glazing Surface
- F1233-08(2019).....Standard Test Method for Security Glazing
Materials and Systems
- F1642/F1642M-17.....Test Method for Glazing and Glazing Systems
Subject to Airblast Loadings
- F. Code of Federal Regulations (CFR):
16 CFR 1201-10.....Safety Standard for Architectural Glazing
Materials
- G. Glass Association of North America (GANA):
2010 Edition.....GANA Glazing Manual

01-01-21

- 2008 Edition.....GANA Sealant Manual
- 2009 Edition.....GANA Laminated Glazing Reference Manual
- 2010 Edition.....GANA Protective Glazing Reference Manual
- H. International Code Council (ICC):
- IBC.....International Building Code
- I. Insulating Glass Certification Council (IGCC)
- J. Insulating Glass Manufacturer Alliance (IGMA):
- TB-3001-13.....Guidelines for Sloped Glazing
- TM-3000.....North American Glazing Guidelines for Sealed
Insulating Glass Units for Commercial and
Residential Use
- K. Intertek Testing Services - Warnock Hersey (ITS-WHI)
- L. National Fire Protection Association (NFPA):
- 80-16.....Fire Doors and Windows
- 252-12.....Fire Tests of Door Assemblies
- 257-12.....Standard on Fire Test for Window and Glass
Block Assemblies
- M. National Fenestration Rating Council (NFRC)
- N. Safety Glazing Certification Council (SGCC) 2012:
Certified Products Directory (Issued Semi-Annually).
- O. Underwriters Laboratories, Inc. (UL):
- 9-08(R2009).....Fire Tests of Window Assemblies
- 263-14.....Fire Tests of Building Construction and
Materials
- 752-11.....Bullet-Resisting Equipment.
- P. Department of Veterans Affairs:
- Q. Architectural Design Manual for VA Facilities (VASDM)
- R. Environmental Protection Agency (EPA):
- 40 CFR 59(2014).....National Volatile Organic Compound Emission
Standards for Consumer and Commercial Products

PART 2 - PRODUCTS

1.1 GLASS

- A. Provide minimum thickness stated and as additionally required to meet performance requirements.
1. Provide minimum 6 mm (1/4 inch) thick glass units unless otherwise indicated.

01-01-21

B. Obtain glass units from single source from single manufacturer for each glass type.

C. Clear Glass:

1. ASTM C1036, Type I, Class 1, Quality q3.

1.2 HEAT-TREATED GLASS

A. Roller Wave Limits for Heat-Treated Glass: Orient all roller wave distortion parallel to bottom surface of glazing, and provide units complying with the following limitations:

1. Measurement Parallel to Line: Maximum peak to valley 0.203 mm (0.008 inch).
2. Measurement Perpendicular to Line: Maximum 0.0254 mm (0.001 inch).
3. Bow/Warp: Maximum 50 percent of bow and warp allowed by ASTM C1048.

B. Clear Tempered Glass:

1. ASTM C1048, Kind FT, Condition A, Type I, Class 1, Quality q3.

1.3 INSULATING GLASS UNITS

A. Provide factory fabricated, hermetically sealed glass unit consisting of two panes of glass separated by a dehydrated air space and comply with ASTM E2190. The exterior glass unit shall be fully tempered and the inner glass unit shall be laminated annealed at a minimum for all blast resistant glazing.

1.4 FIRE PROTECTION AND FIRE RESISTANCE GLAZING

A. Fire-Protection-Rated Glazing: Glazing units tested for use in fire door assemblies or fire windows, UL, ITS-WHI or equivalent listed and labeled by testing agency in accordance with IBC, for fire-protection ratings as indicated on construction documents, based upon positive-pressure testing per NFPA 257 or UL 9, and complying with NFPA 80.

1. Hose-Stream Test: Units must comply, except units having fire-protection rating of 20 minutes.
2. Labeling: Permanently label fire-protection-rated glazing units in accordance with IBC.
3. Safety Glazing: Comply with 16 CFR 1201, Category II.
4. Fire-Protection-Rated Tempered Glass: For 20-minute fire-protection-rated door assemblies, of thickness scheduled.
5. Fire-Protection-Rated Laminated Ceramic Glazing: Units made from two lites of clear, ceramic glass, 8 mm (5/16 inch) total thickness, for rating scheduled.

01-01-21

1.5 GLAZING ACCESSORIES

- A. As required to supplement the accessories provided with the items to be glazed and to provide a complete installation. Ferrous metal accessories exposed in the finished work are to have a finish that will not corrode or stain while in service. Fire rated glazing to be installed with glazing accessories in accordance with the manufacturer's installation instructions.
- B. Setting Blocks: ASTM C864:
 - 1. Silicone type.
 - 2. Channel shape; having 6 mm (1/4 inch) internal depth.
 - 3. Shore A hardness of 80 to 90 Durometer.
- C. Spacers: ASTM C864:
 - 1. Channel shape having a 6 mm (1/4 inch) internal depth.
 - 2. Flanges not less 2.4 mm (3/32 inch) thick and web 3 mm (1/8 inch) thick.
 - 3. Lengths: 25 to 76 mm (1 to 3 inches).
 - 4. Shore A hardness of 40 to 50 Durometer.
- D. Glazing Tapes:
 - 1. Semi-solid polymeric based closed cell material exhibiting pressure-sensitive adhesion and withstanding exposure to sunlight, moisture, heat, cold, and aging.
 - 2. Shape, size and degree of softness and strength suitable for use in glazing application to prevent water infiltration.
 - 3. Complying with AAMA 800 for the following types:
 - a. AAMA 810.1, Type 1, for glazing applications in which tape acts as the primary sealant.
 - b. AAMA 810.1, Type 2, for glazing applications in which tape is used in combination with a full bead of liquid sealant.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verification of Conditions:
 - 1. Examine openings for glass and glazing units; determine they are proper size; plumb; square; and level before installation is started.
 - 2. Verify that glazing openings conform with details, dimensions and tolerances indicated on manufacturer is approved shop drawings.

01-01-21

- B. Review for conditions which may adversely affect glass and glazing unit installation, prior to commencement of installation. Do not proceed with installation until unsatisfactory conditions have been corrected.
- C. Verify that wash down of adjacent masonry is completed prior to erection of glass and glazing units.

3.2 PREPARATION

- A. Determine glazing unit size and edge clearances by measuring the actual unit to receive the glazing.
- B. Shop fabricate and cut glass with smooth, straight edges of full size required by openings to provide GANA recommended edge clearances.
- C. Verify that components used are compatible.
- D. Clean and dry glazing surfaces.
- E. Prime surfaces scheduled to receive sealants, as determined by preconstruction sealant-substrate testing.

3.3 INSTALLATION - GENERAL

- A. Install in accordance with GANA Glazing Manual, GANA Sealant Manual, IGMA TB-3001, and IGMA TM-3000 unless specified otherwise.
- B. Glaze in accordance with recommendations of glazing and framing manufacturers, and as required to meet the Performance Test Requirements specified in other applicable sections of specifications.
- C. Set glazing without bending, twisting, or forcing of units.
- D. Do not allow glass to rest on or contact any framing member.
- E. Glaze doors and operable sash, in a securely fixed or closed and locked position, until sealant, glazing compound, or putty has thoroughly set.
- F. Insulating Glass Units:
 - 1. Glaze in compliance with glass manufacturer's written instructions.
 - 2. When glazing gaskets are used, they are to be of sufficient size and depth to cover glass seal or metal channel frame completely.
 - 3. Do not use putty or glazing compounds.
 - 4. Do not grind, nip, cut, or otherwise alter edges and corners of fused glass units after shipping from factory.

3.4 INSTALLATION - DRY METHOD (TAPE AND GASKET SPLINE GLAZING)

- A. Cut glazing tape spline to length; install on glazing pane. Seal corners by butting and sealing junctions with butyl sealant.
- B. Place setting blocks at 1/4 points with edge block no more than 150 mm (6 inches) from corners.

01-01-21

- C. Rest glazing on setting blocks and push against fixed stop with sufficient pressure to attain full contact.
- D. Install removable stops without displacing glazing spline. Exert pressure for full continuous contact.
- E. Do not exceed edge pressures stipulated by glass manufacturers for installing glass lites.
- F. Trim protruding tape edge.

3.5 REPLACEMENT AND CLEANING

- A. Clean new glass surfaces removing temporary labels, paint spots, and defacement after approval by COR.
- B. Replace cracked, broken, and imperfect glass, or glass which has been installed improperly.
- C. Leave glass, putty, and other setting material in clean, whole, and acceptable condition.

3.6 PROTECTION

- A. Protect finished surfaces from damage during erection, and after completion of work. Strippable plastic coatings on colored anodized finish are not acceptable.

3.7 GLASS TYPE IG# 1: LOW-E-COATED, CLEAR INSULATING GLASS.

- A. Overall Unit Thickness: 25 mm (1 inch).
- B. Minimum Thickness of Each Glass Lite: 6 mm (0.23 inch).
- C. Outdoor Lite: Annealed float glass, except heat-strengthened float glass where required, and fully tempered float glass where indicated.
- D. Interspace Content: Argon.
- E. Indoor Lite: Fully tempered float glass.
- F. Low-E Coating: Sputtered on second surface.
- G. Visible Light Transmittance: 8 percent minimum.
- H. Solar Heat Gain Coefficient: 0.38 maximum.

3.8 GLASS TYPE FR# 1: FIRE-PROTECTION-RATED LAMINATED GLASS WITH INTUMESCENT INTERLAYERS.

- A. Thickness: 1/4".
- B. Rating: to match fire rating of door.
- C. Application: Fire-protection-rated door and window assemblies

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

01-01-21

Page Intentionally Left Blank

01-01-21

SECTION 09 05 16
SUBSURFACE PREPARATION FOR FLOOR FINISHES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies subsurface preparation requirements for areas to
- B. receive the installation of applied and resinous flooring. This section includes removal of existing floor coverings, testing concrete for moisture and pH, remedial floor coating for concrete floor slabs having unsatisfactory moisture or pH conditions, floor leveling and repair as required.

1.2 RELATED WORK

- A. Section 07 92 00, JOINT SEALANTS.
- B. Section 09 65 16, RESILIENT SHEET FLOORING; Section 09 67 23.40, RESINOUS POURED-IN-PLACE FLOORING (RES-4).

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA and TEST DATA.
- B. Written approval confirming product compatibility with subfloor material manufacturer and the flooring manufacturer
- C. Product Data:
 - 1. Moisture remediation system
 - 2. Underlayment Primer
 - 3. Cementitious Self-Leveling Underlayment
 - 4. Cementitious Trowel-Applied Underlayment (Not suitable for resinous floor finishes)
- D. Test Data:
 - 1. Moisture test and pH results performed by a qualified independent testing agency or warranty holding manufacturer's technical representative.

1.4 DELIVERY AND STORAGE

- A. Deliver materials in containers with labels legible and intact and grade-seals unbroken.
- B. Store material to prevent damage or contamination.

01-01-21

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.
- B. ASTM International (ASTM):
- D638-14 (2014)Standard Test Method for Tensile Properties of Plastics
 - D4259-18 (2019)Standard Practice for Preparation of Concrete by Abrasion Prior to Coating Application.
 - C109/C109M-20b (2020)Standard Test Method for Compressive Strength of Hydraulic Cement Mortars (Using 2-in. or [50-mm] Cube Specimens
 - 7234-19 (2020)Standard Test Method for Pull-Off Adhesion Strength of Coatings on Concrete Using Portable Pull-Off Adhesion Testers
 - E96/E96M-16 (2016)Standard Test Methods for Water Vapor Transmission of Materials
 - F710-1e1 (2020)Standard Practice for Preparing Concrete Floors to Receive Resilient Flooring
 - F1869-16aStandard Test Method for Measuring Moisture Vapor Emission Rate of Concrete Subfloor Using Anhydrous Calcium Chloride
 - F2170-19a (2020)Standard Test Method for Determining Relative Humidity in Concrete Floor Slabs Using in situ Probes
 - C348-20 (2020)Standard Test Method for Flexural Strength of Hydraulic-Cement Mortars
 - C191-19 (2020)Standard Test Method for Time of Setting of Hydraulic Cement by Vicat Needle

PART 2 - PRODUCTS

2.1 MOISTURE REMEDIATION COATING

- A. System Descriptions:
1. High-solids, epoxy system designed to suppress excess moisture in concrete prior to an overlayment. For use under resinous products, VCT, tile and carpet where issues caused by moisture vapor are a concern.

01-01-21

- B. Products: Subject to compliance with applicable fire, health, environmental, and safety requirements for storage, handling, installation, and clean up.
- C. System Components: Verify specific requirements as systems vary by manufacturer. Verify build up layers and installation method. Verify compatibility with substrate. Use manufacturer's standard components, compatible with each other and as follows:
1. Liquid applied coating:
 - a. Resin: epoxy.
 - b. Formulation Description: Multiple component high solids.
 - c. Application: Per manufacturer's written installation requirements.
 - d. Thickness: minimum 10 mils
- D. Material Vapor Permeance: Application shall achieve a permeance rating of less than 0.1 perm in accordance with ASTM E96/E96M.
- E. Maximum RH requirement: 100% testing in accordance with ASTM F2170.

Property	Test	Value
Tensile Strength	ASTM D638	4,400 psi
Volatile Organic Compound Limits (V.O.C.)	SCAMD Rule 1113 (Ammended 02/05/2016)	25 grams per liter
Permeance	ASTM E96	0.1 perms
Tensile Modulus	ASTM D638	1.9X10 ⁵ psi
Percent Elongation	ASTM D638	12%
Cure Rate	Per manufacture's Data	4 hours Tack free with 24hr recoat window
Bond Strength	ASTM D7234	100% bond to concrete failure

01-01-21

2.2 CEMENTITIOUS SELF-LEVELING UNDERLAYMENT

A. System Descriptions:

1. High performance self-leveling underlayment resurfacer. Single component, self-leveling, cementitious material designed for easy application as an underlayment for all types of flooring materials. It is used for substrate repair and leveling.

B. Products: Subject to compliance with applicable fire, health, environmental, and safety requirements for storage, handling, installation, and clean up. Gypsum-based products are unacceptable.

C. System Characteristics:

1. Wearing Surface: smooth
2. Thickness: Per architectural drawings, ranging from feathered edge to 1", per application. Applications greater than 1" require additional 3/8" aggregate to mix or as recommended by manufacturer.

D. Underlayment shall be calcium aluminate cement-based, containing Portland cement. Gypsum-based products are unacceptable.

E. Compressive Strength: Minimum 4100 psi in 28 days in accordance with ASTM C109/C109M.

F. Flexural Strength: Minimum 1000 psi in 28 days in accordance with ASTM C348

G. Dry Time: Underlayment shall receive the application of floor coverings in 16 hours, and resinous flooring in 3-7 days.

H. Primer: compatible and as recommended by manufacturer for use over intended substrate

I. System Components: Manufacturer's standard components that are compatible with each other and as follows:

1. Primer:

- a. Resin: copolymer
- b. Formulation Description: single component ready to use.
- c. Application Method: Squeegee and medium nap roller.
- d. All puddles shall be removed, and material shall be allowed to dry, 1-2 hours at 70F/21C.
- e. Number of Coats: (1) one.

2. Grout Resurfacing Base:

- a. Formulation Description: Single component, cementitious self-leveling high-early and high-ultimate strength grout.

01-01-21

- b. Application Method: colloidal mix pump, cam rake, spike roll.
- 1) Thickness of Coats: Per architectural scope, 1" lifts.
 - 2) Number of Coats: More than one if needed.
- c. Aggregates: for applications greater than linch, require additional 3/8" aggregate to mix.
- J.

Property	Test	Value
Compressive Strength	ASTM C109/C109M	2,200 psi @ 24 hrs 3,000 psi @ 7 days
Initial set time Final Set time	ASTM C191	30-45 min. 1 to 1.5 hours
Bond Strength	ASTM D7234	100% bond to concrete failure

2.3 CEMENTITIOUS TROWEL-APPLIED UNDERLAYMENT (NOT SUITABLE FOR RESINOUS FLOOR FINISHES)

- A. Underlayment shall be calcium aluminate cement-based, containing Portland cement. Gypsum-based products are unacceptable.
- B. Compressive Strength: Minimum 4000 psi in 28 days
- C. Trowel-applied underlayment shall not contain silica quartz (sand).
- D. Dry Time: Underlayment shall receive the application of floor covering in 15-20 minutes.

PART 3 - EXECUTION

3.1 ENVIRONMENTAL REQUIREMENTS

- A. Maintain ambient temperature of work areas at not less than 16 degree C (60 degrees F), without interruption, for not less than 24 hours before testing and not less than three days after testing.
- B. Maintain higher temperatures for a longer period of time where required by manufacturer's recommendation.
- C. Do not install materials when the temperatures of the substrate or materials are not within 60-85 degrees F/ 16-30 degrees C.

3.2 SURFACE PREPARATION

- A. Existing concrete slabs with existing floor coverings:
1. Conduct visual observation of existing floor covering for adhesion, water damage, alkaline deposits, and other defects.
 2. Remove existing floor covering and adhesives. Comply with local, state and federal regulations and the RFCI Recommended Work

01-01-21

- Practices for Removal of Resilient Floor Coverings, as applicable to the floor covering being removed.
- B. Concrete shall meet the requirements of ASTM F710 and be sound, solid, clean, and free of all oil, grease, dirt, curing compounds, and any substance that might act as a bond-breaker before application. As required prepare slab by mechanical methods. No chemicals or solvents shall be used.
 - C. General: Prepare and clean substrates according to flooring manufacturer's written instructions for substrate indicated.
 - D. Prepare concrete substrates per ASTM D4259 as follows:
 - 1. Dry abrasive blasting.
 - 2. Wet abrasive blasting.
 - 3. Vacuum-assisted abrasive blasting.
 - 4. Centrifugal-shot abrasive blasting.
 - 5. Comply with manufacturer's written instructions.
 - E. Repair damaged and deteriorated concrete according to flooring manufacturer's written recommendations.
 - F. Verify that concrete substrates are dry.
 - G. Perform anhydrous calcium chloride test, ASTM F 1869. Proceed with application only after substrates have maximum moisture-vapor-emission rate of per flooring manufactures formal and project specific written recommendation.
 - H. Perform in situ probe test, ASTM F2170. Proceed with application only after substrates do not exceed a maximum potential equilibrium relative humidity per flooring manufacture's formal and project specific written recommendation.
 - I. Provide a written report showing test placement and results.
 - J. Prepare joints in accordance with Section 07 92 00, JOINT SEALANTS and material manufacturer's instructions.
 - K. Alkalinity: Measure surface pH in accordance with procedures provided in ASTM F710 or as outlined by qualified testing agency or flooring manufacturer's technical representative.
 - L. Tolerances: Subsurface shall meet the flatness and levelness tolerance specified on drawings or recommended by the floor finish manufacturer. Tolerance shall also not to exceed 1/4" deviation in 10'. As required, install underlayment to achieve required tolerance.

01-01-21

- M. Other Subsurface: For all other subsurface conditions, such as wood or metal, contact the floor finish or underlayment manufacturer, as appropriate, for proper preparation practices.

3.3 MOISTURE REMEDIATION COATING

- A. Where results of relative humidity testing (ASTM F2170) exceed the requirements of the specified flooring manufacturer, apply remedial coating as specified to correct excessive moisture condition.
- B. Prior to remedial floor coating installation mechanically prepare the concrete surface to provide a concrete surface profile in accordance with ASTM D4259.
- C. Mix and apply moisture remediation coating in accordance with manufacturer's instructions.

3.4 CEMENTITIOUS UNDERLAYMENT

- A. Install cementitious self-leveling underlayment as required to correct surface defects, floor flatness or levelness corrections to meet the tolerance requirements as or detailed on drawings, address non-moving cracks or joints, provide a smooth surface for the installation of floor covering, or meet elevation requirements detailed on drawings.
- B. Mix and apply in accordance with manufacturer's instructions.

3.5 PROTECTION

- A. Prior to the installation of the finish flooring, the surface of the underlayment should be protected from abuse by other trades by the use of plywood, tempered hardwood, or other suitable protection course

3.6 FIELD QUALITY CONTROL

- A. Where specified, field sampling of products shall be conducted by a qualified, independent testing facility.

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

01-01-21

Page Intentionally Left Blank

SECTION 09 06 00
SCHEDULE FOR FINISHES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section contains a coordinated system in which requirements for materials specified in other sections shown are identified by abbreviated material names and finish codes in the room finish schedule or shown for other locations.

1.2 MANUFACTURERS

A. Manufacturer's trade names and numbers used herein are only to identify colors, finishes, textures and patterns. Products of other manufacturer's equivalent to colors, finishes, textures and patterns of manufacturers listed that meet requirements of technical specifications will be acceptable upon approval in writing by contracting officer for finish requirements.

1.3 SUBMITTALS

A. Submit in accordance with SECTION 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES—provide quadruplicate samples for color approval of materials and finishes specified in this section.

1. DIGITAL COLOR PHOTOS-INTERIOR VIEWS:

Room Number and Name	Item/View to be Photographed

1.4 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.

B. MASTER PAINTING INSTITUTE: (MPI)

6/1/2019.....Architectural Painting Specification Manual

PART 2 - PRODUCTS

2.1 DIGITAL COLOR PHOTOS

A. Size 24 x 35 mm.

B. Labeled for:

1. Building name and Number.
2. Room Name and Number.

2.2 DIVISION 08 - OPENINGS

A. SECTION 08 11 13, HOLLOW METAL DOORS AND FRAMES

1. Paint both sides of door and frames same color including ferrous metal louvers, and hardware attached to door	
Component	Color of Paint Type and Gloss
Door	Match existing hospital standards
Frame	Match existing hospital standards
Window frame	Match existing hospital standards

B. SECTION 08 14 00, INTERIOR WOOD DOORS

Component	Finish/Color
Doors	Match existing hospital standards
Frames	Match existing hospital standards

C. SECTION 08 31 13, ACCESS DOORS AND FRAMES

Material	Finish/Color
Steel	Match existing hospital standards
Stainless steel	Match existing hospital standards

D. SECTION 08 41 13, ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS

Material	Finish/Color
Steel	
Stainless Steel	

E. SECTION 08 71 00, DOOR HARDWARE

Item	Material	Finish
Hinges		
Door Closers		
Floor Closers		
Floor Pivot Sets		
Closer/ Holder		
Floor Stops		
Door Holders		
Lock/ Latches		
Key Cabinet	Steel	
Armor Plates	Metal Plastic	
Kick Mop Plates	Metal Plastic	
Door Edging		

Exit Device		
Flush Bolts		
Door Pulls		
Push Plates		
Combination Push Pull Plate		
Coordinators		
Light Proof Seals		
Weather Strip		
Threshold		

F. SECTION 08 80 00, GLAZING

Glazing Type	Manufacturer	Mfg. Color Name/No.
G-6		
G-7		
G-8		
G-9		
G-10		
G-11		
G-12		
G-13		
G-14		
G-15		
G-16		
G-17		

2.3 DIVISION 09 - FINISHES

A. SECTION 09 30 13, CERAMIC/PORCELAIN TILING

1. CERAMIC/PORCELAIN/QUARRY TILING		
Finish Code	Manufacturer	Mfg. Color Name/No
CT-2	Daltile	Color to be selected to manufacturers standard colors
CT-3	Daltile	Color to be selected to manufacturers standard colors
CTB-1	Daltile	Color to be selected to manufacturers standard colors
CT-1	Best Tile	Tapestry "Salvia"

B. SECTION 09 51 00, ACOUSTICAL CEILINGS

Finish Code	Color Pattern	Manufacturer	Mfg Name/No.
C-2	White	Armstrong	Ultima Square Lay-in
C-3	White	Armstrong	Ultima Healthzone, Scrubbable

C. SECTION 09 65 19, RESILIENT TILE FLOORING

Finish Code	Size	Material/Component	Manufacturer	Mfg Name/No.
LVT-1	TBD	LVT	Tarkett	Color to be selected to manufacturers standard colors
LVT-2	TBD	LVT	Tarkett	Color to be selected to manufacturers standard colors
LVT-3	TBD	LVT	Tarkett	Color to be selected to manufacturers standard colors

D. SECTION 09 65 16, RESILIENT SHEET FLOORING, HEAT WELDED SEAMS (WSF)

Finish Code	Pattern name	Manufacturer	Mfg. Color Name/No.
WSF-1	TBD	Tarkett	Color to be selected to manufacturers standard colors
WSF-2	TBD	Tarkett	Color to be selected to manufacturers standard colors
WSF-3	TBD	Tarkett	Color to be selected to manufacturers standard colors

E. SECTION 09 65 13, RESILIENT BASE AND ACCESSORIES

Finish Code	Item	Height	Manufacturer	Mfg Name/No.
RB-1	Rubber Base (RB)	4" H	Tarkett/ Johnsonite	Color to be selected to manufacturers standard colors

2.4 SECTION 09 67 23.40, RESINOUS POURED IN PLACE RESILIENT FLOORING

Finish Code	Manufacturer	Mfg. Color Name/No.
RES-1	Stonhard	Color to be selected to manufacturers standard colors
RES-2	Stonhard	Color to be selected to manufacturers standard colors

A. SECTION 09 91 00, PAINTING

1. MPI Gloss and Sheen Standards:

		Gloss @ 60	Sheen @ 85
Gloss Level 1	A traditional matte finish - flat	Max 5 units, and	Max 10 units
Gloss Level 2	A high side sheen flat - "velvet-like" finish	Max 10 units, and	10-35 units

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

Gloss Level 3	A traditional "eggshell-like" finish	10-25 units, and	10-35 units
Gloss Level 4	A "satin-like" finish	20-35 units, and	Min. 35 units
Gloss Level 5	A traditional semi-gloss	35-70 units	
Gloss Level 6	A traditional gloss	70-85 units	
Gloss Level 7	A high-gloss	More than 85 units	

2. Paint Code	Gloss	Manufacturer	Mfg. Color Name/No.
P-1	EGGSHELL FINISH FOR WALLS AND SEMI-GLOSS FOR DOOR TRIM	Sherwin Williams	Moderne White #SW6168
P-2	FLAT	Sherwin Williams	High Reflective White #SW7757
P-3	EGGSHELL	Sherwin Williams	Interesting Aqua #SW6220
P-4	EGGSHELL	Sherwin Williams	Jasper Stone #SW9133
P-5	EGGSHELL	Sherwin Williams	Pewter Tankhard #SW0023
SC-1	EGGSHELL	Sherwin Williams	Moderne White #SW6168
SC-2	EGGSHELL	Sherwin Williams	Interesting Aqua #SW6220
SC-3	EGGSHELL	Sherwin Williams	Jasper Stone #SW9133
SC-4	FLAT	Sherwin Williams	High Reflective White #SW7757

2.5 DIVISION 10 - SPECIALTIES

A. SECTION 10 21 23, CUBICLE CURTAIN TRACKS

Finish Code	Manufacturer	Mfg. Color Name/No.
CCT-1	Inpro	Whisper Cube Track "White"
CC-1	Inpro	Color to be selected to manufacturers standard colors

B. SECTION 10 26 00, WALL AND DOOR PROTECTION

Item	Material	Manufacturer	Mfg. Color Name/No.
Corner Guards	150 High Impact Corner Guard, 130 High Impact Corner Guard	Inpro	Feather #0238
End Wall Corner Guard	150D High Impact End Wall Guard	Inpro	Feather #0238
Wall Guard	1500 and 1800 Wall Guard	Inpro	Brushed Silver
Rigid Wall Protection	Palladium Rigid Sheet	Inpro	See drawings for color name and number

2.6 DIVISION 12 - FURNISHINGS

A. SECTION 12 32 00, MANUFACTURED WOOD CASEWORK

Finish Code	Color	Manufacturer
PL-1	Paloma Polar	Formica
PL-2	French Pear	Wilsonart
SSP-1	Tumbled Glass	Formica
SSP-2	Designer White	Wilsonart

B. SECTION 12 36 00, COUNTERTOPS

Type	Material	Finish/Color
Plastic Laminate	Formia	Paloma Polar
Solid Surface Polymer	Formica	Tumbled Glass
Solid Surface Polymer	Wilsonart	Designer White

C. SECTION 12 24 00, WINDOW SHADES

Component	Material	Manufacturer	Mfg. Color Name/No.
-----------	----------	--------------	---------------------

Shade Cloth	TBD	Inpro	Color to be selected to manufacturers standard colors
-------------	-----	-------	--

PART 3 - EXECUTION

3.1 FINISH SCHEDULES & MISCELLANEOUS ABBREVIATIONS

FINISH SCHEDULE & MISCELLANEOUS ABBREVIATIONS	
Term	Abbreviation
Access Flooring	AF
Accordion Folding Partition	AFP
Acoustical Ceiling	AT
Acoustical Ceiling, Special Faced	AT (SP)
Acoustical Metal Pan Ceiling	AMP
Acoustical Wall Panel	AWP
Acoustical Wall Treatment	AWT
Acoustical Wallcovering	AWF
Anodized Aluminum Colored	AAC
Anodized Aluminum Natural Finish	AA
Baked On Enamel	BE
Brick Face	BR
Brick Flooring	BF
Brick Paving	BP
Bumper Rail	BR
Carpet	CP

Carpet Athletic Flooring	CAF
Carpet Module Tile	CPT
Ceramic Glazed Facing Brick	CGFB
Ceramic Mosaic Tile	FTCT
Ceramic Tile	CT
Ceramic Tile Base	CTB
Concrete	C
Concrete Masonry Unit	CMU
Corner Guard	CG
Cubicle Curtain	CC
Cubicle Curtain Track	CCT
Divider Strips Marble	DS MB
End Wall Guard	EG
Epoxy Coating	EC
Epoxy Resin Flooring	RES
Existing	E
Exposed Divider Strips	EXP
Exterior	EXT
Exterior Finish System	EFS
Exterior Paint	EXT-P
Exterior Stain	EXT-ST

Fabric Wallcovering	WF
Facing Tile	SCT
Feature Strips	FS
Floor Mats & Frames	FM
Floor Tile, Mosaic	FT
Fluorocarbon	FC
Folding Panel Partition	FP
Foot Grille	FG
Glass Masonry Unit	GUMU
Glazed Face CMU	GCMU
Glazed Structural Facing Tile	SFTU
Granite	GT
Gypsum Wallboard	GWB
High Glazed Coating	SC
Latex Mastic Flooring	LM
Linear Metal Ceiling	LMC
Linear Wood Ceiling	LWC
Luxury Vinyl Tile	LVT
Marble	MB
Material	MAT
Mortar	M
Multi-Color Coating	MC
Natural Finish	NF
Paint	P
Paver Tile	PVT

Perforated Metal Facing (Tile or Panels)	PMF
Plaster	PL
Plaster High Strength	HSPL
Plaster Keene Cement	KC
Plastic Laminate	PL
Polypropylene Fabric Wallcovering	PFW
Porcelain Paver Tile	PPT
Porcelain Tile	PT
Quarry Tile	QT
Radiant Ceiling Panel System	RCP
Resilient Stair Tread	RST
Rigid Wall Protection	RWC
Rubber Base	RB
Rubber Tile Flooring	RT
Solid Surface Polymer	SSP
Spandrel Glass	SLG
Stain	ST
Stone Flooring	SF
Structural Clay	SC
Suspension Decorative Grids	SDG
Grids	
Terrazzo Portland Cement	PCT
Terrazzo Tile	TT
Terrazzo, Thin Set	

Textured Gypsum Ceiling Panel	TGC
Textured Metal Ceiling Panel	TMC
Thin set Terrazzo	TST
Veneer Plaster	VP
Vinyl Base	VB
Vinyl Coated Fabric Wallcovering	W

Vinyl Composition Tile	VCT
Vinyl Sheet Flooring	SV
Vinyl Sheet Flooring (Welded Seams)	WSF
Wall Border	WB
Wood	WD

3.2 FINISH SCHEDULE SYMBOLS

Symbol Definition

** Same finish as adjoining walls
- No color required
E Existing
XX To match existing
EFTR Existing finish to remain
RM Remove

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

Page Intentionally Left Blank

06-01-18

SECTION 09 22 16
NON-STRUCTURAL METAL FRAMING

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies steel studs wall systems, shaft wall systems, ceiling or soffit suspended or furred framing, wall furring, fasteners, and accessories for the screw attachment of gypsum board, plaster bases or other building boards.

1.2 RELATED WORK

- A. Section 09 51 00, ACOUSTICAL CEILINGS; Section 09 29 00, GYPSUM BOARD: Ceiling suspension systems for acoustical tile or panels and lay in gypsum board panels.

1.3 TERMINOLOGY

- A. Description of terms shall be in accordance with ASTM C754, ASTM C11, ASTM C841 and as specified.
- B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by beams, trusses, or bar joists. In interstitial spaces with walk-on floors the underside of the walk-on floor is the underside of structure overhead.
- C. Thickness of steel specified is the minimum bare (uncoated) steel thickness.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
1. Studs, runners and accessories.
 2. Hanger inserts.
 3. Channels (Rolled steel).
 4. Furring channels.
 5. Screws, clips and other fasteners.
- C. Shop Drawings:
1. Typical ceiling suspension system.
 2. Typical metal stud and furring construction system including details around openings and corner details.

06-01-18

3. Typical shaft wall assembly
4. Typical fire rated assembly and column fireproofing showing details of construction same as that used in fire rating test.

D. Test Results: Fire rating test designation, each fire rating required for each assembly.

1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE

A. In accordance with the requirements of ASTM C754.

1.6 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society For Testing And Materials (ASTM)

A641-09.....Zinc-Coated (Galvanized) Carbon Steel Wire

A653/653M-11.....Specification for Steel Sheet, Zinc Coated
(Galvanized) or Zinc-Iron Alloy-Coated
(Galvannealed) by Hot-Dip Process.

C11-10.....Terminology Relating to Gypsum and Related
Building Materials and Systems

C635-07.....Manufacture, Performance, and Testing of Metal
Suspension System for Acoustical Tile and
Lay-in Panel Ceilings

C636-08.....Installation of Metal Ceiling Suspension
Systems for Acoustical Tile and Lay-in Panels

C645-09.....Non-Structural Steel Framing Members

C754-11.....Installation of Steel Framing Members to
Receive Screw-Attached Gypsum Panel Products

C841-03 (R2008).....Installation of Interior Lathing and Furring

C954-10.....Steel Drill Screws for the Application of
Gypsum Panel Products or Metal Plaster Bases to
Steel Studs from 0.033 in. (0.84 mm) to 0.112
in. (2.84 mm) in Thickness

E580-11.....Application of Ceiling Suspension Systems for
Acoustical Tile and Lay-in Panels in Areas
Requiring Moderate Seismic Restraint.

06-01-18

PART 2 - PRODUCTS

2.1 PROTECTIVE COATING

- A. Galvanize steel studs, runners (track), rigid (hat section) furring channels, "Z" shaped furring channels, and resilient furring channels, with coating designation of G40 or equivalent.

2.2 STEEL STUDS AND RUNNERS (TRACK)

- A. ASTM C645, modified for thickness specified and sizes as shown.
 - 1. Use C 645 steel, 0.75 mm (0.0296-inch) minimum base-metal (30 mil).
 - 2. Runners same thickness as studs.
 - 3. Exception: Members that can show certified third party testing with gypsum board in accordance with ICC ES AC86 (Approved May 2012) need not meet the minimum thickness limitation or minimum section properties set forth in ASTM C 645. The submission of an evaluation report is acceptable to show conformance to this requirement. Use C 645 steel, 0.48mm (0.019 inch) minimum base-metal (19 mil).
- B. Provide not less than two cutouts in web of each stud, approximately 300 mm (12 inches) from each end, and intermediate cutouts on approximately 600 mm (24-inch) centers.
- C. Doubled studs for openings and studs for supporting concrete backer-board.
- D. Studs 3600 mm (12 feet) or less in length shall be in one piece.
- E. Shaft Wall Framing:
 - 1. Conform to rated wall construction.
 - 2. C-H Studs or C-T Studs.
 - 3. E Studs.
 - 4. J Runners.
 - 5. Steel Jamb-Strut.

2.3 FURRING CHANNELS

- A. Rigid furring channels (hat shape): ASTM C645.
- B. Resilient furring channels:
 - 1. Not less than 0.45 mm (0.0179-inch) thick bare metal.
 - 2. Semi-hat shape, only one flange for anchorage with channel web leg slotted on anchorage side, channel web leg on other side stiffens fastener surface but shall not contact anchorage surface other channel leg is attached to.

06-01-18

C. "Z" Furring Channels:

1. Not less than 0.45 mm (0.0179-inch)-thick base metal, with 32 mm (1-1/4 inch) and 19 mm (3/4-inch) flanges.
2. Web furring depth to suit thickness of insulation.

D. Rolled Steel Channels: ASTM C754, cold rolled; or, ASTM C841, cold rolled.

2.4 FASTENERS, CLIPS, AND OTHER METAL ACCESSORIES

A. ASTM C754, except as otherwise specified.

B. For fire rated construction: Type and size same as used in fire rating test.

C. Fasteners for steel studs thicker than 0.84 mm (0.033-inch) thick. Use ASTM C954 steel drill screws of size and type recommended by the manufacturer of the material being fastened.

D. Clips: ASTM C841 (paragraph 6.11), manufacturer's standard items. Clips used in lieu of tie wire shall have holding power equivalent to that provided by the tie wire for the specific application.

E. Concrete ceiling hanger inserts (anchorage for hanger wire and hanger straps): Steel, zinc-coated (galvanized), manufacturers standard items, designed to support twice the hanger loads imposed and the type of hanger used.

F. Tie Wire and Hanger Wire:

1. ASTM A641, soft temper, Class 1 coating.
2. Gage (diameter) as specified in ASTM C754 or ASTM C841.

G. Attachments for Wall Furring:

1. Manufacturers standard items fabricated from zinc-coated (galvanized) steel sheet.
2. For concrete or masonry walls: Metal slots with adjustable inserts or adjustable wall furring brackets. Spacers may be fabricated from 1 mm (0.0396-inch) thick galvanized steel with corrugated edges.

H. Power Actuated Fasteners: Type and size as recommended by the manufacturer of the material being fastened.

2.5 SUSPENDED CEILING SYSTEM FOR GYPSUM BOARD (OPTION)

A. Conform to ASTM C635, heavy duty, with not less than 35 mm (1-3/8 inch) wide knurled capped flange face designed for screw attachment of gypsum board.

06-01-18

- B. Wall track channel with 35 mm (1-3/8 inch) wide flange.

PART 3 - EXECUTION

3.1 INSTALLATION CRITERIA

- A. Where fire rated construction is required for walls, partitions, columns, beams and floor-ceiling assemblies, the construction shall be same as that used in fire rating test.
- B. Construction requirements for fire rated assemblies and materials shall be as shown and specified, the provisions of the Scope paragraph (1.2) of ASTM C754 and ASTM C841 regarding details of construction shall not apply.

3.2 INSTALLING STUDS

- A. Install studs in accordance with ASTM C754, except as otherwise shown or specified.
- B. Space studs not more than 610 mm (24 inches) on center.
- C. Cut studs 6 mm to 9 mm (1/4 to 3/8-inch) less than floor to underside of structure overhead when extended to underside of structure overhead.
- D. Where studs are shown to terminate above suspended ceilings, provide bracing as shown or extend studs to underside of structure overhead.
- E. Extend studs to underside of structure overhead for fire, rated partitions, smoke partitions, shafts, and sound rated partitions.
- F. Openings:
 - 1. Frame jambs of openings in stud partitions and furring with two studs placed back-to-back or as shown.
 - 2. Fasten back-to-back studs together with 9 mm (3/8-inch) long Type S pan head screws at not less than 600 mm (two feet) on center, staggered along webs.
 - 3. Studs fastened flange to flange shall have splice plates on both sides approximately 50 X 75 mm (2 by 3 inches) screwed to each stud with two screws in each stud. Locate splice plates at 600 mm (24 inches) on center between runner tracks.
- G. Fastening Studs:
 - 1. Fasten studs located adjacent to partition intersections, corners and studs at jambs of openings to flange of runner tracks with two screws through each end of each stud and flange of runner.

06-01-18

2. Do not fasten studs to top runner track when studs extend to underside of structure overhead.

H. Chase Wall Partitions:

1. Locate cross braces for chase wall partitions to permit the installation of pipes, conduits, carriers and similar items.
2. Use studs or runners as cross bracing not less than 63 mm (2-1/2 inches wide).

- I. Form building seismic or expansion joints with double studs back to back spaced 75 mm (three inches) apart plus the width of the seismic or expansion joint.

- J. Form control joint, with double studs spaced 13 mm (1/2-inch) apart.

3.3 INSTALLING WALL FURRING FOR FINISH APPLIED TO ONE SIDE ONLY

- A. In accordance with ASTM C754, or ASTM C841 except as otherwise specified or shown.

B. Wall furring-Stud System:

1. Framed with 63 mm (2-1/2 inch) or narrower studs, 600 mm (24 inches) on center.
2. Brace as specified in ASTM C754 for Wall Furring-Stud System or brace with sections or runners or studs placed horizontally at not less than three-foot vertical intervals on side without finish.
3. Securely fasten braces to each stud with two Type S pan head screws at each bearing.

C. Direct attachment to masonry or concrete; rigid channels or "Z" channels:

1. Install rigid (hat section) furring channels at 600 mm (24 inches) on center, horizontally or vertically.
2. Install "Z" furring channels vertically spaced not more than 600 mm (24 inches) on center.
3. At corners where rigid furring channels are positioned horizontally, provide mitered joints in furring channels.
4. Ends of spliced furring channels shall be nested not less than 200 mm (8 inches).
5. Fasten furring channels to walls with power-actuated drive pins or hardened steel concrete nails. Where channels are spliced, provide two fasteners in each flange.

06-01-18

6. Locate furring channels at interior and exterior corners in accordance with wall finish material manufacturers printed erection instructions. Locate "Z" channels within 100 mm (4 inches) of corner.

- D. Installing Wall Furring-Bracket System: Space furring channels not more than 400 mm (16 inches) on center.

3.4 INSTALLING SUPPORTS REQUIRED BY OTHER TRADES

- A. Provide for attachment and support of electrical outlets, plumbing, laboratory or heating fixtures, recessed type plumbing fixture accessories, access panel frames, wall bumpers, wood seats, toilet stall partitions, dressing booth partitions, urinal screens, chalkboards, tackboards, wall-hung casework, handrail brackets, recessed fire extinguisher cabinets and other items like auto door buttons and auto door operators supported by stud construction.
- B. Provide additional studs where required. Install metal backing plates, or special metal shapes as required, securely fastened to metal studs.

3.5 INSTALLING SHAFT WALL SYSTEM

- A. Conform to UL Design No. U438 for two-hour fire rating. Provide one hour fire rating Shaft wall as indicated on the drawings.
- B. Position J runners at floor and ceiling with the short leg toward finish side of wall. Securely attach runners to structural supports with power driven fasteners at both ends and 600 mm (24 inches) on center.
- C. After liner panels have been erected, cut C-H studs and E studs, from 9 mm (3/8-inch) to not more than 13 mm (1/2-inch) less than floor-to-ceiling height. Install C-H studs between liner panels with liner panels inserted in the groove.
- D. Install full-length steel E studs over shaft wall line at intersections, corners, hinged door jambs, columns, and both sides of closure panels.
- E. Suitably frame all openings to maintain structural support for wall:
 1. Provide necessary liner fillers and shims to conform to label frame requirements.
 2. Frame openings cut within a liner panel with E studs around perimeter.

06-01-18

3. Frame openings with vertical E studs at jambs, horizontal J runner at head and sill.

F. Elevator Shafts:

1. Frame elevator door frames with 0.87 mm (0.0341-inch) thick J strut or J stud jambs having 75 mm (three-inch) long legs on the shaft side.
2. Protrusions including fasteners other than flange of shaft wall framing system or offsets from vertical alignments more than 3 mm (1/8-inch) are not permitted unless shown.
3. Align shaft walls for plumb vertical flush alignment from top to bottom of shaft.

3.6 INSTALLING FURRED AND SUSPENDED CEILINGS OR SOFFITS

- A. Install furred and suspended ceilings or soffits in accordance with ASTM C754 or ASTM C841 except as otherwise specified or shown for screw attached gypsum board ceilings and for plaster ceilings or soffits.
1. Space framing at 400 mm (16-inch) centers for metal lath anchorage.
 2. Space framing at 600 mm (24-inch) centers for gypsum board anchorage.
- B. New exposed concrete slabs:
1. Use metal inserts required for attachment and support of hangers or hanger wires with tied wire loops for embedding in concrete.
 2. Furnish for installation under Division 3, CONCRETE.
 3. Suspended ceilings under concrete rib construction shall have runner channels at right angles to ribs and be supported from ribs with hangers at ends and at 1200 mm (48-inch) maximum intervals along channels. Stagger hangers at alternate channels.
- C. Concrete slabs on steel decking composite construction:
1. Use pull down tabs when available.
 2. Use power activated fasteners when direct attachment to structural framing can not be accomplished.
- D. Where bar joists or beams are more than 1200 mm (48 inches) apart, provide intermediate hangers so that spacing between supports does not exceed 1200 mm (48 inches). Use clips, bolts, or wire ties for direct attachment to steel framing.
- E. Existing concrete construction exposed or concrete on steel decking:

06-01-18

1. Use power actuated fasteners either eye pin, threaded studs or drive pins for type of hanger attachment required.
 2. Install fasteners at approximate mid height of concrete beams or joists. Do not install in bottom of beams or joists.
- F. Steel decking without concrete topping:
1. Do not fasten to steel decking 0.76 mm (0.0299-inch) or thinner.
 2. Toggle bolt to decking 0.9 mm (0.0359-inch) or thicker only where anchorage to steel framing is not possible.
- G. Installing suspended ceiling system for gypsum board (ASTM C635 Option):
1. Install only for ceilings to receive screw attached gypsum board.
 2. Install in accordance with ASTM C636.
 - a. Install main runners spaced 1200 mm (48 inches) on center.
 - b. Install 1200 mm (four foot) tees not over 600 mm (24 inches) on center; locate for edge support of gypsum board.
 - c. Install wall track channel at perimeter.
- H. Installing Ceiling Bracing System:
1. Construct bracing of 38 mm (1-1/2 inch) channels for lengths up to 2400 mm (8 feet) and 50 mm (2 inch) channels for lengths over 2400 mm (8 feet) with ends bent to form surfaces for anchorage to carrying channels and over head construction. Lap channels not less than 600 mm (2 feet) at midpoint back-to-back. Screw or bolt lap together with two fasteners.
 2. Install bracing at an approximate 45-degree angle to carrying channels and structure overhead; secure as specified to structure overhead with two fasteners and to carrying channels with two fasteners or wire ties.
 3. Brace suspended ceiling or soffit framing in seismic areas in accordance with ASTM E580.

3.7 TOLERANCES

- A. Fastening surface for application of subsequent materials shall not vary more than 3 mm (1/8-inch) from the layout line.
- B. Plumb and align vertical members within 3 mm (1/8-inch.)
- C. Level or align ceilings within 3 mm (1/8-inch.)

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

06-01-18

Page Intentionally Left Blank

04-01-20

SECTION 09 29 00
GYPSUM BOARD

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies installation and finishing of gypsum board.

1.2 RELATED WORK

- A. Section 07 92 00, JOINT SEALANTS: Acoustical Sealants.
- B. Section 09 22 16, NON-STRUCTURAL METAL FRAMING: Installation of steel framing members for walls, partitions, furring, soffits, and ceilings.
- C. Section 13 49 00, RADIATION PROTECTION: Lead-lined Wallboard:

1.3 TERMINOLOGY

- A. Definitions and description of terms shall be in accordance with ASTM C11, C840, and as specified.
- B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by the trusses or bar joists.
- C. "Yoked": Gypsum board cut out for opening with no joint at the opening (along door jamb or above the door).

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Cornerbead and edge trim.
 - 2. Finishing materials.
 - 3. Laminating adhesive.
 - 4. Gypsum board, each type.
- C. Shop Drawings:
 - 1. Typical gypsum board installation, showing corner details, edge trim details and the like.
 - 2. Typical sound rated assembly, showing treatment at perimeter of partitions and penetrations at gypsum board.
 - 3. Typical shaft wall assembly.
 - 4. Typical fire rated assembly and column fireproofing, indicating details of construction same as that used in fire rating test.
- D. Samples:

04-01-20

1. Cornerbead.
2. Edge trim.
3. Control joints.

E. Test Results:

1. Fire rating test, each fire rating required for each assembly.
2. Sound rating test.

F. Certificates: Certify that gypsum board types, gypsum backing board types, cementitious backer units, and joint treating materials do not contain asbestos material.

1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE

A. In accordance with the requirements of ASTM C840.

1.6 ENVIRONMENTAL CONDITIONS

A. In accordance with the requirements of ASTM C840.

1.7 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society for Testing And Materials (ASTM):

C11-15.....Terminology Relating to Gypsum and Related
Building Materials and Systems

C475-15.....Joint Compound and Joint Tape for Finishing
Gypsum Board

C840-13.....Application and Finishing of Gypsum Board

C919-12.....Sealants in Acoustical Applications

C954-15.....Steel Drill Screws for the Application of
Gypsum Board or Metal Plaster Bases to Steel
Stud from 0.033 in. (0.84mm) to 0.112 in.
(2.84mm) in thickness

C1002-14.....Steel Self-Piercing Tapping Screws for the
Application of Gypsum Panel Products or Metal
Plaster Bases to Wood Studs or Steel Studs

C1047-14.....Accessories for Gypsum Wallboard and Gypsum
Veneer Base

C1177-13.....Glass Mat Gypsum Substrate for Use as Sheathing

C1178/C1178M-18.....Specification for Coated Glass Mat Water
Resistant Backing Panel

04-01-20

C1658-13.....Glass Mat Gypsum Panels

C1396-14.....Gypsum Board

C. Underwriters Laboratories Inc. (UL):

Latest Edition.....Fire Resistance Directory

D. Inchcape Testing Services (ITS):

Latest Editions.....Certification Listings

PART 2 - PRODUCTS

2.1 GYPSUM BOARD

A. Gypsum Board: ASTM C1396, Type X, 16 mm (5/8 inch) thick unless shown otherwise.

B. Coreboard or Shaft Wall Liner Panels.

1. ASTM C1396, Type X.

2. ASTM C1658: Glass Mat Gypsum Panels,

3. Coreboard for shaft walls 300, 400, 600 mm (12, 16, or 24 inches) wide by required lengths 25 mm (one inch) thick with paper faces treated to resist moisture.

C. Water Resistant Gypsum Backing Board: ASTM C1178, Type X, 16 mm (5/8 inch) thick.

D. Paper facings shall contain 100 percent post-consumer recycled paper content.

2.2 GYPSUM SHEATHING BOARD

A. ASTM C1396, Type X, water-resistant core, 16 mm (5/8 inch) thick.

B. ASTM C1177, Type X.

2.3 ACCESSORIES

A. ASTM C1047, except form of 0.39 mm (0.015 inch) thick zinc coated steel sheet or rigid PVC plastic.

B. Flanges not less than 22 mm (7/8 inch) wide with punchouts or deformations as required to provide compound bond.

2.4 FASTENERS

A. ASTM C1002 and ASTM C840, except as otherwise specified.

B. ASTM C954, for steel studs thicker than 0.04 mm (0.33 inch).

C. Select screws of size and type recommended by the manufacturer of the material being fastened.

D. For fire rated construction, type and size same as used in fire rating test.

04-01-20

- E. Clips: Zinc-coated (galvanized) steel; gypsum board manufacturer's standard items.

2.5 FINISHING MATERIALS AND LAMINATING ADHESIVE

- A. ASTM C475 and ASTM C840. Free of antifreeze, vinyl adhesives, preservatives, biocides and other VOC. Adhesive shall contain a maximum VOC content of 50 g/l.

PART 3 - EXECUTION

3.1 GYPSUM BOARD HEIGHTS

- A. Extend all layers of gypsum board from floor to underside of structure overhead on following partitions and furring:
1. Two sides of partitions:
 - a. Fire rated partitions.
 - b. Smoke partitions.
 - c. Sound rated partitions.
 - d. Full height partitions shown (FHP).
 - e. Corridor partitions.
 2. One side of partitions or furring:
 - a. Inside of exterior wall furring or stud construction.
 - b. Room side of room without suspended ceilings.
 - c. Furring for pipes and duct shafts, except where fire rated shaft wall construction is shown.
 3. Extend all layers of gypsum board construction used for fireproofing of columns from floor to underside of structure overhead, unless shown otherwise.
- B. In locations other than those specified, extend gypsum board from floor to heights as follows:
1. Not less than 100 mm (4 inches) above suspended acoustical ceilings.
 2. At ceiling of suspended gypsum board ceilings.
 3. At existing ceilings.

3.2 INSTALLING GYPSUM BOARD

- A. Coordinate installation of gypsum board with other trades and related work.
- B. Install gypsum board in accordance with ASTM C840, except as otherwise specified.
- C. Moisture and Mold-Resistant Assemblies: Provide and install moisture and mold-resistant glass mat gypsum wallboard products with moisture-

04-01-20

resistant surfaces complying with ASTM C1658 where shown and in locations which might be subject to moisture exposure during construction.

- D. Use gypsum boards in maximum practical lengths to minimize number of end joints.
- E. Bring gypsum board into contact, but do not force into place.
- F. Ceilings:
 - 1. For single-ply construction, use perpendicular application.
 - 2. For two-ply assemblies:
 - a. Use perpendicular application.
 - b. Apply face ply of gypsum board so that joints of face ply do not occur at joints of base ply with joints over framing members.
- G. Walls (Except Shaft Walls):
 - 1. When gypsum board is installed parallel to framing members, space fasteners 300 mm (12 inches) on center in field of the board, and 200 mm (8 inches) on center along edges.
 - 2. When gypsum board is installed perpendicular to framing members, space fasteners 300 mm (12 inches) on center in field and along edges.
 - 3. Stagger screws on abutting edges or ends.
 - 4. For single-ply construction, apply gypsum board with long dimension either parallel or perpendicular to framing members as required to minimize number of joints except gypsum board shall be applied vertically over "Z" furring channels.
 - 5. For two-ply gypsum board assemblies, apply base ply of gypsum board to assure minimum number of joints in face layer. Apply face ply of wallboard to base ply so that joints of face ply do not occur at joints of base ply with joints over framing members.
 - 6. For three-ply gypsum board assemblies, apply plies in same manner as for two-ply assemblies, except that heads of fasteners need only be driven flush with surface for first and second plies. Apply third ply of wallboard in same manner as second ply of two-ply assembly, except use fasteners of sufficient length enough to have the same penetration into framing members as required for two-ply assemblies.

04-01-20

7. No offset in exposed face of walls and partitions will be permitted because of single-ply and two-ply or three-ply application requirements.
8. Installing Two Layer Assembly Over Sound Deadening Board:
 - a. Apply face layer of wallboard vertically with joints staggered from joints in sound deadening board over framing members.
 - b. Fasten face layer with screw, of sufficient length to secure to framing, spaced 300 mm (12 inches) on center around perimeter, and 400 mm (16 inches) on center in the field.
9. Control Joints ASTM C840 and as follows:
 - a. Locate at both side jambs of openings if gypsum board is not "yoked". Use one system throughout.
 - b. Not required for wall lengths less than 9000 mm (30 feet).
 - c. Extend control joints the full height of the wall or length of soffit/ceiling membrane.
- H. Acoustical or Sound Rated Partitions, Fire and Smoke Partitions:
 1. Cut gypsum board for a space approximately 3 mm to 6 mm (1/8 to 1/4 inch) wide around partition perimeter.
 2. Coordinate for application of caulking or sealants to space prior to taping and finishing.
 3. For sound rated partitions, use sealing compound (ASTM C919) to fill the annular spaces between all receptacle boxes and the partition finish material through which the boxes protrude to seal all holes and/or openings on the back and sides of the boxes. STC minimum values as shown.
- I. Electrical and Telecommunications Boxes:
 1. Seal annular spaces between electrical and telecommunications receptacle boxes and gypsum board partitions.
- J. Accessories:
 1. Set accessories plumb, level and true to line, neatly mitered at corners and intersections, and securely attach to supporting surfaces as specified.
 2. Install in one piece, without the limits of the longest commercially available lengths.
 3. Corner Beads:

04-01-20

- a. Install at all vertical and horizontal external corners and where shown.
- b. Use screws only. Do not use crimping tool.
- 4. Edge Trim (casings Beads):
 - a. At both sides of expansion and control joints unless shown otherwise.
 - b. Where gypsum board terminates against dissimilar materials and at perimeter of openings, except where covered by flanges, casings or permanently built-in equipment.
 - c. Where gypsum board surfaces of non-load bearing assemblies abut load bearing members.
 - d. Where shown.

3.3 INSTALLING GYPSUM SHEATHING

- A. Install in accordance with ASTM C840, except as otherwise specified or shown.
- B. Use screws of sufficient length to secure sheathing to framing.
- C. Space screws 9 mm (3/8 inch) from ends and edges of sheathing and 200 mm (8 inches) on center. Space screws a maximum of 200 mm (8 inches) on center on intermediate framing members.
- D. Apply 600 mm by 2400 mm (2 foot by 8 foot) sheathing boards horizontally with tongue edge up.
- E. Apply 1200 mm by 2400 mm or 2700 mm (4 ft. by 8 ft. or 9 foot) gypsum sheathing boards vertically with edges over framing.

3.4 CAVITY SHAFT WALL

- A. Coordinate assembly with Section 09 22 16, NON-STRUCTURAL METAL FRAMING, for erection of framing and gypsum board.
- B. Conform to UL Design No. U438 or FM WALL CONSTRUCTION 12-2/HR (Nonbearing for two-hour fire rating. Conform to FM WALL CONSTRUCTION 25-1/HR (Non-loadbearing) for one-hour fire rating where shown.
- C. Cut coreboard (liner) panels 25 mm (one inch) less than floor-to-ceiling height, and erect vertically between J-runners on shaft side.
 - 1. Where shaft walls exceed 4300 mm (14 feet) in height, position panel end joints within upper and lower third points of wall.
 - 2. Stagger joints top and bottom in adjacent panels.

04-01-20

3. After erection of J-struts of opening frames, fasten panels to J-struts with screws of sufficient length to secure to framing staggered from those in base, spaced 300 mm (12 inches) on center.

D. Gypsum Board:

1. Two hour wall:

- a. Erect base layer (backing board) vertically on finish side of wall with end joints staggered. Fasten base layer panels to studs with 25 mm (one inch) long screws, spaced 600 mm (24 inches) on center.
- b. Use laminating adhesive between plies in accordance with UL or FM if required by fire test.
- c. Apply face layer of gypsum board required by fire test vertically over base layer with joints staggered and attach with screws of sufficient length to secure to framing staggered from those in base, spaced 300 mm (12 inches) on center.

2. One hour wall with one layer on finish side of wall: Apply face layer of gypsum board vertically. Attach to studs with screws of sufficient length to secure to framing, spaced 300 mm (12 inches) on center in field and along edges.

3. Where coreboard is covered with face layer of gypsum board, stagger joints of face layer from those in the coreboard base.

E. Treat joints, corners, and fasteners in face layer as specified for finishing of gypsum board.

F. Elevator Shafts:

1. Protrusions including fasteners other than flange of shaft wall framing system or offsets from vertical alignments more than 3 mm (1/8-inch) are not permitted unless shown.
2. Align shaft walls for plumb vertical flush alignment from top to bottom of shaft.

3.5 FINISHING OF GYPSUM BOARD

- A. Finish joints, edges, corners, and fastener heads in accordance with ASTM C840. Use Level 4 finish for all finished areas open to public view.
- B. Before proceeding with installation of finishing materials, assure the following:
 1. Gypsum board is fastened and held close to framing or furring.

04-01-20

2. Fastening heads in gypsum board are slightly below surface in dimple formed by driving tool.

C. Finish joints, fasteners, and all openings, including openings around penetrations, on that part of the gypsum board extending above suspended ceilings to seal surface of non decorated smoke barrier, fire rated and sound rated gypsum board construction. After the installation of hanger rods, hanger wires, supports, equipment, conduits, piping and similar work, seal remaining openings and maintain the integrity of the smoke barrier, fire rated and sound rated construction. Sanding is not required of non decorated surfaces.

3.6 REPAIRS

- A. After taping and finishing has been completed, and before decoration, repair all damaged and defective work, including nondecorated surfaces.
- B. Patch holes or openings 13 mm (1/2 inch) or less in diameter, or equivalent size, with a setting type finishing compound or patching plaster.
- C. Repair holes or openings over 13 mm (1/2 inch) diameter, or equivalent size, with 16 mm (5/8 inch) thick gypsum board secured in such a manner as to provide solid substrate equivalent to undamaged surface.
- D. Tape and refinish scratched, abraded or damaged finish surfaces including cracks and joints in non decorated surface to provide smoke tight construction fire protection equivalent to the fire rated construction and STC equivalent to the sound rated construction.

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

04-01-20

Page Intentionally Left Blank

11-01-25

SECTION 09 30 13
CERAMIC/PORCELAIN TILING

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies interior ceramic, porcelain and quarry tile, waterproofing membranes for thin-set applications, crack isolation membranes, and tile backer board.

1.2 RELATED WORK

- A. Section 07 92 00, JOINT SEALANTS: Sealing of Joints.
- B. Section 09 06 00, SCHEDULE FOR FINISHES: Color, Texture, Pattern, and Size of Field Tile and Trim Shapes, and Color of Grout Specified.
- C. Section 09 23 00, GYPSUM PLASTERING: Metal and Gypsum Lathing and Gypsum Plaster: Lathing and Portland.
- D. Section 09 24 00, PORTLAND CEMENT PLASTERING: Cement Based Plaster.
- E. Section 09 65 19, RESILIENT TILE FLOORING: Metal and Resilient Edge Strips at Joints with New Resilient Flooring.
- F. Section 09 68 00, CARPETING: Metal and Resilient Edge Strips at Joints with Carpeting.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:
 - 1. Base tile, each type, each color, each size.
 - 2.
 - 3. Porcelain tile, each type, color, patterns and size.
 - 4. Wall (or wainscot) tile, each color, size and pattern.
 - 5. Trim shapes, bullnose cap and cove including bullnose cap and base pieces at internal and external corners of vertical surfaces, each type, color, and size.
- C. Product Data:
 - 1. Ceramic and porcelain tile, marked to show each type, size, and shape required.
 - 2. Chemical resistant mortar and grout (epoxy and furan).
 - 3. Cementitious backer unit.
 - 4. Dry-set portland cement mortar and grout.
 - 5. Divider strip.

11-01-25

6. Elastomeric membrane and bond coat.
7. Reinforcing tape.
8. Leveling compound.
9. Latex-portland cement mortar and grout.
10. Commercial portland cement grout.
11. Organic adhesive.
12. Waterproofing isolation membrane.
13. Fasteners.

D. Certification:

1. Master grade certificate, ANSI A137.1.
2. Manufacturer's certificates indicating that the following materials comply with specification requirements:
 - a. Chemical resistant mortar and grout (epoxy and furan).
 - b. Modified epoxy emulsion.
 - c. Commercial portland cement grout.
 - d. Cementitious backer unit.
 - e. Dry-set portland cement mortar and grout.
 - f. Elastomeric membrane and bond coat.
 - g. Reinforcing tape.
 - h. Latex-portland cement mortar and grout.
 - i. Leveling compound.
 - j. Organic adhesive.
 - k. Waterproof isolation membrane.

E. Installer Qualifications:

1. Submit letter stating installer's experience.

1.4 DELIVERY AND STORAGE

- A. Deliver materials in containers with labels legible and intact and grade-seals unbroken.
- B. Store material to prevent damage or contamination.

1.5 QUALITY ASSURANCE

- A. Installers to be from a company specializing in performing installation of products specified and have a minimum of three (3) years' experience.
- B. Each type and color of tile to be provided from a single source.
- C. Each type and color of mortar, adhesive, and grout to be provided from the same source.

11-01-25

1.6 WARRANTY

- A. Construction Warranty: Comply with FAR clause 52.246-21, "Warranty of Construction".

1.7 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.
- B. American National Standards Institute (ANSI):
- A10.20-06 (R2016) Safe Operating Practices for Tile, Terrazzo and Marble Work
 - A108/A118/A136.1:2019... Installation of Ceramic Tile
 - A108.01-18 Subsurfaces and Preparations by Other Trades
 - A108.02-19 Materials, Environmental, and Workmanship
 - A108.1A-17 Installation of Ceramic Tile in the Wet-Set Method with Portland Cement Mortar
 - A108.1B-17 Installation of Ceramic Tile on a Cured Portland Cement Mortar Setting Bed with Dry-Set or Latex-Portland Cement Mortar
 - A108.1C-17 Contractors Option; Installation of Ceramic Tile in the Wet-Set method with Portland Cement Mortar or Installation of Ceramic Tile on a Cured Portland Cement Mortar Setting Bed with Dry-Set or Latex-Portland Cement Mortar
 - A108.4-09 Ceramic Tile with Organic Adhesives or Water Cleanable Tile-Setting Epoxy Adhesive
 - A108.5-10 Ceramic Tile with Dry-Set Portland Cement Mortar or Latex-Portland Cement Mortar
 - A108.6-10 Ceramic Tile with Chemical Resistant, Water Cleanable Tile-Setting and -Grouting Epoxy
 - A108.8-10 Ceramic Tile with Chemical Resistant Furan Resin Mortar and Grout
 - A108.9-10 Ceramic Tile with Modified Epoxy Emulsion Mortar/Grout
 - A108.10-17 Grout in Tilework
 - A108.11-18 Interior Installation of Cementitious Backer Units

11-01-25

- A108.12-10.....Installation of Ceramic Tile with EGP (Exterior
Glue Plywood) Latex-Portland Cement Mortar
- A108.13-16.....Load Bearing, Bonded, Waterproof Membranes for
Thin-Set Ceramic Tile and Dimension Stone
- A108.14-10.....Paper-Faced Glass Mosaic Tile
- A108.15-19.....Alternate Method: Paper-Faced Glass Mosaic Tile
- A108.17-16.....Crack Isolation Membranes for Thin-Set Ceramic
Tile and Dimension Stone
- A118.1-19.....Dry-Set Portland Cement Mortar
- A118.3-13.....Chemical Resistant, Water Cleanable Tile-
Setting and -Grouting Epoxy and Water Cleanable
Tile-Setting Epoxy Adhesive
- A118.4-19.....Modified Dry-Set Cement Mortar
- A118.5-16.....Chemical Resistant Furan Mortars and Grouts
- A118.6-19.....Standard Cement Grouts for Tile Installation
- A118.7-1.....High Performance Cement Grouts for Tile
Installation
- A118.8-16.....Modified Epoxy Emulsion Mortar/ Grout
- A118.9-19.....Cementitious Backer Units
- A118.10-14.....Load Bearing, Bonded, Waterproof Membranes for
Thin-Set Ceramic Tile and Dimension Stone
Installation
- A118.11-17.....EGP (Exterior Glue Plywood) Modified Dry-set
Mortar
- A118.12-14.....Crack Isolation Membranes for Thin-Set Ceramic
Tile and Dimension Stone Installation
- A118.13-14.....Bonded Sound Reduction Membranes for Thin-Set
Ceramic Tile Installation
- A118.15-19.....Improved Modified Dry-Set Cement Mortar
- A136.1-13.....Organic Adhesives for Installation of Ceramic
Tile
- A137.1-17.....American National Standard Specifications for
Ceramic Tile
- C. ASTM International (ASTM):
- A666-15.....Annealed or Cold-Worked Austenitic Stainless
Steel Sheet, Strip, Plate and Flat Bar

11-01-25

A1064/A1064M-18a.....Carbon-Steel Wire and Welded Wire
Reinforcement, Plain and Deformed, for Concrete

C109/C109M-20b.....Standard Test Method for Compressive Strength
of Hydraulic Cement Mortars (Using 2 inch. or
[50-mm] Cube Specimens)

C241/C241M-15e1.....Abrasion Resistance of Stone Subjected to Foot
Traffic

C348-20.....Standard Test Method for Flexural Strength of
Hydraulic-Cement Mortars

C627-18.....Evaluating Ceramic Floor Tile Installation
Systems Using the Robinson-Type Floor Tester

C954-18.....Steel Drill Screws for the Application of
Gypsum Board on Metal Plaster Base to Steel
Studs from 0.033 in (0.84 mm) to 0.112 in (2.84
mm) in thickness

C979/C979M-16.....Pigments for Integrally Colored Concrete

C1002-18.....Steel Self-Piercing Tapping Screws for the
Application of Panel Products

C1027-19.....Test Method for Determining Visible Abrasion
Resistance of Glazed Ceramic Tile

C1127/C1127M-15.....Standard Guide for Use of High Solids Content,
Cold Liquid-Applied Elastomeric Waterproofing
Membrane with an Integral Wearing Surface

C1178/C1178M-18.....Standard Specification for Coated Glass Mat
Water-Resistant Gypsum Backing Panel

C1325-19.....Non-Asbestos Fiber-Mat Reinforced Cementitious
Backer Units

C1353/C1353M-20e1.....Abrasion Resistance of Dimension Stone
Subjected to Foot Traffic Using a Rotary
Platform, Double-Head Abraser

D1204-14 (2020).....Test Method for Linear Dimensional Changes of
Nonrigid Thermoplastic Sheeting or Film at
Elevated Temperature

D2240-15e1.....Test Method for Rubber Property - Durometer
Hardness

11-01-25

D2497-07(2018).....Tolerances for Manufactured Organic-Base
Filament Single Yarns
D3045-2018.....Heat Aging of Plastics Without Load
D4397-16.....Standard Specification for Polyethylene
Sheeting for Construction, Industrial and
Agricultural Applications
D5109-12(Withdrawn2020).Standard Test Methods for Copper-Clad
Thermosetting Laminates for Printed Wiring
Boards (recommend deletion)

D. Code of Federal Regulation (CFR):

40 CFR 59.....Determination of Volatile Matter Content, Water
Content, Density Volume Solids, and Weight
Solids of Surface Coating

E. Marble Institute of America (MIA)/ Building Stone Institute (BSI):
Dimension Stone Design Manual VIII-2016

F. Tile Council of North America, Inc. (TCNA):
Handbook for Ceramic Tile Installation (2020)G. TCNA DCOF AcuTest-
2012,Dynamic Coefficient of Friction Test

PART 2 - PRODUCTS

2.1 TILE

- A. Comply with ANSI A137.1, Standard Grade, except as modified:
1. Inspection procedures listed under the Appendix of ANSI A137.1.
 2. Abrasion Resistance Classification:
 - a. Tested in accordance with values listed in Table 1, ASTM C1027.
 - b. Class V, 12000 revolutions for floors in Corridors, Kitchens,
Storage including Refrigerated Rooms
 - c. Class IV, 6000 revolutions for remaining areas.
 - d. Tile Having Abrasive Grains:
 - 1) Unglazed Ceramic Mosaic Tile: Abrasive grains throughout body
of the tile.
 - e. Porcelain Paver Tile: Matte surface finish with raised ridges
spaced uniformly over tile surface.
 3. Mosaic tile may be mounted or joined by a resinous bonding material
along tile edges.
 4. Factory Blending: For tile with color variations, within the ranges
4. selected during sample submittals blend tile in the factory and

11-01-25

4. package so tile units taken from one (1) package show the same range
4. in colors as those taken from other packages and match approved
4. samples.
5. Factory-Applied Temporary Protective Coating:
 - a. Protect exposed face surfaces (top surface) of tile against adherence of mortar and grout by pre-coating with a continuous film of hot applied petroleum paraffin wax.
 - b. Do not coat unexposed tile surfaces.
- B. Porcelain Paver Tile: Nominal 8 mm (5/16 inch) thick, with cushion
- B. edges. Porcelain tile produced by the dust pressed method are to be
- B. made of approximately 50 percent feldspar; the remaining 50 percent is
- B. to be made up of various high-quality light firing ball clays yielding
- B. a tile with a water absorption rate of 0.5 percent or less and a
- B. breaking strength of between 176 to 181 kg (390 to 400 pounds).
- C. Trim Shapes:
 1. Conform to applicable requirements of adjoining floor and wall tile.
 2. Use trim shapes sizes conforming to size of adjoining field wall tile including existing spaces unless detailed on construction documents or specified otherwise.
 3. Internal and External Corners:
 - a. Square internal and external corner joints are not acceptable.
 - b. External corners including edges: Use bullnose shapes.
 - c. Internal corners: Use cove shapes.
 - d. Base to floor internal corners: Use special shapes providing integral cove vertical and horizontal joint.
 - e. Base to floor external corners: Use special shapes providing bullnose vertical edge with integral cove horizontal joint. Use stop at bottom of openings having bullnose return to wall.
 - f. Wall top edge internal corners: Use special shapes providing integral cove vertical joint with bullnose top edge.
 - g. Wall top edge external corners: Use special shapes providing bullnose vertical and horizontal joint edge.
 - h. For unglazed ceramic mosaic and glazed wall tile installed in portland cement mortar setting bed, use cove and bullnose shapes as applicable. When ceramic mosaic wall and base tile is required, use C Series cove and bullnose shapes.

11-01-25

- i. For quarry tile work, use cove and bullnose shapes as applicable.
- j. Provide cove and bullnose shapes where indicated in construction documents, and required to complete tile work.

2.2 BACKER UNITS

A. Cementitious Backer Units:

- 1. Use in showers or wet areas.
- 2. Conform to ASTM C1325; Type A.
- 3. Use in maximum lengths available to minimize end to end butt joints.

2.3 JOINT MATERIALS FOR CEMENTITIOUS BACKER UNITS

- A. Reinforcing Tape: Vinyl coated woven glass fiber mesh tape, open weave, 50 mm (2 inches) wide. Tape with pressure sensitive adhesive backing will not be permitted.
- B. Tape Embedding Material: Latex-portland cement mortar complying with ANSI A108.01.
- C. Joint material, including reinforcing tape, and tape embedding material, are to be as specifically recommended by the backer unit manufacturer.

2.4 FASTENERS

A. Screws for Cementitious Backer Units.

- 1. Standard screws for gypsum board are not acceptable.
- 2. Minimum 8 mm (0.3145 inch) diameter head, corrosion resistant coated, with washers.
- 3. ASTM C954 for steel 1 mm (0.033 inch) thick.
- 4. ASTM C1002 for steel framing less than 0.0329 inch thick.

B. Washers: Galvanized steel, 13 mm (1/2 inch) minimum diameter.

2.5 SETTING MATERIALS OR BOND COATS

- A. Conform to TCNA Handbook for Ceramic Tile Installation.
- B. Portland Cement Mortar: ANSI A108.02.
- C. Latex-Portland Cement Mortar: ANSI A118.4.
 - 1. For wall applications, provide non-sagging, latex-portland cement mortar complying with ANSI A118.4.
 - 2. Prepackaged Dry-Mortar Mix: Factory-prepared mixture of portland cement; dry, redispersible, ethylene vinyl acetate additive; and other ingredients to which only water needs to be added at Project site.

11-01-25

- D. Dry-Set Portland Cement Mortar: ANSI A118.1. For wall applications, provide non-sagging, latex-portland cement mortar complying with ANSI A118.1.
- E. Organic Adhesives: ANSI A136.1, Type 1.
- F. Chemical-Resistant Bond Coat:
1. Epoxy Resin Type: ANSI A118.3.
 2. Furan Resin Type: ANSI A118.5.
- G. Elastomeric Waterproofing Membrane and Bond Coat:
1. TCNA F122-14 (on ground concrete) and TCNA F112A-14 (above ground concrete).
 2. ANSI A118.10.
 3. One component polyurethane, liquid applied material having the following additional physical properties:
 - a. Hardness: Shore "A" between 40-60.
 - b. Elongation: Between 300-600 percent.
 - c. Tensile strength: Between .27 - .41 Newton per square millimeter (40-60 pounds per square inch gauge).
 4. Coal tar modified urethanes are not acceptable.
- H. Waterproofing Isolation Membrane:
1. Sheet System TCNA F122-14 (on-ground concrete) and TCNA F122A-14 (above-ground concrete).
 2. Composite sheet consisting of ASTM D5109, Type II, Grade I Chlorinated Polyethylene (CM) sheet reinforced on both sides with a non-woven polyester fiber.
 3. Designed for use in wet areas as an isolation and positive waterproofing membranes for thin-set bonding of sheet to substrate and thin-set bonding of ceramic and porcelain tile or marble to sheet. Suited for both horizontal and vertical applications.
 4. Conform to the following additional physical properties:

Property	Units	Results	Test Method
Hardness Shore A	Points	70-80	ASTM D2240 (10 Second Reading)
Shrinkage	Percent	5 maximum	ASTM D1204

11-01-25

Brittleness		No crack remains flexible at temperature -37 degrees C (-35 degrees F)	ASTM D2497 13 mm (1/2-inch) Mandrel Bend
Retention of Properties after Heat Aging	Percent of original	80 Tensile 80 Breaking 80 Elongation	ASTM D3045, 90 degrees C (194 degrees F) for 168 hours

5. Manufacturer's standard sheet size with prefabricated or preformed inside and outside corners.
6. Sheet manufacturer's solvent welding liquid or xylene and edge sealant.

2.6 GROUTING MATERIALS

A. Coloring Pigments:

1. Pure mineral pigments, lime proof and nonfading, complying with ASTM C979/C979M.
2. Coloring pigments may only be added to grout by the manufacturer.
3. Job colored grout is not acceptable.
4. Use is required in Commercial Portland Cement Grout, Dry-Set Grout, and Latex-Portland Cement Grout.

B. Water-Cleanable Epoxy Grout: ANSI A118.3, with a VOC content of 65 g/L or less when calculated according to 40 CFR 59 (EPA Method 24).

1. Provide product capable of withstanding continuous and intermittent exposure to temperatures of up to 60 and 100 degrees C (140 and 212 degrees F), respectively, and certified by manufacturer for intended use.

2.7 PATCHING AND LEVELING COMPOUND

- A. Portland cement base, polymer-modified, self-leveling compound, manufactured specifically for resurfacing and leveling concrete floors. Products containing gypsum are not acceptable.
- B. Provide a patching and leveling compound with the following minimum physical properties:
 1. Compressive strength - 25 MPa (3500 psig) per ASTM C109/C109M.
 2. Flexural strength - 7 MPa (1000 psig) per ASTM C348 (28 day value).
 3. Tensile strength - 4.1 MPa (600 psi) per ANSI 118.7.

11-01-25

4. Density - 1.9.

- C. Capable of being applied in layers up to 38 mm (1-1/2 inches) thick without fillers and up to 101 mm (4 inches) thick with fillers, being brought to a feather edge, and being trowelled to a smooth finish.
- D. Primers, fillers, and reinforcement as required by manufacturer for application and substrate condition.
- E. Ready for use in 48 hours after application.

2.8 METAL DIVIDER STRIPS

- A. Terrazzo type divider strips.
- B. Heavy top type strip with 5 mm (3/16 inch) wide top and 38 mm (1 1/2 inch) long leg. Height to match tile and setting-bed thickness.
- C. Embedded leg perforated and deformed for keying to mortar.
- D. Stainless-steel, ASTM A666, 300 Series exposed-edge material.

2.9 WATER

- A. Clean, potable and free from salts and other injurious elements to mortar and grout materials.

2.10 CLEANING COMPOUNDS

- A. Specifically designed for cleaning masonry and concrete and which will not prevent bond of subsequent tile setting materials including patching and leveling compounds and elastomeric waterproofing membrane and coat.
- B. Materials containing acid or caustic Material are not acceptable.

2.11 FLOOR MORTAR BED REINFORCING

- A. ASTM A1064/A1064M welded wire fabric without backing, MW3 x MW3
- A. (2 x 2-W0.5 x W0.5).

2.12 POLYETHYLENE SHEET

- A. Polyethylene sheet conforming to ASTM D4397.
- B. Nominal thickness: 0.15 mm (6 mils).

PART 3 - EXECUTION

3.1 ENVIRONMENTAL REQUIREMENTS

- A. Maintain ambient temperature of work areas at not less than 16 degrees C (60 degrees F), without interruption, for not less than 24 hours before installation and not less than three (3) days after installation.

11-01-25

- B. Maintain higher temperatures for a longer period of time where required by manufacturer's recommendation and ANSI Specifications for installation.
- C. Do not install tile when the temperature is above 38 degrees C (100 degrees F).
- D. Do not install materials when the temperature of the substrate is below 16 degrees C (60 degrees F).
- E. Do not allow temperature to fall below 10 degrees C (50 degrees F) after third day of completion of tile work.

3.2 ALLOWABLE TOLERANCE

- A. Variation in plane of sub-floor, including concrete fills leveling compounds and mortar beds:
 - 1. Not more than 6 mm in 3048 mm (1/4 inch in 10 feet) from required elevation where portland cement mortar setting bed is used.
 - 2. Not more than 3 mm in 3048 mm (1/8 inch in 10 feet) where dry-set portland cement, and latex-portland cement mortar setting beds and chemical-resistant bond coats are used.
- B. Variation in Plane of Wall Surfaces:
 - 1. Not more than 6 mm in 2438 mm (1/4 inch in 8 feet) from required plane where portland cement mortar setting bed is used.
 - 2. Not more than 3 mm in 2438 mm (1/8 inch in 8 feet) where dry-set or latex-portland cement mortar or organic adhesive setting materials is used.

3.3 SURFACE PREPARATION

- A. Cleaning New Concrete or Masonry:
 - 1. Chip out loose material, clean off all oil, grease dirt, adhesives, curing compounds, and other deterrents to bonding by mechanical method, or by using products specifically designed for cleaning concrete and masonry.
 - 2. Use self-contained power blast cleaning systems to remove curing compounds and steel trowel finish from concrete slabs where ceramic tile will be installed directly on concrete surface with thin-set materials.
 - 3. Steam cleaning or the use of acids and solvents for cleaning will not be permitted.
- B. Patching and Leveling:

11-01-25

1. Mix and apply patching and leveling compound in accordance with manufacturer's instructions.
2. Fill holes and cracks and align concrete floors that are out of required plane with patching and leveling compound.
 - a. Thickness of compound as required to bring finish tile system to elevation shown on construction documents.
 - b. At substrate expansion, isolation, and other moving joints, allow joint of same width to continue through underlayment.
3. Apply patching and leveling compound to concrete and masonry wall surfaces that are out of required plane.
4. Apply leveling coats of material compatible with wall surface and tile setting material to wall surfaces, other than concrete and masonry that are out of required plane.
- C. Additional preparation of concrete floors for tile set with epoxy, or furan-resin is to be in accordance with the manufacturer's printed instructions.
- D. Cleavage Membrane:
 1. Install polythene sheet as cleavage membrane in depressed slab when waterproof membrane is not scheduled or indicated.
 2. Turn up at edge of depressed floor slab to top of floor.
- E. Walls:
 1. Apply patching and leveling compound to concrete and masonry surfaces that are out of required plane.
 2. Apply leveling coats of material compatible with wall surface and tile setting material to wall surfaces, other than concrete and masonry that are out of required plane.
 3. Apply metal lath to framing in accordance with ANSI A108.1:
 - a. Use fasteners specified in paragraph "Fasteners." Use washers when lath opening is larger than screw head.
 - b. Apply scratch and leveling coats to metal lath in accordance with ANSI A108.1C.
 - c. Total thickness of scratch and leveling coats:
 - 1) Apply 9 mm to 16 mm (3/8 inch to 5/8 inch) thick over solid backing.
 - 2) 16 mm to 19 mm (5/8 to 3/4 inch) thick on metal lath over studs.

11-01-25

3) Where wainscots are required to finish flush with wall surface above, adjust thickness required for flush finish.

d. Apply scratch and leveling coats more than 19 mm (3/4 inch) thick
d. in two (2) coats.

F. Existing Floors and Walls:

1. Remove existing composition floor finishes and adhesive. Prepare surface by grinding, chipping, self-contained power blast cleaning or other suitable mechanical methods to completely expose uncontaminated concrete or masonry surfaces. Follow safety requirements of ANSI A10.20.
2. Remove existing concrete fill or topping to structural slab. Clean and level the substrate for new setting bed and waterproof membrane or cleavage membrane.
3. Where new tile bases are required to finish flush with plaster above
3. or where they are extensions of similar bases in conjunction with
3. existing floor tiles, cut channel in floor slab and expose rough
3. wall construction sufficiently to accommodate new tile base and
3. setting material.

3.4 CEMENTITIOUS BACKER UNITS

- A. Remove polyethylene wrapping from cementitious backer units and separate to allow for air circulation. Allow moisture content of backer units to dry down to a maximum of 35 percent before applying joint treatment and tile.
- B. Install in accordance with ANSI A118.9 except as specified otherwise.
- C. Install units horizontally or vertically to minimize joints with end joints over framing members. Units with rounded edges; face rounded edge away from studs to form a "V" joint for joint treatment.
- D. Secure cementitious backer units to each framing member with screws spaced not more than 203 mm (8 inches) on center and not closer than 13 mm (1/2 inch) from the edge of the backer unit or as recommended by backer unit manufacturer. Install screws so that the screw heads are flush with the surface of the backer unit.
- E. Where backer unit joins shower pans or waterproofing, lap backer unit over turned up waterproof system. Install fasteners only through top one-inch of turned up waterproof systems.

11-01-25

F. Do not install joint treatment for seven (7) days after installation of cementitious backer unit.

G. Joint Treatment:

1. Fill horizontal and vertical joints and corners with latex-portland cement mortar. Apply fiberglass tape over joints and corners and embed with same mortar.
2. Leave 6 mm (1/4 inch) space for sealant at lips of tubs, sinks, or other plumbing receptors.

3.5 GLASS MAT WATER-RESISTANT BACKING BOARD

- A. Install in accordance with manufacturer's instructions.
TCNA Systems W245-1.
- B. Treat joints with tape and latex-portland cement mortar or adhesive.

3.6 METAL DIVIDER STRIPS

- A. Install metal divider strips in floor joints between ceramic and quarry tile floors and between tile floors and adjacent flooring of other materials where the finish floors are flush unless shown otherwise on construction documents.
- B. Set divider strip in mortar bed to line and level centered under doors or in openings.

3.7 CERAMIC TILE - GENERAL

- A. Comply with ANSI A108/A118/A136 series of tile installation standards applicable to methods of installation and TCNA Installation Guidelines.
- B. Installing Mortar Beds for Floors:
 1. Install mortar bed in a manner that does not damage cleavage or waterproof membrane; 32 mm (1-1/2 inch) minimum thickness.
 2. Install floor mortar bed reinforcing centered in mortar fill.
 3. Screed finish to level plane or slope to drains shown on construction documents, float finish.
 4. For thin set systems cure mortar bed not less than seven (7) days.
Do not use curing compounds or coatings.
 5. For tile set with portland cement paste over plastic mortar bed coordinate to set tile before mortar bed sets.
- C. Setting Beds or Bond Coats:
 1. Where recessed or depressed floor slabs are filled with portland cement mortar bed, set ceramic mosaic floor tile in either portland cement paste over plastic mortar bed or latex-portland cement mortar

11-01-25

- over cured mortar bed except as specified otherwise, ANSI A108-1C, TCNA System F121-14 or F111-14.
2. Set floor tile in elastomeric bond coat over elastomeric membrane per ANSI 108.13, TCNA System F122-14 where indicated on construction documents.
 3. Set wall tile installed over concrete or masonry in dry-set portland cement mortar, or latex-portland cement mortar, ANSI 108.1B and TCNA System W211-14, W221-14 or W222-14.
 4. Set wall tile installed over concrete backer board in latex-portland cement mortar, ANSI A108.1B.
 5. Set wall tile installed over portland cement mortar bed on metal lath base in portland cement paste over plastic mortar bed, or dry-set portland cement mortar or latex-portland cement mortar over a cured mortar bed, ANSI A108.1C, TCNA System W231-14, W241-14.
 6. Set tile installed over gypsum board and gypsum plaster in organic adhesive, ANSI A108.1, TCNA System W242-14.
 7. Set trim shapes in same material specified for setting adjoining tile.

D. Workmanship:

1. Lay out tile work so that no tile less than one-half full size is used. Make all cuts on the outer edge of the field. Align new tile work scheduled for existing spaces to the existing tile work unless specified otherwise.
2. Set tile firmly in place with finish surfaces in true planes. Align tile flush with adjacent tile unless shown otherwise on construction documents.
3. Form intersections and returns accurately.
4. Cut and drill tile neatly without marring surface.
5. Cut edges of tile abutting penetrations, finish, or built-in items:
 - a. Fit tile closely around electrical outlets, piping, fixtures and fittings, so that plates, escutcheons, collars and flanges will overlap cut edge of tile.
 - b. Seal tile joints water tight as specified in Section 07 92 00, JOINT SEALANTS, around electrical outlets, piping fixtures and fittings before cover plates and escutcheons are set in place.

11-01-25

6. Completed work is to be free from hollow sounding areas and loose, cracked or defective tile.
7. Remove and reset tiles that are out of plane or misaligned.
8. Floors:
 - a. Extend floor tile beneath casework and equipment, except those units mounted in wall recesses.
 - b. Align finish surface of new tile work flush with other and existing adjoining floor finish where indicated in construction documents.
 - c. Push and vibrate tiles over 203 mm (8 inches) square to achieve full support of bond coat.
9. Walls:
 - a. Cover walls and partitions, including pilasters, furred areas, and freestanding columns from floor to ceiling, or from floor to nominal wainscot heights as indicated in construction documents with tile.
 - b. Finish reveals of openings with tile, except where other finish materials are indicated in construction documents.
 - c. Finish wall surfaces behind and at sides of casework and equipment, except those units mounted in wall recesses, with same tile as scheduled for room proper.
10. Joints:
 - a. Keep all joints in line, straight, level, perpendicular and of even width unless shown otherwise on construction documents.
 - b. Make joints 2 mm (1/16 inch) wide for glazed wall tile and mosaic tile work.
 - c. Make joints in quarry tile work not less than 6 mm (1/4 inch) nor more than 9 mm (3/8 inch) wide. Finish joints flush with surface of tile.
 - d. Make joints in paver tile, porcelain type; maximum 3 mm (1/8 inch) wide.
11. Back Buttering: For installations indicated below, obtain 100 percent mortar coverage by complying with applicable special requirements for back buttering of tile in referenced ANSI A108/A118/A136 series of tile installation standards:

11-01-25

- a. Tile wall installations in wet areas, including showers, tub enclosures, laundries and swimming pools.
- b. Tile installed with chemical-resistant mortars and grouts.
- c. Tile wall installations composed of tiles 203 by 203 mm (8 by 8 inches) or larger.

**3.8 CERAMIC TILE INSTALLED WITH PORTLAND CEMENT MORTAR MORTAR BED THICKNESS
3.8 SHOULD BE THE SAME THICKNESS THROUGHOUT WHERE NO DRAINS OCCUR.**

- A. Mortar Mixes for Floor, Wall and Base Tile ANSI A108.1A. except specified otherwise.
- B. Installing Wall and Base Tile: ANSI A108.1A, except specified otherwise.

3.9 PORCELAIN TILE INSTALLED WITH LATEX PORTLAND CEMENT BONDING MORTAR

- A. Due to the denseness of porcelain tile use latex portland cement bonding mortar that meets the requirements of ANSI A108.01. Mix bonding mortars in accordance with manufacturer's instructions. Provide liquid ratios and comply with dwell times during the placement of bonding mortar and tile.

3.10 THIN SET CERAMIC AND PORCELAIN TILE INSTALLED WITH DRY-SET PORTLAND CEMENT AND LATEX-PORTLAND CEMENT MORTAR

- A. Installation of Tile: ANSI A108.1B, except as specified otherwise.

3.11 THIN SET CERAMIC AND PORCELAIN TILE INSTALLED WITH ORGANIC ADHESIVE

- A. Installation of Tile: ANSI A108.4.

3.12 THIN SET CERAMIC AND PORCELAIN TILE INSTALLED WITH CHEMICAL-RESISTANT BOND COAT

- A. Epoxy Resin Type: Install tile in accordance with Installation of Tile with Epoxy Mortar; ANSI A108.6.
- B. Furan Resin Type: Proportion, mix and place in accordance with the B. manufacturer's printed instructions. Set tile in accordance with B. ANSI A108.8.

3.13 CERAMIC AND PORCELAIN TILE INSTALLED WITH ELASTOMERIC BOND COAT

- A. Surface Preparation: Prepare surfaces as specified.
- B. Installation of Elastomeric Membrane: ANSI A108.10 and TCNA F122-14 (on ground concrete) and F122A-14 (above-ground concrete).
 - 1. Prime surfaces, where required, in accordance with manufacturer's instructions.

11-01-25

2. Install first coat of membrane material in accordance with manufacturer's instructions, in thickness of 0.76 to 1.3 mm (30 to 50 mils).
3. Extend material over flashing rings of drains and turn up vertical surfaces not less than 101 mm (4 inches) above finish floor surface.
4. When material has set, recoat areas with a second coat of elastomeric membrane material for a total thickness of 1.3 to 1.9 mm (50 to 75 mils).
5. After curing test for leaks with 25 mm (1 inch) of water for 24 hours.

C. Installation of Tile in Elastomeric Membrane:

1. Spread no more material than can be covered with tile before material starts to set.
2. Apply tile in second coat of elastomeric membrane material in accordance with the coating manufacturer's instructions in lieu at aggregate surfacing specified in ASTM C1127. Do not install top coat over tile.

3.14 GROUTING

A. Grout Type and Location:

B. Workmanship:

1. Install and cure grout in accordance with the applicable standard.
2. Water-Cleanable Epoxy Grout: ANSI A118.3.

3.15 MOVEMENT JOINTS

A. Prepare tile expansion, isolation, construction and contraction joints for installation of sealant. Refer to Section 07 92 00, JOINT SEALANTS.

B. TCNA details EJ 171-14.

3.16 CLEANING

- A. Thoroughly sponge and wash tile. Polish glazed surfaces with clean dry cloths.
- B. Methods and materials used are not permitted to damage or impair appearance of tile surfaces.
- C. The use of acid or acid cleaners on glazed tile surfaces is prohibited.
- D. Clean tile grouted with epoxy, furan and commercial portland cement grout and tile set in elastomeric bond coat as recommended by the manufacturer of the grout and bond coat.

11-01-25

3.17 PROTECTION

- A. Keep traffic off tile floor, until grout and setting material is fully set and cured.
- B. Where traffic occurs over tile floor is unavoidable, cover tile floor with not less than 9 mm (3/8 inch) thick plywood, wood particle board, or hardboard securely taped in place. Do not remove protective cover until time for final inspection. Clean tile of any tape, adhesive and stains.

3.18 TESTING FINISH FLOOR

- A. Test floors in accordance with ASTM C627 to show compliance with codes 1 through 10.

- - - E N D - - -

12-01-18

SECTION 09 51 00
ACOUSTICAL CEILINGS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Acoustical units.
 - 2. Metal ceiling suspension system for acoustical ceilings.
 - 3. Adhesive application.

1.2 RELATED REQUIREMENTS

- A. Section 08 31 13, ACCESS DOORS AND FRAMES: Access doors in adhesive applied tile.
- B. Section 09 06 00, SCHEDULE FOR FINISHES: Color, pattern, and location of each type of acoustical unit.
- C. Section 09 22 16, NON-STRUCTURAL METAL FRAMING: Ceiling Suspension System.
- D. Section 09 29 00, GYPSUM BOARD: Lay in gypsum board ceiling panels.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. ASTM International (ASTM):
 - 1. A641/A641M-09a(2014) - Zinc-coated (Galvanized) Carbon Steel Wire.
 - 2. A653/A653M-15e1 - Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-coated (Galvannealed) by the Hot-Dip Process.
 - 3. C423-09a - Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method.
 - 4. C634-13 - Terminology Relating to Environmental Acoustics.
 - 5. C635/C635M-13a - Manufacture, Performance, and Testing of Metal Suspension Systems for Acoustical Tile and Lay-in Panel Ceilings.
 - 6. C636/C636M-13 - Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels.
 - 7. D1779-98(2011) - Adhesive for Acoustical Materials.
 - 8. E84-15b - Surface Burning Characteristics of Building Materials.
 - 9. E119-16 - Fire Tests of Building Construction and Materials.
 - 10. E413-16 - Classification for Rating Sound Insulation.
 - 11. E580/E580M-14 - Installation of Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels in Areas Subject to Earthquake Ground Motions.

12-01-18

12. E1264-14 - Classification for Acoustical Ceiling Products.

C. International Organization for Standardization (ISO):

1. ISO 14644-1 - Classification of Air Cleanliness.

1.4 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting at project site minimum 30 days before beginning Work of this section.

1. Required Participants:

- a. Contracting Officer's Representative.
- b. Architect/Engineer.
- c. VA Interior Designer.
- d. Inspection and Testing Agency.
- e. Contractor.
- f. Installer.
- g. Manufacturer's field representative.

2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.

- a. Installation schedule.
- b. Installation sequence.
- c. Preparatory work.
- d. Protection before, during, and after installation.
- e. Installation.
- f. Terminations.
- g. Transitions and connections to other work.
- h. Inspecting and testing.
- i. Other items affecting successful completion.

3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Show size, configuration, and fabrication and installation details.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Ceiling suspension system indicating manufacturer recommendation for each application.

12-01-18

3. Installation instructions.

4. Warranty.

D. Samples:

1. Acoustical units, 150 mm (6 inches) in size, each type, including units specified to match existing.

a. Submit quantity required to show full color and texture range.

2. Suspension system, trim and molding, 300 mm (12 inches) long.

3. Colored markers for access service.

4. Approved samples may be incorporated into work.

E. Certificates: Certify each product complies with specifications.

1. Acoustical units, each type.

F. Qualifications: Substantiate qualifications comply with specifications.

1. Manufacturer with project experience list.

G. Operation and Maintenance Data:

1. Care instructions for each exposed finish product.

1.6 QUALITY ASSURANCE

A. Manufacturer Qualifications:

1. Regularly manufactures specified products.

2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.

a. Project Experience List: Provide contact names and addresses for completed projects.

1.7 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.8 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight conditioned facility.

B. Protect products from damage during handling and construction operations.

1.9 FIELD CONDITIONS

A. Environment:

1. Product Temperature: Minimum 21 degrees C (70 degrees F) for minimum 48 hours before installation.

12-01-18

2. Work Area Ambient Conditions: HVAC systems are complete, operational, and maintaining facility design operating conditions continuously, beginning 48 hours before installation until Government occupancy.
3. Install products when building is permanently enclosed and when wet construction is completed, dried, and cured.

1.10 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

- A. Ceiling System: Acoustical ceilings units on exposed grid suspension systems.

2.2 SYSTEM PERFORMANCE

- A. Design product complying with specified performance:
 1. Maximum Deflection: 1/360 of span, maximum.
- B. Surface Burning Characteristics: When tested according to ASTM E84.
 1. Flame Spread Rating: 200 maximum.
 2. Smoke Developed Rating: 450 maximum.

2.3 PRODUCTS - GENERAL

- A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Provide acoustical units from one manufacturer.
 1. Provide each product exposed to view from one production run.
- C. Provide suspension system from same manufacturer.

2.4 ACOUSTICAL UNITS

- A. General:
 1. Ceiling Panel and Tile: ASTM E1264, bio-based content according to USDA Bio-Preferred Product requirements.
 - a. Mineral Fiber: 3.6 kg/sq. m (3/4 psf) weight, minimum.
 2. Classification: Provide type and form as follows:
 - a. Type III Units - Mineral base with water-based painted finish maximum 10 g/l VOC; Form 2 - Water felted, minimum 16 mm (5/8 inch) thick.
 - b. Type IV Units - Mineral base with membrane-faced overlay, Form 2 - Water felted, minimum 16 mm (5/8 inch) thick. Apply poly (vinyl) chloride over paint coat.

12-01-18

- c. Type V Units - Perforated steel facing (pan) with mineral or glass fiber base backing.
 - 1) Steel: Galvanized steel, ASTM A653, with G30 coating. minimum 0.38 mm (0.015 inch) thick.
 - 2) Bonderize both sides. Apply two coats of baked-on enamel finish on surfaces exposed to view and one coat on concealed surfaces.
- d. Type VI Units - Perforated stainless steel facing (pan) with mineral or glass fiber base backing.
- e. Type VII Units - Perforated aluminum facing (pan) with mineral or glass fiber base backing.
 - 1) Aluminum sheets, minimum 0.635 mm (0.025 inch) thick.
 - 2) Apply two coats of baked-on enamel finish, free from gloss or sheen, on face and flanges.
- f. NRC (Noise Reduction Coefficient): ASTM C423, minimum 0.55 unless specified otherwise.
- g. CAC (Ceiling Attenuation Class): ASTM E413, 40-44 range unless specified otherwise.
- h. LR (Light Reflectance): Minimum 0.75.
- 3. Lay-in panels: As indicated on Drawings.
- B. SPECIAL FACED ACOUSTICAL TILE UNITS AT(SP): Anti-microbial coated surfaces suitable for use in Class 5 Clean Rooms per ISO 14644-1. Special faced acoustical tile units shall meet all general requirements stated in this specification.
 - 1. Type XX-A Units - Perforated Ceramic Units for Wet Service.
 - a. Mineral wool material, fired in kiln to produce a stable panel, totally unaffected by moisture when submerged in water.
 - b. No damage when subjected to 10 cycles of steam at 135 degrees C (275 degrees F) and cooling to 10 degrees C (50 degrees F).
 - c. Minimum of 16 mm (5/8 inch) thick.
 - d. Not affected when immersed in five percent chlorine solution, except for paint finish.
 - 2. Type III-A Units - Mineral base with painted finish.
 - a. Form 1, modular, cast or molded.
 - b. NRC: 0.75 minimum.
 - c. Thickness: 19 mm (3/4 inch) minimum.

12-01-18

- d. Weight, 4.9 kg/sq. m (one pound per square foot).
- 3. Type XX-B Units - Combination mineral base and glass fiber with fabric finish.
 - a. Back Half of Panel: Perforated water felted mineral fiber.
 - b. Face Half of Panel: Glass fiber with glass cloth face.
 - c. NRC: 0.75 minimum.
 - d. Thickness: 28 mm (1 1/8 inches) minimum.

2.5 METAL SUSPENSION SYSTEM

- A. General: ASTM C635, intermediate-duty, except as otherwise specified.
 - 1. Suspension System: Provide the following:
 - a. Galvanized cold-rolled steel, bonderized.
 - 2. Main and Cross Runner: Use same construction Do not use lighter-duty sections for cross runners.
- B. Exposed Grid Suspension System: Support of lay-in panels.
 - 1. Grid Width: 22 mm (7/8 inch) minimum with 8 mm (5/16 inch) minimum panel bearing surface.
 - 2. Molding: Fabricate from the same material with same exposed width and finish.
 - 3. Finish: Baked-on enamel flat texture finish.
 - a. Color: To match adjacent acoustical units unless specified otherwise in Section 09 06 00, SCHEDULE FOR FINISHES.
- C. Concealed Grid Suspension System: Mineral base acoustical tile support.
 - 1. Concealed grid upward access suspension system initial opening, 300 mm by 600 mm (12 by 24 inches).
 - 2. Flange Width: 22 mm (7/8 inch) minimum except:
 - a. Access Hook and Angle: 11 mm (7/16 inch) minimum.
- D. Suspension System Support of Metal Type V, VI, and VII Tiles: Concealed grid type with runners for snap-in attachment of metal tile (pans).
- E. Carrying Channels Secondary Framing: Cold-rolled or hot-rolled steel, black asphaltic paint finish, rust free.
 - 1. Weight per 300 m (per thousand linear feet), minimum:

Size		Cold-rolled		Hot-rolled	
mm	inches	kg	pound	kg	pound
38	1-1/2	215.4	475	508	1120
50	2	267.6	590	571.5	1260

12-01-18

F. Anchors and Inserts: Provide anchors or inserts to support twice the loads imposed by hangers.

1. Hanger Inserts: Steel, zinc-coated (galvanized after fabrication).

a. Nailing type option for wood forms:

- 1) Upper portion designed for anchorage in concrete and positioning lower portion below surface of concrete approximately 25 mm (one inch).
- 2) Lower portion provided with minimum 8 mm (5/16 inch) hole to permit attachment of hangers.

b. Flush ceiling insert type:

- 1) Designed to provide a shell covered opening over a wire loop to permit attachment of hangers and keep concrete out of insert recess.
- 2) Insert opening inside shell approximately 16 mm (5/8 inch) wide by 9 mm (3/8 inch) high over top of wire.
- 3) Wire 5 mm (3/16 inch) diameter with length to provide positive hooked anchorage in concrete.

G. Clips: Galvanized steel, designed to secure framing member in place.

H. Tile Splines: ASTM C635.

I. Wire: ASTM A641.

1. Size:

- a. Wire Hangers: Minimum diameter 2.68 mm (0.1055 inch).
- b. Bracing Wires: Minimum diameter 3.43 mm (0.1350 inch).

2. 6 ACCESSORIES

A. Adhesives: Low pollutant-emitting, water based type recommended by adhered product manufacturer for each application.

B. Perimeter Seal: Vinyl, polyethylene or polyurethane open cell sponge material, density of 1.3 plus or minus 10 percent, compression set less than 10 percent with pressure sensitive adhesive coating on one side.

1. Thickness: As required to fill voids between back of wall molding and finish wall.

2. Size: Minimum 9 mm (3/8 inch) wide strip.

C. Access Identification Markers: Colored markers with pressure sensitive adhesive on one side, paper or plastic, 6 to 9 mm (1/4 to 3/8 inch) diameter.

12-01-18

1. Color Code: Provide the following color markers for service identification:

Color	Service
Red	Sprinkler System: Valves and Controls
Green	Domestic Water: Valves and Controls
Yellow	Chilled Water and Heating Water
Orange	Ductwork: Fire Dampers
Blue	Ductwork: Dampers and Controls
Black	Gas: Laboratory, Medical, Air and Vacuum

PART 3 - EXECUTION

1.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
- C. Remove existing acoustical panels and suspension system to permit new installation.
 1. Dispose of other removed materials.

1.2 INSTALLATION - GENERAL

- A. Install products according to manufacturer's instructions and approved submittal drawings.
 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

1.3 ACOUSTICAL UNIT INSTALLATION

- A. Applications:
 1. Cut acoustic units for perimeter borders and penetrations to fit tight against penetration for joint not concealed by molding.
- B. Layout acoustical unit symmetrically, with minimum number of joints.
- C. Installation:
 1. Install acoustic tiles after wet finishes have been installed and solvents have cured.
 2. Install lay-in acoustic panels in exposed grid with minimum 6 mm (1/4 inch) bearing at edges on supports.
 - a. Install tile to lay level and in full contact with exposed grid.
 - b. Replace cracked, broken, stained, dirty, or tile.
 3. Tile in concealed grid upward access suspension system:

12-01-18

- a. Install acoustical tile with joints close, straight and true to line, and with exposed surfaces level and flush at joints.
 - b. Make corners and arises full, and without worn or broken places.
 - c. Locate acoustical units providing access to service systems.
4. Adhesive applied tile:
- a. Condition of surface according to ASTM D1779, Note 1, Cleanliness of Surface, and Note 4, Rigidity of Base Surface.
 - b. Size or seal surface as recommended by manufacturer of adhesive and allow to dry before installing units.
5. Markers:
- a. Install color coded markers to identify the various concealed piping, mechanical, and plumbing systems.
 - b. Attach colored markers to exposed grid on opposite sides of the units providing access.
 - c. Attach marker on exposed ceiling surface of upward access acoustical unit.
- D. Touch up damaged factory finishes.
- 1. Repair painted surfaces with touch up primer.

1.4 CEILING SUSPENSION SYSTEM INSTALLATION

- A. General: Install according to ASTM C636.
- 1. Use direct or indirect hung suspension system or combination of both.
 - 2. Support a maximum area of 1.48 sq. m (16 sq. ft.) of ceiling per hanger.
 - 3. Prevent deflection in excess of 1/360 of span of cross runner and main runner.
 - 4. Provide additional hangers located at each corner of support components.
 - 5. Provide minimum 100 mm (4 inch) clearance from the exposed face of the acoustical units to the underside of ducts, pipe, conduit, secondary suspension channels, concrete beams or joists; and steel beam or bar joist unless furred system is shown.
 - 6. Provide main runners minimum 1200 mm (48 inches) in length.
 - 7. Install hanger wires vertically. Angled wires are not acceptable except for seismic restraint bracing wires.
- B. Direct Hung Suspension System: ASTM C635.

12-01-18

1. Support main runners by hanger wires attached directly to the structure overhead.
 2. Maximum spacing of hangers, 1200 mm (4 feet) on centers unless interference occurs by mechanical systems. Use indirect hung suspension system where not possible to maintain hanger spacing.
- C. Anchorage to Structure:
1. Concrete:
 - a. Install hanger inserts and wire loops required for support of hanger and bracing wire. Install hanger wires with looped ends through steel deck when steel deck does not have attachment device.
 - b. Use eye pins or threaded studs with screw-on eyes in existing or already placed concrete structures to support hanger and bracing wire. Install in sides of concrete beams or joists at mid height.
 2. Steel:
 - a. Install carrying channels for attachment of hanger wires.
 - 1) Size and space carrying channels to support load within performance limit.
 - 2) Attach hangers to steel carrying channels, spaced four feet on center, unless area supported or deflection exceeds the amount specified.
 - b. Attach carrying channels to the bottom flange of steel beams spaced not 1200 mm (4 feet) on center before fireproofing is installed. Weld or use steel clips for beam attachment.
 - c. Attach hangers to bottom chord of bar joists or to carrying channels installed between the bar joists when hanger spacing prevents anchorage to joist. Rest carrying channels on top of the bottom chord of the bar joists, and securely wire tie or clip to joist.
- D. Indirect Hung Suspension System: ASTM C635.
1. Space carrying channels for indirect hung suspension system maximum 1200 mm (4 feet) on center. Space hangers for carrying channels maximum 2400 mm (8 feet) on center or for carrying channels less than 1200 mm (4 feet) on center so as to insure that specified requirements are not exceeded.

12-01-18

2. Support main runners by specially designed clips attached to carrying channels.

E. Seismic Ceiling Bracing System:

1. Install according to ASTM E580.
2. Connect bracing wires to structure above as specified for anchorage to structure and to main runner or carrying channels of suspended ceiling at bottom.

1.5 CEILING TREATMENT

A. Moldings:

1. Install metal wall molding at perimeter of room, column, or edge at vertical surfaces.
2. Install special shaped molding at changes in ceiling heights and at other breaks in ceiling construction to support acoustical units and to conceal their edges.

B. Perimeter Seal:

1. Install perimeter seal between vertical leg of wall molding and finish wall, partition, and other vertical surfaces.
2. Install perimeter seal to finish flush with exposed faces of horizontal legs of wall molding.

C. Existing ceiling:

1. Where extension of existing ceilings occurs, match existing.
2. Where acoustical units are salvaged and reinstalled or joined, use salvaged units within a space. Do not mix new and salvaged units within a space which results in contrast between old and new acoustic units.
3. Comply with specifications for new acoustical units for new units required to match appearance of existing units.

1.6 CLEANING

- A. Remove excess adhesive before adhesive sets.
- B. Clean exposed surfaces. Remove contaminants and stains.

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

12-01-18

Page Intentionally Left Blank

01-01-21

SECTION 09 65 13
RESILIENT BASE AND ACCESSORIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Resilient base (RB) adhered to interior walls and partitions.

1.2 RELATED REQUIREMENTS

A. Section 09 65 16, RESILIENT SHEET FLOORING: Sheet Flooring Integral Base.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

F1861-16.....Resilient Wall Base.

D4259-18.....Preparation of Concrete by Abrasion Prior to
Coating Application.

C. International Concrete Repair Institute (ICRI):

310.2R-2013.....Selecting and Specifying Concrete Surface
Preparation for Sealers, Coatings, Polymer
Overlays, and Concrete Repair.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA,
AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Description of each product.
2. Adhesives and primers indicating manufacturer's recommendation for each application.
3. Installation instructions.

C. Samples:

1. Resilient Base: 150 mm (6 inches) long, each type and color.

D. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
2. Low Pollutant-Emitting Materials:
 - a. Stair Treads and Sheet Rubber Flooring: Submit Floor Score label.
 - b. Show volatile organic compound types and quantities.

01-01-21

E. Operation and Maintenance Data:

1. Care instructions for each exposed finish product.

1.5 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.6 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight facility.
- B. Protect products from damage when handling and during construction operations.

1.7 FIELD CONDITIONS

- A. Environment:
 1. Product Temperature: Minimum 21 degrees C (70 degrees F) for minimum 48 hours before installation.
 2. Work Area Ambient Temperature Range: 21 to 27 degrees C (70 to 80 degrees F) continuously, beginning 48 hours before installation.
 3. Install products when building is permanently enclosed and when wet construction is completed, dried, and cured.

1.8 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 PRODUCTS

- A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Provide each product from one manufacturer and from one production run.

2.2 RESILIENT BASE

- A. Resilient Base: 3 mm (1/8 inch) thick, 100 mm (4 inches) high.
 1. Type: Rubber or vinyl; use one type throughout.
 2. ASTM F1861, Type TP thermoplastic rubber or Type TV thermoplastic vinyl, Group 2 - layered.
- B. Applications:
 1. Carpet Flooring Locations: Style A - Straight.
 2. Other Locations: Style B - Cove.

01-01-21

2.3 PRIMER (FOR CONCRETE FLOORS)

- A. Primer: Type recommended by adhesive manufacturer.

2.4 LEVELING COMPOUND (FOR CONCRETE FLOORS)

- A. Leveling Compound: Provide products mixed with latex or polyvinyl acetate resins.

2.5 ADHESIVES

- A. Adhesives: Low pollutant-emitting, water based type recommended by adhered product manufacturer for each application.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
- C. Remove existing base to permit new installation.
 - 1. Dispose of removed materials.
- D. Correct substrate deficiencies.
 - 1. Fill cracks, pits, and depressions with leveling compound.
 - 2. Remove protrusions; grind high spots.
 - 3. Apply leveling compound to achieve 3 mm (1/8 inch) in 3 m (10 feet) maximum surface variation.
- E. Clean substrates. Remove contaminants capable of affecting subsequently installed product's performance.
 - 1. Mechanically clean concrete floor substrate according to ASTM D4259.
 - 2. Surface Profile: ICRI Guideline No. 310.2R.
- F. Allow substrate to dry and cure.
- G. Perform flooring manufacturer's recommended bond, substrate moisture content, and pH tests.

3.2 INSTALLATION GENERAL

- A. Install products according to manufacturer's instructions.
 - 1. When instructions deviate from specifications, submit proposed resolution for Contracting Officer consideration.

3.3 RESILIENT BASE INSTALLATION

- A. Applications:
 - 1. Install resilient base in rooms scheduled on Drawings.
 - 2. Install resilient base on casework and locker toe spaces, and other curb supported fixed equipment.

01-01-21

3. Extend resilient base into closets, alcoves, and cabinet knee spaces, and around columns within scheduled room.
- B. Lay out resilient base with minimum number of joints.
 1. Length: 600 mm (24 inches) minimum, each piece.
 2. Locate joints 150 mm (6 inches) minimum from corners and intersection of adjacent materials.
- C. Installation:
 1. Apply adhesive uniformly for full contact between resilient base and substrate.
 2. Set resilient base with hairline butted joints aligned along top edge.
- D. Factory form corners and end stops.
 1. V-groove back of outside corner.
 2. V-groove face of inside corner and notch cove for miter joint.
- E. Roll resilient base ensuring complete adhesion.

3.4 CLEANING

- A. Remove excess adhesive before adhesive sets.
- B. Clean exposed resilient base surfaces. Remove contaminants and stains.
 1. Clean with mild detergent. Leave surfaces free of detergent residue.
- C. Polish exposed resilient base to gloss sheen.

3.5 PROTECTION

- A. Protect products from construction traffic and operations.
 1. Maintain protection until directed by Contracting Officer's Representative.
- B. Replace damaged products and re-clean.
 1. Damaged Products include cut, gouged, scraped, torn, and unbonded products.

- - E N D - -

05-01-18

SECTION 09 65 16
RESILIENT SHEET FLOORING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Welded seam sheet flooring (WSF) with heat welded seams and integral cove base.

1.2 RELATED REQUIREMENTS

- A. Section 09 06 00, SCHEDULE FOR FINISHES: Color, Pattern and Texture.
- B. Section 09 65 13, RESILIENT BASE AND ACCESSORIES: Resilient Base over Base of Lockers, Equipment and Casework.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. ASTM International (ASTM):
1. D4259-88(2012) - Abrading Concrete.
 2. E648-15e1 - Standard Test Method for Critical Radiant Flux of Floor-Covering Systems Using a Radiant Heat Energy Source.
 3. E662-15a - Standard Test Method for Specific Optical Density of Smoke Generated by Solid Materials.
 4. F1303-04(2014) - Sheet Vinyl Floor Covering with Backing.
 5. F1913-04(2014) - Vinyl Sheet Floor Covering Without Backing.
- C. International Concrete Repair Institute (ICRI):
1. 310.2R-13 - Selecting and Specifying Concrete Surface Preparation for Sealers, Coatings, and Polymer Overlays, and Concrete Repair.
- D. SCS Global Services (SCS):
1. FloorScore.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
1. Show size, configuration, and fabrication and installation details.
- B. Manufacturer's Literature and Data:
1. Description of each product.
 2. Application and installation instructions.
 3. Warranty.
- C. Samples:

05-01-18

1. Sheet material, 38 mm by 300 mm (1-1/2 inch by 12 inch), of each color and pattern with welded seam using specified welding rod .
2. Cap strip and fillet strip, 300 mm (12 inches) for integral base.
3. Shop Drawings and Certificates: Layout of joints showing patterns where joints are expressed, and type and location of obscure type joints. Indicate orientation of directional patterns.
4. Certificates: Quality Control Certificate Submittals and lists specified in paragraph, QUALIFICATIONS.
5. Edge strips: 150 mm (6 inches) long each type.
6. Primer: Pint container, each type.
- D. Certificates: Certify each product complies with specifications.
 1. Heat welded seaming is manufacturer's prescribed method of installation.
- E. Qualifications: Substantiate qualifications comply with specifications.
 1. Manufacturer with project experience list.
 2. Installer with project experience list.

1.5 QUALITY ASSURANCE

- A. Installer Qualifications: A company specializing in installation with minimum three (3) years' experience and employs experienced flooring installers who have retained, and currently hold, an INSTALL Certification, or a certification from a comparable certification program.
 1. Installers to be certified by INSTALL or a comparable certification program with the following minimum criteria:
 - a. US Department of Labor approved four (4) year apprenticeship program, 160 hours a year.
 - b. Career long training.
 - c. Manufacturer endorsed training.
 - d. Fundamental journeyman skills certification.

1.6 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

05-01-18

1.7 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight conditioned facility.
- B. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

- A. Environment:
 - 1. Work Area Ambient Temperature Range: Minimum 18 to 38 degrees C (65 to 100 degrees F) continuously, beginning 48 hours before installation. Maintain room temperature above 18 degrees C (65 degrees F) after installation.
 - 2. Install products when building is permanently enclosed and when wet construction is completed, dried, and cured.

1.9 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."
- B. Manufacturer's Warranty: Warrant resilient sheet flooring against material and manufacturing defects.
 - 1. Warranty Period: 10 years.

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

- A. Sheet Flooring:
 - 1. Critical Radiant Flux: ASTM E648; 0.45 watts per sq.cm or more, Class I.
 - 2. Smoke Density: ASTM E662; less than 450.

2.2 PRODUCTS - GENERAL

- A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Provide vinyl sheet color and pattern from one production run.

2.3 WELDED SEAM SHEET FLOORING

- A. Welded Seam Sheet Flooring (WSF): ASTM F1860; Type I and Type II rubber, with backing.
 - 1. Wear Surface: Smooth.
 - 2. Wear Layer Thickness: Minimum 1.0 mm (0.040 inches).
 - 3. Total Thickness: 2 mm (0.080 inches).
- B. Sheet Size: Provide maximum size sheet produced by manufacturer to minimize joints.
 - 1. Minimum Width: 1200 mm (48 inches).

05-01-18

2.4 ACCESSORIES

- A. Bonding Chemical: Flooring manufacturer's standard seam bonding chemical.
- B. Welding Rod: Flooring manufacturer's standard, in color matching field color of sheet flooring.
- C. Adhesives: Water resistant type recommended by flooring manufacturer to suit application.
- D. Base Accessories:
 - 1. Fillet Strip: 19 mm (3/4 inch) radius fillet strip compatible with flooring material.
 - 2. Cap Strip: Zero edge J-Shape extruded flanged reducer strip compatible with flooring material approximately 25 mm (1 inch) exposed height with 13 mm (1/2 inch) flange.
- E. Leveling Compound:
 - 1. Provide cementitious type with latex or polyvinyl acetate resins additive.
- F. Primer:
 - 1. Type recommended by adhesive or flooring manufacturer.
- G. Edge Strips:
 - 1. Extruded aluminum, mill finish, mechanically cleaned.
 - 2. 28 mm (1-1/8 inch) wide, 6 mm (1/4 inch) thick, bevel one edge to 3 mm (1/8 inch) thick.
 - 3. Drill and counter sink edge strips for flat head screws. Space holes near ends and approximately 225 mm (9 inches) on center.
 - 4. Fasteners: Stainless steel, type to suit application.
- H. Sealant:
 - 1. As specified in Section 07 92 00, JOINT SEALANTS.
 - 2. Compatible with flooring.
- I. Polish: Type recommended by flooring manufacturer to suit application and anticipated traffic.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
- C. Remove existing sheet flooring to permit new installation.
 - 1. Do not use solvents for removing adhesives.

05-01-18

2. Dispose of removed materials.
- D. Ensure interior finish work such as plastering, drywall finishing, concrete, terrazzo, ceiling work, and painting work is complete and dry before installation.
 1. Complete mechanical, electrical, and other work above ceiling line.
 2. Ensure heating, ventilating, and air conditioning systems are installed and operating in order to maintain temperature and humidity requirements.
- E. Correct substrate deficiencies.
 1. Fill cracks, pits, and dents with leveling compound.
 2. Grind, sand, or cut away protrusions. Grind high spots.
 3. Level flooring substrate to 3 mm (1/8 inch) maximum variation.
- F. Clean substrates. Remove contaminants capable of affecting subsequently installed product's performance.
 1. Mechanically clean concrete floor substrate according to ASTM D4259.
 2. Surface Profile: ICRI 310.2R CSP 3 to CSP 4.
- G. Perform flooring manufacturer's recommended bond, substrate moisture content, and pH tests.
- H. Broom or vacuum clean substrates immediately before flooring installation.
- I. Primer: Apply primer according to manufacturer's instructions.

3.2 INSTALLATION - GENERAL

- A. Install products according to manufacturer's instructions.
 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

3.3 INSTALLATION OF FLOORING

- A. Flooring Layout:
 1. Arrange pattern in one direction with side and end joints pattern matched.
 2. Extend flooring wall-to-wall, under cabinets, casework, laboratory and pharmacy furniture, and other equipment for seamless flooring installation.
 3. Arrange sheets to minimize seams.
 4. Locate seams in inconspicuous and low traffic areas, minimum 150 mm (6 inches) away from parallel joints in flooring substrates.

05-01-18

- B. Match edges of flooring for color shading and pattern at seams.
- C. Install flooring flush with adjacent floor finishes.
- D. Extend flooring into toe spaces, door reveals, closets, and similar openings.
- E. Install flooring fully adhered to substrate.
 - 1. Air pockets or loose edges are not acceptable.
 - 2. Trim sheet materials tight to flooring penetrations; seal joints at pipe with waterproof sealant specified in Section 07 92 00, JOINT SEALANTS.
- F. Butt joints tight, without gaps and bulges.
- G. Installation of Edge Strips:
 - 1. Install edge strips at flooring terminations and transitions to other floor finishes.
 - 2. Locate edge strips under center lines of doors unless otherwise indicated.
 - 3. Set edge strips in adhesive and mechanically fasten to substrate.

3.4 INTEGRAL COVE BASE INSTALLATION

- A. Set preformed fillet strip at floor intersection with walls and other vertical surfaces.
- B. Extend flooring over fillet strip and 150 mm (6 inches) up wall surface.
- C. Form straight or radius internal and external corners to suit Application.
- D. Adhere base to wall surface.
- E. Terminate base exposed top edge with cap strip. Seal cap strip to wall with sealant.
- F. Weld joints as specified for flooring.

3.5 HEAT WELDING

- A. Heat weld joints of flooring and base using welding rod.
- B. Rout joint, insert welding rod into routed space, and fuse flooring and welding rods for seamless, watertight installation.
 - 1. Fuse joints for seamless weld.
- C. Finish joints flush, free from voids, and recessed or raised areas.

3.6 CLEANING

- A. Remove excess adhesive before adhesive sets.
- B. Clean and polish materials.

05-01-18

- C. Vacuum floor thoroughly.
- D. Perform initial maintenance according to flooring manufacturer's instructions.
 - 1. Delay washing flooring until adhesive is fully set and welded joints can contain wash water.

3.7 PROTECTION

- A. Protect flooring from traffic and construction operations.
- B. Keep traffic off sheet flooring for minimum 24 hours after installation.
- C. Cover flooring with reinforced kraft paper, and plywood or hardboard.
- D. Remove protective materials immediately before acceptance.
- E. Repair damage.
- F. Apply polish to vinyl flooring.
- G. Buff flooring to uniform sheen.

- - E N D - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

05-01-18

Page Intentionally Left Blank

05-01-18

SECTION 09 65 19
RESILIENT TILE FLOORING

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies the installation of vinyl tile flooring, and accessories required for a complete installation.

1.2 RELATED WORK:

- A. B. Resilient Base: Section 09 65 13, RESILIENT BASE AND ACCESSORIES.
- B. Subfloor Testing and Preparation: Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.
- C. E. Color, Pattern and Texture for Resilient Tile Flooring and Accessories: Section 09 06 00, SCHEDULE FOR FINISHES.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Resilient material manufacturer's recommendations for adhesives, underlayment, primers, and polish.
 - 3. Application, installation and maintenance instructions.
- C. Samples:
 - 1. Tile: Each type, color, thickness and finish.
 - 2. Edge Strips: Each type, color, thickness and finish.
 - 3. Feature Strips: Each type, color, thickness and finish.
- D. Shop Drawings:
 - 1. Layout of patterns as shown on the construction documents.
 - 2. Edge strip locations showing types and detail cross sections.
- E. Test Reports:
 - 1. Abrasion resistance: Depth of wear for each tile type and color and volume loss of tile, certified by independent laboratory. Tested per ASTM F510/F510M.
 - 2. Moisture and pH test results as per Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

05-01-18

1.4 DELIVERY:

- A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number and date of manufacture.
- B. Materials from containers which have been distorted, damaged or opened prior to installation are not acceptable.

1.5 STORAGE:

- A. Store materials in a clean, dry, enclosed space off the ground, protected from harmful weather conditions and at temperature and humidity conditions recommended by the manufacturer. Protect adhesives from freezing. Store flooring, adhesives, and accessories in the spaces where they will be installed for at least 48 hours before beginning installation.

1.6 QUALITY ASSURANCE:

- A. Installer Qualifications: A company specializing in installation with minimum three (3) years' experience and employs experienced flooring installers who have retained, and currently hold, an INSTALL Certification, or a certification from a comparable certification program.
 - 1. Installers to be certified by INSTALL or a comparable certification program with the following minimum criteria:
 - a. US Department of Labor approved four (4) year apprenticeship program, 160 hours a year.
 - b. Career long training.
 - c. Manufacturer endorsed training.
 - d. Fundamental journeyman skills certification.
- B. Furnish product type materials from the same production run.

1.7 WARRANTY:

- A. Construction Warranty: Comply with FAR clause 52.246-21, "Warranty of Construction".

1.8 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. ASTM International (ASTM):

05-01-18

- D2047-11.....Test Method for Static Coefficient of Friction
of Polish-Coated Flooring Surfaces as Measured
by the James Machine
- D2240-05 (R2010)Test Method for Rubber Property-Durometer
Hardness
- D4078-02 (R2008)Water Emulsion Floor Finish
- E648-14c.....Critical Radiant Flux of Floor Covering Systems
Using a Radiant Energy Source
- E662-14.....Specific Optical Density of Smoke Generated by
Solid Materials
- E1155/E1155M-14.....Determining Floor Flatness and Floor Levelness
Numbers
- F510/F510M-14.....Resistance to Abrasion of Resilient Floor
Coverings Using an Abrader with a Grit Feed
Method
- F710-11.....Preparing Concrete Floors to Receive Resilient
Flooring
- F925-13.....Test Method for Resistance to Chemicals of
Resilient Flooring
- F1700-13a.....Solid Vinyl Floor Tile
- F1869-11.....Test Method for Measuring Moisture Vapor
Emission Rate of Concrete Subfloor Using
Anhydrous Calcium Chloride
- F2170-11.....Test Method for Determining Relative Humidity
in Concrete Floor Slabs Using in Situ Probes
- C. Code of Federal Regulation (CFR):
- 40 CFR 59.....Determination of Volatile Matter Content, Water
Content, Density Volume Solids, and Weight
Solids of Surface Coating
- D. International Standards and Training Alliance (INSTALL):

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS:

- A. Provide adhesives, underlayment, primers, and polish recommended by resilient floor material manufacturer.
- B. Critical Radiant Flux: 0.45 watts per sq. cm or more, Class I, per ASTM E648.

05-01-18

C. Smoke Density: Less than 450 per ASTM E662.

D. Slip Resistance - Not less than 0.5 when tested with ASTM D2047.

2.2 VINYL-TILE:

A. Tile Standard: ASTM F1700.

1. Class: Class I, monolithic vinyl tile.

2. Type: A, smooth surface.

2.3 ADHESIVES:

A. Provide water resistant type adhesive for flooring, base and accessories as recommended by the manufacturer to suit substrate conditions. Submit manufacturer's descriptive data, documentation stating physical characteristics, and mildew and germicidal characteristics.

2.4 PRIMER FOR CONCRETE SUBFLOORS:

A. Provide in accordance with Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

2.5 LEVELING COMPOUND FOR CONCRETE FLOORS:

A. Provide cementitious products with latex or polyvinyl acetate resins in the mix in accordance with Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

2.6 POLISH AND CLEANERS:

A. Cleaners: As recommended in writing by floor tile manufacturer.

B. Polish: ASTM D4078.

PART 3 - EXECUTION

3.1 ENVIRONMENTAL REQUIREMENTS:

- A. Maintain flooring materials and areas to receive resilient flooring at a temperature above 20 degrees C (68 degrees F) for three (3) days before application, during application and two (2) days after application, unless otherwise directly by the flooring manufacturer for the flooring being installed. Maintain a minimum temperature of 13 degrees C (55 degrees F) thereafter. Provide adequate ventilation to remove moisture from area and to comply with regulations limiting concentrations of hazardous vapors.
- B. Do not install flooring until building is permanently enclosed and wet construction in or near areas to receive tile materials is complete, dry and cured.

05-01-18

3.2 SUBFLOOR TESTING AND PREPARATION:

- A. Prepare and test surfaces to receive resilient tile and adhesive as per Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.
 - 1. Remove existing resilient floor and existing adhesive.
- B. Prepare concrete substrates in accordance with ASTM F710.
- C. Perform work regarding removal of flooring and adhesive containing asbestos as specified in Section 02 82 13.19, ASBESTOS FLOOR TILE AND MASTIC ABATEMENT.

3.3 INSTALLATION:

- A. Install in accordance with manufacturer's instructions for application and installation unless specified otherwise.
- B. Mix tile from at least two containers. An apparent line either of shades or pattern variance is not acceptable.
- C. Tile Layout:
 - 1. If layout is not shown on construction documents, lay tile symmetrically about center of room or space with joints aligned.
 - 2. Vary edge width as necessary to maintain full size tiles in the field, no edge tile to be less than 1/2 the field tile size, except where irregular shaped rooms make it impossible.
 - 3. Place tile pattern in the same direction; do not alternate tiles unless specifically indicated in the construction documents to the contrary.
- D. Application:
 - 1. Adhere floor tile to flooring substrates using a full spread of adhesive applied to substrate to produce a completed installation without open cracks, voids, raising and puckering at joints, telegraphing of adhesive spreader marks, and other surface imperfections.
 - 2. Scribe, cut, and fit floor tiles to butt neatly and tightly to vertical surfaces and permanent fixtures including built-in furniture, cabinets, pipes, outlets, and door frames.
 - 3. Extend floor tiles into toe spaces, door reveals, closets, and similar openings. Extend floor tiles to center of door openings.
 - 4. Roll tile floor with a minimum 45 kg (100 pound) roller.
- E. Seal joints at pipes with sealants in accordance with Section 07 92 00, JOINT SEALANTS.

05-01-18

F. Installation of Edge Strips:

1. Locate edge strips under center line of doors unless otherwise shown on construction documents.
2. Set resilient edge strips in adhesive. Anchor metal edge strips with anchors and screws.
3. Where tile edge is exposed, butt edge strip to touch along tile edge.
4. Where thin set ceramic tile abuts resilient tile, set edge strip against floor file and against the ceramic tile edge.

3.4 CLEANING AND PROTECTION:

- A. Clean adhesive marks on exposed surfaces during the application of resilient materials before the adhesive sets. Exposed adhesive is not acceptable.
- B. Keep traffic off resilient material for a minimum 72 hours after installation.
- C. Clean flooring as recommended in accordance with manufacturer's printed maintenance instructions and within the recommended time frame. As required by the manufacturer, apply the recommended number of coats and type of polish and/or finish in accordance with manufacturer's written instructions.
- D. When construction traffic occurs over tile, cover resilient materials with reinforced kraft paper properly secured and maintained until removal is directed by COR. At entrances and where wheeled vehicles or carts are used, cover tile with plywood, hardboard, or particle board over paper, secured and maintained until removal is directed by COR.
- E. When protective materials are removed and immediately prior to acceptance, replace damaged tile and mouldings, re-clean resilient materials.

3.5 LOCATION:

- A. Unless otherwise indicated in construction documents, install tile flooring, under areas where casework, laboratory and pharmacy furniture and other equipment occur.
- B. Extend tile flooring for room into adjacent closets and alcoves.

- - - E N D - - -

01-01-21

SECTION 09 67 23.40
RESINOUS POURED IN PLACE RESILIENT FLOORING (RES-4)

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies resinous, poured in place resilient urethane flooring with integral cove base:
1. Res-4 specifically designed for sterile fields and clean room type spaces.

1.2 RELATED WORK

- A. Section 09 06 00, SCHEDULE FOR FINISHES: Color and location of each type of resinous flooring: As indicated in.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
1. Description of each product to be provided.
 2. Application and installation instructions.
 3. Maintenance Instructions: Submit manufacturer's written instructions for recommended maintenance practices.
- C. Qualification Data: For Installer.
- D. Sustainable Submittal:
1. Product data for products having recycled content, submit documentation indicating percentages by weight of post-consumer and pre-consumer recycled content.
 - a. Include statements indicating costs for each product having recycled content.
 2. Product data for field applied, interior, paints, coatings, and primers, include printed statement of VOC content indicating compliance with environmental requirements.
- E. Samples:
1. Each color and texture specified in Section 09 06 00, SCHEDULE FOR FINISHES.
 2. Samples for verification: For each (color and texture) resinous flooring system required, 12 inches (304 mm) square, applied to a rigid backing by installer for this project.

01-01-21

3. Sample showing construction from substrate to finish surface in thickness specified and color and texture of finished surfaces. Finished flooring must match the approved samples in color and texture.

F. Shop Drawings: Include plans, sections, component details, and attachment to other trades. Indicate layout of the following:

1. Patterns.
2. Edge configuration.

G. Certifications and Approvals:

1. Manufacturer's certification of material and substrate compliance with specification.
2. Manufacturer's approval of installer.
3. Contractor's certificate of compliance with Quality Assurance requirements.

H. Warranty: As specified in this section.

1.4 QUALITY ASSURANCE

A. Manufacture Certificate: Manufacture shall certify that a particular resinous flooring system has been manufactured and in use for a minimum of five (5) years.

B. Installer Qualifications: Engage an experienced installer (applicator) who is experienced in applying resinous flooring systems similar in material, design, and extent to those indicated for this project for a minimum period of five (5) years, whose work has resulted in applications with a record of successful in-service performance, and who is acceptable to resinous flooring manufacturer.

1. Engage an installer who is certified in writing by resinous flooring manufacturer as qualified to apply resinous flooring systems indicated.
2. Contractor shall have completed at least ten (10) projects of similar size and complexity. Include list of at least five (5) projects. List must include owner (purchaser); address of installation, contact information at installation project site; and date of installation.
3. Installer's Personnel: Employ persons trained for application of specified product.

C. Source Limitations:

01-01-21

1. Obtain primary resinous flooring materials including primers, resins, hardening agents, grouting coats and finish or sealing coats from a single manufacturer.
2. Provide secondary materials, including patching and fill material, joint sealant, and repair material of type and from source recommended by manufacturer of primary materials.

D. Pre-Installation Conference:

1. Convene a meeting not less than thirty days prior to starting work.
2. Attendance:
 - a. Contractor
 - b. VA COR
 - c. Manufacturer and Installer's Representative
3. Review the following:
 - a. Environmental requirements
 - 1) Air and surface temperature
 - 2) Relative humidity
 - 3) Ventilation
 - 4) Dust and contaminants
 - b. Protection of surfaces not scheduled to be coated
 - c. Inspect and discuss condition of substrate and other preparatory work performed
 - d. Review and verify availability of material; installer's personnel, equipment needed
 - e. Design, pattern and edge conditions.
 - f. Performance of the coating with chemicals anticipated in the area receiving the resinous (urethane and epoxy mortar/cement) flooring system
 - g. Application and repair
 - h. Field quality control
 - i. Cleaning
 - j. Protection of coating systems
 - k. One-year inspection and maintenance
 - l. Coordination with other work

E. Manufacturer's Field Services: Manufacturer's representative shall provide technical assistance and guidance for surface preparation and application of resinous flooring systems.

01-01-21

F. Contractor Job Site Log: Contractor shall document daily; the work accomplished environmental conditions and any other condition event significant to the long term performance of the urethane and epoxy mortar/cement flooring materials installation. The Contractor shall maintain these records for one year after Substantial Completion.

1.5 MATERIAL PACKAGING DELIVERY AND STORAGE

- A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number and date of manufacture.
- B. Protect materials from damage and contamination in storage or delivery, including moisture, heat, cold, direct sunlight, etc.
- C. Maintain temperature of storage area between 60 and 80 degrees F (15 and 26 degrees C).
- D. Keep containers sealed until ready for use.
- E. Do not use materials beyond manufacturer's shelf life limits.
- F. Package materials in factory pre-weighed and in single, easy to manage batches sized for ease of handling and mixing proportions from entire package or packages. No On site weighing or volumetric measurements are allowed.

1.6 PROJECT CONDITIONS

- A. Environmental Limitations: Comply with resinous flooring manufacturer's written instructions for substrate temperature, ambient temperature, moisture, ventilation, and other conditions affecting resinous flooring application.
 - 1. Maintain material and substrate temperature between 65 and 85 degrees F (18 and 30 deg C) during resinous flooring application and for not less than 24 hours after application.
 - 2. Concrete substrate shall be properly cured per referenced section 03 30 00, CAST-IN-PLACE CONCRETE. Standard cure time a minimum of 30 days. A vapor barrier must be present for concrete subfloors on or below grade.
 - a. Resinous flooring applications where moisture testing resulting in readings exceeding limits as defined in this specification under part 3, section 3.4, paragraph B, shall employ an multiple component 15 mil thick system designed to suppress excess moisture in concrete.

01-01-21

b. Application at a minimum thickness of 15 mils, over properly prepared concrete substrate as defined in section 3.4.

c. Moisture suppression system must meet the design standards as follows:

B. Lighting: Provide permanent lighting or, if permanent lighting is not

Property	Test	Value	in
Tensile Strength	ASTM D638	4,400 psi	
Volatile Organic Compound Limits (V.O.C.)	EPA & LEED	25 grams per liter	
Permeance	ASTM E96 @ 16mils/ 0.4mm on concrete	0.1 perms	
Tensile Modulus	ASTM D638	1.9X10 ⁵ psi	
Percent Elongation	ASTM D638	12%	
Cure Rate	Per manufactures Data	4 hours Tack free with 24hr recoat window	
Bond Strength	ASTM D7234	100% bond to concrete failure	

place, simulate permanent lighting conditions during resinous flooring application.

C. Close spaces to traffic during resinous flooring application and for not less than 24 hours after application, unless manufacturer recommends a longer period.

1.7 WARRANTY

A. Work subject to the terms of the Article "Warranty of Construction" FAR clause 52.246-21.

B. Warranty: Manufacture shall furnish a single, written warranty covering the full assembly (including substrata) for both material and workmanship for a extended period of three (3) full years from date of installation, or provide a joint and several warranty signed on a single document by manufacturer and applicator jointly and severally warranting the materials and workmanship for a period of three (3) full

01-01-21

years from date of installation. A sample warranty letter must be included with bid package or bid may be disqualified.

1.8 APPLICABLE PUBLICATIONS

A. The publication listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. ASTM Standard C722-04 (2012), "Standard Specification for Chemical-Resistant Monolithic Floor Surfacing," ASTM International, West Conshohocken, PA, 2006, DOI: 10.1520/C0722-04R12, www.astm.org.

1. Specification covers the requirements for aggregate-filled, resin-based, monolithic surfacings for use over concrete.

C. ASTM International (ASTM):

D638-14.....Tensile Properties of Plastics

D1308-02(2013).....Effect of Household Chemicals on Clear and
Pigmented Organic Finishes

C423-17.....Sound Absorption and Sound Absorption
Coefficients by the Reverberation Room Method

D2240-15e1.....Rubber Property-Durometer Hardness

D2794-93(2019).....Resistance of Organic Coatings to the Effects
of Rapid Deformation Impact

D4060-19.....Abrasion Resistance of Organic Coatings by the
Taber Abraser

D7234-19.....Pull-Off Adhesion Strength of Coatings on
Concrete Using Portable Pull-Off Adhesion
Testers

E96/E96M-16.....Water Vapor Transmission of Materials

F970-17 (2017).....determining the recovery properties of
resilient floor covering after static
loading.F1869-16a Measuring Moisture Vapor
Emission Rate of Concrete Subfloor Using
Anhydrous Calcium Chloride

F1914-18 (2018).....Short-term indentation and residual indentation
of resilient floor covering.

F2170-19a.....Determining Relative Humidity in Concrete Floor
Slabs Using in situ Probes

01-01-21

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION FOR RES-4 (POURED IN PLACE RESILIENT)

A. System Descriptions:

1. Monolithic, multi-component urethane chemistry resinous flooring system. Multi step concrete sealing primer with resilient poured in place urethane resin base, optional decorative aggregates, High performance polyaspartic undercoats (pigment and clear options), and High performance polyurethane low VOC sealers.

B. Products: Subject to compliance with applicable fire, health, environmental, and safety requirements for storage, handling, installation, and clean up.

C. System Components: Verify specific requirements as systems vary by manufacturer. Verify build up layers and installation method. Verify compatibility with substrate. Use manufacturer's standard components, compatible with each other and as follows:

1. Primers:

- a. Resin: epoxy or urethane.
- b. Formulation Description: Multiple component high solids.
- c. Application Method: squeegee, backroll, double step second coat with squeegee application.
- d. Thickness of coat(s): 4-6mil.
- e. Number of Coats: Two wet on wet.

2. Mortar (Base):

- a. Resin: Epoxy.
- b. Formulation Description: Multiple component resilient mortar.
- c. Application Method: Rake and spike roll.
 - 1) Thickness of coat: Verify thickness as systems vary by manufacturer; approximately from 1/8 to 3/16 inch (3 to 5 mm).
- d. Aggregate: Optional aggregates to achieve aesthetics, and design requirements.
 - 1) Requires additional sanding steps.

3. Undercoat:

- a. Resin: Decorative quartz.
- b. Formulation Description: Pigmented, or clear options, multi-component, high solids.
- c. Application Method: Notched squeegee and Back roll

01-01-21

- d. Number of Coats: One or two per manufacturers requirements.
- 4. Sealer coat:
 - a. Resin: Polyaspartic coating.
 - b. Formulation Description: High performance polyurethane low VOC sealer.
 - c. Type/Finish: Clear flat.
 - d. Thickness of coat(s): 2-3mil.
 - e. Number of Coats: (2) two.
 - f. Application: Squeegee and finish roll.

D. System Characteristics:

- 1. Color and Pattern: As indicated in the Schedule for Finishes.
- 2. Integral cove base: 1 inch (25.4 mm) radius epoxy mortar cove keyed into concrete substrate and or resinous flooring mortar system. No fillers integral cove base must be troweled in place with specified resinous mortar base.
- 3. Overall System Thickness: Nominal 1/8 to 3/16 inches (3 to 5 mm).
- 4. Flooring systems used in sterile fields, operating suites, procedure rooms, or clean room spaces must comply with resistance to VHP processes, and exhibit Betadyne staining resistance. Written published documentation of compliance is to be submitted during bid process. Failure to submit will result in disqualification of bid. Temperature Range: Systems vary by manufacturer; approximate range from a minimum of 45 to 150 degrees F.
- 5. Flooring systems used in sterile fields, operating suites and

E. Physical Properties:

- 1. Physical Properties of flooring system when tested as follows:

Property	Test	Value
Hardness (Shore A)	ASTM D2240	85-80
Percent Elongation	ASTM D638	150%-200%
Impact Resistance (ft lbs)	ASTM D2794	60-140 in/lbs.
Residual indentation	ASTM F 1914	<1% thickness (140lb./64kg.load) Or equal to 0.14 % thickness (140 lb./64kg.load)

01-01-21

Static Load Limit	ASTM F970	0.002in./0.05mm (125lb./57kg. load) Or equal to 0.001in./0.025mm (250lb./113kg.load)	2. 3.
Abrasion Resistance (gm loss)	ASTM D4060	0.03	
Noise Reduction Coefficient	ASTM C 423	0.05	
Bond Strength	ASTM D7234	100% bond to concrete failure	

F. Chemical Resistance in accordance ASTM D1308 - 02(2007) "Standard Test Method for Effect of Household Chemicals on Clear and Pigmented Organic Finishes". ASTM International, West Conshohocken, PA, 2006, DOI: 10.1520/D1308-02R07, www.astm.org. No effect to the following exposures:

1. Acetic acid (5 percent)
2. Ammonium hydroxide (10 percent)
3. Citric Acid (50 percent)
4. Fatty Acid
5. Motor Oil, 20W
6. Hydrochloric acid (20 percent)
7. Sodium Chloride
8. Sodium Hypochlorite (10 percent)
9. Sodium Hydroxide (30 percent)
10. Sulfuric acid (25 percent)
11. Urine, Feces
12. Hydrogen peroxide (10 percent)

2.2 SUPPLEMENTAL MATERIALS

- A. Textured Top Coat: Type recommended or produced by manufacturer of seamless resinous flooring system, slip resistance type and profile of desired final finish.
- B. Joint Sealant: Type recommended or produced by resinous flooring manufacturer for type of service or joint conditioned indicated.
- C. Waterproof Membrane: Type recommended or produced by manufacturer of resinous floor coatings for type of service and conditions as indicated in Drawings.

01-01-21

- D. Crack Isolation Membrane: Type recommended or produced by manufacturer of resinous flooring for conditions as indicated in Drawings.
- E. Anti-Microbial Additive: Incorporate anti-microbial chemical additive to prevent growth of most bacteria, algae, fungi, mold, mildew, yeast, etc.
- F. Patching and Fill Material: Resinous product of or approved by resinous coating manufacturer for application indicated. Resinous based materials only. Cementitious or single component product are not expectable.

2.3 BASE CAP STRIP

- A. Zinc cove strip.
- B. Shape for 2mm depth of base material, "J" or "L" configuration.
- C. Finish:
 - 1. Finish exposed surfaces in accordance with NAAMM Metal Finishes Manual.

PART 3 - EXECUTION

3.1 INSPECTION

- A. Examine the areas and conditions where monolithic resinous system with integral base is to be installed with the VA COR.
- B. Moisture Vapor Emission Testing: Perform moisture vapor transmission testing in accordance with ASTM F1869 to determine the MVER of the substrate prior to commencement of the work. See section 3.4, 3.

3.2 PROJECT CONDITIONS

- A. Maintain temperature of rooms (air and surface) where work occurs, between 70 and 90 degrees F (21 and 32 degrees C) for at least 48 hours, before, during, and 24 hours after installation. Maintain temperature at least 70 degrees F (21 degrees C) during cure period.
- B. Maintain relative humidity less than 75 percent.
- C. Do not install materials until building is permanently enclosed and wet construction is complete, dry, and cured.
- D. Maintain proper ventilation of the area during application and curing time period.
 - 1. Comply with infection control measures of the VA Medical Center.

01-01-21

3.3 INSTALLATION REQUIREMENTS

- A. The manufacturer's instructions for application and installation shall be reviewed with the VA COR for the seamless resinous flooring system with integral cove base.
- B. Substrate shall be approved by manufacture technical representative.

3.4 PREPARATION

- A. General: Prepare and clean substrates according to resinous flooring manufacturer's written instructions for substrate indicated. Provide clean, dry, and neutral Ph substrate for resinous flooring application.
- B. Concrete Substrates: Provide sound concrete surfaces free of laitance, glaze, efflorescence, curing compounds, form-release agents, dust, dirt, grease, oil, and other contaminants incompatible with resinous flooring.
 - 1. Prepare concrete substrates as follows:
 - a. Shot-blast surfaces with an apparatus that abrades the concrete surface, contains the dispensed shot within the apparatus, and recirculates the shot by vacuum pickup.
 - b. Comply with manufacturer's written instructions.
 - 2. Repair damaged and deteriorated concrete according to resinous flooring manufacturer's written recommendations.
 - 3. Verify that concrete substrates are dry.
 - a. Perform anhydrous calcium chloride test, ASTM F 1869. Proceed with application only after substrates have maximum moisture-vapor-emission rate of **[3 lb of water/1000 square feet. (1.36 kg of water/92.9 square meters)]** in 24 hours.
 - b. MVT threshold for monolithic resinous flooring shall not exceed 3 lbs/1000 square feet (0.0001437 kPa) in a 24 hour period.
 - c. When MVT emission exceeds this limit, apply manufacturer's recommended vapor control primer or other corrective measures as recommended by manufacturer prior to application of flooring or membrane systems.
 - d. Perform in situ probe test, ASTM F2170. Proceed with application only after substrates do not exceed a maximum potential equilibrium relative humidity of 85 percent.
 - e. Provide a written report showing test placement and results.

01-01-21

4. Verify that concrete substrates have neutral Ph and that resinous flooring will adhere to them. Perform tests recommended by manufacturer. Proceed with application only after substrates pass testing.

C. Resinous Materials: Mix components and prepare materials according to resinous flooring manufacturer's written instructions.

D. Use patching and fill material to fill holes and depressions in substrates according to manufacturer's written instructions.

E. Treat control joints and other nonmoving substrate cracks to prevent cracks from reflecting through resinous flooring according to manufacturer's written recommendations. Allowances should be included for flooring manufacturer recommended joint fill material, and concrete crack treatment.

F. Prepare wall to receive integral cove base:

1. Verify wall material is acceptable for resinous flooring application, if not, install material (e.g. cement board) to receive base.
2. Fill voids in wall surface to receive base, install undercoats (e.g. water proofing membrane, and/or crack isolation membrane) as recommended by resinous flooring manufacturer.
3. Install base prior to flooring if required by resinous flooring manufacturer.
4. Grind, cut or sand protrusions to receive base application.

3.5 APPLICATION

A. General: Apply components of resinous flooring system according to manufacturer's written instructions to produce a uniform, monolithic wearing surface of thickness indicated.

1. Coordinate application of components to provide optimum adhesion of resinous flooring system to substrate, and optimum intercoat adhesion.
2. Cure resinous flooring components according to manufacturer's written instructions. Prevent contamination during application and curing processes.
3. At substrate expansion and isolation joints, provide joint in resinous flooring to comply with resinous flooring manufacturer's written recommendations.

01-01-21

- B. Apply joint sealant to comply with manufacturer's written recommendations.
- C. Apply Primer: over prepared substrate at manufacturer's recommended spreading rate for all areas to receive integrated cove base.
- D. Apply cove base: Trowel to wall surfaces at a 1 inch radius, before applying flooring. Apply according to manufacturer's written instructions and details including those for taping, mixing, priming, and troweling, sanding, and top coating of cove base. Round internal and external corners.
- E. Apply Primer: over prepared substrate at manufacturer's recommended spreading rate.
- F. Mortar base: Mix mortar material according to manufacturer's recommended procedures. Application should be based upon the following: Screed Rake, free-flowing mortar. Uniformly spread mortar over substrate using manufacturer's specially designed screed rake adjusted to manufacturer's recommended height. Spike-roll the mortar to remove any rake lines.
- G. Aggregates: For applications with aggregate follow manufactures installation procedures, that includes sanding steps to expose aggregates pre-mixed into mortar base.
- H. Under-Coat: Mix and apply sealer with strict adherence to manufacturer's installation procedures. Options for pigmented or clear undercoats depending on design type choice.
- I. First Sealer: Mix and apply sealer with strict adherence to manufacturer's installation procedures.
- J. Second Sealer: Mix and apply second sealer coat with strict adherence to manufacturer's installation procedures.

3.6 TOLERANCE

- A. From line of plane: Maximum 1/8 inch (3.18 mm) in total distance of flooring and base. Broadcast resinous flooring system will contour substrate. Deviation and tolerance are subject to concrete tolerance.
- B. From radius of cove: Maximum of 1/8 inch (3.18 mm) plus or 1/16-inch (1.59 mm) minus.

3.7 ENGINEERING DETAILS

- A. Chase edges to "lock" the flooring system into the concrete substrate along lines of termination.

01-01-21

- B. Penetration Treatment: Lap and seal resinous system onto the perimeter of the penetrating item by bridging over compatible elastomer at the interface to compensate for possible movement.
- C. Trenches: Continue flooring system into trenches to maintain monolithic protection. Treat cold joints to assure bridging of potential cracks.
- D. Treat floor drains by chasing the flooring system to lock in place at point of termination.
- E. Treat control joints to bridge potential cracks and to maintain monolithic protection. Treat cold joints and construction joints to bridge potential cracks and to maintain monolithic protection on horizontal and vertical surfaces as well as horizontal and vertical interfaces.
- F. Discontinue Resinous floor system at vertical and horizontal contraction and expansion joints by installing backer rod and compatible sealant after coating installation is completed. Provide sealant type recommended by manufacturer for traffic conditions and chemical exposures to be encountered.

3.8 CURING, PROTECTION AND CLEANING

- A. Cure resinous flooring materials in compliance with manufacturer's directions, taking care to prevent contamination during stages of application and prior to completion of curing process.
- B. Close area of application for a minimum of 24 hours.
- C. Protect resinous flooring materials from damage and wear during construction operation.
 - 1. Cover flooring with kraft type paper.
 - 2. Optional 6 mm (1/4 inch) thick hardboard, plywood, or particle board where area is in foot or vehicle traffic pattern, rolling or fixed scaffolding and overhead work occurs.
- D. Remove temporary covering and clean resinous flooring just prior to final inspection. Use cleaning materials and procedures recommended by resinous flooring manufacturer.

- - - E N D - - -

01-01-21

SECTION 09 68 00
CARPETING

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Section specifies carpet, molding, adhesives, and other items required for complete installation.

1.2 RELATED WORK

- A. Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES: Testing of Concrete Floors Before Installation.
- B. Section 09 06 00, SCHEDULE FOR FINISHES: Manufacturer, Color and Style of Carpet and Edge Strip.
- C. Section 09 65 13, RESILIENT BASE AND ACCESSORIES: Resilient Wall Base.

1.3 QUALITY ASSURANCE

- A. Installer Qualifications: A company specializing in carpet installation with a minimum three (3) years' experience and employing experienced flooring installers who have retained, and currently hold, an INSTALL Certification, or a certification from a comparable certification program, and a valid OSHA 10 certification.
 - 1. Installers to be certified by INSTALL or a comparable certification program with the following minimum criteria:
 - a. US Department of Labor approved four (4) year apprenticeship program, 160 hours a year.
 - b. Career long training.
 - c. Manufacturer endorsed training.
 - d. Fundamental journeyman skills certification.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Product Data:
 - 1. Manufacturer's catalog data and printed documentation stating physical characteristics, durability, resistance to fading and flame resistance characteristics for each type of carpet material and installation accessory.
 - 2. Manufacturer's printed installation instructions for the carpet, including preparation of installation substrate, seaming techniques and recommended adhesives and tapes.

01-01-21

C. Samples:

1. Carpet: "Production Quality" samples 305 x 305 mm (12 x 12 inches) of carpets, showing quality, pattern and color specified in Section 09 06 00, SCHEDULE FOR FINISHES.
2. Floor Edge Strip (Molding): 152 mm (6 inches) long of each color and type specified.
3. Base Edge Strip (Molding): 152 mm (6 inches) long of each color specified.

D. Shop Drawings: Installers layout plan showing seams and cuts for sheet carpet and carpet module.

E. Maintenance Data: Carpet manufacturer's maintenance instructions describing recommended type of cleaning equipment and material, spotting and cleaning methods and cleaning cycles.

F. Installer's Qualifications.

G. Manufacturer's warranty.

1.5 DELIVERY AND STORAGE

A. Deliver carpet in manufacturer's original wrappings and packages clearly labeled with manufacturer's brand name, size, dye lot number and related information. Transport carpet to job site in a manner that prevents damage and distortion that might render it unusable. When bending or folding is unavoidable for delivery purposes, unfold carpet and lay flat immediately.

B. Deliver adhesives in containers clearly labeled with manufacturer's brand name, number, installation instructions, safety instructions and flash points.

C. Store in a clean, dry, well-ventilated area, protected from damage and soiling. Before installation, acclimate carpet to the atmospheric conditions of the areas in which it will be installed for 2 days prior to installation

1.6 ENVIRONMENTAL REQUIREMENTS

A. Maintain areas in which carpeting is to be installed at a temperature between 18 - 35 degrees C (65 - 95 degrees F) with a maximum relative humidity of 65 percent for two (2) days before installation, during installation and for three (3) days after installation.

B. Minimum Substrate Surface Temperature: 18 degrees C (65 degrees F) at time of installation.

01-01-21

- C. Three (3) days after installation, maintain minimum temperature of 10 degrees C (50 degrees F) for the duration of the contract.

1.7 WARRANTY

- A. Construction Warranty: Comply with FAR clause 52.246-21, "Warranty of Construction".
- B. Manufacturer Warranty: Manufacturer shall warranty their carpet for a minimum of ten (10) years from date of installation and final acceptance by the Government. Submit manufacturer warranty.

1.8 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American National Standards Institute (ANSI):
ANSI/NSF 140-10.....Sustainable Carpet Assessment Standard
- C. American Association of Textile Chemists and Colorists (AATCC):
16-04.....Colorfastness to Light
134-11.....Electric Static Propensity of Carpets
165-08.....Colorfastness to Crocking: Textile Floor Coverings-AATCC Crockmeter Method
174-11.....Antimicrobial Activity Assessment of New Carpets
- D. ASTM International (ASTM):
D1335-17e1.....Tuft Bind of Pile Yarn Floor Coverings
D3278-20.....Flash Point of Liquids by Small Scale Closed-Cup Apparatus
D5116-17.....Determinations of Organic Emissions from Indoor Materials/Products
D5252-20.....Operation of the Hexapod Tumble Drum Tester
D5417-16.....Operation of the Vettermann Drum Tester
E648-19ae1.....Critical Radiant Flux of Floor-Covering Systems Using a Radiant Heat Energy Source
- E. Code of Federal Regulation (CFR):
40 CFR 59.....Determination of Volatile Matter Content, Water Content, Density Volume Solids, and Weight Solids of Surface Coating
- F. The Carpet and Rug Institute (CRI):

01-01-21

CIS.....Carpet Installation Standard

G. International Standards and Training Alliance (INSTALL)

H. International Organization for Standardization (ISO):

2551-81.....Machine-Made Textile Floor Coverings

I. U.S. Consumer Product and Safety Commission (CPSC):

16 CFR 1630.....Surface Flammability of Carpets and Rugs

PART 2 - PRODUCTS

2.1 CARPET

A. Physical Characteristics:

1. Carpet free of visual blemishes, streaks, poorly dyed areas, fuzzing of pile yarn, spots or stains and other physical and manufacturing defects.

2. Type:

a. Carpet Construction: Multi-Level Pattern Loop.

b. Carpet Type: Carpet tile, 24 by 24 inch square with 0.15 percent growth/shrink rate in accordance with ISO 2551.

c. Pile Type: Multilevel loop. Pile type and thickness must conform to ADA requirements.

d. Pile Fiber: Commercial 100 percent branded (federally registered trademark), nylon continuous filament.

Static Control: Provide static control to permanently regulate static buildup to less than 3.5 kV when tested at 20 percent relative humidity and 21 degrees C (70 degrees F) in accordance with AATCC 134.

3. Backing Materials: Provide backing for glue-down installations. For healthcare installations, provide impervious moisture backing that is 100 percent PVC free.

1) Secondary Backing: Manufacturer's standard material.

4. Appearance Retention Rating (ARR): Carpet to be tested and have the minimum 3.5 - 4.0 severe ARR when tested in accordance with either the ASTM D5252 (Hexapod) or ASTM D5417 (Vettermann) test methods using the number of cycles for short and long term tests as specified in the ASTM standard.

5. Tuft Bind: Comply with ASTM D1335 for tuft bind force required to pull a tuft or loop free from carpet backing with a minimum 36 N (8 pound) average force for modular carpet tile.

01-01-21

6. Colorfastness to Crocking: Dry and wet crocking and water bleed, comply with AATCC 165 Color Transference Chart for colors, minimum class 4 rating.
7. Colorfastness to Light (AATCC 16, Option 3): Color change between the exposed and unexposed carpet areas equivalent to a minimum of Grade 4 on the Gray Scale for Color Change after an exposure of 40 AFU (AATCC fading units) for all specified colors.
8. Delamination Strength: Minimum of 440 N/m (2.5 lb./inch) between secondary backing.
9. Flammability and Critical Radiant Flux Requirements:
 - a. Comply with 16 CFR 1630.
 - b. Test Carpet in accordance with ASTM E648.
 - c. Class I: Minimum critical radiant flux of 0.45 watts per square centimeter (2.9 watts per square inch).
10. Average Pile Yarn Density (APYD):
 - a. Other areas: Minimum APYD 4000.

2.2 ADHESIVE AND CONCRETE PRIMER

- A. Provide water resistant, mildew resistant, nonflammable, and nonstaining adhesives and concrete primers for carpet installation. Provide release adhesive for modular tile carpet as recommended by the carpet manufacturer. Provide adhesives flashpoint of minimum 60 degrees C (140 degrees F) in accordance with ASTM D3278.

2.3 SEAMING TAPE

- A. Provide tape for seams as recommended by the carpet manufacturer for the type of seam used in installation. Seam sealant is to have a maximum VOC content of 50 g/L when calculated according to 40 CFR 59, (EPA Method 24). Do not use sealants that contain 1,1,1-trichloroethane or toluene.

2.4 EDGE STRIPS (MOLDING)

- A. Vinyl Edge Strip:
 1. For use in low traffic areas. Beveled floor flange minimum 50 mm (2 inches) wide.
 2. Beveled surface to finish flush with carpet for tight joint and other side to floor finish.
 3. Color as indicated on drawings.

01-01-21

PART 3 - EXECUTION

3.1 SURFACE PREPARATION

- A. Contractor to prepare and test surfaces to receive carpet and adhesives as per Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

3.2 GENERAL INSTALLATION

- A. Isolate area of installation from rest of building.
- B. Perform all work by manufacturer's approved installers. Conduct installation in accordance with the manufacturer's printed instructions and CRI CIS.
- C. Protect edges of carpet meeting hard surface flooring with molding and install in accordance with the molding manufacturer's printed instructions.
- D. Follow ventilation, personal protection, and other safety precautions recommended by the adhesive manufacturer. Continue ventilation during installation and for at least three (3) days following installation.
- E. Do not permit traffic or movement of furniture or equipment in carpeted area for 24 hours after installation.
- F. Complete other work which would damage the carpet prior to installation of carpet.
- G. Follow carpet manufacturer's recommendations for matching pattern and texture directions.
- H. Cut openings in carpet where required for installing equipment, pipes, outlets, and penetrations. Bind or seal cut edge of sheet carpet. Use additional adhesive to secure carpets around pipes and other vertical projections.

3.3 MODULAR TILE INSTALLATION

- A. Install per CRI CIS, Adhesive Application.
- B. Lay carpet modules with pile in same direction unless specified otherwise in Section 09 06 00, SCHEDULE FOR FINISHES.
- C. Install carpet modules so that cleaning methods and solutions do not cause dislocation of modules.
- D. Lay carpet modules uniformly to provide tight flush joints free from movement when subject to traffic.

3.4 EDGE STRIPS INSTALLATION

- A. Install edge strips over exposed carpet edges adjacent to uncarpeted finish flooring.

01-01-21

- B. Anchor vinyl edge strip to floor with adhesive. Apply adhesive to edge strip and insert carpet into lip and press lip down over carpet.

3.5 PROTECTION AND CLEANING

- A. Once a carpet installation is complete, clean up scrap materials and debris, and vacuum the area, using manufacturer-approved equipment. Inspect seams carefully for evenness and protruding backing yarns, and inspect the perimeter of the installation for an acceptable finished appearance.
- B. Protect installed carpet if furniture is being moved, by laying plywood, fiberboard or porous non-staining sheeting material for minimum time practical. Based on manufacturer guidelines, protect carpet from rolling or foot traffic. Protect against other materials or renovation or construction activities, including dust, debris, paint, contractor traffic, until it is ready for its final use.
- C. Do not move furniture or equipment on unprotected carpeted surfaces.
- D. Just before final acceptance of work, remove protection and vacuum carpet clean.

- - - E N D - - -

Department of Veterans Affairs
Salem VA Medical Center
Salem, VA

VA Project No. 658-19-103
Renovate Surgical Suite - Phase II
Bid Documents: 12/30/2025

01-01-21

Page Intentionally Left Blank

01-01-21

SECTION 09 91 00
PAINTING

PART 1 - GENERAL

1.1 DESCRIPTION

A. Work of this Section includes all labor, materials, equipment, and services necessary to complete the painting and finishing as shown on the construction documents and/or specified herein, including, but not limited to, the following:

1. Prime coats which may be applied in shop under other sections.
2. Prime painting unprimed surfaces to be painted under this Section.
3. Painting items furnished with a prime coat of paint, including touching up of or repairing of abraded, damaged or rusted prime coats applied by others.
4. Painting ferrous metal (except stainless steel) exposed to view.
5. Painting galvanized ferrous metals exposed to view.
6. Painting interior concrete block exposed to view.
7. Painting gypsum drywall exposed to view.
8. Painting of wood exposed to view, except items which are specified to be painted or finished under other Sections of these specifications. Back painting of all wood in contact with concrete, masonry or other moisture areas.
9. Painting pipes, pipe coverings, conduit, ducts, insulation, hangers, supports and other mechanical and electrical items and equipment exposed to view.
10. Painting surfaces above, behind or below grilles, gratings, diffusers, louvers lighting fixtures, and the like, which are exposed to view through these items.
11. Painting includes shellacs, stains, varnishes, coatings specified, and striping or markers and identity markings.
12. Incidental painting and touching up as required to produce proper finish for painted surfaces, including touching up of factory finished items.
13. Painting of any surface not specifically mentioned to be painted herein or on construction documents, but for which painting is obviously necessary to complete the job, or work which comes within the intent of these specifications, is to be included as though specified.

01-01-21

1.2 RELATED WORK

- A. Section 01 35 26, SAFETY REQUIREMENTS: Activity Hazard Analysis.
- B. Division 05 METALS: Shop prime painting of steel and ferrous metals.
- C. Section 08 14 00, INTERIOR WOOD DOORS: Prefinished flush doors with transparent finishes.
- D. Section 09 06 00, SCHEDULE FOR FINISHES: Type of Finish, Color, and Gloss Level of Finish Coat.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Painter qualifications.
- C. Manufacturer's Literature and Data:
 - 1. Before work is started, or sample panels are prepared, submit manufacturer's literature and technical data, the current Master Painters Institute (MPI) "Approved Product List" indicating brand label, product name and product code as of the date of contract award, will be used to determine compliance with the submittal requirements of this specification. The Contractor may choose to use subsequent MPI "Approved Product List", however, only one (1) list may be used for the entire contract and each coating system is to be from a single manufacturer. All coats on a particular substrate must be from a single manufacturer. No variation from the MPI "Approved Product List" where applicable is acceptable.

1.4 DELIVERY AND STORAGE

- A. Deliver materials to site in manufacturer's sealed container marked to show following:
 - 1. Name of manufacturer.
 - 2. Product type.
 - 3. Batch number.
 - 4. Instructions for use.
 - 5. Safety precautions.
- B. In addition to manufacturer's label, provide a label legibly printed as following:
 - 1. Federal Specification Number, where applicable, and name of material.
 - 2. Surface upon which material is to be applied.
 - 3. Specify Coat Types: Prime; body; finish; etc.

01-01-21

- C. Maintain space for storage, and handling of painting materials and equipment in a ventilated, neat and orderly condition to prevent spontaneous combustion from occurring or igniting adjacent items.
- D. Store materials at site at least 24 hours before using, at a temperature between 7 and 30 degrees C (45 and 85 degrees F).

1.5 QUALITY ASSURANCE

- A. Qualification of Painters: Use only qualified journeyman painters for the mixing and application of paint on exposed surfaces. Submit evidence that key personnel have successfully performed surface preparation and application of coating on a minimum of three (3) similar projects within the past three (3) years.
- B. Paint Coordination: Provide finish coats which are compatible with the prime paints used. Review other Sections of these specifications in which prime paints are to be provided to ensure compatibility of the total coatings system for the various substrates. Upon request from other subcontractors, furnish information on the characteristics of the finish materials proposed to be used, to ensure that compatible prime coats are used. Provide barrier coats over incompatible primers or remove and re-prime as required. Notify the Contracting Officer Representative (COR) in writing of any anticipated problems using the coating systems as specified with substrates primed by others.

1.6 REGULATORY REQUIREMENTS

- A. Paint materials are to conform to the restrictions of the local Environmental and Toxic Control jurisdiction.
 - 1. Volatile Organic Compounds (VOC) Emissions Requirements: Field-applied paints and coatings that are inside the waterproofing system to not exceed limits of authorities having jurisdiction.
 - 2. Lead-Based Paint:
 - a. Comply with Section 410 of the Lead-Based Paint Poisoning Prevention Act, as amended, and with implementing regulations promulgated by Secretary of Housing and Urban Development.
 - b. Regulations concerning prohibition against use of lead-based paint in federal and federally assisted construction, or rehabilitation of residential structures are set forth in Subpart F, Title 24, Code of Federal Regulations, Department of Housing and Urban Development.

01-01-21

- c. Do not use coatings having a lead content over 0.06 percent by weight of non-volatile content.
- d. For lead-paint removal, see Section 02 83 33.13, LEAD-BASED PAINT REMOVAL AND DISPOSAL.
- 3. Asbestos: Provide materials that do not contain asbestos.
- 4. Chromate, Cadmium, Mercury, and Silica: Provide materials that do not contain zinc-chromate, strontium-chromate, Cadmium, mercury or mercury compounds or free crystalline silica.
- 5. Human Carcinogens: Provide materials that do not contain any of the ACGIH-BKLT and ACGHI-DOC confirmed or suspected human carcinogens.
- 6. Use high performance acrylic paints in place of alkyd paints.

1.7 SAFETY AND HEALTH

- A. Apply paint materials using safety methods and equipment in accordance with the following:
 - 1. Comply with applicable Federal, State, and local laws and regulations, and with the ACCIDENT PREVENTION PLAN, including the Activity Hazard Analysis (AHA) as specified in Section 01 35 26, SAFETY REQUIREMENTS. The AHA is to include analyses of the potential impact of painting operations on painting personnel and on others involved in and adjacent to the work zone.
- B. Safety Methods Used During Paint Application: Comply with the requirements of SSPC PA Guide 10.
- C. Toxic Materials: To protect personnel from overexposure to toxic materials, conform to the most stringent guidance of:
 - 1. The applicable manufacturer's Material Safety Data Sheets (MSDS) or local regulation.
 - 2. 29 CFR 1910.1000.
 - 3. ACHIH-BKLT and ACGHI-DOC, threshold limit values.

1.8 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.
- B. American Conference of Governmental Industrial Hygienists (ACGIH):
ACGIH TLV-BKLT-2012.....Threshold Limit Values (TLV) for Chemical
Substances and Physical Agents and Biological
Exposure Indices (BEIs)

01-01-21

- ACGIH TLV-DOC-2012.....Documentation of Threshold Limit Values and
Biological Exposure Indices, (Seventh Edition)
- C. ASME International (ASME):
- A13.1-07(R2013).....Scheme for the Identification of Piping Systems
- D. Code of Federal Regulation (CFR):
- 40 CFR 59.....Determination of Volatile Matter Content, Water
Content, Density Volume Solids, and Weight Solids
of Surface Coating
- E. Commercial Item Description (CID):
- A-A-1272A.....Plaster Gypsum (Spackling Compound)
- F. Federal Specifications (Fed Spec):
- TT-P-1411A.....Paint, Copolymer-Resin, Cementitious (For
Waterproofing Concrete and Masonry Walls) (CEP)
- G. Master Painters Institute (MPI):
- 1.....Aluminum Paint
- 3.....Primer, Alkali Resistant, Water Based
- 4.....Interior/ Exterior Latex Block Filler
- 5.....Exterior Alkyd Wood Primer
- 6.....Exterior, Latex for Exterior Wood Primer
- 7.....Exterior Oil Wood Primer
- 8.....Exterior Alkyd, Flat MPI Gloss Level 1
- 9.....Exterior Alkyd Enamel MPI Gloss Level 6
- 10.....Exterior Latex, Flat
- 11.....Exterior Latex, Semi-Gloss
- 15.....Exterior Latex, Low Sheen (MPI Gloss Level 3-4)
- 17.....Primer, Bonding, Waterbased
- 18.....Organic Zinc Rich Primer
- 22.....Aluminum Paint, High Heat (up to 590° - 1100F)
- 23.....Primer, Metal, Surface Tolerant
- 27.....Exterior / Interior Alkyd Floor Enamel, Gloss
- 31.....Polyurethane, Moisture Cured, Clear Gloss
- 36.....Knot Sealer
- 39.....Primer, Latex, for Interior Wood
- 40.....Exterior, Latex High Build
- 42.....Textured Coating, Latex, Flat

01-01-21

- 43.....Interior Satin Latex, MPI Gloss Level 4
- 44.....Interior Low Sheen Latex, MPI Gloss Level 2
- 45.....Interior Primer Sealer
- 46.....Interior Enamel Undercoat
- 47.....Interior Alkyd, Semi-Gloss, MPI Gloss Level 5
- 48.....Interior Alkyd, Gloss, MPI Gloss Level 6
- 50.....Interior Latex Primer Sealer
- 51.....Interior Alkyd, Eggshell, MPI Gloss Level 3
- 52.....Interior Latex, MPI Gloss Level 3
- 53.....Interior Latex, Flat, MPI Gloss Level 1
- 54.....Interior Latex, Semi-Gloss, MPI Gloss Level 5
- 59.....Interior/Exterior Alkyd Porch & Floor Enamel, Low
Gloss
- 60.....Interior/Exterior Latex Porch & Floor Paint, Low
Gloss
- 66.....Interior Alkyd Fire Retardant, Clear Top-Coat (ULC
Approved)
- 67.....Interior Latex Fire Retardant, Top-Coat (ULC
Approved)
- 68.....Interior/ Exterior Latex Porch & Floor Paint,
Gloss
- 71.....Polyurethane, Moisture Cured, Clear, Flat
- 77.....Epoxy Cold Cured, Gloss
- 79.....Marine Alkyd Metal Primer
- 90.....Interior Wood Stain, Semi-Transparent
- 91.....Wood Filler Paste
- 94.....Exterior Alkyd, Semi-Gloss
- 95.....Fast Drying Metal Primer
- 98.....High Build Epoxy Coating
- 99.....Sealer, Water-based, for Concrete Floors
- 101.....Epoxy Anti-Corrosive Metal Primer
- 107.....Primer, Rust-Inhibitive, Water-based

- 108.....High Build Epoxy Coating, Low Gloss
- 113.....Elastomeric, Pigmented, Exterior, Water-based,
Flat

01-01-21

- 114.Interior Latex, Gloss
- 115.Epoxy-Modified Latex, Interior Gloss (MPI gloss level 6)
- 118.Dry Fall, Latex Flat
- 119.Exterior Latex, High Gloss (acrylic)
- 134.Galvanized Water Based Primer
- 135.Non-Cementitious Galvanized Primer
- 138.Interior High Performance Latex, MPI Gloss Level 2
- 139.Interior High Performance Latex, MPI Gloss Level 3
- 140.Interior High Performance Latex, MPI Gloss Level 4
- 141.Interior High Performance Latex (SG) MPI Gloss Level 5
- 144.....Latex, Interior, Institutional Low Odor / VOC, (MPI Gloss Level 2)
- 145.....Latex, Interior, Institutional Low Odor / VOC, (MPI Gloss Level 3)
- 146.....Latex, Interior, Institutional Low Odor / VOC, (MPI Gloss Level 4)
- 151.....Light Industrial Coating, Interior, Water-based, (MPI Gloss Level 3)
- 153.....Light Industrial Coating, Interior, Water-based, (MPI Gloss Level 4)
- 163.....Exterior Water Based Semi-Gloss Light Industrial Coating, MPI Gloss Level 5
- 164.....Exterior, Water Based, Gloss, Light Industrial Coating, MPI Gloss Level 6

H. Society for Protective Coatings (SSPC):

- SSPC SP 1-82(R2004).....Solvent Cleaning
- SSPC SP 2-82(R2004).....Hand Tool Cleaning
- SSPC SP 3-28(R2004).....Power Tool Cleaning
- SSPC SP 10/NACE No.2.....Near-White Blast Cleaning
- SSPC PA Guide 10.....Guide to Safety and Health Requirements

I. Maple Flooring Manufacturer's Association (MFMA):

J. U.S. National Archives and Records Administration (NARA):

- 29 CFR 1910.1000.....Air Contaminants

K. Underwriter's Laboratory (UL)

01-01-21

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Conform to the coating specifications and standards referenced in PART 3. Submit manufacturer's technical data sheets for specified coatings and solvents.

2.2 PAINT PROPERTIES

- A. Use ready-mixed (including colors), except two component epoxies, polyurethanes, polyesters, paints having metallic powders packaged separately and paints requiring specified additives.
- B. Where no requirements are given in the referenced specifications for primers, use primers with pigment and vehicle, compatible with substrate and finish coats specified.
- C. Provide undercoat paint produced by the same manufacturer as the finish coats. Use only thinners approved by the paint manufacturer and use only to recommended limits.
- D. VOC test method for paints and coatings is to be in accordance with 40 CFR 59 (EPA Method 24). Part 60, Appendix A with the exempt compounds' content determined by Method 303 (Determination of Exempt Compounds) in the South Coast Air Quality Management District's (SCAQMD) "Laboratory Methods of Analysis for Enforcement Samples" manual.

2.3 BIOBASED CONTENT

- A. Paint products shall comply with following bio-based standards for biobased materials:

Material Type	Percent by Weight
Interior Paint	20 percent biobased material
Interior Paint- Oil Based and Solvent Alkyd	67 percent biobased material
Exterior Paint	20 percent biobased material
Wood & Concrete Stain	39 percent biobased content
Polyurethane Coatings	25 percent biobased content
Water Tank Coatings	59 percent biobased content
Wood & Concrete Sealer-Membrane Concrete Sealers	11 percent biobased content
Wood & Concrete Sealer-Penetrating Liquid	79 percent biobased content

01-01-21

- B. The minimum-content standards are based on the weight (not the volume) of the material.

PART 3 - EXECUTION

3.1 JOB CONDITIONS

- A. Safety: Observe required safety regulations and manufacturer's warning and instructions for storage, handling and application of painting materials.
1. Take necessary precautions to protect personnel and property from hazards due to falls, injuries, toxic fumes, fire, explosion, or other harm.
 2. Deposit soiled cleaning rags and waste materials in metal containers approved for that purpose. Dispose of such items off the site at end of each day's work.
- B. Atmospheric and Surface Conditions:
1. Do not apply coating when air or substrate conditions are:
 - a. Less than 3 degrees C (5 degrees F) above dew point.
 - b. Below 10 degrees C (50 degrees F) or over 35 degrees C (95 degrees F), unless specifically pre-approved by the COR and the product manufacturer. Under no circumstances are application conditions to exceed manufacturer recommendations.
 - c. When the relative humidity exceeds 85 percent; or to damp or wet surfaces; unless otherwise permitted by the paint manufacturer's printed instructions.
 2. Maintain interior temperatures until paint dries hard.
 3. Do no exterior painting when it is windy and dusty.
 4. Do not paint in direct sunlight or on surfaces that the sun will warm.
 5. Apply only on clean, dry and frost-free surfaces except as follows:
 - a. Apply water thinned acrylic and cementitious paints to damp (not wet) surfaces only when allowed by manufacturer's printed instructions.
 - b. Concrete and masonry when permitted by manufacturer's recommendations, dampen surfaces to which water thinned acrylic and cementitious paints are applied with a fine mist of water on hot dry days to prevent excessive suction and to cool surface.
 6. Varnishing:
 - a. Apply in clean areas and in still air.
 - b. Before varnishing vacuum and dust area.

01-01-21

c. Immediately before varnishing wipe down surfaces with a tack rag.

3.2 INSPECTION

- A. Examine the areas and conditions where painting and finishing are to be applied and correct any conditions detrimental to the proper and timely completion of the work. Do not proceed with the work until unsatisfactory conditions are corrected to permit proper installation of the work.

3.3 GENERAL WORKMANSHIP REQUIREMENTS

- A. Application may be by brush or roller. Spray application only upon acceptance from the COR in writing.
- B. Furnish to the COR a painting schedule indicating when the respective coats of paint for the various areas and surfaces will be completed. This schedule is to be kept current as the job progresses.
- C. Protect work at all times. Protect all adjacent work and materials by suitable covering or other method during progress of work. Upon completion of the work, remove all paint and varnish spots from floors, glass and other surfaces. Remove from the premises all rubbish and accumulated materials of whatever nature not caused by others and leave work in a clean condition.
- D. Remove and protect hardware, accessories, device plates, lighting fixtures, and factory finished work, and similar items, or provide in place protection. Upon completion of each space, carefully replace all removed items by workmen skilled in the trades involved.
- E. When indicated to be painted, remove electrical panel box covers and doors before painting walls. Paint separately and re-install after all paint is dry.
- F. Materials are to be applied under adequate illumination, evenly spread and flowed on smoothly to avoid runs, sags, holidays, brush marks, air bubbles and excessive roller stipple.
- G. Apply materials with a coverage to hide substrate completely. When color, stain, dirt or undercoats show through final coat of paint, the surface is to be covered by additional coats until the paint film is of uniform finish, color, appearance and coverage, at no additional cost to the Government.
- H. All coats are to be dry to manufacturer's recommendations before applying succeeding coats.

01-01-21

- I. All suction spots or "hot spots" in plaster after the application of the first coat are to be touched up before applying the second coat.
- J. Do not apply paint behind frameless mirrors that use mastic for adhering J. to wall surface.

3.4 SURFACE PREPARATION

A. General:

- 1. The Contractor shall be held wholly responsible for the finished appearance and satisfactory completion of painting work. Properly prepare all surfaces to receive paint, which includes cleaning, sanding, and touching-up of all prime coats applied under other Sections of the work. Broom clean all spaces before painting is started. All surfaces to be painted or finished are to be completely dry, clean and smooth.
- 2. See other sections of specifications for specified surface conditions and prime coat.
- 3. Perform preparation and cleaning procedures in strict accordance with the paint manufacturer's instructions and as herein specified, for each particular substrate condition.
- 4. Clean surfaces before applying paint or surface treatments with materials and methods compatible with substrate and specified finish. Remove any residue remaining from cleaning agents used. Do not use solvents, acid, or steam on concrete and masonry. Schedule the cleaning and painting so that dust and other contaminants from the cleaning process will not fall in wet, newly painted surfaces.
- 5. Maximum Moisture Content of Substrates: When measured with an electronic moisture meter as follows:
 - a. Concrete: 12 percent.
 - b. Fiber-Cement Board: 12 percent.
 - c. Masonry (Clay and CMU's): 12 percent.
 - d. Wood: 15 percent.
 - e. Gypsum Board: 12 percent.
 - f. Plaster: 12 percent.

B. Zinc-Coated (Galvanized) Metal, Aluminum, Copper and Copper Alloys Surfaces Specified Painted:

- 1. Clean surfaces to remove grease, oil and other deterrents to paint adhesion in accordance with SSPC-SP 1 (Solvent Cleaning).

01-01-21

2. Spot coat abraded and damaged areas of zinc-coating which expose base metal on hot-dip zinc-coated items with MPI 18 (Organic Zinc Rich Coating). Prime or spot prime with MPI 134 (Waterborne Galvanized Primer) or MPI 135 (Non-Cementitious Galvanized Primer) depending on finish coat compatibility.

C. Gypsum Board:

1. Remove dust, dirt, and other deterrents to paint adhesion.
2. Fill holes, cracks, and other depressions with CID-A-A-1272A finished flush with adjacent surface, with texture to match texture of adjacent surface. Patch holes over 25 mm (1-inch) in diameter as specified in Section for gypsum board.

3.5 PAINT PREPARATION

- A. Thoroughly mix painting materials to ensure uniformity of color, complete dispersion of pigment and uniform composition.
- B. Do not thin unless necessary for application and when finish paint is used for body and prime coats. Use materials and quantities for thinning as specified in manufacturer's printed instructions.
- C. Remove paint skins, then strain paint through commercial paint strainer to remove lumps and other particles.
- D. Mix two (2) component and two (2) part paint and those requiring additives in such a manner as to uniformly blend as specified in manufacturer's printed instructions unless specified otherwise.
- E. For tinting required to produce exact shades specified, use color pigment recommended by the paint manufacturer.

3.6 APPLICATION

- A. Start of surface preparation or painting will be construed as acceptance of the surface as satisfactory for the application of materials.
- B. Unless otherwise specified, apply paint in three (3) coats; prime, body, and finish. When two (2) coats applied to prime coat are the same, first coat applied over primer is body coat and second coat is finish coat.
- C. Apply each coat evenly and cover substrate completely.
- D. Allow not less than 48 hours between application of succeeding coats,
- D. except as allowed by manufacturer's printed instructions, and approved by D. COR.
- E. Apply by brush or roller. Spray application for new or existing occupied spaces only upon approval by acceptance from COR in writing.

01-01-21

1. Apply painting materials specifically required by manufacturer to be applied by spraying.
2. In new construction and in existing occupied spaces, where paint is applied by spray, mask or enclose with polyethylene, or similar air tight material with edges and seams continuously sealed including items specified in "Building and Structural Work Field Painting"; "Work not Painted"; motors, controls, telephone, and electrical equipment, fronts of sterilizes and other recessed equipment and similar prefinished items.

F. Do not paint in closed position operable items such as access doors and panels, window sashes, overhead doors, and similar items except overhead roll-up doors and shutters.

3.7 PRIME PAINTING

- A. After surface preparation, prime surfaces before application of body and finish coats, except as otherwise specified.
- B. Spot prime and apply body coat to damaged and abraded painted surfaces before applying succeeding coats.
- C. Additional field applied prime coats over shop or factory applied prime coats are not required except for exterior exposed steel apply an additional prime coat.
- D. Prime rabbets for stop and face glazing of wood, and for face glazing of steel.
- E. Gypsum Board:
 1. Surfaces scheduled to have MPI 53 (Interior Latex, Flat), MPI 51 (Interior Alkyd, Eggshell) respectively.
 2. Primer: MPI 50 (Interior Latex Primer Sealer) except use MPI 45 (Interior Primer Sealer) MPI 46 (Interior Enamel Undercoat) in shower and bathrooms.
 3. Surfaces scheduled to receive vinyl coated fabric wall covering:
 - a. Use MPI 45 (Interior Primer Sealer).
 - b. Use MPI 101 (Cold Curing Epoxy Primer) for surfaces scheduled to receive MPI 77 (Epoxy Cold Cured, Gloss).

3.8 INTERIOR FINISHES

- A. Apply following finish coats over prime coats in spaces or on surfaces specified in Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Metal Work:

01-01-21

1. Apply to exposed surfaces.
2. Omit body and finish coats on surfaces concealed after installation except electrical conduit containing conductors over 600 volts.
3. Ferrous Metal, Galvanized Metal, and Other Metals Scheduled:
 - a. Apply two (2) coats of MPI 47 (Interior Alkyd, Semi-Gloss) unless specified otherwise.
 - b. One (1) coat of MPI 46 (Interior Enamel Undercoat) plus one coat of MPI 47 (Interior Alkyd, Semi-Gloss) on exposed interior surfaces of alkyd-amine enamel prime finished windows.

C. Gypsum Board:

1. One (1) coat of MPI 45 (Interior Primer Sealer), MPI 46 (Interior Enamel Undercoat), plus one (1) coat of MPI 139 (Interior High Performance Latex, MPI Gloss level 5).
2. Paint Finish:
 - a. One (1) coat of MPI 45 Interior Primer Sealer), MPI 46 (Interior Enamel Undercoat), plus one (1) coat of MPI 48 (Interior Alkyd Gloss).
 - b. Two (2) coats of MPI 51 (Interior Alkyd, Eggshell).

D. Miscellaneous:

1. Apply where specified in Section 09 06 00, SCHEDULE FOR FINISHES.

3.9 REFINISHING EXISTING PAINTED SURFACES:

- A. Clean, patch and repair existing surfaces as specified under "Surface Preparation". No "telegraphing" of lines, ridges, flakes, etc., through new surfacing is permitted. Where this occurs, sand smooth and re-finish until surface meets with COR's approval.
- B. Remove and reinstall items as specified under "General Workmanship Requirements".
- C. Remove existing finishes or apply separation coats to prevent non compatible coatings from having contact.
- D. Patched or Replaced Areas in Surfaces and Components: Apply spot prime and body coats as specified for new work to repaired areas or replaced components.
- E. Except where scheduled for complete painting apply finish coat over plane surface to nearest break in plane, such as corner, reveal, or frame.
- F. Refinish areas as specified for new work to match adjoining work unless specified or scheduled otherwise.

01-01-21

- G. Sand or dull glossy surfaces prior to painting.
- H. Sand existing coatings to a feather edge so that transition between new and existing finish will not show in finished work.

3.10 PAINT COLOR:

- A. Color and gloss of finish coats is specified in Section 09 06 00, SCHEDULE FOR FINISHES.
- B. For additional requirements regarding color see Articles, "REFINISHING EXISTING PAINTED SURFACE" and "MECHANICAL AND ELECTRICAL FIELD PAINTING SCHEDULE".
- C. Coat Colors:
 - 1. Color of priming coat: Lighter than body coat.
 - 2. Color of body coat: Lighter than finish coat.
 - 3. Color prime and body coats to not show through the finish coat and to mask surface imperfections or contrasts.
- D. Painting, Caulking, Closures, and Fillers Adjacent to Casework:
 - 1. Paint to match color of wall where casework is stainless steel or plastic laminate.

3.11 BUILDING AND STRUCTURAL WORK FIELD PAINTING:

- A. Painting and finishing of interior and exterior work except as specified here-in-after.
 - 1. Painting and finishing of new and existing work including colors and gloss of finish selected is specified in Finish Schedule, Section 09 06 00, SCHEDULE FOR FINISHES.
 - 2. Painting of disturbed, damaged and repaired or patched surfaces when entire space is not scheduled for complete repainting or refinishing.
 - 3. Painting of galvanized metal.
 - 4. Identity painting and safety painting.
- B. Building and Structural Work not Painted:
 - 1. Prefinished items:
 - a. Casework, doors, elevator entrances and cabs, metal panels, wall covering, and similar items specified factory finished under other sections.
 - b. Factory finished equipment and pre-engineered metal building components such as metal roof and wall panels.
 - 2. Finished surfaces:
 - a. Hardware except ferrous metal.

01-01-21

- b. Anodized aluminum, stainless steel, chromium plating, copper, and brass, except as otherwise specified.
- c. Signs, fixtures, and other similar items integrally finished.
- 3. Concealed surfaces:
 - a. Inside dumbwaiter, elevator and duct shafts, interstitial spaces, pipe basements, crawl spaces, pipe tunnels, above ceilings, attics, except as otherwise specified.
 - b. Inside walls or other spaces behind access doors or panels.
 - c. Surfaces concealed behind permanently installed casework and equipment.
- 4. Moving and operating parts:
 - a. Shafts, chains, gears, mechanical and electrical operators, linkages, and sprinkler heads, and sensing devices.
 - b. Tracks for overhead or coiling doors, shutters, and grilles.
- 5. Labels:
 - a. Code required label, such as Underwriters Laboratories Inc., Intertek Testing Service or Factory Mutual Research Corporation.
 - b. Identification plates, instruction plates, performance rating, and nomenclature.
- 6. Galvanized metal:
 - a. Exterior chain link fence and gates, corrugated metal areaways, and gratings.
 - b. Gas Storage Racks.
 - c. Except where specifically specified to be painted.
- 7. Metal safety treads and nosings.
- 8. Gaskets.
- 9. Concrete curbs, gutters, pavements, retaining walls, exterior exposed foundations walls and interior walls in pipe basements.
- 10. Face brick.
- 11. Structural steel encased in concrete, masonry, or other enclosure.
- 12. Structural steel to receive sprayed-on fire proofing.
- 13. Ceilings, walls, columns in interstitial spaces.
- 14. Ceilings, walls, and columns in pipe basements.
- 15. Wood Shingles.

01-01-21

3.12 IDENTITY PAINTING SCHEDULE:

- A. Identify designated service in new buildings or projects with extensive remodeling in accordance with ASME A13.1, unless specified otherwise, on exposed piping, piping above removable ceilings, piping in accessible pipe spaces, interstitial spaces, and piping behind access panels. For existing spaces where work is minor match existing.
1. Legend may be identified using snap-on coil plastic markers or by paint stencil applications.
 2. Apply legends adjacent to changes in direction, on branches, where pipes pass through walls or floors, adjacent to operating accessories such as valves, regulators, strainers and cleanouts a minimum of 12.2 M (40 feet) apart on straight runs of piping. Identification next to plumbing fixtures is not required.
 3. Locate Legends clearly visible from operating position.
 4. Use arrow to indicate direction of flow using black stencil paint.
 5. Identify pipe contents with sufficient additional details such as temperature, pressure, and contents to identify possible hazard. Insert working pressure shown on construction documents where asterisk appears for High, Medium, and Low Pressure designations as follows:
 - a. High Pressure - 414 kPa (60 psig) and above.
 - b. Medium Pressure - 104 to 413 kPa (15 to 59 psig).
 - c. Low Pressure - 103 kPa (14 psig) and below.
 - d. Add Fuel oil grade numbers.
 6. Legend name in full or in abbreviated form as follows:

PIPING	COLOR OF EXPOSED PIPING	COLOR OF BACKGROUND	COLOR OF LETTERS	LEGEND ABBREVIATIONS
Blow-off		Green	White	Blow-off
Boiler Feedwater		Green	White	Blr Feed
A/C Condenser Water Supply		Green	White	A/C Cond Wtr Sup
A/C Condenser Water Return		Green	White	A/C Cond Wtr Ret
Chilled Water Supply		Green	White	Ch. Wtr Sup
Chilled Water Return		Green	White	Ch. Wtr Ret
Shop Compressed Air		Blue	White	Shop Air
Air-Instrument Controls		Green	White	Air-Inst Cont
Drain Line		Green	White	Drain

01-01-21

Emergency Shower		Green	White	Emg Shower
High Pressure Steam		Green	White	H.P. _____ *
High Pressure Condensate				
Return		Green	White	H.P. Ret _____ *
Medium Pressure Steam		Green	White	M. P. Stm _____ *
Medium Pressure Condensate				
Return		Green	White	M.P. Ret _____ *
Low Pressure Steam		Green	White	L.P. Stm _____ *
Low Pressure Condensate				
Return		Green	White	L.P. Ret _____ *
High Temperature Water				
Supply		Green	White	H. Temp Wtr Sup
High Temperature Water				
Return		Green	White	H. Temp Wtr Ret
Hot Water Heating Supply		Green	White	H. W. Htg Sup
Hot Water Heating Return		Green	White	H. W. Htg Ret
Gravity Condensate Return		Green	White	Gravity Cond Ret
Pumped Condensate Return		Green	White	Pumped Cond Ret
Vacuum Condensate Return		Green	White	Vac Cond Ret
Fuel Oil - Grade		Brown	White	Fuel Oil-Grade
(Diesel Fuel included under Fuel Oil)				
Boiler Water Sampling		Green	White	Sample
Chemical Feed		Green	White	Chem Feed
Continuous Blow-Down		Green	White	Cont. B D
Pumped Condensate		Green	White	Pump Cond
Pump Recirculating		Green	White	Pump-Recirc.
Vent Line		Green	White	Vent
Alkali		Orange	Black	Alk
Bleach		Orange	Black	Bleach
Detergent		Yellow	Black	Det
Liquid Supply		Yellow	Black	Liq Sup
Reuse Water		Yellow	Black	Reuse Wtr
Cold Water (Domestic)	White	Green	White	C.W. Dom
Hot Water (Domestic)				
Supply	White	Yellow	Black	H.W. Dom
Return	White	Yellow	Black	H.W. Dom Ret
Tempered Water	White	Yellow	Black	Temp. Wtr
Ice Water				
Supply	White	Green	White	Ice Wtr
Return	White	Green	White	Ice Wtr Ret
Reagent Grade Water		Green	White	RG
Reverse Osmosis		Green	White	RO
Sanitary Waste		Green	White	San Waste

01-01-21

Sanitary Vent		Green	White	San Vent
Storm Drainage		Green	White	St Drain
Pump Drainage		Green	White	Pump Disch
Chemical Resistant Pipe				
Waste		Orange	Black	Acid Waste
Vent		Orange	Black	Acid Vent
Atmospheric Vent		Green	White	ATV
Silver Recovery		Green	White	Silver Rec
Oral Evacuation		Green	White	Oral Evac
Fuel Gas		Yellow	Black	Gas
Fire Protection Water				
Sprinkler	Red	Red	White	Auto Spr
Standpipe	Red	Red	White	Stand
Sprinkler	Red	Red	White	Drain

7. Electrical Conduits containing feeders over 600 volts, paint legends using 50 mm (2 inch) high black numbers and letters, showing the voltage class rating. Provide legends where conduits pass through walls and floors and at maximum 6096 mm (20 foot) intervals in between. Use labels with yellow background with black border and words Danger High Voltage Class, as indicated on drawings.
8. See Sections for methods of identification, legends, and abbreviations of the following:
 - a. Regular compressed air lines: Section 22 15 00, GENERAL SERVICE COMPRESSED-AIR SYSTEMS.
 - b. Dental compressed air lines: Section 22 61 13.74, DENTAL COMPRESSED-AIR PIPING / Section 22 61 19.74, DENTAL COMPRESSED-AIR EQUIPMENT.
 - c. Laboratory gas and vacuum lines: Section 22 62 00, VACUUM SYSTEMS FOR LABORATORY AND HEALTHCARE FACILITIES / Section 22 63 00, GAS SYSTEMS FOR LABORATORY AND HEALTHCARE FACILITIES.
 - d. Medical Gases and vacuum lines: Section 22 62 00, VACUUM SYSTEMS FOR LABORATORY AND HEALTHCARE FACILITIES / Section 22 63 00, GAS SYSTEMS FOR LABORATORY AND HEALTHCARE FACILITIES.
 - e. Conduits containing high voltage feeders over 600 volts:

Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS /
Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS /
Section 28 05 28.33, CONDUITS AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY.

01-01-21

B. Fire and Smoke Partitions:

1. Identify partitions above ceilings on both sides of partitions except within shafts in letters not less than 64 mm (2 1/2 inches) high.
2. Stenciled message: "SMOKE BARRIER" or, "FIRE BARRIER" as applicable.
3. Locate not more than 6096 mm (20 feet) on center on corridor sides of partitions, and with a least one (1) message per room on room side of partition.
4. Use semi-gloss paint of color that contrasts with color of substrate.

C. Identify columns in pipe basements and interstitial space:

1. Apply stenciled number and letters to correspond with grid numbering and lettering indicated on construction documents.
2. Paint numbers and letters 101 mm (4 inches) high, locate 45 mm (18 inches) below overhead structural slab.
3. Apply on four (4) sides of interior columns and on inside face only of exterior wall columns.
4. Color:
 - a. Use black on concrete columns.
 - b. Use white or contrasting color on steel columns.

3.13 PROTECTION CLEAN UP, AND TOUCH-UP:

- A. Protect work from paint droppings and spattering by use of masking, drop cloths, removal of items or by other approved methods.
- B. Upon completion, clean paint from hardware, glass and other surfaces and items not required to be painted of paint drops or smears.
- C. Before final inspection, touch-up or refinished in a manner to produce solid even color and finish texture, free from defects in work which was damaged or discolored.

- - - E N D - - -

01-01-21

SECTION 09 96 59

**RESINOUS SPECIALTY GLAZED COATING SYSTEMS FOR WALLS, CEILINGS,
WALLBOARD, AND BLOCK CMU (RES-W1, RES-W2)**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Section includes surface preparation and application of high-performance seamless glazed wall coating system on new or existing surfaces including masonry CMU and wall board substrates.
 - 1. Interior substrates:
 - a. Wall board substrates.
- B. Wall systems consist of multi component epoxy and or urethane resins, primer base and finishing coats.

1.2 RELATED WORK

- A. Section 09 06 00, SCHEDULE FOR FINISHES: Color and room finish schedule.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Description of each product to be provided.
 - 2. Application and installation instructions.
 - 3. Maintenance Instructions: Submit manufacturer's written instructions for recommended maintenance practices.
- C. Qualification Data: For Installer.
- D. Sustainable Submittal:
 - 1. Product data for field applied, interior, paints, coatings, and primers, include printed statement of VOC content indicating compliance with environmental requirements.
- E. Samples:
 - 1. Each color and texture specified in Section 09 06 00, SCHEDULE FOR FINISHES.
 - 2. Samples for verification: For each (color and texture) resinous wall/ceiling system required, 6 inches (152 mm) square, applied to a rigid backing by installer for this project.

01-01-21

3. Sample showing construction from substrate to finish surface in thickness specified and color and texture of finished surfaces. Finished resinous coating must match the approved samples in color and texture.

F. Shop Drawings: Include plans, sections, component details, and attachment to other trades. Indicate layout of the following:

1. Patterns.
2. Edge configuration.

G. Certification and Approval:

1. Manufacturer's certification of material and substrata compliance.
2. Manufacturer's approval of installer.
3. Contractor's certificate of compliance with Quality Assurance requirements.

H. Warranty: As specified in this section.

1.4 QUALITY ASSURANCE

- A. Manufacture Certificate: Manufacture shall certify that a particular resinous coating for wall/ceiling system has been in use for a minimum of five years.
- B. Manufacturer Field Technical Service Representatives: Resinous flooring manufacture shall retain the services of Field Technical Service Representatives who are trained specifically on installing the system to be used on the project.
 1. Field Technical Services Representatives shall be employed by the system manufacture to assist in the quality assurance and quality control process of the installation and shall be available to perform field problem solving issues with the installer.
- C. Installer Qualifications: Engage an installer who is certified in writing by resinous product manufacturer, who is experienced in applying resinous coating for wall/ceiling systems similar in material, design, and extent to those indicated for this project for a minimum period of 5 years, whose work has resulted in applications with a record of successful in-service performance, and who is acceptable to resinous coating for wall/ceiling manufacturer.
- D. Source Limitations:

01-01-21

1. Obtain resinous coating materials including primers, resins, hardening agents, grouting coats and finish or sealing coats from a single manufacturer.
- E. Mockups: Apply mockups of each coating system indicated to verify preliminary selections made under sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.
1. Architect will select one surface to represent surfaces and conditions for application of each coating system specified in Part 3.
 - a. Wall and Ceilings provide samples of at least 100 square feet
 - b. Other Items: Architect will designate items or areas required.
 2. Test mock-up with anticipated chemicals to be used in the designated area.
 3. Approved mockups not damaged during the testing may become part of the completed work if undisturbed at time of Substantial Completion.
 4. Sign off from VA COR on texture must be complete before installation of wall/ceiling system.
 5. Final approval of color selections will be based on mockups.
 - a. Preliminary color selections are not approved; apply additional mockups of additional colors selected by Architect at no added cost to Owner.
- F. Pre-Installation Conference
1. Convene a meeting not less than thirty days prior to starting work.
 2. Attendance:
 - a. Contractor
 - b. VA COR
 - c. Manufacturer and Installer's Representative
 3. Review the following:
 - a. Environmental requirements
 - 1) Air and surface temperature
 - 2) Relative humidity
 - 3) Ventilation
 - 4) Dust and contaminates
 - b. Protection of surfaces not scheduled to be coated

01-01-21

- c. Inspect and discuss condition of substrate and other preparatory work performed
- d. Review and verify availability of material; installer's personnel, equipment needed
- e. Design and edge conditions.
- f. Performance of the coating with chemicals anticipated in the area receiving the resinous coating system
- g. Application and repair
- h. Field quality control
- i. Cleaning
- j. Protection of coating systems
- k. One-year inspection and maintenance
- l. Coordination with other work

1.5 MATERIAL PACKAGING DELIVERY AND STORAGE

- A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number, date of manufacture and mixing/thinning instructions.
- B. Protect materials from damage and contamination in storage or delivery, including moisture, heat, cold, direct sunlight, etc.
- C. Maintain temperature of storage area between 60 and 80 degrees F (15 and 26 degrees C).
- D. Keep containers sealed until ready for use.
- E. Do not use materials beyond manufacturer's shelf life limits.
- F. Package materials in factory pre-weighed and in single, easy to manage batches sized for ease of handling and mixing proportions from entire package or packages.

1.6 PROJECT CONDITIONS

- A. Environmental Limitations: Comply with resinous wall/ceiling manufacturer's written instructions for substrate temperature, ambient temperature, moisture, ventilation, and other conditions affecting resinous wall/ceiling applications.
 - 1. Maintain material and substrate temperature between 65 and 85 degrees F (18 and 30 degrees C) during resinous wall/ceiling application and for not less than 24 hours after application.

01-01-21

- B. Lighting: Provide permanent lighting or, if permanent lighting is not in place, simulate permanent lighting conditions during resinous wall/ceiling application.
- C. Close spaces to traffic during resinous wall/ceiling application and for not less than 24 hours after application, unless manufacturer recommends a longer period.

1.7 WARRANTY

- A. Warranty: Manufacture shall furnish a single, written warranty covering the full assembly (including substrata) for both material and workmanship for an extended period of (3) full years from date of installation, or provide a joint and several warranty signed on a single document by manufacturer and applicator jointly and severally warranting the materials and workmanship for a period of (3) full years from date of installation. A sample warranty letter must be included with bid package or bid may be disqualified.

1.8 APPLICABLE PUBLICATIONS

- A. The publication listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. ASTM International (ASTM):
 - D412-16.....Vulcanized Rubber and Thermoplastic Elastomers—Tension
 - D2240-15e1.....Rubber Property—Durometer Hardness
 - D4060-19.....Abrasion Resistance of Organic Coatings by the Taber Abrader
 - C531-18-.....Linear Shrinkage and Coefficient of Thermal Expansion of Chemical-Resistant Mortars, Grouts, Monolithic Surfacing, and Polymer Concretes
- C. Chemical Resistance in accordance ASTM D1308 - 02(2007) "Standard Test Method for Effect of Household Chemicals on Clear and Pigmented Organic Finishes". ASTM International, West Conshohocken, PA, 2006, DOI: 10.1520/D1308-02R07, www.astm.org. No effect to the following exposures:
 - 1. Acetic acid (5%)
 - 2. Ammonium hydroxide (10%)

01-01-21

3. Citric Acid (50%)
4. Fatty Acid
5. Motor Oil, 20W
6. Hydrochloric acid (20%)
7. Sodium Chloride
8. Sodium Hypochlorite (10%)
9. Sodium Hydroxide (30%)
10. Sulfuric acid (25%)
11. Urine, Feces
12. Hydrogen peroxide (10%)

PART 2 - PRODUCTS

2.1 SPECIAL WALL COATING SYSTEM.

A. Physical Properties of flooring system when tested as follows:

Property	Test	Value
Hardness	ASTM D2240	80-85
Abrasion Resistance	ASTM D4060	0.03 gm maximum weight loss
Fire Resistance of dry film	ASTM E84	Class A
Temperature Limitations	Continuous exposure Intermittent exposure	140°F/60°C 200°F/93°C
VOC		< 50 G/L
Bond Strength		100% to Substrate Failure

2.2 SYSTEM DESCRIPTION (RES-W2)

A. Multi-layer, liquid applied flexible urethane wall system for high abuse applications. The system is designed for use on vertical services to provide a seamless, smooth, tough surface that promotes a sanitary environment. The system consists of a two-component, urethane elastomeric urethane base coat and two topcoats of two-component waterborne polyurethane.

B. System Characteristics.

1. Color and pattern: As indicated on drawings.
2. Wearing Surface: Smooth
3. Overall System Thickness: 12-15 mils.

01-01-21

C. System Components: Manufactures standard components that are compatible with each other including primer, sealer, and finish coats as standard with manufacture of resinous system and as follows:

1. Primer Formulation Description: Multi-component 100% solids epoxy.

2. Formulation Description: Body Coat:

a. Resin: Urethane.

b. Formulation Description: Two component urethane membrane.

c. Application Method: Roller.

d. Coats: One

e. Thickness: 10 mils (wet).

3. First Top Coat:

a. Resin: Waterborne aliphatic.

b. Formulation Description: Two Component, high solids.

c. Type: Pigmented.

d. Finish: Gloss.

e. Number of coats: One.

f. Application Method: back roll or spray apply.

4. Second Top Coat:

a. Resin: Waterborne aliphatic.

b. Formulation Description: Two Component high solids.

c. Type: Pigmented.

d. Finish: Gloss.

e. Number of coats: One.

f. Application Method: back roll or spray apply.

g. Optional 100% solids urethane for UV and increased chemical protection.

D. VOC Content: Products shall comply with VOC limits of authorities having jurisdiction.

1. Flat Paints and Coatings: 50 g/L.

2. Nonflat Paints and Coatings: 150 g/L.

3. Primers, Sealers: 200 g/L.

2.3 SPECIAL WALL COATING SYSTEM.

A. Physical Properties of flooring system when tested as follows:

Property	Test	Value
Hardness	ASTM D2240	70
Elongation	ASTM D412	200%

01-01-21

Tensile Strength	ASTM D412	1200 psi
Abrasion Resistance	ASTM D4060 (CS-17 Wheel)	0.03 gm maximum weight loss
Fire Resistance of dry film	ASTM E84	Class B Flame Spread 40 Smoked developed 115
Temperature Limitations	Continuous exposure Intermittent exposure	140°F/60°C 200°F/93°C
VOC		< 50 G/L
Bond Strength		100% to substrate failure

2.4 ACCESSORY MATERIALS

- A. Patching and Fill Material: Resinous product of or approved by resinous manufacturer for application indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. General: Prepare and clean substrates according to resinous flooring manufacturer's written instructions for substrate indicated. Provide clean, dry, and neutral Ph substrate for resinous wall coating application.
- B. Clean sub-surface of all contaminants.
- C. Examine surfaces for defects that cannot be corrected by procedures specified herein.
- D. Any wall board application must have a (1) one, (2) two, or (3) three finish level. With an appropriate spackle compound. Finish Level (4) four, or (5) five is not acceptable and result in wall system failures, due to gypsum mud poor cohesive strengths.

3.2 PROJECT CONDITIONS

- A. Maintain temperature of materials above 21 degrees C (70 degrees F), for 48 hours before installation.
- B. Maintain temperature of rooms where work occurs, between 21 and 32 degrees C (70 and 90 degrees F) for at least 48 hours, before, during,

01-01-21

and 24 hours after installation. Maintain temperature at least 21 degrees C (70 degrees F) thereafter.

- C. Do not install materials until building is permanently enclosed and wet construction is complete, dry, and cured.
- D. Area free of other trades during and for a period of 24 hours after installation.

3.3 INSTALLATION REQUIREMENTS

- A. The respective manufacturer's instructions for application and installation will be considered for use when approved by the COR.
- B. Submit proposed installation deviation from this specification to the COR indicating the differences in the method of installation.

3.4 PREPARATION

- A. General: Prepare and clean substrates according to manufacturer's written instructions for substrate indicated. Provide clean, dry, and neutral Ph substrate for resinous application.
- B. Substrates: Provide sound surfaces free of laitance, glaze, efflorescence, curing compounds, form-release agents, dust, dirt, grease, oil, and other contaminants incompatible.
 - 1. Repair damaged and deteriorated substrate according to manufacturer's written recommendations.
 - 2. Verify that substrates are dry.
- B. Resinous Materials: Mix components and prepare materials according to manufacturer's written instructions.
- C. Use patching and fill material to fill holes and depressions in substrates according to manufacturer's written instructions.

3.5 APPLICATION

- A. General: Apply components of resinous wall system according to manufacturer's written instructions to produce a uniform, monolithic surface of thickness indicated.
 - 1. Coordinate application of components to provide optimum adhesion of resinous system to substrate, and optimum inter-coat adhesion.
 - 2. Cure resinous components according to manufacturer's written instructions. Prevent contamination during application and curing processes.
- B. Apply Primer: over prepared substrate at manufacturer's recommended spreading rate.

01-01-21

- C. Base coat(s): Apply according to manufacturer's written instructions and details including those for taping, mixing, priming, and troweling, sanding, and top coating.
- D. Topcoat: Mix and roller apply the topcoat(s) with strict adherence to manufacturer's installation procedures and coverage rates.

3.6 CURING, PROTECTION AND CLEANING

- A. Cure resinous materials in compliance with manufacturer's directions, taking care to prevent contamination during stages of application and prior to completion of curing process.
- B. Close area of application for a minimum of 24 hours.
- C. Protect resinous materials from damage and wear during construction operation.

- - - END - - -