

STATEMENT OF WORK

Mirrors, SS Shelves & Dual Shades OM revised

Brockton



Department of Veterans Affairs
VA Boston Healthcare System
940 Belmont Street Building 4
Brockton, MA 02301



STATEMENT OF WORK CONTENTS

Justification
Scope of Work
Bid Requirements
Furniture Requirements
Other Considerations for Proposal
Contractor Requirements
Payment Schedule
Non- Personal Services Statement
Drawing and Sketch

Justification

VA Boston Healthcare System's Brockton campus 2 Units in Building 4; Rehab and Dementia wards is currently in need of new mirrors and shelving units for the Restrooms and Patient Rooms. The building is undergoing renovations. Appropriate furniture and accessories as selected below will help to create a 'home-like, non-institutional, and patient centered environment that imbue healing familiarity and a sense of being valued' while receiving treatment at the VA Boston Healthcare System. These wards also require strict design guidelines to be met that can be found under the Mental Health Environment of Care (MHEOC) checklist and Mental Health guideline. A safe patient environment is the number one priority of this project. All furnishings must meet strict guidelines for patient safety.

Scope of Work

The selected contractor will be required to remove and dispose of existing damaged mirrors (2) and supply, deliver and install the new mirrors and shelving to VA Boston Healthcare Systems Brockton campus located at 940 Belmont Street, Brockton, MA 02301, Building 4- C Units for First and Second Floors. Building 4 is equipped with a loading dock on the South side off Vestibule B012, shown in hashed lines on the attached drawing. The service elevator is currently out of order. The vendor will need to coordinate to use the loading dock that is shared with EMS and Laundry, as they use this daily for laundry deliveries for all buildings on campus. The timeframe for delivery receipt shall be no later than 14 weeks following award of contract, with coordination of specific dates mutually agreed upon by VA Boston's Healthcare System, Brockton and the selected contractor. Timeliness for delivery is of the utmost importance. Any work being done on the unit while open must take special precautions.

Parts
Etc.

70 - Mirror - Essential

18" x 36" capsule shaped framed mirror
Finish: Polished Chrome or Nickel



70 - SSM Shelving Units - Bathroom Solid Surface Wall Shelf

Features

Size: 12"x12"x5"

Material: Solid surface


Surface Polishing: Glossy or Matte




Installation Services

The awarded contract will need to provide design, removal/disposal of existing furniture and installation services to the VA to ensure that the awarded products fit in the space and ensure that the staff and equipment is accommodated.


- FF&E to be selected from manufacturer's standard offerings which need to include at a minimum solid surface, powder coated surfaces, painted metal, trim, hardware, and/or fabric samples must be submitted with this proposal.
- Shop drawings: Provide complete shop and installation drawings, including all dimensioning, details and accessory items.
- Indicate location and wall reinforcement and anchorages on drawing submittal.
- Product data: Provide catalog and model numbers for all components and sub-components.
- Samples: Provide samples of all materials, fabrics, finishes, and colors as requested by VA.
- Removal of and relocation of (16) paper towel dispensers (as shown in photos)
- Removal of and disposal of existing mirrors (2)
- Installation to follow attached sketch and as shown below:

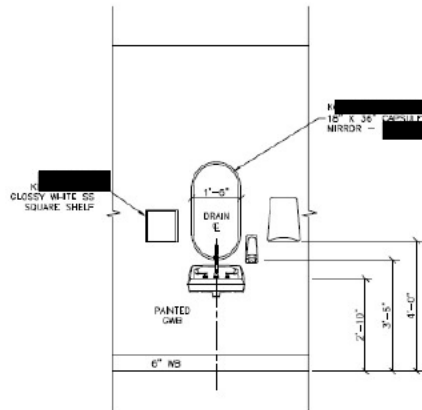

TYPICAL BEDROOM
1 WASH STATION INTERIOR ELEVATION
A SCALE 1/2"=1'-0" LOCATIONS: ROOM CLK - C SIDE BEDROOMS

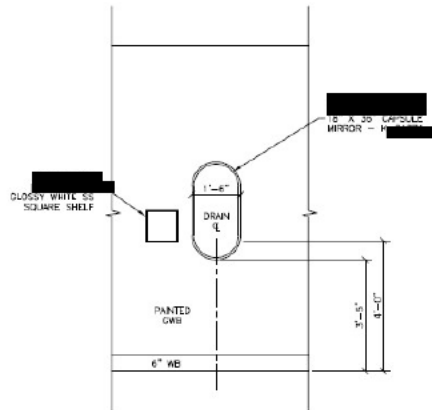


TYPICAL BEDROOM
1 SINK INTERIOR ELEVATION
B SCALE 1/2"=1'-0" LOCATIONS: ROOM CLK - C SIDE BEDROOMS

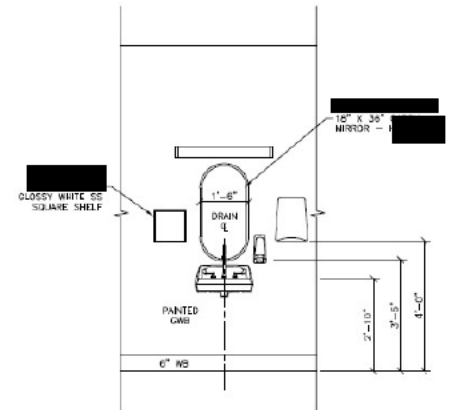

TYPICAL BATHROOM
1 SINK INTERIOR ELEVATION
C SCALE 1/2"=1'-0" LOCATIONS: ROOM CLK - C SIDE BEDROOMS

Example Photos of items to be removed, paper towel dispensers to be reinstalled by VA Engineering staff

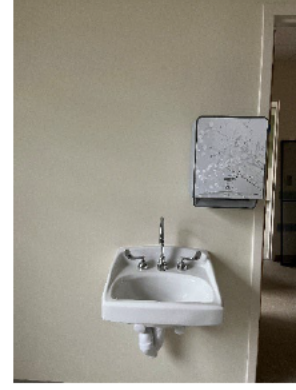

Qty. 104 - Dual Solar Window Shades

Dimensions: 54" high x 48" wide +/- ; Note, some widths and heights may vary

Manufacturer: Draper Flex or approved equal

Type: Dual shade with fascia

Operator: Clutch Mechanism with continuous metal chain loop

Back Roller Shade Fabric: SB9000 Series, Room Darkening in oyster

Front Sheer Roller Shade Fabric: ATF2900 Series, 5% Open Weave in oyster/beige

Fascia: Ivory (provide end caps if shades require outside mount)

Mount: Preferred Inside

Include: Window cleat for loop chains and single fascia for windows that are mulled together (96" wide +/-)

BRAND NAME OR EQUAL SALIENT CHARACTERISTICS

- "Or equal" products must include manufacturer's product brochure including specification information.

SHADE PERFORMANCE REQUIREMENTS

[REDACTED]

[REDACTED]

[REDACTED]

1. [REDACTED]

2. [REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED] agency records schedules.

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

1

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]