

Project #4: Storage Facility

1.0 Project Overview – Construct Storage Facility:

Provide two (2) General Purpose warehouse Facilities in support of Production at Anniston Army Depot. Work includes 35-foot-high bay enclosed spaces (each roughly 32,000 SF) to accommodate storage of all current combat vehicles including those with largest size and turning radius, specifically the M88 (Recovery Vehicle) family of vehicles and the Wheeled Amphibious Combat Vehicle (ACV). The high bay structure will be industrial, insulated, pre-engineered metal buildings (PEMB) with appropriate finishes for storage of military vehicles. Architectural standing seam gable roofs. Minimum 9-inch-thick reinforced concrete slab on grade required to support tracked vehicles. These facilities will have no assigned personnel and no planned accommodations for paved sidewalk or parking areas. However, both facilities will include restrooms, overhead doors, cyber security, fire protection and alarm systems. Supporting facilities include utility services and connection (electrical, water, sanitary sewer, and natural gas), fire pumps, security lighting, pavement markings, curbs and gutters, storm drainage, information systems to include fiber optic cable service, lightning protection systems, landscaping, signage, and site improvements. Heating, ventilation, and exhaust fans for the open bay workflow. Heating and cooling are required in the restrooms. Measures in accordance with the Department of War (DoW) Minimum Antiterrorism for Buildings standards will be provided. Access for individuals with disabilities will be provided.

Please Note: The SF of facilities (roughly 32,000 SF) is provided as a rough guide. Actual size to be determined during design development and may vary.

2.0 Core Regulatory Compliance:

All design and construction activities must strictly adhere to the latest versions of the Unified Facilities Criteria (UFC), including but not limited to:

- UFC 1-200-01: DoD Building Code
- All relevant architectural, structural, mechanical, electrical, and fire protection UFCs.
- All installation-specific regulations and standards for ANAD.

3.0 General Scope of Work for Demolition of Buildings & Construction of new Facility:

These two (2) warehouses will be constructed on vacant gravel lots currently used for miscellaneous open-air storage. No facility will be demolished as part of this effort.

3.2 Construction of two warehouses:


Scope of work covered in Section 1 above. Overhead view of sites depicted below. Please note that the need for two (2) warehouses, instead of one, is driven by site constraints. There is a culvert bifurcation the two sites.

DRAFT Anniston FORGE 2 - W91QEY-26-R-A002
RPP – Attachment 0004



The Contractor shall furnish all labor, materials, equipment, and supervision necessary to build these warehouses at the site location.

Note: Civil, Site and Architectural Plans included in this project scope for informational purposes only and should be used as a reference document.

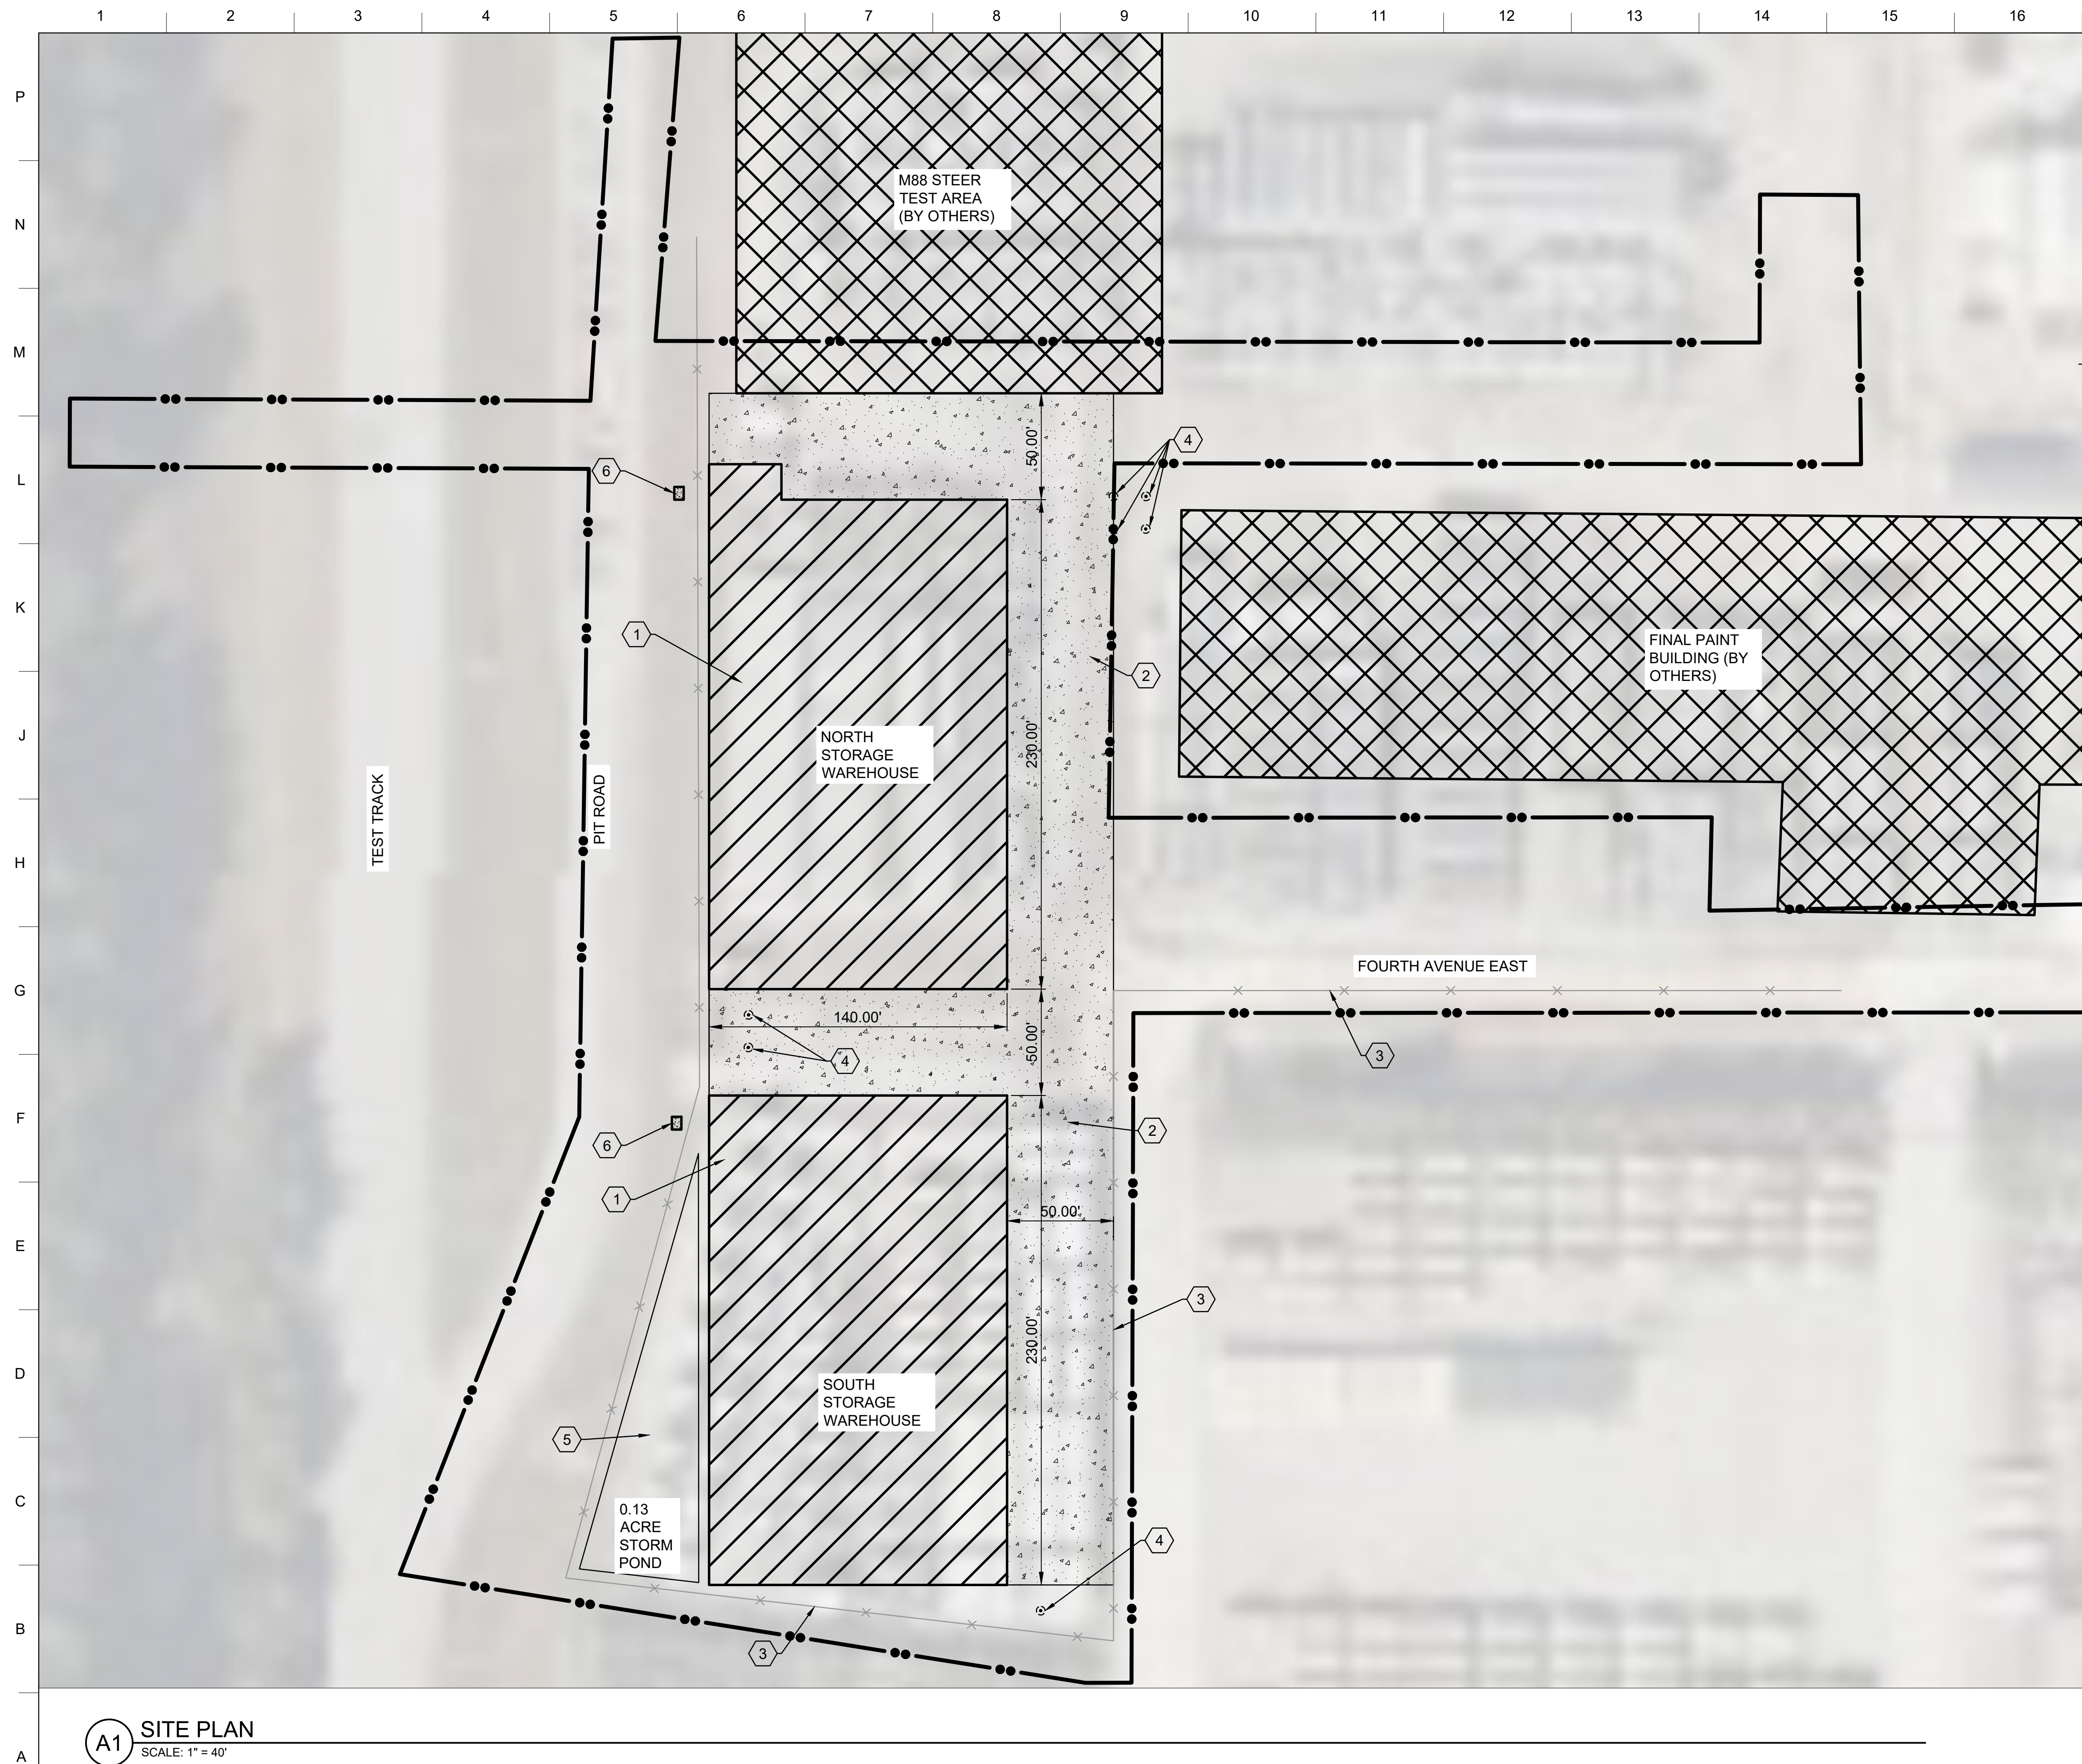

GENERAL NOTES

1. NO PARKING SPACES SHALL BE PROVIDED AS PART OF THIS PROJECT
2. ACCESS ROADWAY RADII TO BE DESIGNED TO SUPPORT M88 - FURTHER INFORMATION FORTHCOMING FOR M88 TURNING RADII



SHEET KEY NOTES

- | | |
|---|-------------------------------------|
| 1 | PROPOSED BUILDING |
| 2 | REINFORCED CONCRETE PAVEMENT |
| 3 | EXISTING DLA FENCE LINE DELINIATION |
| 4 | BOLLARD |
| 5 | RETENTION POND |
| 6 | CONCRETE TRANSFORMER PAD |



LEGEND

-
- 
 FUTURE BUILDING FOOTPRINT (BY OTHERS)

 PROPOSED BUILDING FOOTPRINT

 PROPOSED CONCRETE PAVEMENT

 PROPOSED BOLLARD

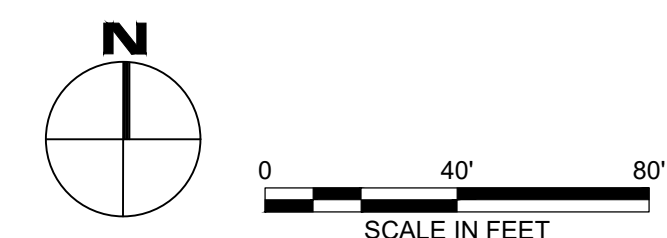 EXISTING FENCE

 PROJECT LIMITS



**US Army Corps
of Engineers ®**

[illegible][illegible]

ANNISTON ARMY DEPOT, ANNISTON AL
BUILDINGS 293, 294 & 295 REPLACEMENT


CIVIL
SITE PLAN

SHEET ID

CS101

File Path:


Plot Date:

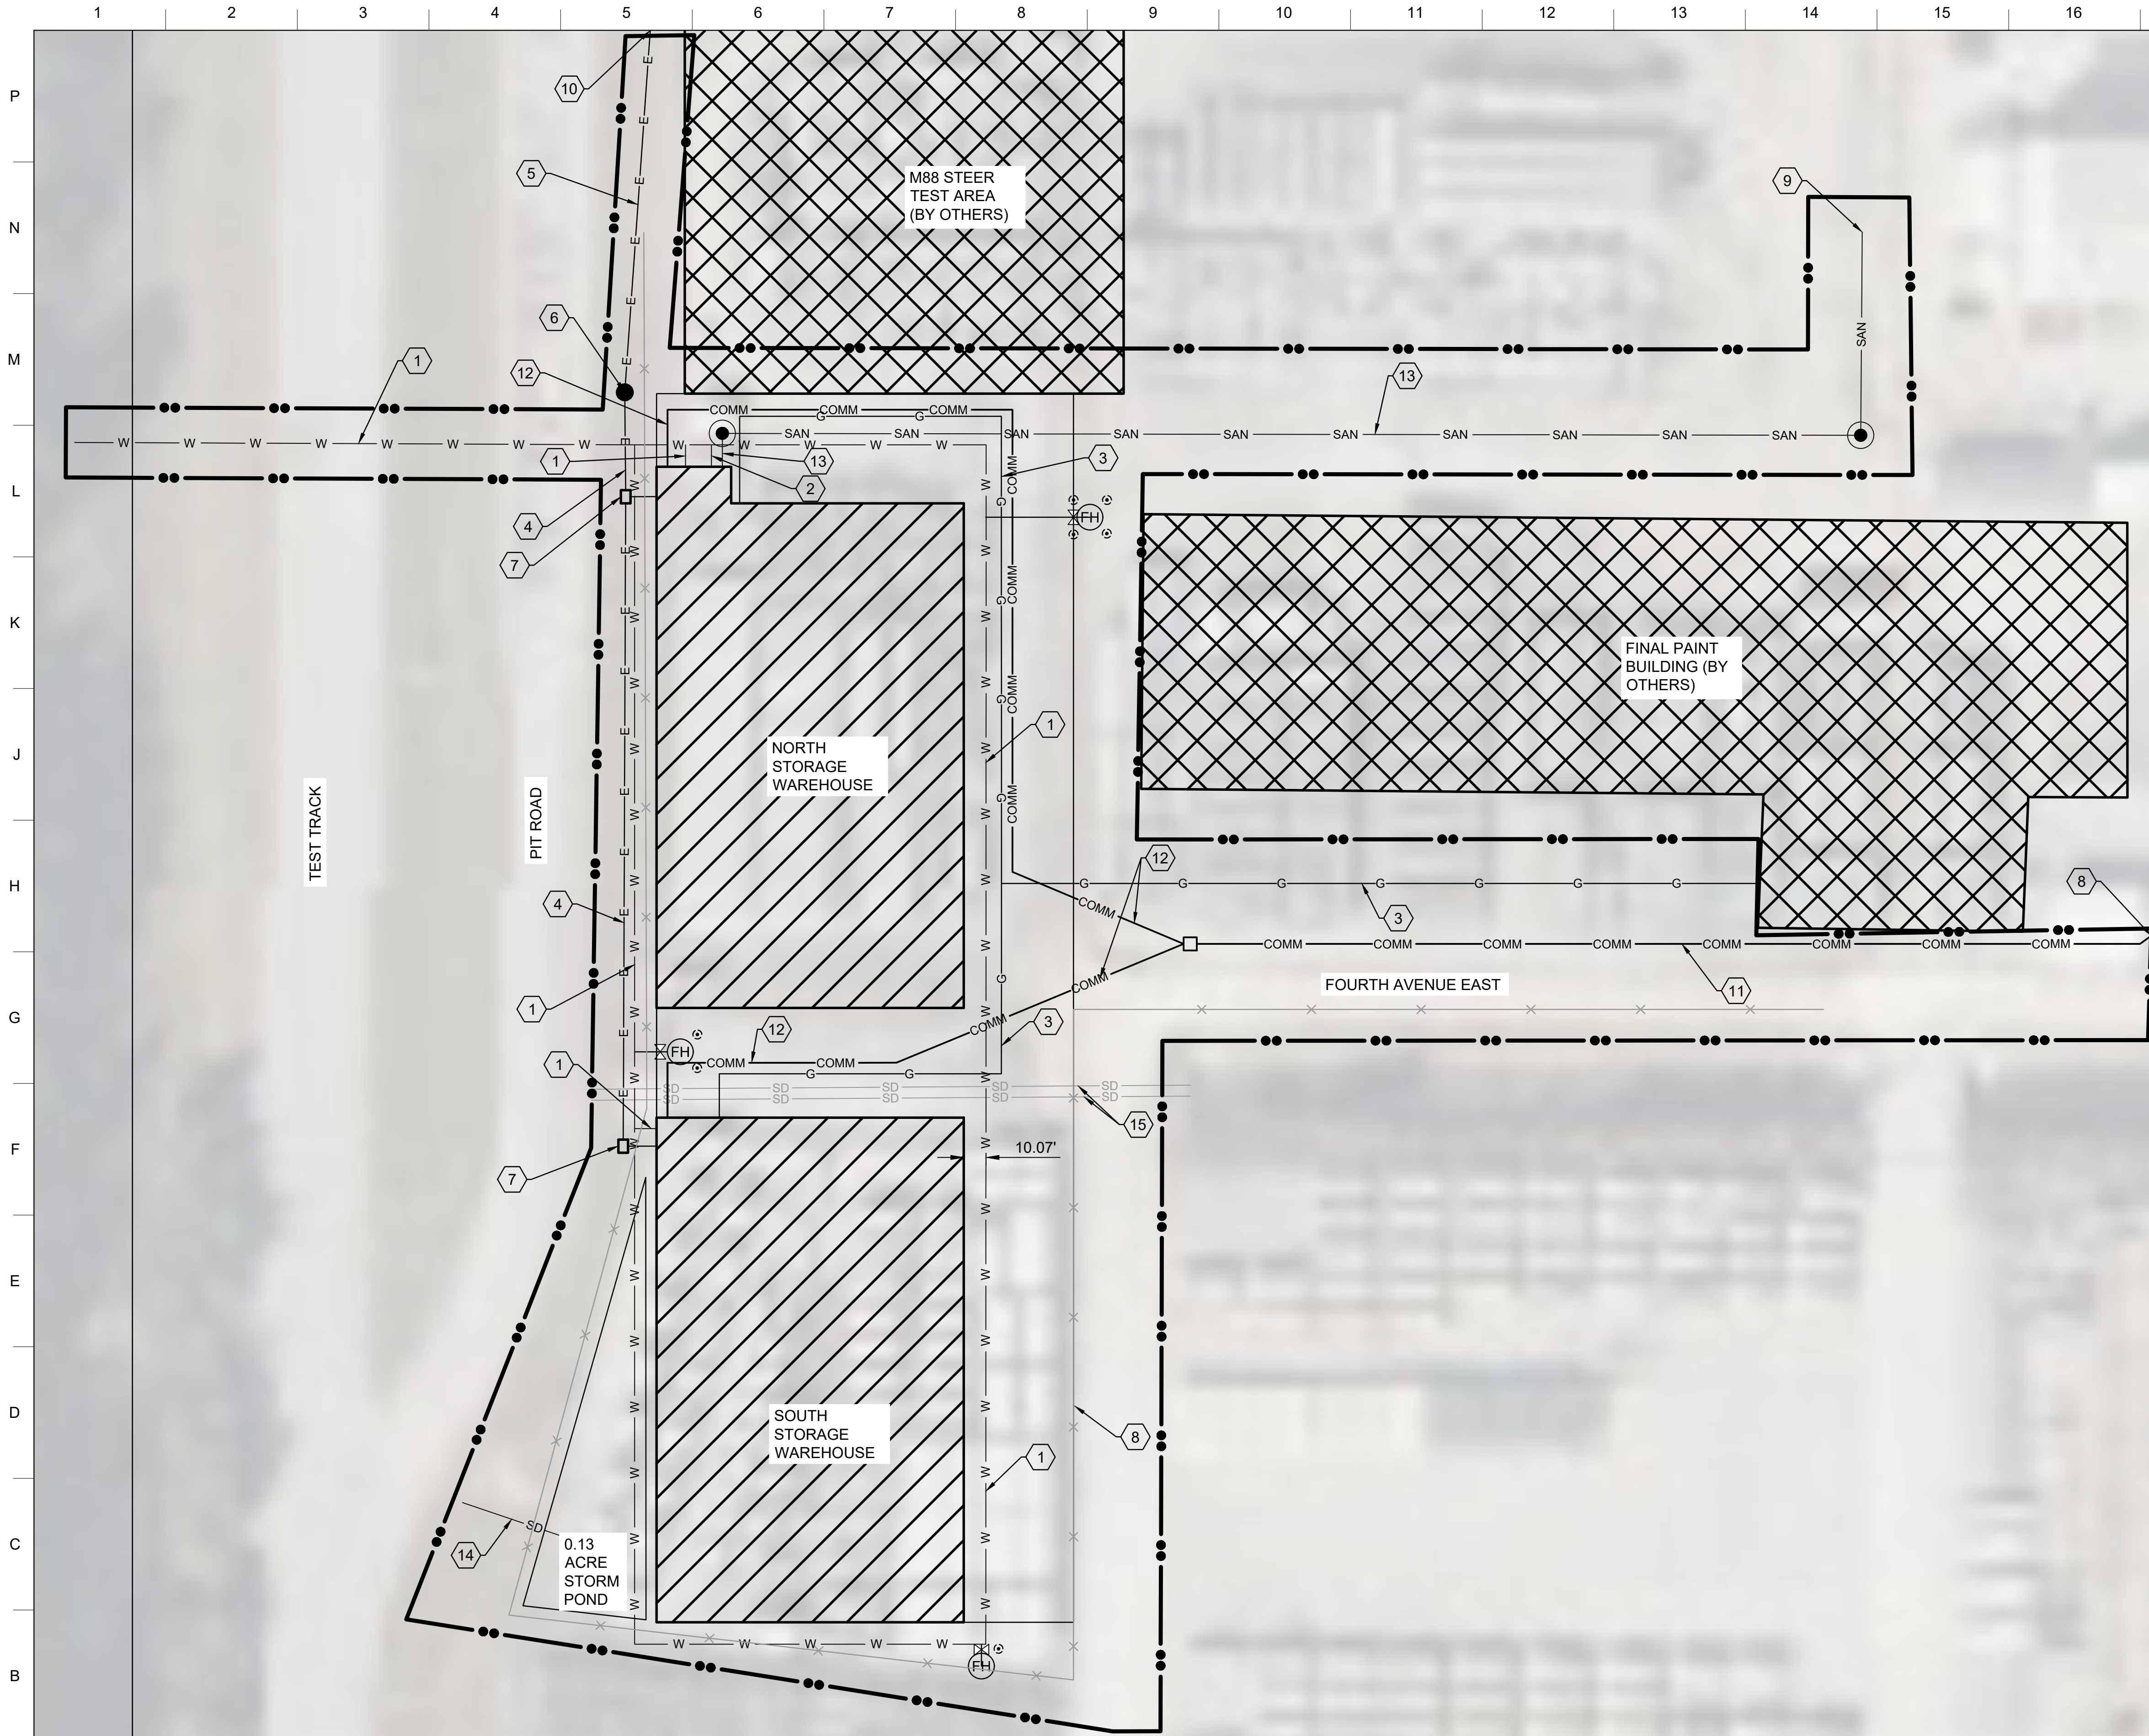

- ### GENERAL NOTES
- PER ANNISTON ARMY DEPOT DPW GUIDANCE THE NORTH/SOUTH EXISTING SANITARY LINE TO THE WEST OF THE TEST TRACK IS A FORCE MAIN. THEREFORE THE SANITARY LINE FOR THE NORTHERN WAREHOUSE IS PLANNED TO CONNECT INTO THE GRAVITY SANITARY LINE TO THE NORTHEAST.
 - ANNISTON ARMY DEPOT PERSONNEL DIRECTED THAT DIRECTION BORING UNDER THE TEST TRACK AND PIT ROAD FOR THE 6 INCH DOMESTIC AND FIRE WATER LATERAL IS REQUIRED FOR TEST TRACK OPERATIONS TO STAY ACTIVE THROUGHOUT CONSTRUCTION.

- ### SHEET KEY NOTES
- 1 6 INCH PVC DOMESTIC AND FIRE WATER LINE
 - 2 4 INCH PVC DOMESTIC WATER LATERAL
 - 3 NATURAL GAS LINE
 - 4 ELECTRICAL LINE (UNDERGROUND)
 - 5 ELECTRICAL LINE (OVERHEAD) FROM EXISTING POLE AD-066 NEAR B244
 - 6 PROPOSED ELECTRICAL POLE
 - 7 PROPOSED TRANSFORMER
 - 8 TELECOM CONNECTION TO EXISTING HANDHOLE NEAR BLDG 449
 - 9 CONNECT INTO EXISTING SANITARY LINE
 - 10 CONNECT INTO EXISTING ELECTRICAL LINE AT POLE AD-066
 - 11 FOUR (4) 4 INCH CONCRETE ENCASED TELECOM LINE
 - 12 TWO (2) 4 INCH CONCRETE ENCASED TELECOM LINE
 - 13 4 INCH PVC SANITARY LINE (GRAVITY)
 - 14 STORM DRAINAGE PIPE
 - 15 EXISTING DUAL 30 INCH STORM CULVER

- ### LEGEND
- FUTURE BUILDING FOOTPRINT (BY OTHERS)
 - PROPOSED BUILDING FOOTPRINT
 - PROPOSED WATER LINE
 - PROPOSED SANITARY LINE
 - PROPOSED GAS LINE
 - PROPOSED TELECOM LINE
 - PROPOSED ELECTRICAL LINE
 - PROPOSED STORM DRAINAGE LINE
 - EXISTING STORM DRAINAGE LINE
 - PROPOSED SANITARY MANHOLE
 - PROPOSED FIRE HYDRANT
 - PROPOSED 6'x6'x4' TELECOM HANDHOLE
 - EXISTING FENCE
 - PROJECT LIMITS

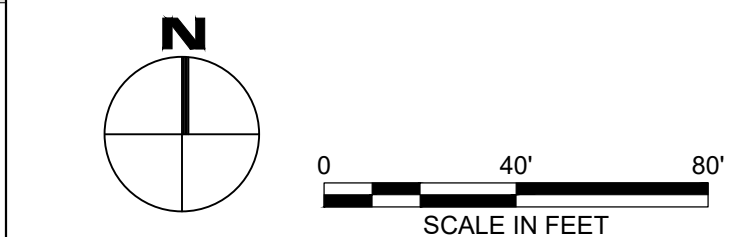

US Army Corps of Engineers®

DESIGNED BY: Z GARDNER		ISSUE DATE: MAY 2025	MARK	DESCRIPTION	DATE
DRAWN BY: Z GARDNER <td>TASK ORDER NUMBER: W9127825F0089</td>		TASK ORDER NUMBER: W9127825F0089			
CHECKED BY: D PRICE		CONTRACT NO.: W9127821D0001			
SUBMITTED BY: NTS		SIZE: ANSI D			

US ARMY CORPS OF ENGINEERS


ANNISTON ARMY DEPOT, ANNISTON AL
BUILDINGS 233, 234 & 235 REPLACEMENT


CIVIL
UTILITY PLAN

SHEET ID

CU101



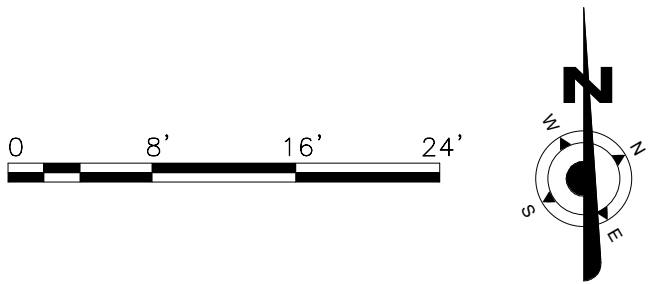



[illegible]

J MARTIN	DRAWN BY: J MARTIN	TASK ORDER NUMBER: W9127825F0089
	CHECKED BY: M HOOD	CONTRACT NO.: W9127821D0001
	SUBMITTED BY: M HOOD	

NTS 1155 KELLY JOHNSON
BLVD, SUITE 105
OAK SPRING, AR 72455

PERSPECTIVES

SHEET ID

A104

Autodesk Docs://Anniston Army Depot/Anniston Army Depot Design Charette Model.rvt

File Path:

5/22/2025 11:25:16 AM

Plot Date:

2 PERSPECTIVE B