

AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT				1. CONTRACT ID CODE J		PAGE 1 OF 2 PAGES	
2. AMENDMENT/MODIFICATION NUMBER 0004		3. EFFECTIVE DATE 27 Apr 2026		4. REQUISITION/PURCHASE REQUISITION NUMBER See Continuation Sheet		5. PROJECT NUMBER (If applicable) WON 1710371	
6. ISSUED BY NAVFACSYS COM MID-ATLANTIC 9324 VIRGINIA AVENUE, NORFOLK NORFOLK, VA 23511-0395 UNITED STATES James Godwin, Email: james.a.godwin41.civ@us.navy.mil Telephone: 7573411999		CODE N40085		7. ADMINISTERED BY (If other than Item 6) SCD: PAS:		CODE	
8. NAME AND ADDRESS OF CONTRACTOR (Number, street, county, State and ZIP Code)				☒ (X)		9A. AMENDMENT OF SOLICITATION NUMBER N4008526R0005	
				☒ (X)		9B. DATED (SEE ITEM 11) 26 Feb 2026	
				☐ ()		10A. MODIFICATION OF CONTRACT/ORDER NUMBER	
				☐ ()		10B. DATED (SEE ITEM 13)	
CODE		FACILITY CODE					

11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS

☒ The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offers ☒ is extended. ☐ is not extended.

Offers must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended, by one of the following methods:
 (a) By completing items 8 and 15, and returning 1 copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted;
 or (c) By separate letter or electronic communication which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by letter or electronic communication, provided each letter or electronic communication makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.

12. ACCOUNTING AND APPROPRIATION DATA (If required)
 See Section 00 70 00 - Conditions of the Contract

**13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS.
IT MODIFIES THE CONTRACT/ORDER NUMBER AS DESCRIBED IN ITEM 14.**

CHECK ONE	A. THIS CHANGE ORDER IS ISSUED PURSUANT TO: (Specify authority) THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NUMBER IN ITEM 10A.
☐	
☐	B. THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES (such as changes in paying office, appropriation data, etc.) SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR 43.103(b).
☐	C. THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:
☐	D. OTHER (Specify type of modification and authority)

E. IMPORTANT: Contractor ☐ is not ☐ is required to sign this document and return _____ copies to the issuing office.

14. DESCRIPTION OF AMENDMENT/MODIFICATION (Organized by UCF section headings, including solicitation/contract subject matter where feasible.)
 See Schedule

Except as provided herein, all terms and conditions of the document referenced in Item 9A or 10A, as heretofore changed, remains unchanged and in full force and effect.

15A. NAME AND TITLE OF SIGNER (Type or print)		16A. NAME AND TITLE OF CONTRACTING OFFICER (Type or print) JAMES A. GODWIN	
15B. CONTRACTOR/OFFEROR	15C. DATE SIGNED	16B. UNITED STATES OF AMERICA 	16C. DATE SIGNED 27 Apr 2026
(Signature of person authorized to sign)		(Signature of Contracting Officer)	

SECTION SF 30 BLOCK 14 CONTINUATION PAGE

SUMMARY OF CHANGES

Block 14 (Description of Amendment/Modification): SOLICITATION NUMBER N40085-26-R-0005, DESIGN-BID-BUILD (DBB) P1112 B72 RESILIENCY IMPROVEMENTS, PORTSMOUTH NAVAL SHIPYARD (PNSY), KITTERY, MAINE

The proposal due date of 14 May 2026 NLT 2:00 PM EDT has been extended to 21 May 2026 NLT 2:00 PM EDT.

The Amendment is issued to incorporate the following:

- 1. Provide Specification/Drawing revisions (See summary of revisions).
- 2. Provide responses to PPIs (additional PPI responses will be forthcoming via Amendment(s)).
- 3. Provide revised Attachment H - Price Proposal Form (provided on SAM.gov).
- 4. Extend the proposal due date from 14 May 2026 to 21 May 2026 NLT 2:00 PM EDT. The PPI cutoff date of 23 April 2026 NLT 2:00 PM EDT remains unchanged.

Section 00 00 00 - Procurement and Contracting Requirements

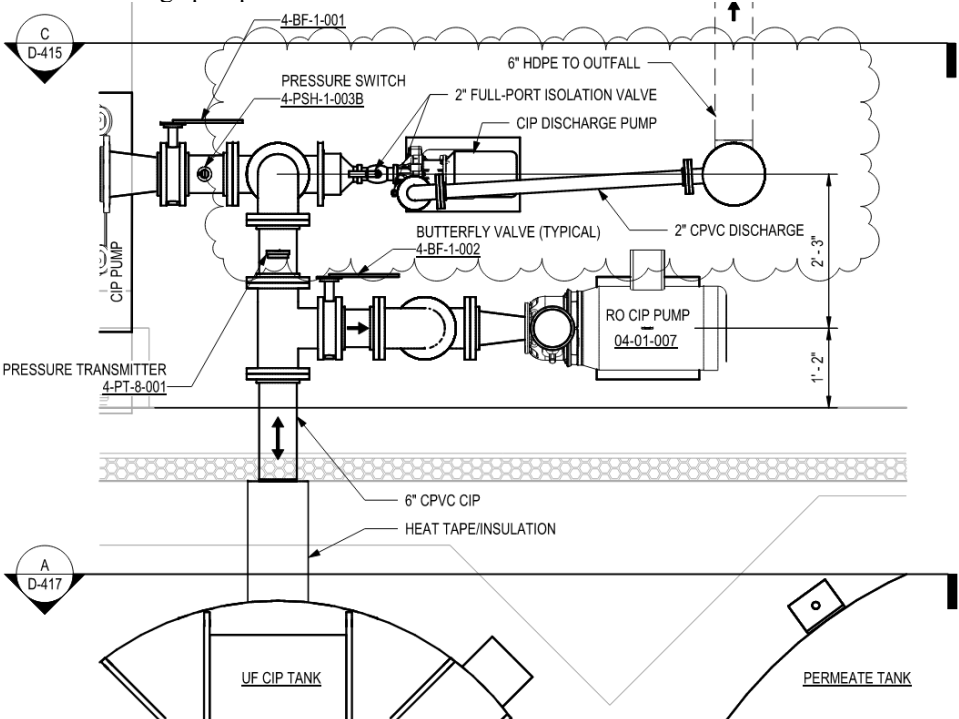
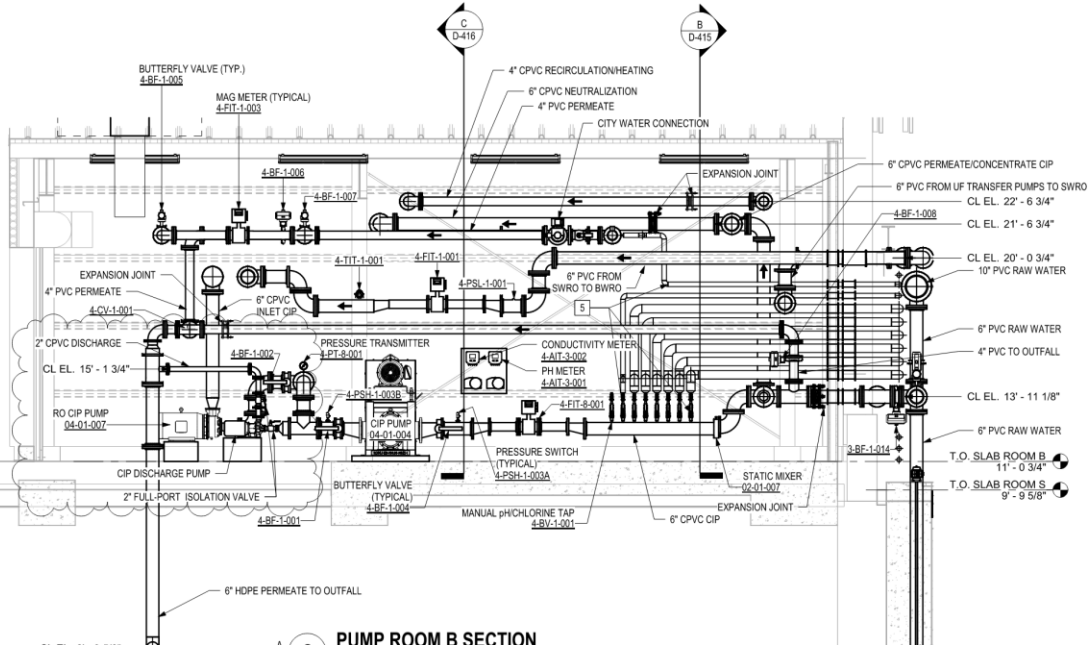
The following changes have been made:

INFORMATION	FROM	TO
Response Due Date	14 May 2026	21 May 2026

SECTION SF 30 - BLOCK 14 CONTINUATION PAGE (SF 30)

1. Specification/Drawing Continuation Sheet:

Drawing No.	Summary of Revision	PPI No.
V-104	Boundary showing area where onsite archeologist is required.	98
C-102	Detail callouts for D-501 and D-502 have been corrected to D-401 and D-402.	54
C-102	Detail callouts for D-503 has been corrected to D-420.	55
C-102	Add a 12"x12"x12" PP-RCT Tee to the above ground outfall pipe at the below grade to above grade pipe transition near the corner of Building 178. The middle outlet of the tee must include a 12" gate valve and a 12" HDPE blind flange. The other outlet of the tee must include a 12" gate valve between the tee and the remaining above grade outfall pipe.	n/a
C-108	Government revised drawings for location of accessory structure identified in Bid Option 13. See drawings included in amendment.	19
A-402	Government revised drawings for location of accessory structure identified in Bid Option 13. See drawings included in amendment.	19
A-403	Government revised drawings for location of accessory structure identified in Bid Option 13. See drawings included in amendment.	19
A-500	Drawing revised to include detail F	n/a
GC100	Revised notes order on drawing. The second Note 5 will become Note 6, Note 6 becomes Note 7, Note 7 becomes Note 8.	17
FA101	Revised keynote 1 to delete "explosion Proof"	170
M-102	General Sheet Note #5 will be revised to reference the new bridge crane (bid option #12) in lieu of the existing overhead crane.	215
D-101	Note 3 has been updated and expansion anchors have been removed.	151
D-102	Section views have been revised, reference D-301.	149
D-102	Call out on discharge of pumps has been changed to "Glass Lined DI Class 53"	150
D-102	Section views have been revised to direct to D-301.	120
D-102	Callout for providing removal 4'x6' roof hatch has been reviewed to refer to S-124.	197
D-103 D-107	Drawing updated to include bypass connection and pig launching location outside of building	51
D-106	Drawings and process indicate an outdated blower selection and line sizing was used. Blower to be rated for a max capacity of 492 ICFM @ 5.5psi. The air line from the blowers to the membrane tanks should be revised to 6" rather than 3". The motor will also now be 25 HP. Vendor Aerzen GM 15L model, kaeser, or approved equal. A flow switch and isolation valve will be on the blower discharge piping.	71
D-106	The combined HDPE line from the UF pumps to the UF break tank has been changed from 6-inch to 8-inch.	73
D-405	Section A has been revised to call out 8" SDSS piping to match Section C.	161
D-405	Section A has been revised to call out 8" SDSS piping to match Section C.	162

D-414	Add CIP discharge pump  A PUMP ROOM B ENLARGED PLAN SCALE: 3/4" = 1'-0"	n/a
D-415	Add CIP Discharge Pump  C PUMP ROOM B SECTION SCALE: 3/8" = 1'-0"	n/a
D-415	A note to be added to drawing D-106: For the combined CIP system bi-directional pump, a PSV or a pressure switch with safety relay is required on the PD pump discharge.	77

D-505	Added air valve detail to drawing	166
D-607	Abbreviated Equipment List of Major Suppliers. Changed intake screen quantity from 2 to 1.	n/a
E-002	Note will be deleted. Any unforeseen conditions will be handled in accordance with the FAR 52.236-2 Differing Site Conditions.	46
E-002	Add CIP Discharge Pump to Mechanical Equipment Wiring Schedule – Process Equipment Table. CIP Discharge Pump schedule as follows: Equipment: CIP Discharge Pump Panelboard: PP-B72S HP: 2 Volt: 460 Phase: 3 CB Size: 20 Wires per set: 3 Sets: 1 Cond: ¾" Wire Size: 12 +GND: 12 Starter: VFD	n/a
E-101 E-102 ED101 ED102 ED103 EL101 EL102 EP101 EP102 EP103 EP104 EP105 EP106 EP107 EP108	Reprint sheet to resolve discrepancy between drawing scale and graphic scale shown on drawings.	192
E-102	Revise Fence Grounding Note #1 to “FENCE POSTS MUST BE BONDED TO THE SUBSTATION GROUND GRID AT INTERVALS NOT TO EXCEED 10 FEET USING BARE COPPER CONDUCTOR (MINIMUM #2/0 AWG OR AS SPECIFIED BY THE GROUNDING STUDY).”	191
EP101	Add NEMA 4X VFD, rated per Mechanical Equipment Wiring Schedule – Process Equipment Table for CIP Discharge Pump. Coordinate with equipment location shown in drawing sheet D-415 changes listed in this continuation sheet. Feed from Panel PP-B72S, Circuit 15.	n/a
EP109	Government revised drawings for location of accessory structure identified in Bid Option 13. See drawings included in amendment.	19
EP601	One-line diagram to be updated. The MCC-B72D branch feeding 06-01-006 will be removed and the branch feeding 06-01-005 will be revised to 06-01-005/006.	196
EP701	Replace PP-72S, Feeder No. 15 Spare breaker with 20A to support CIP Discharge Pump per continuation sheet changes on sheet E-002 and EP101.	n/a

Spec No.	Part / Subpart / Paragraph	Summary of Revision	PPI No.
01 11 00.00 22	1.2.2.a	This sentence has been deleted.	114
01 14 00.00 22	1.8.2	This section has been deleted.	115
01 30 00.00 22	1.4.2.2	Delete qualifications for contractor project manager.	118
01 30 00.00 22	1.6 and 1.6.2	Preconstruction meeting must take place within 60 calendar days from receiving the Notice to Proceed. The Accident Prevention Plan and the Indoor Air Quality Management Plan must be submitted to the Contracting Officer 15 calendar days prior to the Preconstruction meeting.	119
01 30 00.00 22	1.6	Preconstruction meeting must take place within 60 calendar days from receiving the Notice to Proceed.	121
01 30 00.00 22	1.6.2	The Preconstruction Survey Report must be submitted and approved prior to the start of on-site construction.	122
01 30 00.00 22	1.6.2	Facility Turnover Planning Meeting Agenda, Red Zone Checklist-POAM, and NAVFAC PWD ME Internal Service Requirements must be submitted at least 14 calendar days prior to the initial Red Zone meeting, to be held at approximately 75% of construction completion and be outlined in the baseline schedule.	123
01 45 35	Appendix A	See revised Schedule of Special Inspections	181, 182, 183, 208
01 90 00.15 20	Attachment (2.0/A/6 & 2.0/I/1/d)	Revised paragraph to identify that the contractor is to operate the system 24 hrs. per day during the 48-day demonstration period.	205
02 83 00.00 22	3.1.1.3	No change to 1 st paragraph. Delete 2 nd and 3 rd paragraph.	n/a
02 83 00.00 22	3.1.1.3	Revise specification to: "Furniture and equipment will remain in the lead, cadmium, and chromium (VI) control area. Protect and cover furnishings and equipment or remove furnishings and equipment from the work area and store in a location approved by the Contracting Officer."	132
05 12 00	1.4.1.1 and 1.4.1.2	Revised paragraph. Shop and erection drawings are not required to be stamped by a PE. Connection designs are required to be stamped by a PE.	184
23 05 93	Attachment D	Deleted requirement for DALT. Revised Attachment to only include the requirement to provide Seal Class A on all new ductwork.	217
23 64 26	2.4.5.c.5	The specified maximum sound level has been revised to 70 dBA from 63 dBA.	57
23 64 26	2.4.5.e	Revised section from two valves to one valve.	58
26 56 00		Specification added to project	198
28 31 60	2.4.1.1	Change "Horns must be explosion proof..." to "Horns must be corrosion proof..."	170
32 17 23		Specification added to project	200

Spec No.	Part / Subpart / Paragraph	Summary of Revision	PPI No.
40 60 00	2.4.3	Add paragraph 2.4.3.2 Ultrasonic Flow Meter. Ultrasonic flowmeter must utilize high frequency transit time transducer. Flowmeter must be capable of measuring flow up to a maximum flow rate of 40 fps. Provide Ultrasonic Flow Meters complete with matched transducers, self aligning installation hardware and transducer cables. Ultrasonic transducers must be optimized for the specific pipe and process conditions for the application. The flow meter accuracy must plus or minus 1 percent of rate from 0.3 to 12 meters/sec 0 to 40 ft/sec. The flowmeter must be loop powered and have a 4-20mA output. Transmitter shall be rated NEMA4X.	52
46 81 00	2.7.6	All Control Panels in the membrane supplier's scope shall be rated for NEMA 4X, 316L stainless steel.	63
46 82 00	1.1.2.a.3a	Temporary piping has been deleted from specification	140
46 82 00	2.3.2.d	Acceptable materials include Nickel Aluminum Bronze (e.g., ASTM B148 C95800), Super Duplex Stainless Steel, or Duplex Stainless Steel 2205. Shaft sleeve is removed.	65
46 82 00	2.5.5	Add Section 2.5.5 CIP Discharge Pump The CIP pump shall be an industrial-duty centrifugal chemical transfer pump with VFD control, designed for corrosive service including acidic and caustic solutions at temperatures up to 140°F. Pump Basis of Design: • Flow: 40 GPM (Primary design point) • Head: 70 ft TDH • Flow: 20 GPM (secondary point) • Power: 2 HP (minimum) • VFD Drive • Material: Chemical-resistant polypropylene or approved equal • Acceptable manufacturer: Finish Thompson DB Series Magnetic Drive Pump or approved equal. Provide the following on the pump discharge line in order of flow: 1. Spring-loaded chemical-compatible check valve immediately downstream of pump discharge 2. Full-port chemical-resistant isolation valve (2-inch) downstream of check valve 3. Pressure gauge (0–100 psi range) with chemical diaphragm seal installed on pump discharge for system monitoring All valves and wetted components shall be compatible with acidic and caustic CIP waste service	n/a

Spec No.	Part / Subpart / Paragraph	Summary of Revision	PPI No.
Memorandum Bidding Notes	n/a	Delete Item 29 due to relocation of Bid Option 13 structure.	n/a

2. PPI Responses:

PPI	Reference			Question	Government Response
	Page	Section	Para.		
1		Electrical		Because this facility is owned by the United States Federal Government, and is utilized as a Maintenance Utility Building, we understand that Unified Facilities Criteria (“UFC”) 3-520-01 and Unified Facilities Guide Specifications (UFGS) Section 26 05 19.10.10 shall apply for purposes of competitive bidding and project execution. To ensure that the project is bid and constructed in accordance with the applicable regulations and requirements, please confirm that UFC 3-520-01 and UFGS Section 26 05 19.10.10 shall apply to this project. Specifically, please confirm that bidders are permitted to utilize the type(s) of material(s) described in UFC 3-520-01 and UFGS Section 26 05 19.10.10 applicable to their scope of work despite any potentially contradictory provisions in the design plans and specifications.	As a federal project, all Department of Defense UFC standards are applicable. Applicable UFGS specifications are included in the project technical specification sections, edited to project requirements. Reference the applicable technical specifications for requirements.
2		Electrical		Regarding the Build America Buy America Act (“BABA”), please confirm the products in this design and that are specified comply with all BABA requirements or otherwise please: 1. Identify any and all General Applicability Waivers related to any products, categories of products or manufactured products specified for this project. 2. Name any and all project level waivers that have been proposed and/or awarded for this project.	Project is designed to comply with the Buy American Act.
3				Given the complexity of this project and the level of effort required to prepare a comprehensive effort and proposal, we request that the proposal due date be extended to May 15, 2026. This will afford Contractors the time needed to provide the Government with comprehensive, cost efficient proposals.	See Amendment for due date extension.
4				Salvage disposition list, which items are assumed required and at what point during the project will the Government	Refer to AD101 for salvaged material. Awardee shall submit post award RFI.

				Contracting officer issue disposition for salvaged materials?	
5	S-002			Pre-engineering metal building , "Metal framed building, States the metal building manufacturer must provide supplemental framing to support the required building systems and equipment loads at no additional cost to owner." Government to provide values for all equipment loads to be supported.	Contractor shall provide equipment loads based on selected manufacturer.
6				Please explicitly define the scope of the engineering requirements for the cold form metal framing	The Engineer delegates the design of the pre-engineered metal building (PEMB) to the metal building manufacturer (MBM). The MBM will submit the design drawings and calculations to the Engineer I9:I213 for final review and approval after the MBM has had the drawings and calculations stamped by a third-party licensed engineer.
7	S-101			Government to provide information related to size, depth, and installation date of existing duct banks shown on S-101. Government to confirm existing ductbank conditions will be acceptable with proximity of pile installation efforts.	Location of ductbank was identified within design. Keynote #1 on S-104 indicates that the GC will need to field-verify the extents of the duct banks prior to pile installation and construction.
8				If specific manufacturers were used in space planning, design coordination and design of the building structure, please provide the information from the manufacturers that was incorporated into the building design. Please confirm design flexibility was incorporated to account for all approved manufacturers in the case an approved manufacturer is procured in lieu of the BOD.	Confirmed. Design flexibility was incorporated and no basis of design manufacture was required.
9				Will contaminated soils, classified as non-hazardous soil for disposal by spec definition be the responsibility of the contractor if discovered after bidding during soil classification testing? Contaminated soils require increased PPE controls and have special disposal restrictions as mandated by PNSY which will increase cost. How should bidders quantify this unforeseen increase?	The Contractor will need to dispose of all soils in accordance with the Specifications in the RFP. The Contractor should assume any soil determined 'contaminated' by the disposal facilities should be priced as hazardous soil for the purposes of bidding.
10				Confirm if any dust cleaning of the building surfaces will be necessary to remove hazardous dust prior to construction. E.g. lead, ACM, guano, pcb, etc.	Refer to RFP Specification Sections 02 82 00.00 22 and 02 83 00.00 22

11				Please confirm the building life safety has been evaluated by the AHJ/Navfac/USACE FPE/QFPE and the layout shown on the drawings meets or exceeds the code requirements for the system. If not, please confirm how much scope is required to be installed for final acceptance but not shown on the documents.	Confirmed. NAVFAC Fire Protection Engineer has reviewed the project bid documents.
12	C-001	Utility Notes		Government to confirm note 7, if excavation does not begin within 27 days of a PWD ME Dig Safe, a new notification is required. Will this secondary notification be 14 calendar days as well?	Confirmed.
16	V-104	General Note 2		Government to confirm the date of the (latest edition) of the "Portsmouth Naval Shipyard's current soil management standard operating procedure"	Latest revision is 2021.
17	GC100	General Note 5		Government drawing shows note 5 repeated, with two different call outs. Please revise to ensure proper action may occur	Note 5 is incorrectly repeated twice. The second note 5 should be note 6, note 6 should be note 7, and note 7 should be note 8. The callouts are for the new work notes only. Note 5 and the call out is appropriate for the new work notes.
19	C-108	New Work Keynote 3		drawing notes, have a typos, please correct and confirm action item and location of 13' x 15' free standing building	Refer to Option 13 changes in location of accessory structure. See government marked up drawing C-108, A-402, A-403, and EP-109.
21	CG501	Temporary ASW Tie-in/removal		Government to confirm if an additional two week performance test will be required of the existing AWS when brought into service, prior to removing the temporary ASW pumps. Note 6 states to perform the reverse sequence to shut down temporary system connections.	Confirmed.
22		01 14 00.00 1.5.1.2 Yellow Materials		Please confirm the extents of applicability of "yellow" and "orange-yellow", "Protective Clothing" under this section, particularly as it applies to typical construction PPE (i.e. vests, jackets, etc.)	Construction PPE such as safety vests/jackets, ear plugs, and safety goggles/glasses are allowed.
23				Please confirm any restricted areas, security islands, or other areas associated with this project that may require the use of escorts.	No escorts are required.
24				Government requires 3 week notice for escorts, confirm that escorts will be available 100% of the time provided 3 weeks notice is given and escorts are requested.	See response to PPI 23.

25		01 14 00.00 1.7		Government notes existing equipment and materials are to be protected during occupied building operations. Government to provide a list of what materials, desks, chairs, office equipment etc. is anticipated to be covered, moved, or relocated during the duration of the project.	Equipment that requires protection during construction includes thermal and electrical equipment operating inside the facility.
28				Please identify any lighting that is considered to be "CIA Lighting", so that the proposers can quantify any potential temporary lighting necessary.	The lighting in this project is not part of enforcing security requirements for illumination of the CIA fence secure boundary and should comply with standard interior and exterior lighting requirements.
29				Please identify the specific ACI certification required for the "Lead Foreman or Journeyman of the Concrete Placing, Finishing, and Curing Crews" for cast in place foundations and/or flatwork.	The Lead Foreman or Journeyman must be an ACI certified Concrete Flatwork Technician and Finisher.
30				How much ambient noise and visibility obstructions should be factored into the engineering of the fire alarm system? Has the current design considered these factors?	Current design shows a general layout and location of fire alarm devices. It is the Contractors responsibility to determine the best location and characteristics for devices based on final equipment selections and layout.
31				Confirm if AACE 53R-06 will be used to determine if monthly NAS update will be accepted for payment or in lieu of this publication, please provide alternative standard or criteria.	Primavera P6 is required in accordance with specification 01 32 17.00 20.
32				Contract Documents include references for NFPA 101. Please confirm all applicable scope associated with this reference are detailed, described and/or identified in the plans and specifications and the design complies therewith.	Bid per plans and specifications.
33				Please confirm all existing pathways planned for installation and ductbanks depicted on this project have been evaluated for compliance with TIA-569 stipulations for bend, separation, etc.	Specification 27 10 00 and reference to TIA-569 is applicable to newly installed infrastructure only. Where identified for installation within existing infrastructure, compliance to this TIA-569 is not required.
34				Confirm the conduits sizes shown on the contract documents comply with the TIA-569 requirements.	All conduits are sized minimum 3/4" in accordance with UFC standards and in compliance with TIA-569 requirements for horizontal installations.
37	E-002	Electrical Demolition Notes		Note 5 on Electrical Demolition notes, appears to require additional notification and outage/shutdown approval. Will this notification/approval be required in addition to the outage requirement of 15 days? If so, what is the complete process for electrical outage and notification of approval?	Refer to specification section 01 14 00.00 22 for outage requirements.

38	Solicitation Pg 10	Factor 1, Corporate Experience	13	We request that the Project Data Sheet page limit be expanded from 2 pages to 4 pages to allow our team to fully detail relevant project information.	Bid per RFP. Project Data Sheet shall not exceed two (2) pages.
39		00 10 00		The Bid Form Contains a column "Option Line Item xxx" and then the item description lists an Option Item which does not match. When referenced on the contract drawings, please confirm that "Option Line Item" is being referenced. Please consider updating the item description to match the Option Line Item.	Refer to the Memorandum Bidding Notes P1112 released as part of the solicitation.
40	C-108			C-108 references Option 13, which does not exist on the Bid Form. Please confirm this is referencing Option 12.	Refer to the Memorandum Bidding Notes P1112 released as part of the solicitation.
41	CG-102			Several Plans reference the Temporary ASW System as Bid Option 9. Please confirm if this should be Bid Option 8.	Refer to the Memorandum Bidding Notes P1112 released as part of the solicitation.
42	Drawing D-101		Keynote #10	New work key note #10 on drawing D-101 states to provide a bid alternative in option #3 to provide 70/30 copper nickel pipe. Bid option 3 states that this alternative is in lieu of all plastic piping. Please confirm whether this option is just for HPPE and Aquatherm or PVC as well?	Bid Option 3 includes providing copper-nickel piping in place of HDPE and polypropylene piping. PVC piping is excluded.
43	Solicitation	Factor 1	Corporate Experience	Would the government consider allowing work performed as a subcontractor if the value of the work meets the pricing threshold/ complexity requirements as long as the contractor can also show prime experience on other projects included in the submission?	Bid per RFP. Experience shall be that of the Offeror performed as the Prime Contractor. Experience of proposed subcontractors will not be considered. Furthermore, experience of the offeror while working as a subcontractor will not be considered.
44		Standard Form 1442		The Bid Deadline of April 14th is short for a project of this complexity and may result in fewer GC bidders. Please consider extending the bid date by 2 weeks.	See Amendment for due date extension.
45	E-002	Electrical Demolition Notes		Line item 3 - "...Electrical Contractor must visit the site prior to the submission of bids to become more familiar with actual conditions and extend of work" this investigation will require multiple visits, and per the specification required escorts to be made possible to access existing facilities. The project bid date will need to be pushed out to allow and accommodate site visits of existing facilities.	Bid per plans and specifications.

46	E-002	Electrical Demolition Notes		Line item 1 - "Include in bid all costs for removal and relocation in the contract. These cost must include work described in the contract documents with allowances for normal unforeseen difficulties when concealed work has been opened.." Government needs to define what the allowance carried should be valued at. Government to determine how many "normal occurrences" of unforeseen conditions should be carried in the bid.	Note will be deleted. Any unforeseen conditions will be handled in accordance with the FAR 52.236-2 Differing Site Conditions.
47	E-002	Electrical Demolition Notes		Line item 4 - "Remove and/or relocate all existing electrical work which interferes with the new architectural and electrical layouts and schemes in full coordination with the architect's demolition plan" Government to confirm if additional items are to be removed/relocated or demoed not shown on the contract drawings provided for demolition/removal or relocation.	Bid per plans and specifications.
48	EP107	New Work Notes 1		Is there a time duration required between the shutdowns of Feeder 72-2A and 72-23A? As in will both feeders be required to be in service before taking the second feeder down for a specific period of time?	Refer to sheet G-006.
49	AD001	General Demolition Notes		Line item 1 states, "Contractor shall visit the site to verify and be fully aware of existing conditions prior to start of work. Contractor shall identify all existing items of work schedule to remain or salvaged for reuse" Will the bid date be moved out beyond April 2026 to allow for multiple site visits and scope clarification?	See Amendment for due date extension.
50	AD001	General Demolition Notes		Line item 1 states, "Contractor shall visit the site to verify and be fully aware of existing conditions prior to start of work. Contractor shall identify all existing items of work schedule to remain or salvaged for reuse" Does the Government not already have a list of which items are to be demoed or salvaged. The note is asking for the Contractor to make those determination, which doesn't seem possible in the time provided.	Contractor to create a list and submit it to the COR for approval prior to the start of work.
51	C-102	New Work Note 35		Note states <i>"By-pass connection and pig launching connection refer to Sheet D-109"</i> Sheet D-109 does not appear to have any additional information or details regarding these connections. Please clarify or provide.	Drawing D-103 & D-107 updated to include bypass connection and pig launching location outside of building
52	C-102	New Work Note 28		Note directs contractor to install an ultrasonic flowmeter. Please provide specifications for the flowmeter being requested.	Flowmeter can be seen on D-601. Refer to specification 40 60 00 for ultrasonic flow meter requirements.

53	C-102	New Work Note 4		Note states " <i>PE coated 316 SS underground air pipe, power, and signal.</i> " 1. Confirm there shall be 3 separate pipes at this location. 2. What size pipe is required?	Refer to Detail A on sheet C-304.
54	C-102	Existing 48" ASW Intake Location/ Proposed outfall shown just below Building 242		Detail callouts A. D-501 and A. D-502 as shown refer to an equipment pad detail and chemical injection nozzle detail respectively. It does not appear as though this was the engineers intent. Please provide correct detail drawing references for the work at this location.	References have been corrected to D-401 and D-402.
55	C-102	12" outfall just left of Building 238		Detail callout A. D-503 refers to Fill Pipe ID Labels. It does not appear as though this was the engineers intent. Please provide correct detail drawing references for the work at this location.	Reference has been corrected to D-420.
56	1361	23 64 26	2.4.5.a .1	Spec calls for items to be skid mounted but drawing D-102 shows items separated out. Please confirm if this system needs to be "Turnkey" or parts to be shipped loose for a "Field-Install" by others.	Components may be skid-mounted or shipped loose for field installation by others.
57	1361	23 64 26	2.4.5.c	Spec calls for 5hp pressure lubricated recip or rotary screw compressor and be 63 dBA or less, most screw units are 65-70 dBA and recip units approx. 80 dBA. Will a pressure lubricated reciprocating compressor equal to the ones already in operation at DD2 & DD3 be acceptable?	The specified maximum sound level has been revised to 70 dBA for the intake pump room. A pressure-lubricated reciprocating compressor equal to the units currently in operation at DD2 and DD3 is acceptable, provided the installed unit does not exceed 70 dBA. provided they fit in space provided.
58	1361	23 64 26	2.4.5.e	Spec calls for TWO fast-acting pneumatic valves but there is only one valve & screen referenced on the drawings. Please confirm only ONE valve needs to be provided	One valve needs to be provided.
59	1361	23 64 26	2.4.5.f .2.b	Spec calls for a lockable disconnect with type-J fusing. Is it acceptable to supply no disconnect on the panel?	Provide lockable disconnect with Type J Flushing per specification.
60	1	01 75 00		Please provide this section as it is missing from RFP.	Bid per plans and specifications.
61	1	40 05 13.96	1.1	ASME B31.1 & 3 requirements are documented in numerous parts of the P-1112 specification but are not present in Section 46 80 00 BWRO, 46 81 00 SWRO and 46 82 00 Immersed Membrane System. Please confirm that ASME B31.1&3 are not applicable to the membrane filtration system.	ASME B31.1&3 are not applicable to the membrane filtration system.

62	1	46 80 00	1.2	As the BWRO is installed downstream of the SWRO, please confirm the BWRO does not need to be suitable for seawater.	The BWRO treats SWRO permeate only and does not require seawater process design. However, as the units are located in a coastal/marine environment, materials must be suitable for external salt exposure. Standard galvanized components and carbon steel fasteners are acceptable provided they have proven service experience in similar coastal SWRO/BWRO installations and corrosive water will not be in contact with the galvanized components.
63	11	46 81 00	2.7.6	Please confirm if all Control Panels in membrane supplier's scope should be rated for NEMA 4X Versus NEMA 4 CS. NEMA 4X 316L Stainless Steel is the industry standard for marine and coastal environments. It provides superior resistance to chlorides and pitting compared to 304 stainless steel or carbon steel.	All Control Panels in the membrane supplier's scope shall be rated for NEMA 4X, 316L stainless steel.
64	10	46 82 00	1.3B	Barium: Please confirm units of these values. The expected concentration should be in ug/L.	Confirmed. The expected concentration should be in ug/L for Barium.
65	19	46 82 00	2.3.2d	The Permeate/backwash pumps Boerger casing is Duplex SS 2205 and not bronze. Please validate the MOC selection as this will impact the pump selection. Also Boerger rotary lobe pumps do not have shaft sleeves, as they do not have product wetted shafts.	Acceptable materials include Nickel Aluminum Bronze (e.g., ASTM B148 C95800), Super Duplex Stainless Steel, or Duplex Stainless Steel 2205. Shaft sleeve is removed.
66	19	46 82 00	2.3.2d	Please allow WEG as an approved motor vendor.	WEG may be submitted as an engineer approved equal.
67	27	46 82 00	2.10.3 a	NSF 61 certification/compliance is typically required in drinking water applications. Please confirm if NSF 61 certification is required. 316 SS is not recommended upstream of the BWRO. Duplex 2205 or Nylon materials are typically utilized and recommended.	NSF 61 certification/compliance is not required for this project. For piping and components upstream of the BWRO, the use of Duplex 2205 stainless steel or approved Nylon materials is acceptable and recommended due to enhanced corrosion resistance in brackish water environments. 316 stainless steel shall not be used in these locations.
68		40 60 00		There are two sets of directions for controls documentation. Please clarify that Section 46 82 00 is applicable and not Sections 40 60 00.	Section 46 82 00 is applicable to the desalination equipment. Section 40 60 00 is applicable to the controls contractor integrating the desalinization equipment into the balance of plant controls.

69	22	40 60 00	2.10.3.3.1	Help: Please clarify that these requirements are for the plant SCADA system and not the PLC system.	see response to PPI 68.
70	24	40 60 00	2.10.3.6	System Access Control: Please clarify that these requirements are for the plant SCADA system and not the PLC system.	see response to PPI 68.
71		D-106		Aeration Blower and Line Sizing: Drawings and process indicate an outdated blower selection and line sizing was used. Blower to be rated for a max capacity of 492 ICFM @ 5.5psi. The air line from the blowers to the membrane tanks should be revised to 6" rather than 3". The motor will also now be 25 HP. Please note a flow switch and isolation valve will be on the blower discharge piping.	Drawings and process indicate an outdated blower selection and line sizing was used. Blower to be rated for a max capacity of 492 ICFM @ 5.5psi. The air line from the blowers to the membrane tanks should be revised to 6" rather than 3". The motor will also now be 25 HP. Vendor Aerzen GM 15L model, kaeser, or approved equal. A flow switch and isolation valve will be on the blower discharge piping.
72		D-106		Permeate Ultrasonic Flowmeters: Please consider full bore flanged E&H Promag Magmeters for this application (3-FIT-1-002/3/4).	Ultrasonic flow meter will be used after the BWRO, as RO permeate is too low in conductivity for a magnetic flow meter. E&H Promag Magmeter is not accepted.
73		D-106		Common Permeate Piping to UF Break Tank: Please revise the pipe size of the combined permeate piping from 6" to 8" to reduce line velocities to <8 fps.	The combined HDPE line from the UF pumps to the UF break tank has been changed from 6-inch to 8-inch.
74		D-106		UF Drain Pumps Common Discharge Magmeter: Please consider installing a magmeter on the common line of the UF Drain Pump Discharge for pump protection and drain control.	Due to limited space, a meter will not be installed on the UF drain pump pipe. A meter (07-FIT01-001) is installed on the 12" common outfall pipe.
75		D-404		Air Ejector System: Air ejector panels will be supplied for the UF membrane trains but are not shown on the drawings. Please clarify their location.	The air ejector system panels will be indicated on the drawings and to be located adjacent to the UF membrane trains inside the UF tanks room (Room S).
76		D-409		Membrane Tank Raw Water Pipe Size: Drawings show 6" line from raw water common header to individual membrane trains, except D-409 which shows 8". Please revise the line size to 8".	10" PVC piping will be used for the common raw water line, and 6" PVC piping will connect the common header to the individual UF tanks, as shown on drawing D-406.
77		D-415		CIP Pump PSV: For the combined CIP system bi-directional pump, a PSV or pressure switch with safety relay is required on the PD pump discharge. Please refer to the attached drawing.	A note added to drawing D-106: For the combined CIP system bi-directional pump, a PSV or a pressure switch with safety relay is required on the PD pump discharge.
78		D-416		CIP Tank: For the combined CIP system bi-directional pump, a PSV or pressure	See response to PPI 77.

				switch with safety relay is required on the PD pump discharge.	
79				Given the size, complexity, and technical requirements of this procurement, we requested a bid extension to May 21. This additional time would support more complete and competitive proposals that provide best value to the NAVFAC. Currently other ongoing NAVFAC procurements are the main focus of other vendors, and extending the bid date will provide for better vendor coverage and thus help ensure the best possible price for NAVFAC.	See Amendment for due date extension.
80	4	00 21 00	3(a)(1), item 9	The solicitation requires submission of financial statements as part of the proposal. Please confirm the acceptable method of submission for these documents. Specifically, can Offerors submit financial statements via a DoD-approved secure transfer method, or must all financial documents be submitted directly through PIII as part of the proposal package.	Financial statements can be submitted with the Offeror's price proposal as requested in the RFP. Alternately, if required, Offeror's may submit financial statements securely via DoDSafe. Financial documents submitted this way must still comply with the proposal due date as stated in the RFP. Late submissions will not be accepted.
81				Can NAVFAC provide to bidders current photos of key access areas within Building 72 for pre-bid purposes. This would help with vendor coordination for vendors that were unable to make the site visit.	No.
82	solicitation	Factor 1	Corporate Experience	Would the government consider allowing the overall project size standard to be reduced to \$5mil if there was still a single project requirement of \$15mil as currently written. We feel this will add previously completed projects on island to qualify for this technical package.	Bid per RFP.
83	solicitation	Factor 1	Corporate Experience	Would the government consider altering the scope requirements to match those of the complexity part A to include industrial processes/ distribution, pumping stations or similar. We feel this will expand on relevant qualifying projects.	See Amendment 0003 for revisions.

84	Price Proposal	CLIN 0009	Option 10	Would the government consider providing a SF value to this ILS line item for equal comparison of proposals. Drawing A-101 indicates to correct deficiencies to the existing historic brick and appears to cloud the entire interior and exterior of Pump room S whereas A-200 & A600 depicts a smaller portion of the exterior facade and interior walls. We don't see that the masonry wall paint was tested for anything other than asbestos on H-102. Does the government have LCC results for this interior coating masonry wall? Will sponge jet be an acceptable method for removing coating from historic brick? If not, full removal of coating to allow repointing will be limited based on previous experience.	Bid per plans and specifications.
85	Price Proposal	All		It appears the memorandum has altered the price proposal form for multiple CLINs. Will the government be issuing a new version of the price proposal form?	Utilize the originally provided Price Proposal Form which remains valid. The Memorandum - Bidding Notes which provided the clarification to coordinate the CLIN numbering employed in the drawings and specs with the CLIN numbering on the Price Proposal Form. Example, include costs for the scope described on drawings as Option No. 2 in the Price Proposal Form as CLIN 0002 (Option No. 1), Option Item No. 1: North and South Cooling Tower Permeate Supply.
86	D-607	SH 182/226		The government has provided an abbreviated equipment list of major suppliers for the project. Would the government be willing to provide the full equipment list with all valves that have identifiable tag IDs listed in the process drawing set.	Bid per plans and specifications.
87	H-102	SH 8 of 226		The existing ceiling paint for the entire S room is in extremely poor condition. There was no test result for this coating provided on H-102, nor was there a map provided for the samples collected in the saltwater room. Would the government provide this map corresponding to samples collected in B72 to bidders. Would the government be able to provide sampling results for the ceiling paint to bidders. Are bidders to assume only the minimal amount of paint removal to facilitate new work/ penetrations in their proposals.	See H101 and H102 for sample locations and tables of sample results. Sample results of ceiling paint in S room are not available. Assume ceiling paint to contain RCRA 8 metals. See 02 83 00.00 22 for handling requirements. Bid abatement requirements per plans and specs.

90	S-122			Detail E on Drawing S-122 shows details for concrete repairs. Note 1 states to assume 30SF of repairs for bidding purposes, what depth of repair should be assumed for bidding purposes? Additionally confirm that no supplemental rebar is required in these repair areas.	For bidding purposes, assume repair depth of less than or equal to 3 inches. Confirmed, no supplemental rebar is required in these repair areas (existing rebar to remain).
91	H-102			Drawing H-102, which is indicated as Hazardous Material - Plan 2 of 2, references Drawing H-101. There is no drawing H-101 for Hazardous Material Plan 1 of 2, please provide drawing H-101.	H-101 has been provided in amendment.
93	5	00 21 00	Factor 1 - Corporate Experience	The solicitation limits Factor 1 – Corporate Experience to two (2) pages. Given the complexity and scope of relevant project experience necessary to demonstrate qualifications for this project, we request NAVFAC revise this limit to four (4) single-sided pages, or two (2) double-sided pages, to allow for more complete descriptions of project scope, resiliency features, performance outcomes, and overall relevance.	Bid per RFP. Project Data Sheet shall not exceed two (2) pages.
94				With current volatility in commodity pricing - would NAVFAC consider adding a Economic Price Adjustment form for items of significant quantity as part of this proposal? Without inclusion of an EPA contractors will price in potentially significant amounts of escalation into the base price. Recommend concrete, rebar, various sizes of piping, tanks, wire, conduit, and premanufactured building all for potential inclusion into the EPA.	No. Please bid per RFP.
95		Attachment H		Price form attachment H includes line items 001A, B, C for various abatement items in respective locations. Please confirm contractor is to include in these items only abatement as specifically indicated or shown on contract documents.	Bid per plans and specifications.
96		Attachment H		NAVFAC frequently includes unit price line items on the bid form for abatement of typically encountered hazardous materials to allow for pricing in the event additional quantities beyond indicated are encountered. Would NAVFAC consider adding similar bid items to this proposal?	Bid per plans and specifications.

98	V-104			Drawing V-104 has a note indicated a callout of an overall boundary of historical areas. However, no overall boundary is established. Please clarify what area of the project will require onsite archeologists while excavation is proceeding.	See redlined drawing V-104 with dashed red polygon defining the boundary/limits that require on-site monitoring, documentation, and reporting of excavation activities. The on-site monitoring, documentation, and reporting must be performed by a qualified archaeologist and in accordance with the approved work plan in accordance with the specifications.
101		01 11 00.00 22	1.2.2.f	Significant portions of the work are within the operational buildings. If the intent is that escorts are needed to perform work in areas such as Rooms S, M, and C in Bldg 72 and within Building 242 - please confirm escorts will be available during all workdays in the indicated hours of available work, as lack of escorts would stop work and impact the project schedule. Or please provide clarity on areas where escorts are anticipated.	See response to PPI 23.
103				Due to a very recently submitted bid at PNSY for significant project in the same work area, we are requesting extension to the proposal due date to May 21st as many of the same vendors will be involved in pricing this project and additional time will provide for better pricing for NAVFAC.	See Amendment for due date extension.
104		46 82 00	1.1.2	Please clarify Contractor "design" responsibility listed herein. While many of these items may not be designed by the Section 46 82 00 Vendor, the design for many, if not all appear to be completed as part of the project design by the DOR.	The contractor shall provide design only where explicitly required in the contract or vendor specifications. All other systems and components shall be installed per the DOR's design.
109		46 82 00	3.2.4	Is the Contractor required to maintain bonds and insurance through the 1-year period contemplated by Bid Option 7.	Yes, bonds are required to be held through the duration of the warranty period.
110		46 82 00	3.2.4	If Bid Option 7 is exercised, will the Government provide a work location (i.e. office/desk/other) for the Lead Plant Operator or is this to be provided by the Contractor?	Government will provide work space with desk for Lead Plant Operator.
112		Bid Form/Drawings		The bid option numbers as identified in the drawing set do not match the bid options as identified in the proposal form. Ex. Drawing C-107 identifies the work as "Option 6" whereas the work on the proposal form is for "Post construction completion follow-on services. Please correct the proposal form to match the option work as shown on the drawings.	Refer to the Memorandum Bidding Notes P1112 released as part of the solicitation.

113		C-105		New work note 1 instructs contractor to construct a permanent bulkhead at connection to building 72 and to refer to S-310. Drawing S-310 does not show anything relating to a bulkhead. Please advise.	Reference has been corrected to S-308. See memorandum - Bidding Notes.
114		01 11 00.00 22	1.2.2, a	Please clarify extent and locations of desired "temporary partitions"	This sentence has been removed from specification.
115		01 14 00.00 22	1.8.2	Please identify all items within the project identified as "Critical Infrastructure"	This part of the specification has been removed.
116		01 14 00.00 22	1.16	Please confirm that "Only Contractor company-owned vehicles will be allowed to park on the Portsmouth Naval Shipyard" and the Jamaica Island parking lot is not available for contractor POVs.	Bid per plans and specifications.
117		01 30 00.00 22	1.4.2	Please advise if the Project Manager is required to be "on the job-site at all times during the performance of the Contract work.", similar to the Superintendent. This is not currently stated as a requirement.	Bid per plans and specifications.
118		01 30 00.00 22	1.4.2.2	It is stated that "Approval of the Project Manager by the Contracting Officer is required prior to the start of construction.", however this section does not identify minimum qualifications for this approval to be based upon or duties to be performed by the Project Manager. Please advise.	Qualifications not require for contractor's project manager.
119		01 30 00.00 22	1.6	This section states that certain Preconstruction Submittals must be submitted 30-calendar days prior to the Preconstruction Meeting. This section states that the Preconstruction Meeting must take place within 45-calendars days from the Notice to Proceed. It is not practical to have the Accident Prevention Plan and the Indoor Air Quality Management Plan created within 15-days of the Notice to Proceed. We recommend that the requirement be modified such that these Preconstruction Submittals must be approved prior to the start of on-site construction.	Specification section 01 30 00.00 22 will be revised to say the Preconstruction meeting must take place within 60 calendar days from receiving the Notice to Proceed. The Accident Prevention Plan and the Indoor Air Quality Management Plan must be submitted to the Contracting Officer 15 calendar days prior to the Preconstruction meeting.
120	D-102			Shows A and B Section Arrows directing to page D-310. There is no page D-310. Is is supposed to direct to D-301?	Drawing has been revised to direct to D-301.

121		01 30 00.00 22	1.6	This section states that certain Preconstruction Submittals must be submitted 15-calendar days prior to the Preconstruction Meeting. This section states that the Preconstruction Meeting must take place within 45-calendars days from the Notice to Proceed. It is not practical to have these nine items created within 30-days of the Notice to Proceed. We recommend that the requirement be modified such that these Preconstruction Submittals must be approved prior to the start of on-site construction.	Specification section 01 30 00.00 22 will be revised to say the Preconstruction meeting must take place within 60 calendar days from receiving the Notice to Proceed.
122		01 30 00.00 22	1.6	This section states that the Preconstruction Survey Report (01 57 19.00 22) must be submitted 15-calendar days prior to the Preconstruction Meeting. This section states that the Preconstruction Meeting must take place within 45-calendar days from the Notice to Proceed. Per 01 57 19.00 22, 1.5.1, the generation of this report requires obtaining a camera pass and performing a site visit with the Contracting Officer. It is not practical to have this created within 30-days of the Notice to Proceed. We recommend that the requirement be modified such that these Preconstruction Submittals must be approved prior to the start of on-site construction.	Specification section 01 30 00.00 22 will be revised to remove the requirement for submitting of the Preconstruction Survey Report within 15-calendar days prior to the Preconstruction Meeting. The Preconstruction Survey Report must be submitted and approved prior to the start of on-site construction.
123		01 30 00.00 22	1.6	This section states that the Facility Turnover Planning Meeting Agenda and Red Zone Checklist-POAM and NAVFAC PWD ME Internal Service Requirements List must be submitted at or prior to the Preconstruction Meeting. This section states that the Preconstruction Meeting must take place within 45-calendar days from the Notice to Proceed. It is not practical to have these items created within 45-days of the Notice to Proceed, particularly when the items to be included in the Internal Service Requirement List have not yet been procured and approved.. We recommend that the requirement be modified such that these Preconstruction Submittals must be submitted at least 14-days prior to the initial Red Zone meeting, to be held at approximately 75% of construction completion per 01 30 00.00 22, 1.12.. It is additionally noted that Section 01 30 00.00 22, 1.12.3 calls for the preliminary Internal Service List to be provided at the initial Facility Turnover Meeting.	Specification section 01 30 00.00 22 will be revised to remove the Facility Turnover Planning Meeting Agenda, Red Zone Checklist-POAM, and NAVFAC PWD ME Internal Service Requirements List from the list of preconstruction submittals. These three submittals must be submitted at least 14 calendar days prior to the initial Red Zone meeting, to be held at approximately 75% of construction completion and be outlined in the baseline schedule.

124		01 32 17.00 20	1.8	Please identify the Government's current version of Primavera P6.	Awardee will coordinate with contracting officer after award.
125		01 32 17.00 20	1.10.1.8	Ref. '...using a nominal 30-year, greater than 0.10 inch precipitation amount parameter...' Using 0.10 inch precipitation results in excess of 80 non-work days per calendar year. Our experience is approximately 40 non-work days on average per calendar year. Please confirm if 0.50 inch precipitation is preferred for non-work days for weather.	Bid per plans and specifications.
126		01 33 00	1.4.2	Please confirm if the Contractor is to submit the noted submittals directly to the NAVFAC FPE or if they are to be submitted via eCMS for distribution to the NAVFAC MIDLANT by the DM/CM.	Submit via eCMS for distribution by DM/CM.
127		Various		Can a finish schedule please be provided?	Bid per plans and specifications.
128		01 45 00.00 20	1.5.3	Ref. QC absence no more than 30 days - Industry average PTO typically exceeds this when combined with sick time. Please consider 45 days combined absence for the QC Manager with a fully-qualified alternate QCM.	Bid per plans and specifications.
129	C-102			Confirm call out on C-102, for A/D-503 is accurate. A/D-503 shows field pipe IDs and not outfall detail.	Refer to PPI 54 response.
130	C-102			Confirm the location of where underground pipe ends in the IR zone towards outfall. Note 30 on C-102 shows heat tracing to be continuous for all above ground pipe, but the location and drawing appear in conflict. Where does the heat trace end, at the outfall?	Note 30 calls out heat trace for all outfall piping above ground. Heat trace can end once water within piping cannot freeze at the vertical portion of the outfall.
131	D-103			Confirm the sizing/ style of SS Piping. Note 2 calls out SS Air line coming from Salt Water Building as 1 1/2". D-103 calls out the SS Air Piping as 2" PE coated pipe.	The Note 2 is correct with 1-1/2 inch diameter pipe. The 2 inch coated SS air pipe is called out on dwg C-304 for the screen airburst system. Civil Profile Intake to B242.
132		02 83 00.00 22	3.1.1.3	This paragraph seems to identify 3 potential differing scopes. Please clarify.	Spec revision to state: "Furniture and equipment will remain in the lead, cadmium, and chromium (VI) control area. Protect and cover furnishings and equipment or remove furnishings and equipment from the work area and store in a location approved by the Contracting Officer."
133		03 30 00	1.6.7.b	Please identify the specific ACI certification required for the Lead Foreman or Journeyman.	Refer to PPI 29 response.

134	Solicitation Pg 8	3. Evaluation Factors	5	It is our understanding that the FAPIIS platform is no longer active. Please confirm that this item is not needed with the submitted proposal.	FAPIIS.gov records are now called Responsibility/Qualification and these records are part of entity information in SAM.gov. Please ensure this information in SAM.gov is current, accurate, and complete in accordance with the RFP.
135				Given the complexity of this project and the level of effort required to prepare a comprehensive effort and proposal, we request that the proposal due date be extended to May 15, 2026. This will afford Contractors the time needed to provide the Government with comprehensive, cost efficient proposals.	See Amendment for due date extension.
136	D-606			Drawing D-606 states that the fill line for each chemical tank terminates at the building exterior. Please provide clarification where these chemical fill connections are going to be located on the exterior of B72.	Refer to the Room C plan (D-111) for the location of the chemical fill station. The fill stations are not located outside of the exterior of the building.
137	pdf page 1965, 1967, 1968	463000	2.2.3	Specification section 463000 part 2.2.3 notes to provide the chemical feed systems in Table 1. Table 1 provided at the end of the specification section is not fully legible - please reissue.	A readable version of Table 1 has been provided.
138	pdf page 1965, 1967, 1968	463000	2.2.8.2.b, 2.2.8.2.c, 2.2.8.3.a	Specification section 463000 part 2.2.8.2.b, 2.2.8.2.c, 2.2.8.3.a Refers to tables 2 and 3 provided at the end of the section. Tables 2 and 3 provide are not fully legible and information in columns is cut off the pages, please reissue.	A readable version of Table 2 & 3 has been provided.
139	Pdf page 1960	463000	2.3	Specification section 463000 part 2.3 states to provide a 90 day supply at the maximum pumping rate for each feeder or pair of duplex feeders. Please clarify if all the noted chemical systems operational duration and characteristics or provide the quantity of chemical to furnish to establish an equal basis of bid.	The specification requires providing a 90-day supply of each chemical at the maximum pumping rate for each feeder or pair of duplex feeders. This applies to all chemical feeders in the project. Additionally, Safety Data Sheets and certification confirming that supplied chemicals meet project requirements must be submitted as specified.
140	pdf page 2022	468200	1.1.2.a.3a	Specification section 468200 part 1.1.2. states equipment and services to be provided by the general contractor and separate from the vendor responsibility, includes 1.1.2.a.3.a - stating that temporary piping required for the startup and commissioning. Please define and quantify "temporary piping" to establish and equal basis of bid.	Item 1.1.2.a.3.a regarding temporary piping is removed from the contractor's scope.

141	pdf page 2023	468200	1.1.2.b .4	Specification section 468200 part 1.1.2.b.4 - states" supply one month of storage of all chemicals, pre-treatment, CIP of membrane during start up, commissioning and acceptance testing". Please refer to RFI question regarding quantifying the quantity of chemical to be provided to establish an equal basis of bid. In addition, clarify duration of 90 days noted in specification 463000 versus one month in section 468200.	Section 46 82 00 Part 1.1.2.b.4 requires a one-month chemical storage supply for start-up, commissioning, and acceptance testing of the membrane system. Section 46 30 00 specifies a 90-day chemical supply for ongoing plant operation. The one-month supply covers initial phases, while the 90-day supply addresses sustained operation.
142	pdf page 2023	468200	1.1.2.b .8	Specification section 468200 part 1.1.2.b.8 Not to provide laboratory services during startup, commissioning and acceptance testing. Please define all associated water quality parameters to be tested, frequency of testing and duration of testing to establish an equal basis of bid.	Water quality testing will include the parameters listed for Raw Water (Section 46 82 00) and Permeate Water Quality. Testing will typically be conducted daily for Raw Water and Permeate parameters during startup and commissioning, and weekly thereafter through acceptance testing, with a duration of 4 weeks.
143	DD-101			Drawing DD-101, Keynotes 2 and 3 states to "Cut existing 48" Intake Pipe...", Please clarify the material of this existing pipe.	Existing pipe is ductile iron pipe based on Navy record drawings. Class of pipe is unknown. Contractor to confirm pipe thickness to confirm proper dresser coupling connection.
144	DD-101			Drawing DD-101, Keynote 3 states "...Installation of New Ductile Iron or Stainless Steel Bolted Coupling. Drawing D-101, Keynote 1 states "48" Stainless Steel Bolted Coupling, Dresser Style 38". Please clarify which material is to be used for this coupling	For the seawater intake, the 48" coupling shown on Drawing D-101, Keynote 3 shall be stainless steel, Dresser Style 38.
145	D-101			Please confirm that the blind flange to be used in Keynote 3, and Detail B is to be HDPE Material and not Stainless Steel.	Confirmed. Blind flange to be HDPE.
146	D-101			Drawing D-101, Keynote 6 States "Provide Support Either Underneath or at Connection Points to Prevent Stress on Pipe". Please provide more specific details as to the type of support that will be allowed to be used here.	The plastic pipe is not intended to carry the full weight of the fittings or the valves. A detail of a pipe support is provided on D-501 -Details part 1 of 5 Detail C as example. We would recommend placing a support cradling the valve weight and similar for the dresser coupling. The expansion joints do not require a support. Work with pipe manufacture to provide necessary intermediate supports as required. Detail F provides the pipe support in the 48 inch pipe.

147	DD-101			Drawing DD-101, Key note 8 states "Remove and Dispose Valve, Actuator, and Associated Electrical". Please provide more information as to the type and size of the valve, type, size, and length of the Actuator and where the electric is currently run to.	Actuator is fed from the Main Distribution Panel. Valve is a sluice gate.
148	SD-103			Drawing SD-103, Keynote 3 states "Core Through Existing Wet Well Chamber Wall", with a call out on the plan stating "48" Dia. Core Through Existing Wet Well, See Process". Drawing DD-101, Keynote 5 states "Core 48"x48" Opening in Wall, Flush with Floor..." Drawing D-101, Keynote 7 states "48"x48" Opening in Existing Wall...". Please clarify if this opening is to be a 48" Dia. Round opening, or a 48"x48" Square opening.	The cored opening is round. See detail "A/S-121".
149	D-102			Drawing D-102 has two callouts for section views on D-310, However there is no drawing D-310. Please clarify what drawings these should reference.	Drawing has been revised to reference D-301.
150	D-102			Drawing D-102 calls for "Glass Lined DI Class 52 Spool Pieces" coming off of the New Vertical Turbine Pumps. The minimum DI Class pipe that can be flanged is Class 53. Please clarify the Class of DIP to be used for these spools.	Note has been updated to call out Class 53.
151	D-101			Drawing D-101, Keynote 3 makes reference to both Expansion Anchors and Epoxy Anchoring. Please clarify which style of anchor is to be used for the Blind Flange Thrust Rods.	Note has been updated and expansion anchors have been removed. Epoxy anchoring to be used.
152	D-501			Drawing D-501, Detail F shows anchor bolts going through the "Existing 48" Intake Pipe" and into the concrete. Please provide material type and wall thickness for the existing 48" Intake Pipe.	The pipe leaving the wet well is reinforced concrete pipe (RCP). The thickness of the pipe is unknown but assumed to be 3.5 inches thick minimum.
153	G-005	Calculated Occupant Load	NA	The calculated occupant load for Room M is noted as 1 person. Does this mean 1 person is allowed in this room at any given time, including during construction?	Calculated Occupant load is based on Building Code requirement for spaces based on usage and square footage. This does not apply to occupancy limits during construction or operation.
154	D-105	A	NA	The drawings show flanges at most fittings (90s, Tees, Reducers, etc.) on the PVC and CPVC lines. Is it the intent to have every fitting flanged for easy removal?	Flanges only at equipment, valves, or points requiring future removal. Standard fittings (90s, Tees, reducers) to be solvent-welded.
155	D-602	NA	NA	Currently the bid documents do not provide a scope or layout for air piping to Pump Room B, Pump Room S, and Room C for operation of control valves and equipment. Can a clear scope and drawings be provided for this piping?	Refer to drawing D-103 for compressed air tie-in location. Compressed air piping is small bore and shall be field run by contractor.

156	NA	NA	NA	Please supply a hanger detail for all suspended process piping including the type of hangers and spacing required.	Piping supports shall be designed by the contractor and submitted for review by the government.
157	D-413	B	NA	The drawings shows (3) "City Water Connection With Solenoid Valves." Please provide a detail of the tie in to the city water at this point.	The connection point is shown on D-113 - Condensate Plan Section A.
158	D-417	B	NA	Does the CIP Overflow Tank 05-07-003A and associated piping require insulation?	Insulation is required.
159	D-417	B	NA	Where does the water discharge from the CIP overflow tank? Please provide a detail.	Overflow to ground.
160	C-107/C-303	NA	NA	Sheet C-303 calls for 12" HDPE whereas Sheet C-107 calls for 15" HDPE. Please clarify.	Refer to PPI 92 response.
161	D-405	A and C	NA	Section A calls the SDSS piping to be 10" but Section C calls the same piping to be 8". Please advise which is correct.	8" SDSS piping to be used. Drawing to be corrected.
162	D-405	B and C	NA	Section C calls the 8" suction piping to be SDSS but section B calls the piping to be SS. Please clarify.	8" SDSS piping to be used. Drawing to be corrected.
163	C-102			Please provide duct bank detail for Heat trace feeder conduit supplying above grade 12" outfall piping.	Refer to EP-505.
166	D-601	Note 1		Please provide connection details for Air Actuated valves.	Refer to air valve detail.
167	DI-601			Please provide pathway for 6 strand fiber optic cable between CP-72 and CP-242.	Refer to sheet C-102.
168	FA101			Please provide manufacturer make and model of existing notification devices.	Make and Model of existing devices is unknown.
169	FA101			Please confirm existing King Fisher FACP has enough capacity to accept new initiating devices.	Confirmed.
170	FA101			Explosion proof horn and strobes lack the ability to sync with existing devices please advise.	Devices shown in Room C do not need to be Explosion Proof but must be corrosion proof.
171	28 31 60			Will additions to existing fire alarm system require a system wide QFPE stamp.	QFPE is required to stamp new work only.
172				There are no hardware sets provided for the door package. Please provide complete hardware sets with required manufacturer item numbers and finishes.	Please refer to the performance based specification for direction.
173	AD-102	NA	NA	Please provide details for demolition of existing concrete pad. What is the existing concrete thickness and reinforcement?	Please refer to notes 7 & 9 on drawing AD001 for direction.
174	AD-101	NA	NA	Please provide details for the existing crane structure and columns for demolition in Pump Room S.	Please refer to notes 7 & 9 on drawing AD001 for direction.

175		46 64 30	2.3.20	Specification Section 46 64 30, ASW Equipment, paragraph 2.3.20 requires Temporary ASW System Performance Testing for 2 weeks. Required tests are mentioned for several system components and statement is made that the tests will occur over 2 week period. Please clarify if NAVFAC is requiring full time Contractor presence (24x7 for 14 days) during testing of the Temporary ASW system, or is the requirement that all testing is to take place within 2 weeks of starting the tests? Further, considering the original system is in place during the test period (not cut over yet), some components may not be able to be tested while the original permanent system is in place. Would final temporary ASW system testing after cut over be acceptable? Would a 2 week test period apply after the cut over the temporary system?	Specification 46 64 30 requires a two week test of equipment. The contractor presence is not required around the clock during the test. The existing ASW system will not be taken offline until the entire Temporary ASW system has been approved by COR for operation.
176	CG10 1, CG10 2			Reference sheet nos. CG101 and GC102 regarding work area for temporary ASW pumps. Are temporary pumping equipment and compressor for temporary air burst to be installed on existing ground and remain exposed or is there to be a temporary building/shelter to be provided ? If a temporary building/shelter is to be provided, please advise as to specifications, dimensions, etc. addressing the requirements for same.	An enclosure of suitable size for the equipment must be provided by the contractor.
177	CG10 1, CG10 2			Provide detail/cross section showing dimensions of DD2 utility tunnel, existing utilities and supports located within the tunnel.	The EPDM hoses shall be laid on the floor of the utility tunnel.
178	CG10 1, CG10 2			Provide location where contractor is to be provided access into DD2 utility tunnel to stage and remove materials. Include dimensions and elevations of access to be provided.	Access to the DD2 Utility tunnel is via manhole adjacent to Building 91.
179	D-112			Drawings indicate that the PVC to Existing Condensate Tank is to be 6" in Section B but Section A calls out 8". Advise as to where it reduces or if this is incorrect.	8" Permeate from tank to pumps. Pump discharge is 6" to condensate tank.
180	D-112			It is unclear for the routing of the PVC to Existing Condensate Tank between the Permeate Pumps 06-01-001 and 002 and the Tie-in at the Existing Condensate Tank, please provide further instructions and drawings.	Permeate to condensate tank runs through Room C. See drawing D-110.
181		01 45 35		In the Schedule of Special Inspections, none of the "Applicable if Box is Checked" check boxes at the beginning of each section are checked. Please confirm if this is accurate or if there was an oversight and indicate which sections require Special Inspections.	See updated attachment for 01 45 35.

182		01 45 35		In the Statement of Special Inspections on (p373 of 2073), which indicates requirements for LFRS, the document does not appear to be completed correctly for this project. Please clarify the requirement for SIOR for LFRS for this project.	See updated attachment for 01 45 35.
183		01 45 35	2.1	Spec 01 45 35, Para 2.1 indicates that work performed in the fabricators shop is to be inspected in accordance with the Schedule for Special Inspections if the fabricator is not AISC certified. Please clarify if this only applies to structural steel, or if it applies to miscellaneous metals (AISC definition) fabricated steel as well. Also, please confirm AISC shop certification type required.	See updated attachment for 01 45 35.
184		05 12 00	1.4.1.1 1.4.1.2	Spec 05 12 00, Sections 1.4.1.1 and 1.4.1.2, indicate that shop and erection drawings are required to be stamped by a PE. Shop and erection drawings are a drafting "tool" used to communicate contract doc requirements (including approved connection designs) for shop production and field erection. There is no design content actually produced by detailers preparing these drawings. For this reason, we request that this spec be further clarified to not require shop and erection drawings to be PE stamped. Note: Connections Designs prepared by the fabricator for permanent structural steel and Temporary Design Structures that aid in steel erection would be designed, stamped, and submitted separately from shop and erection drawings.	Concur. Shop and erection drawings are not required to be stamped by a PE. Connection designs are required to be stamped by a PE.
185	D-110			Please clarify if all piping from tanks to dosing skids are 3" CPVC.	Refer to drawing D-110, D-111, and D-606.
186	D-110			Please clarify if all piping from tanks to overflow tanks are 2" CPVC with a duck bill control valve.	Refer to drawing D-110, D-111, and D-606.
187	D-110			Please clarify if all overflow vent piping is 2" PVC.	Refer to drawing D-110, D-111, and D-606.
188	D-110			Please clarify if all feed piping from chemical fill stations are 2" CPVC.	Confirmed, see drawing D-504.
189	D-110			Please clarify the size of all Chemical Injection Piping.	Refer to drawing D-110, D-111, and D-606.
190	D-110			Please clarify if the Chemical Injection Piping will require containment piping.	Yes all piping is "pipe-in-pipe" system per specification 46 30 00 and note 7 on D-606.

191	E-102	26 11 16	3.2.2	Specification Section 26 11 16, Paragraph 3.2.2 states "Ground fence at each gate post and corner post and at intervals not exceeding 10 feet." Drawing E-102, Fence Grounding Note 1 states "Fence Posts Must Be Bonded to the Substation Ground Grid at Intervals Not to Exceed 50 Feet . . ". Please advise the maximum interval for the Substation Fence Grounding.	Fence grounding note will be revised to match specification.
192	Various Electrical Drawings			Drawing Scales roughly 8% from what is shown on the graphic scale. Please update the drawings and the scale.	Drawings and graphic scales will be updated.
193	DI601			Drawing DI601, Note 2 states "6 Strand Fiber Optic Cable Suitable for Underground Installation. Coordinate with Existing Fiber Loop". There is no current conduit path/raceway shown on the drawings between Pump Room A in Building 242 and Pump Room B in Building 72. Need further information on Underground routing of fiber.	Refer to Civil sheets for underground conduit routing. The fiber between 242 and 72, and Pump Room A and the control room will be new. Field route and identify type of fiber in use at control room.
194	EP601, EP102	46 82 00	1.1.2	Please confirm the intended installation location for the VFDs and FVNR starters. Drawing EP601 indicates that the VFDs and FVNRs are located within the Motor Control Center (MCC), while other drawings show these components mounted external to the MCC.	The VFD and FVNR starters associated with the equipment powered by the MCC will be located within the MCC. The disconnect switches and thermal motor starters shown on the plan drawings are disconnects local to the equipment required by code.
195	F-001, FA101, and FX500			Please confirm whether the fire alarm tamper switches and flow switches are existing and already installed at the location of the new fire sprinkler riser, or if new tamper switches and flow switches are required as part of this contract. If new tamper and flow switches are required, please provided where initiating circuits should originate from.	Fire protection tamper and flow switches are required to be new.
196	EP701 and EP601			A discrepancy has been identified between the referenced drawings regarding the circuiting of pumps P10A and P10B (06-01-005, 06-01-006). Drawing EP701 indicates that P10A and P10B are served from a common circuit, while Drawing EP601 shows the pumps connected to separate circuits. Please confirm the intended configuration. Should P10A and P10B be installed on a single shared circuit as shown on Drawing EP701, or should each pump be provided with a dedicated circuit as shown on Drawing EP601?	P10A and P10B are intended to be installed in a duty/standby configuration and will be fed by a common circuit. Drawing EP601 will be updated.

197	D-102			Contract drawing D-102 Call out above vertical turbine pumps - for "4'x6' roof hatch reference S-123." It appears the correct reference drawing is S-124. Please update.	Drawing to be updated to refer to S-124.
198				Please provide specification 26 56 00 for External Lighting	Specification has been included.
199				Please provide specification 22 00 00 for Plumbing, General Purpose	The plumbing inserts can be found within sections 23 05 15 Common Piping for HVAC. The specific section is 2.2.11 Emergency Eyewash and Shower.
200				Please provide details and specification 32 17 23 for pavement markings.	Specification has been included.
201				Please provide details and specification for necessary traffic control, specification 34 01 00	Refer to CG100 for traffic control requirements.
202	12	01 14 00.00 22	1.12.1	Ref. NFPA 241 - What if any temporary fire alarm or fire protection systems will be required during construction?	The contractor must comply with NFPA 241 which includes preparation of a fire prevention plan identifying hazards and implementing controls; regulations and oversight during welding, cutting, or other hot work; and site management including regular removal of combustible waste and securement of flammable materials. The drawings identify existing fire alarm and fire protection systems.
203	12	01 14 00.00 22	1.12.1	Ref. Portsmouth Naval Shipyard fire regulations - Can these regulations be provided?	Refer to COMNAVREGMIDLANTINST_113 20_11B.
204				Air Operated Valves require Compressed Air in order to operate and direct the water and/or chemicals through the system. This pressure is generally regulated to 125 PSIG. There is no mention or or indication of where the compressed air system is or what pressure it maintains. Please provide the location of the compressed air system and what pressure it maintains. If there is not currently a compressed air/instrument air system please advise.	Basis of design vendor has confirmed that the existing instrument air system is sufficient quality and pressure for operation of valves. Refer to D-103 (Note 2) for location of compressed air tie-in.
205	532/54 3 of 2073	01 90 00.15 20 Attachment	2.0/A/ 6 & 2.0/I/1 /d	Ref. Startup, Performance Testing & Demonstration - Paragraph 2.0/A/6 requires the contractor to operate the system 24 hrs per day during the 48 day demonstration period. In contrast, Paragraph 2.0/I/1/d states the Owner's operation staff will be responsible for the full operation during demonstration period. Please confirm who will be responsible for the operation of the	The contractor is to operate the system 24 hrs per day during the 48 day demonstration period. Paragraph will be revised.

				equipment during demonstration 48 day period.	
206	1	01 33 10	1.2	Ref. "or equal" Please confirm where the documents clearly identify which materials and equipment in this project are subject to the "or equal" requirements.	All materials and equipment not included in J&A forms are subject to the "or equal" requirements. Items listed in the provided J&A forms are sole source only.
207	1	01 33 10	1.2	Ref. Salient physical, functional or performance characteristics. Please confirm where the documents clearly identify which characteristics are considered salient and must be met without exception for procurement of "or equal" materials or equipment.	Or equal would must performance requirements of drawings and specifications.
208	Attachment	01 45 35		Ref. Schedule of Special Inspections - This attachment does not appear to be completed yet. The seismic category is not checked and none of the applicable boxes are checked and appendix A is for a Maintenance Hangar in Anytown, VA. Please confirm if any special inspections are required for this scope of work.	See updated attachment for 01 45 35.
209	S-101	New Work Note 1		See "New Work Notes on S-101" Note 1 states, "Expose top of existing ductbanks prior to pile install. Verify in field the extents of existing ductbanks and report discrepancies to the EOR prior to construction". Please confirm the ductbank location is only applicable prior to pile installation, and not prior to "any" construction activities.	Confirmed.
210	33	03 30 00	3.5.2	Ref. Vapor Retarder and Vapor Barrier - The drawing details do not indicate where the vapor barrier will be applied. Where the construction for cast in place is installed on a combination of existing soil or concrete it may not be possible to maintain a continuous vapor barrier especially given the amount of penetrations. Please provide locations and details for termination of the vapor barrier.	See vapor barrier termination bar detail F/A500. Vapor barrier to be provided under all new construction per specification.
211	20	01 57 19.00 22	3.1.2	Ref. Permits - Drawing A000 Note 11 instructs the contractor to obtain permits. 01 57 19 states the Government has obtained the required permits and they are available. The specifications do not include a PROD for verification. Please confirm if permits are to be obtained by the Government or the contractor.	Permits will be obtained by the Government. Upon receipt of all permits the Government will provide them to the Contractor.

212	20	01 57 19.00 22	3.1.2	Ref. Permits - Drawing A000 Note 11 instructs the contractor to obtain permits. 01 57 19 states the Government has obtained the required permits and they are available. The specifications do not include a PROD for verification. Please provide the approved permits for the project.	Permits will be obtained by the Government. Upon receipt of all permits the Government will provide them to the Contractor.
213	20	01 57 19.00 22	3.1.2	Ref. Permits - 01 57 19 states the contractor is to provide an RPE for permit inspections and certifications. Please confirm which permits will require certifications and inspections and the frequency of inspection.	The Contractor is responsible for completing erosion and sediment control inspections in accordance with the Specifications (01 57 19), the individual completing those inspections must be a Maine Certified Erosion and Sediment Control Inspector. An RPE is not required for those inspections, and the project does not require the construction of permanent stormwater BMPs.
214	M-102	New Work Note 11		Ref. EF-2 Ductwork - Please confirm if the intention of this note is for the duct downstream of the fan or will all ductwork connected to EF-2 be required stainless construction?	All ductwork connected to EF-2 is required to be stainless steel.
215	M-102	Gen. Sheet Note 5		Ref. Existing Crane vs. duct hangers - It is unclear the limits of the crane envelope to determine where hangers are possible. Can the location of the existing crane envelope be provided?	M-102 General Sheet Note #5 will be revised to reference the new bridge crane (bid option #12) in lieu of the existing overhead crane.
216	M-102	Gen. Sheet Note 4 & 23 30 00	Part 2	Ref. Stainless Steel Ductwork and Accessories - Where stainless duct construction is required, will accessories such as fire dampers, grilles, etc be required stainless. Specifications do not describe or detail stainless accessories.	Duct accessories for stainless steel duct is required to be stainless steel.
217		23 05 93	Appendix D	Ref. Duct Construction - 23 30 00 para. 2.9.1.a indicates static pressures found in Appendix D of 23 05 93. Appendix does not include Inches of WC values. Please provide.	All supply and exhaust ductwork is low-pressure (between 0 and 1.5 inches w.c.), a Duct Air Leakage Test (DALT) and the associated Appendix D table are not required for this scope. The contractor must provide a Seal Class A on all new ductwork. This ensures that all transverse joints, longitudinal seams, and wall penetrations are sealed to maintain system efficiency, regardless of the lack of a formal pressure test. Appendix D table will be updated to only show the seal class requirement for the duct systems.

218	12	23 30 00	2.9.1	Ref. Metal Ductwork - Please confirm the stainless duct construction (seams, connections, metal gage, fasteners, etc.) should also follow SMACNA 1966.	Stainless steel duct construction should also adhere to SMACNA 1966.
219	2	01 11 00	1.2.1.g	Please confirm there are no environmental regulatory restrictions and additional scope associated with the disposal of brine directly to the outfall at Berth 4.	Discharge of brine will be in accordance with permits obtained by the Government.
220	21	01 14 00.00 22	1.18	Ref. Critical or Tier 1 Infrastructure - Please confirm any critical or Tier 1 infrastructure associated with the project and subject to the risk analysis and risk mitigation planning.	No critical or Tier 1 infrastructure associated with this project.
221	A-301			Ref. notes pointing to existing structure "2HR intumescent paint on existing structure. Full extent within building envelope". Confirm this is for information only and is not calling for new intumescent on the existing structure.	New 2HR intumescent paint is to be applied to existing cooling tower structural members that exist within the existing pump room as well as new pump room. The Contractor must submit an impairment plan prior to construction.
222	36	52.246-21		N4008526E0005 Is missing 52.246-21 Warranty of Construction, page 36 goes from 52.232.5 Payments under Fixed Price Construction Contracts to 52.243-3 Value Engineering Construction so per the FAR Clauses incorporated by reference there are many references missing -Please confirm that the missing clauses are not part of this project	See FAR 52.252-1 and 52.252-2 in the Solicitation. Clauses/Provisions incorporated by reference have the same force and effect as if they were given in full text. Links are provided to view the full text of all clauses/provisions incorporated by reference.
223		01 50 00.00 22	3.6.2	This paragraph lists requirements for Administrative Field Offices. Please confirm if these are for the use of the Contractor only, or must they also be provided for the engineer and/or owner?	These offices are for contractor use only.
224		01 50 00.00 22	3.6.2	This paragraph lists requirements for a building constructed for temporary field office. Please confirm a portable office trailer, meeting the same requirements, is acceptable.	Portable office trailers are acceptable.
225				Please advise if the local building permits are applicable to this project, or if they will be waived.	Not applicable.
226				Please advise if materials purchased for this project are exempt from Maine Sales Tax.	Contractors can use the Maine Contractor's Exempt Purchase Certificate (ST-A-119) and provide to vendors to get the tax exemption. Materials that will be installed into the real property of the federal government are tax exempt. Any consumables, tools, etc that are bought for a project are not tax exempt.

(End of Summary of Changes)