

Commercial Solution Opportunity – Defense Commissary Agency (DECA)

In accordance with the Commercial Opportunity Solution – Defense Commissary Agency (DeCA), dated 04.10.2026, paragraph 5.0, the following specific requirement in support of Aol 5.4 Lower Costs is attached.

The Defense Commissary Agency (DeCA) is seeking innovative, commercial approaches from European Union registered firms for industrial temporary generator controls at the Central Distribution Center on Ramstein Air Base, Germany supporting operations within the European area. This purchase is for an industrial temporary generator controls to replace an existing backup power system non-operable electrical switchgear. The goal is to leverage industry best practices, modern technologies, and creative service models to improve reliability, accountability, and overall service quality for CDC electrical backup power systems. Equipment and approach will undergo vigorous inspections at all stages (installation methodology prior to work performance, material delivery, material install, commissioning) by the Technischer Überwachungsverein (TUEV Saarland) in alignment with commercial practices followed by the Deutsches Institut für Normung. The timeline for performance is 10 weeks total from award until commissioning by the TUEV. Attachment 1 contains technical data that will provide assistance in understanding current conditions that commercial solution proposal will need to meet.

Our objective is to build and install temporary generator controls for the two existing Cummins generators. Interested vendors with proven expertise in providing temporary generator controls equipment should submit their Commercial Solution Proposal (Phase 3) in accordance with section 3.4 Commercial Solution Proposals.

The **REVISED** closing date for this opportunity is Thursday, 30 April 2026 at 2:00 PM Central European Time (CET). Award is contemplated on or around 5 MAY 2026 as the rental generators currently in place (that this requirement will replace) have limited performance remaining.

All communications to include questions pertaining to this opportunity shall be sent via email to the following Points of Contact:

Suzette San Juan (Suzette.Sanjuan@deca.mil)

Anna Gulewich (anna.gulewich@deca.mil)

PROJECT: Temporary Control Solution for Existing Generator System

ISSUE: The problem lies exclusively in the generator control system, including both the dedicated local control and the higher-level / supervisory control system. The system is inoperable.

SOLUTION: A temporary solution is required for the generator control system of the existing emergency power installation.

Current Site Conditions:

The site is equipped with two existing generators, and both units are operational. A load bank test has already been carried out successfully, confirming that both generators are functioning properly.

The existing installation consists of:

- 2 x Cummins C900D5 generators
- equipped with HC634H alternators
- inventory numbers: CDK 000365 and CDK 000366

Expected Proposal to provide information on the technical solution:

Seeking the temporary solution to include:

- a temporary replacement for the existing generator control system
- the local generator control
- the higher-level / supervisory control
- the interface and communication with the circuit breakers
- all required components for a proper and reliable temporary operation
- 24/7 hotline / emergency support availability, so that in the event of a power failure, immediate support and switching can be ensured

Seeking a solution from the same manufacturer as the existing equipment (CUMMINS GENERATORS), or a preferred service provider experienced with paralleling Cummins Generators. The purpose of this request is to obtain commercial solutions for a temporary control solution that restores proper coordinated operation of the emergency power system until a permanent modernization or replacement is implemented.

Load Test Results

Aggregat: 820 kVA Generator 1
Leistung: 656 kW PRP

[illegible]

Prüfung Ramstein KCS 16.03.2026

Aggregat: 820 kVA Generator 2
Leistung: 656 kW PRP

[illegible]

Ort/Datum: Ramstein KCS 16.03.2026



[REDACTED]

Vorgangsnummer • [REDACTED]

[REDACTED]
[REDACTED]
[REDACTED]
[REDACTED]

Ansprechpartner • [REDACTED]

Telefon • [REDACTED]

E-Mail [REDACTED]

02.04.2026

Funktionsprüfung Netzersatzanlage

Anlage:
CDC-K Cold Storage
Auf der Weilerbacher Brücke
Kaiserslautern, Einsiedlerhof

Tag der Prüfung: 16.03.2026

Prüfungsunternehmen: [REDACTED]

Zusammenfassung:


Am Tag der Prüfung wurden beide Generatoren ohne Generatorsteuerung getestet, da diese nicht funktionsfähig ist. Beide Generatoren haben einen Lasttest bestanden mit 800kW, dies wurde durch eine mobile Lastbank geplüft. Am Generator 2 wurde eine Manipulation an der Not-Aus Steuerung festgestellt, wodurch dieser erst gar nicht starten konnte. Die Manipulation wurde beseitigt, daraufhin lief dieser störungsfrei.

Die vorhandene Hardware ist bis auf die Generatorsteuerung voll funktionsfähig.

Probleme der aktuellen Anlage:

Ohne die Generatorsteuerung kann die Frequenz nicht geregelt werden weshalb der Lasttest mit 52,5Hz gefahren wurde, ohne funktionierende Generatorsteuerung ist ein Betrieb mit diesen Generatoren nicht möglich. Des Weiteren wäre eine Synchronisationseinheit notwendig um beide Generatoren gleichzeitig zu betreiben.

Dieses Problem lässt sich mit einer mobilen Steuerung beheben.
Lieferzeit ca. 10 Wochen

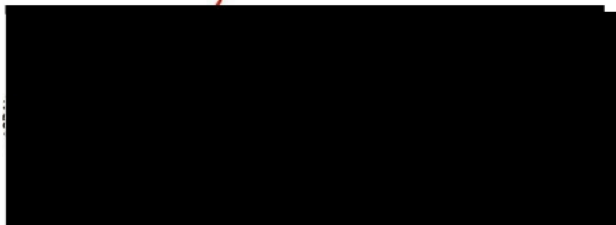

Vorgangsnummer: [REDACTED]



Ansprechpartner: [REDACTED]

Telefon: [REDACTED]

E-Mail: [REDACTED]

Datum: 02.04.2026

Alternative Möglichkeiten:

Der Betrieb mit nur einem Generator ist mit einem funktionsfähigen Generatorsteuergerät möglich, jedoch reicht die Leisung nur zum Betrieb von einer Kältemaschine aus. Somit wäre keine ausreichende Leistung zum Betrieb der Anlage vorhanden, man könnte die Kältemaschinen im Wechselbetrieb laufen lassen, es wäre zu prüfen, ob dies für die Kälteanlagen vertraglich ist.


Ausführungszeitraum: ca. 10 Tage


Wichtig: Mindestens 2 Mitarbeiter müssen im Fehlerfall permanent vor Ort sein.
(1x NEA/1x Protec)

Umsetzungsvorschlag:

Wichtig ist langfristig eine automatische Umschaltung mit Lastübernahme zu realisieren. Dies ist nur möglich, wenn die Einspeisefelder inkl. der Steuerung ausgetauscht werden und eine wenige priorisierte Abgabe so realisiert werden, dass diese von dem Lastmanagement abgeschaltet werden können.

Für diese Lösung gibt es leider noch keine konkreten Lieferzeiten, sollten sich aber im Rahmen von 3-5 Monaten bewegen. Zur Überprüfung sollte die mobile Notstromversorgung weiter bestehen, um im Ernstfall vorbereitet zu sein.





[REDACTED]

[REDACTED]

[REDACTED]
[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]
[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]
[REDACTED]

[REDACTED]

Functional test of emergency power system

Attachment:

CDC-K Cold Storage

On the Weilerbach Bridge

Kaiserslautern, Einsiedlerhof

Date of the exam: March 16,

2026 Examining company: [REDACTED]

Summary:

On the day of the inspection, both generators were tested without their generator control systems, as these were not functioning. Both generators passed a load test at 800 kW, which was verified using a mobile load bank. On generator 2, tampering with the emergency stop control was discovered, preventing it from starting at all. The tampering was rectified, and it subsequently ran without any further problems.

The existing hardware is fully functional except for the generator control.


Problems with the current system:

Without generator control, the frequency cannot be regulated, which is why the load test was conducted at 52.5 Hz. Operation with these generators is not possible without a functioning generator control system. Furthermore, a synchronization unit would be necessary to operate both generators simultaneously.

This problem can be solved with a mobile control system.

Delivery time approx. 10 weeks

[REDACTED]

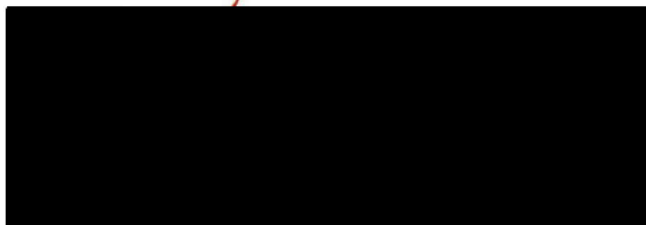

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

Transaction number [REDACTED]

Contact person: [REDACTED]

[REDACTED]
[REDACTED]
[REDACTED]
[REDACTED]

Telephone: [REDACTED]

E-mail: [REDACTED]

Datum: [REDACTED]

Alternative options!

Operation with only one generator is possible with a functioning generator control unit, however, the power output is only sufficient to operate one refrigeration unit. Therefore, there would not be sufficient power to operate the system; the chillers could be run in alternating operation, but it would need to be checked whether this is compatible with the chiller systems.

Execution period: approx. 10 days.


Important: At least 2 employees must be permanently on site in case of errors.
(1x NEA/1x Protec)

[REDACTED]

In the long term, it is important to implement automatic switching with load control.

[REDACTED]
[REDACTED]

Unfortunately, there are no concrete delivery times for this solution yet, but they should be in the range of 3-5 months. To bridge the gap, the mobile emergency power supply should remain in place to be prepared for an emergency.



Trier, den 26.03.2026
Netzersatzanlage: 2 x 910 kVA / Funktionsprüfung

Untersuchungsbericht Funktionsprüfung der NEA

Aufgrund der Störung an beiden Aggregaten wurden wir beauftragt eine Funktionsprüfung der Netzersatzanlagen ohne Steuerung durchzuführen. Das Ziel soll sein die Funktion der Aggregate zu testen, um festzustellen ob die Aggregate die geforderte Leistung liefern. Der Lastlauftest mit mobilen Lastwiderstand ist ebenfalls Bestandteil des Auftrags.

Funktionsprüfung am 16.03.2026

Nach Ankunft unser Technischer waren die Aggregate außer Betrieb.

Es wurde zuerst Aggregat Nr. 2 getestet.

Nach erstem Startversuch war die Spannung und Frequenz unstabil und das Aggregat ging aus. Wir haben die Kraftstoffzufuhr überprüft und festgestellt, dass das Magnetventil in der Kraftstoffzuleitung elektrisch geschlossen war, da keine Anforderung aus der NEA-Steuerung (außer Betrieb) vorlag.

Wir haben das Magnetventil direkt bestromt bzw. manuel geöffnet und haben dadurch die Kraftstoffzufuhr ermöglicht.

Nach erneutem Versuch hat das Aggregat gestartet und stabile Spannung und Frequenz geliefert.

Nach Anschluss der Lastbank wurde der Lastlauftest in verschiedenen Stufen von ca. 20% bis 110% in Zeitabständen von ca. 15 Minuten einwandfrei ohne Funktionsstörungen durchgeführt, siehe Lastlaufprotokoll Generator 2.

Im Anschluss wurde auch der Generator 1 konform der Prüfung des Generator 2 getestet, siehe Lastlaufprotokoll Generator 1.

Beide Aggregate laufen stabil und liefern die Leistung, die auf dem Typenschild steht



Die Aggregate befinden sich in einem allgemein technisch einwandfreien Zustand und sind für sichere Notstromversorgung aus unserer Sicht zu empfehlen.

Da die vollautomatische Notstromsteuerung nicht in Betrieb ist, bzw. aufgrund des Alters und des evtl. Defekts so empfehlen wir eine komplett neue vollautomatische Notstromsteuerung inkl. Zentralsteuerung für beide Aggregate zu realisieren.

Die Nutzung der Aggregate als handische Notversorgung (Ersatz für mobile NEA) ist jederzeit möglich.

Mit nur einem Aggregat ist keine provisorische Steuerung erforderlich und man könnte mit 950 KVA / 760 KW jederzeit innerhalb von 2-3 Tagen die Anlage in Betrieb nehmen und das Objekt handisch im Notfall versorgen können.

Die provisorische Nutzung von beiden Aggregaten als vorübergehende mobile Lösung mit insgesamt ca. 1900 kVA / 1520 kW ist nur dann möglich, wenn man eine provisorische Steuerung für die Synchronisation der Aggregate realisiert.

Wir als Hersteller der Netzersatzanlagen sind in der Lage eine provisorische Notstromsteuerung für die Nutzung der bestehenden Aggregate innerhalb von ca. 5-6 Wochen zu liefern. Darüber hinaus sind wir selbstverständlich in der Lage eine finale Lösung für die komplette vollautomatische Notstromsteuerung inkl. Zentralfeld sowie evtl. erforderliche NSHV Verteilung zu liefern. Bauzeit ca. 5-6 Monaten.

Wichtiger Hinweis:

Die bei der Leistungsprüfung der Aggregate gemessene Frequenz von 52,2-52,5 Hz konnte leider aufgrund der nicht vorhandenen Woodward Steuerung nicht auf 50Hz geregelt werden. Sobald die neue Notstromsteuerung eingebaut wird, so wird auch die Frequenz stabil bei 50Hz geregelt.



Lastlauf Aggregat Nr. 2





Lastlauf Aggregat Nr. 1



