


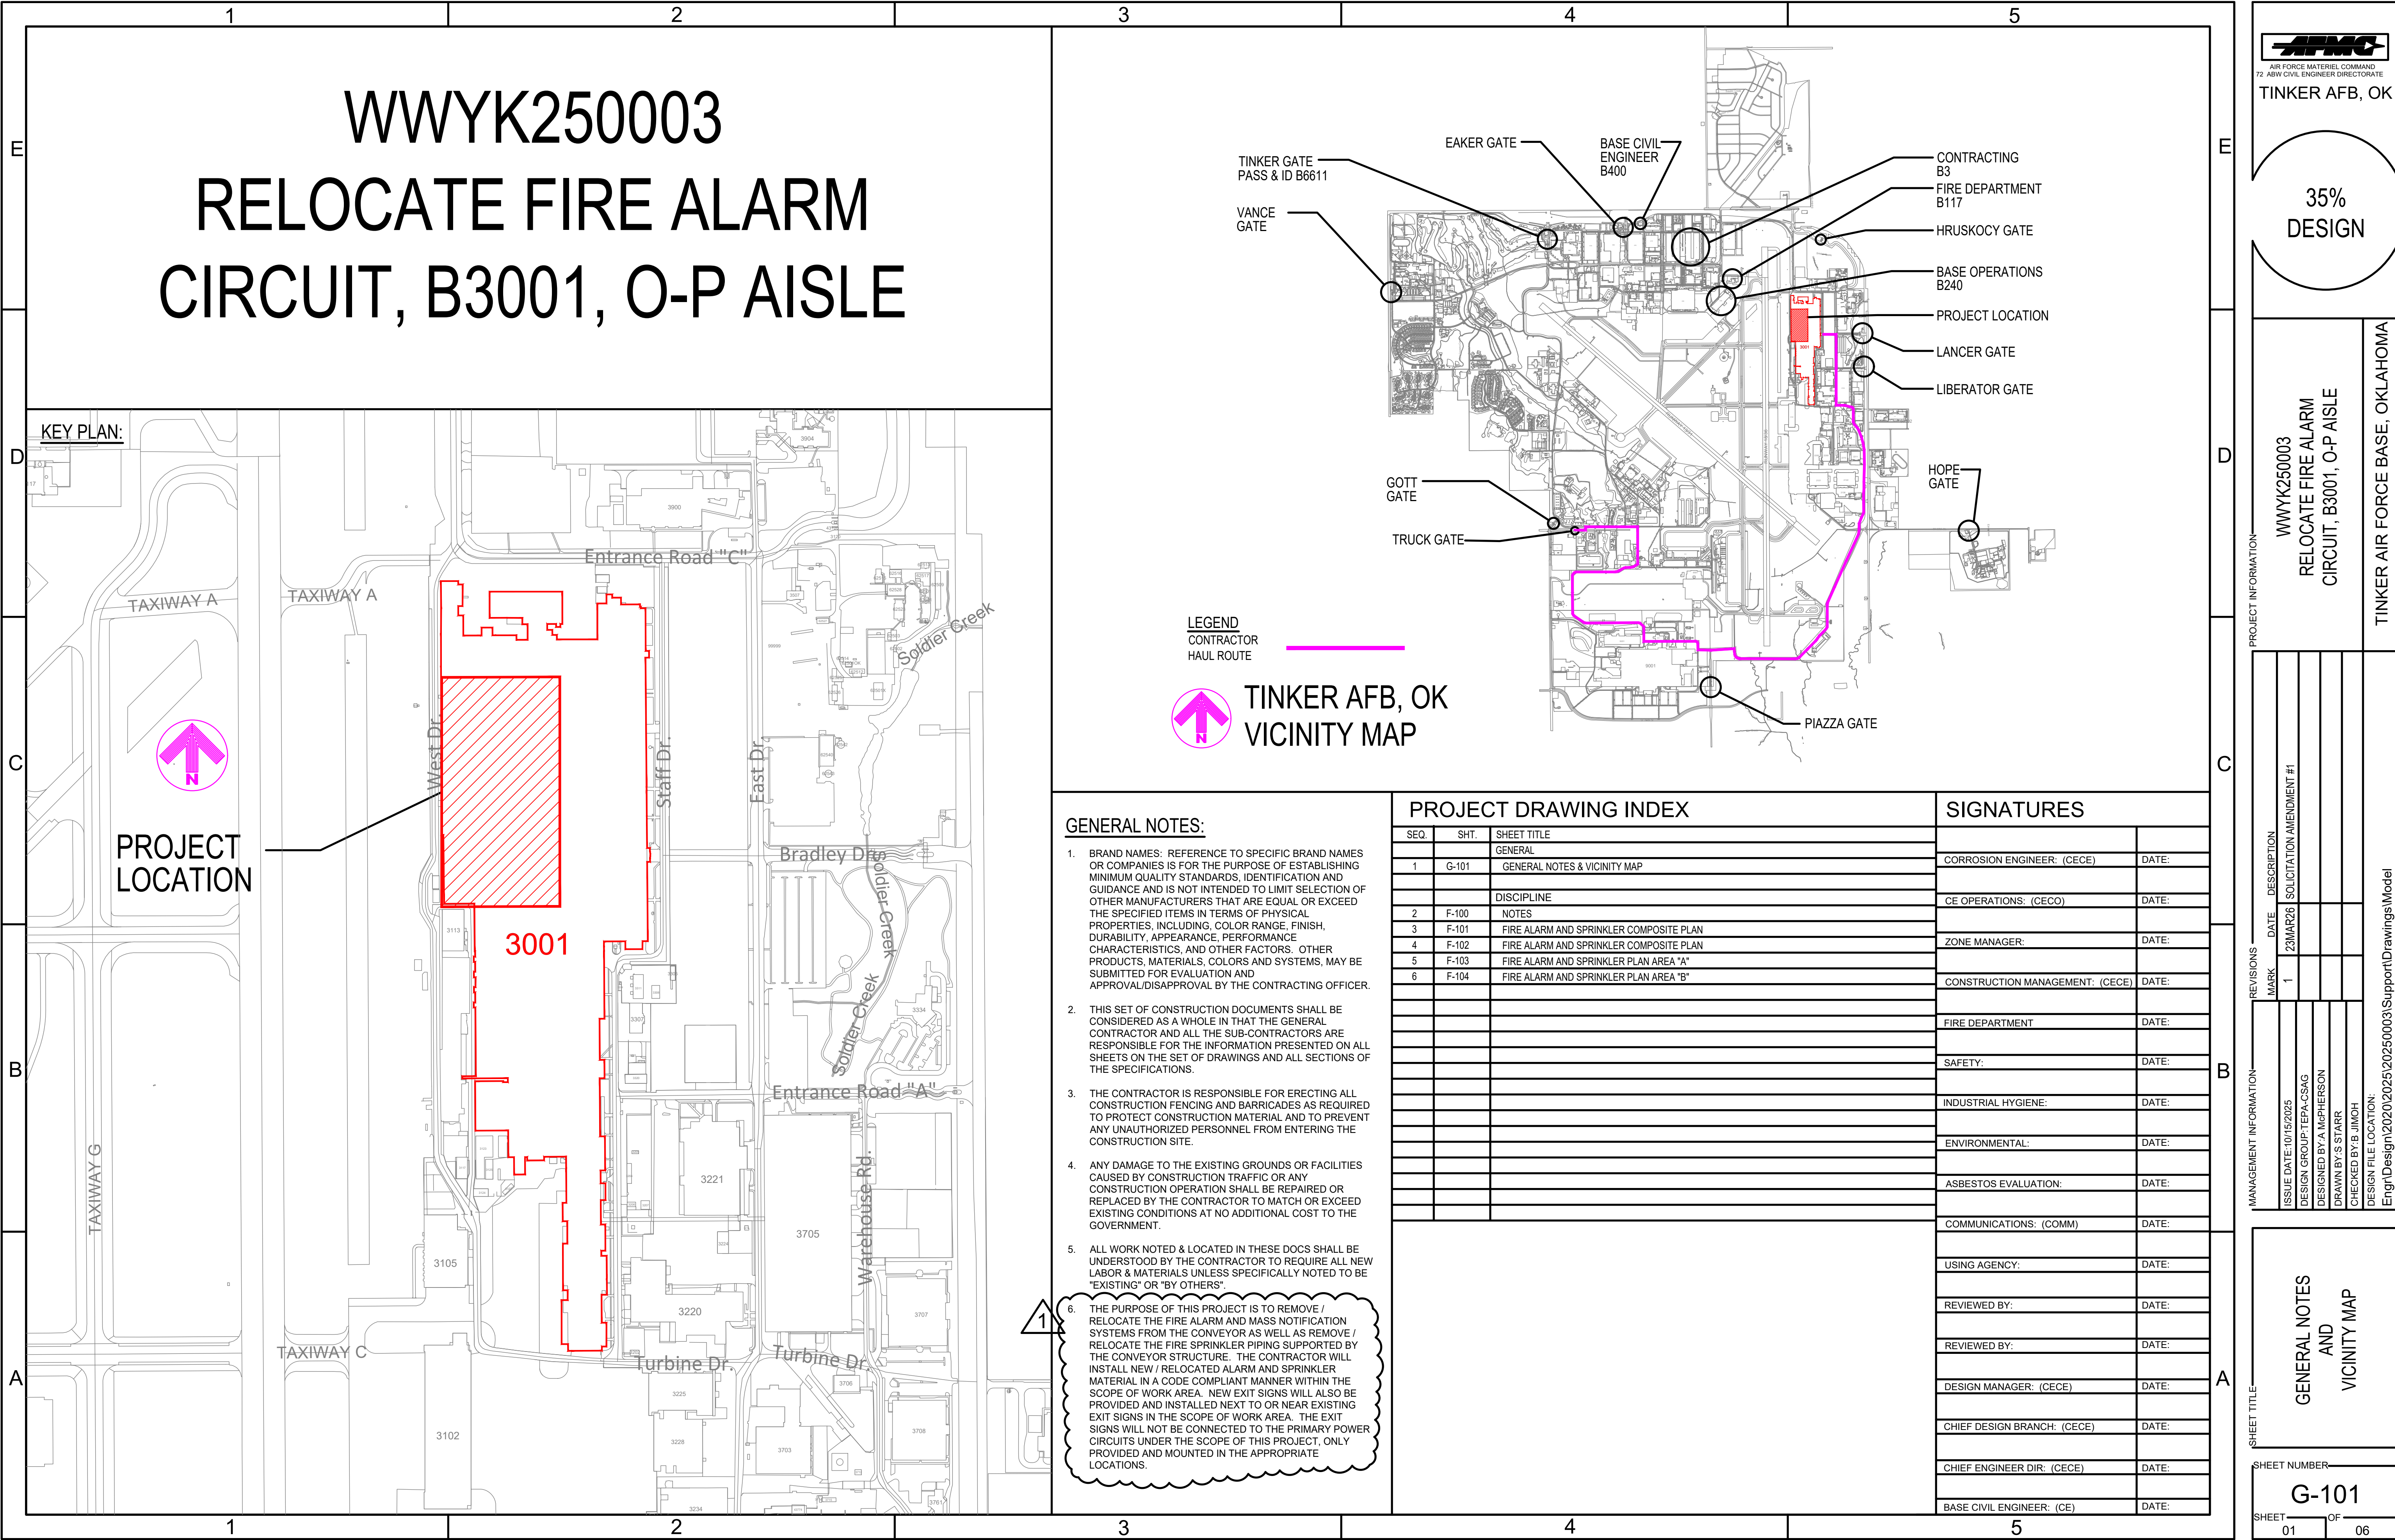

E

D

C

B

A

FIRE ALARM AND MASS NOTIFICATION DEMOLITION NOTES:

EXISTING BUILDING SCOPE EXTENTS:

1.

UFC 3-600-01, SECTION 34-1.1, EXISTING FACILITIES, MINIMUM REQUIREMENTS: FACILITIES AS THEY EXIST, MUST MEET THE REQUIREMENTS OF NFPA 101, FOR EXISTING OCCUPANCIES. FACILITIES THAT DO NOT MEET THE REQUIREMENTS OF NFPA 101 FOR EXISTING OCCUPANCIES MUST CONFORM TO ONE OF THE FOLLOWING:

A.

UPGRADE THE DEFICIENCY TO MEET THE EXISTING OCCUPANCY REQUIREMENTS, OR

B.

ESTABLISH MANAGEMENT PROTOCOLS TO PROVIDE A LEVEL OF LIFE SAFETY EQUIVALENT TO THAT REQUIRED BY NFPA 101 FOR EXISTING OCCUPANCIES. UNTIL AN UPGRADE PROJECT CAN BE COMPLETED, MANAGEMENT PROTOCOLS MUST BE IN WRITING AND APPROVED BY THE COMPONENT FIRE PROTECTION ENGINEER.

2.

UFC 3-600-01, 34-1.2.1, WORK IN EXISTING FACILITIES: CONFORM TO THE REQUIREMENTS OF THE BUILDING REHABILITATION CHAPTER OF NFPA 101 FOR DESIGN AND CONSTRUCTION PROJECTS IN EXISTING BUILDINGS EXCEPT AS SPECIFIED IN UFC 3-600-01.

A.

THE ENTIRE FACILITY, AT A MINIMUM, MUST COMPLY WITH THE APPLICABLE EXISTING OCCUPANCY CHAPTER OF NFPA 101 BEFORE BEGINNING THE PROJECT FOR WORK IN EXISTING FACILITIES. THE PROJECT MAY INCLUDE BRINGING THE FACILITY INTO COMPLIANCE WITH THE APPLICABLE OCCUPANCY CHAPTER OF NFPA 101.

B.

THE AREAS OF THE FACILITY WHERE NO WORK IS BEING PERFORMED MUST MEET THE APPLICABLE EXISTING OCCUPANCY CHAPTER OF NFPA 101, BEFORE BEGINNING THE PROJECT OR BE INCLUDED AS PART OF THE PROJECT.

3.

NFPA 101, 43.2.2.1.3, MODIFICATION: THE RECONFIGURATION OF ANY SPACE; THE ADDITION, RELOCATION, OR ELIMINATION OF ANY DOOR OR WINDOW; THE ADDITION OR ELIMINATION OF LOAD BEARING ELEMENTS; THE RECONFIGURATION OR EXTENSION OF ANY SYSTEM; OR THE INSTALLATION OF ANY ADDITIONAL EQUIPMENT.

4.

NFPA 101, 43.5.1.3, GENERAL REQUIREMENTS: NEWLY CONSTRUCTED ELEMENTS, COMPONENTS, AND SYSTEMS SHALL COMPLY WITH THE REQUIREMENTS OF OTHER SECTIONS OF THIS CODE [NFPA 101] APPLICABLE TO NEW CONSTRUCTION.

EXIT SIGNS:

1.

LOCATE AND PROVIDE NEW EXIT SIGNS IN THE SCOPE OF WORK AREA NEXT TO OR NEAR EXISTING EXIT SIGNS. EXIT SIGNS SHALL BE PROVIDED WITH BATTERY BACKUP. THE NEW EXIT SIGNS WILL NOT BE CONNECTED TO POWER CIRCUITS TO ENERGIZE THE UNITS. THE GOVERNMENT WILL BE PROVIDING THE MATERIALS AND LABOR TO ENERGIZE THE EXIT SIGNS AT A LATER DATE. THE GOVERNMENT WILL PROVIDE THE EMT AND POWER CIRCUITS TO THE NEW EXIT SIGNS THAT THE CONTRACTOR PROVIDES AND INSTALLS. THE GOVERNMENT WILL BE WIRING AND ENERGEIZNG AND TESTING THE EXIT SIGNS OUTSIDE THE SCOPE OF THIS PROJECT AT A LATER DATE.

2.

PROVIDE A FLOOR PLAN THAT IDENTIFIES THE PROPOSED EXIT SIGN LOCATIONS FOR GOVERNMENT REVIEW. THE LAYOUT WILL BE REVIEWED FOR APPROVAL BY THE GOVERNMENT PRIOR TO INSTALLATION.

3.

THE CONTRACTOR IS NOT RESPONSIBLE FOR THE DEMOLITION OF THE EXISTING EXIT SIGNS. THE GOVERNMENT WILL DEMOLISH THE EXISTING EXIT SIGNS AND WIRE / ENERGIZE NEW CONTRACTOR INSTALLED EXIT SIGNS AFTER THE DEMOLITION OF THE CONVEYOR AT A LATER DATE, OUTSIDE THE SCOPE OF THIS PROJECT.

FIRE ALARM AND MASS NOTIFICATION GENERAL NOTES:

1.

MODIFY THE EXISTING FIRE ALARM AND MASS NOTIFICATION SYSTEM AS INDICATED ON THE CONTRACT DOCUMENTS, AS EVIDENTLY INTENDED AND IN ACCORDANCE WITH NFPA 70, NFPA 72, UFC 3-600-01 WITH CHANGE 6, AND TINKER AFB FIRE PROTECTION STANDARDS. THE DRAWINGS ARE DIAGRAMMATIC IN NATURE AND INDICATE GENERAL ARRANGEMENTS OF SYSTEMS AND WORK, BUT DO NOT INCLUDE ALL INTERCONNECTIONS BETWEEN OTHER SYSTEMS, PROVIDE CONDUIT, BACK BOXES, RACEWAY AND WIRING AS REQUIRED TO ACCOMPLISH THE FUNCTIONS INTENDED AND REQUIRED BY CODE.

2.

COORDINATE WORK WITH THAT OF OTHER TRADES SO AS TO AVOID CONFLICTS. RESOLVE CONFLICTS PRIOR TO ROUGH-IN. FAILURE TO PROVIDE SUCH COORDINATION PRIOR TO WORK BEING INSTALLED SHALL NOT BE CAUSE FOR ADDITIONAL COMPENSATION TO THE CONTRACTOR, AND MAY RESULT IN REJECTION OF THE WORK.

3.

COMMISSIONING AND PRELIMINARY AND FINAL ACCEPTANCE TESTING WILL BE IN ACCORDANCE WITH SPECIFICATION SECTIONS 28 31 76 FIRE ALARM AND MASS NOTIFICATION SYSTEM, FIRE PROTECTION, COORDINATE TESTING WITH OTHER TRADES AND BASE PERSONNEL PRIOR TO OPERATION. ALL FIRE SUPPRESSION AND FIRE ALARM TESTING WILL OCCUR SIMULTANEOUSLY TO EXPEDITE COMMISSIONING.

4.

THE BUILDING FIRE ALARM AND MASS NOTIFICATION SYSTEM SHALL REMAIN OPERATIONAL AT ALL TIMES. SUPERVISE ALL FIRE PROTECTION IMPAIRMENTS IN ACCORDANCE WITH UFC 3-601-02. NO PORTION OF THE BUILDING SHALL BE OCCUPIED UNTIL THE FIRE ALARM DEVICES HAVE BEEN INSTALLED OR FIRE WATCH IN PLACE.

5.

PROVIDE NEW MATERIALS, BEARING LABELS OR MARKING INDICATING THIRD PARTY TESTING AND APPROVAL, SUITABLE FOR THE APPLICATION INTENDED.

6.

INSTALL FIRE ALARM CABLE IN METAL RACEWAY. FREE-RUN CABLE IS NOT PERMITTED. RACEWAY SHALL BE CONCEALED IN FINISHED SPACES, AND MAY BE INSTALLED EXPOSED IN UNFINISHED SPACES SUCH AS MECHANICAL AND ELECTRICAL ROOMS. INSTALL RACEWAY PERPENDICULAR OR PARALLEL TO THE BUILDING'S STRUCTURAL COMPONENTS. RACEWAY SHOULD BE 3/4 INCH RED EMT.

7.

PROVIDE PULL AND JUNCTION BOXES AS REQUIRED TO MEET CODE AND INSTALLATION REQUIREMENTS. PULL AND JUNCTION BOXES SHALL BE CONCEALED IN FINISHED SPACES. COORDINATE WITH OTHER TRADES SO AS TO AVOID CONFLICTS. BOXES TO BE RED.

8.

SUPPORT CONDUIT AND BACK BOXES BY MEANS OF ANCHORS, RODS, HANGERS, ETC., TO MAINTAIN ALIGNMENT AND PREVENT MOVEMENT. SUPPORT CEILING MOUNTED BACK BOXES WITH "T" HANGERS OR EQUAL METHOD OF SUPPORT. BACK BOXES SHALL NOT BE SUPPORTED SOLEY BY CONDUIT.

9.

NOT USED.

10.

WHERE CONDUIT PASS THROUGH FIRE WALLS, FIRE BARRIERS, FIRE PARTITION, OR FLOORS, A FIRE SEAL WILL BE PLACED BETWEEN THE PIPE AND SLEEVE IN ACCORDANCE WITH REQUIRED FIRESTOPPING.

11.

SEAL PENETRATIONS AT FIRE OR SMOKE RATED CONSTRUCTION WITH FIRESTOPPING MATERIALS APPROVED AND LISTED FOR THE RATING OF THE CONSTRUCTION TO BE PENETRATED. PROVIDE DOCUMENTATION FOR EACH PENETRATION SEALING SYSTEMS FOR VERIFICATION OF PROPER INSTALLATION.

12.

PERFORM WORK ON DE-ENERGIZED SYSTEMS ONLY TO PREVENT PERSONNEL INJURY AND POTENTIAL SYSTEM FAILURE. WHERE WORK ON EXISTING SYSTEMS SHALL REQUIRE INTERRUPTION OF ELECTRICAL SERVICE, TEMPORARY PROVISIONS ACCEPTABLE TO THE OWNER SHALL BE REQUIRED.

13.

MODIFIED SYSTEM, CONSTRUCTION (SHOP) DRAWINGS AND CALCULATIONS MUST PREPARED BY AN INDIVIDUAL THAT HAS OBTAINED NATIONAL INSTITUTE FOR CERTIFICATION IN ENGINEERING TECHNOLOGIES, FIRE ALARM SYSTEMS, LEVEL III CERTIFICATION, AT A MINIMUM. THE QPFE MUST REVIEW THE SHOP DRAWINGS, CALCULATIONS AND MATERIAL SUBMITTALS. THE SHOP DRAWINGS MUST BEAR THE REVIEW STAMP OF THE QPFE PRIOR TO SUBMITTING THE FIRE ALARM AND MASS NOTIFICATION SYSTEM SHOP DRAWINGS TO THE GOVERNMENT.

14.

NOT USED.

SPRINKLER SYSTEM DEMOLITION NOTES:

SPRINKLER SYSTEM GENERAL NOTES:

1.

CONTRACT DOCUMENTS WERE PREPARED FROM FIELD SURVEYS. THEY ARE NOT INTENDED TO DEPICT UNFORESEEN CONDITIONS THAT MAY ADVERSELY AFFECT THE ARCHITECTURAL, ELECTRICAL, AND MECHANICAL SYSTEM DEMOLITION OR INSTALLATION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS PRIOR TO STARTING ANY WORK.

2.

THE EXISTING BUILDING SPRINKLER SYSTEM LOCATED OUTSIDE OF THE WORK AREA SHALL REMAIN OPERATIONAL AT ALL TIMES. THE FIRE ALARM SYSTEM SHALL MONITOR THE SPRINKLER SYSTEM WATER FLOW AND VALVE TAMPER DEVICES AT ALL TIMES. SUPERVISE ALL FIRE PROTECTION IMPAIRMENTS IN ACCORDANCE WITH UFC 3-601-02. NO SPRINKLER HEADS SHALL BE DEMOLISHED UNTIL THE BUILDING OCCUPANTS HAVE BEEN REMOVED FROM THE AFFECTED PORTION OF THE BUILDING.

3.

PERFORM DEMOLITION AND INSTALLATION IN A MANNER THAT SHALL HAVE LEAST ADVERSE EFFECT ON NORMAL BUILDING OPERATION. CONTRACTOR SHALL COORDINATE DEMOLITION AND INSTALLATION WITH THE BUILDING USER AND THE GOVERNMENT.

4.

HOT WORK ASSOCIATED WITH DEMOLITION AND CONSTRUCTION SHALL BE PERFORMED IN ACCORDANCE WITH NFPA §1B. SAFEGUARDS FOR HOT WORK OPERATIONS INCLUDE, BUT ARE NOT LIMITED TO THE RELOCATION OF COMBUSTIBLE STORAGE, THE USE OF FIRE RESISTIVE BARRIERS TO PROTECT COMBUSTIBLES THAT CANNOT BE RELOCATED, THE ESTABLISHMENT OF FIRE WATCH AND THE TERMINATION OF HOT WORK OPERATIONS WHEN FIRE PROTECTION SYSTEMS ARE OUT OF SERVICE. ADDITIONALLY, HOT WORK SHOULD NOT BE PERFORMED WHEN ALTERNATIVE METHODS CAN BE EMPLOYED TO DISMANTLE EXISTING OR ASSEMBLE NEW SYSTEMS.

5.

THE CONTRACTOR SHALL PROVIDE PORTABLE FIRE EXTINGUISHERS SUITABLE FOR THE COMBUSTIBLES PRESENT DURING CONSTRUCTION. WHERE EXISTING BUILDING EXTINGUISHERS AREA BLOCKED, REMOVED OR GENERALLY MADE INACCESSIBLE TO THE BUILDING OCCUPANTS, SUPPLEMENTAL EXTINGUISHERS SHALL BE PROVIDED SUCH THAT A PORTABLE FIRE EXTINGUISHER IS LOCATED WITHIN 75 FT OF ALL AREAS OF THE BUILDING. THE CONTRACTOR SHALL REGULARLY INSPECT (AT LEAST WEEKLY) PORTABLE EXTINGUISHERS LOCATED WITHIN THE WORK AREA TO ENSURE THAT THEY ARE CHARGED, FREE FROM DAMAGE AND ACCESSIBLE.

1.

CONTRACTOR IS RESPONSIBLE FOR FINAL INSTALLATION DESIGN AND COORDINATION. SIZING OF FIRE SUPPRESSION COMPONENTS WILL BE CONFIRMED BY CONTRACTOR. DESIGNER WILL BE A MINIMUM NICET LEVEL III TECHNICIAN.

2.

THESE DRAWINGS ARE CONCEPTIAL IN NATURE AND DEVICE PLACEMENTS ARE REPRESENTATIVE. CONTRACTOR TO VERIFY AND PROVIDE FULL DESIGN IN ACCORDANCE WITH APPLICABLE CODES (UFC, ICC, NFPA, ETC.).

3.

THE FIRE SPRINKLER CONTRACTOR WILL COORDINATE WITH THE FIRE ALARM CONTRACTOR AND OTHER TRADES FOR PROVISION OF CONNECTIONS BETWEEN THEIR RESPECTIVE SYSTEMS.

4.

ALL MATERIALS ARE TO BE UL LISTED OR FM APPROVED FOR USE IN FIRE PROTECTION SYSTEMS.

5.

COMMISSIONING AND PRELIMINARY AND FINAL ACCEPTANCE TESTING WILL BE IN ACCORDANCE WITH SPECIFICATION SECTIONS 21 13 13 WET PIPE SPRINKLER SYSTEM, FIRE PROTECTION. COORDINATE TESTING WITH OTHER TRADES AND BASE PERSONNEL PRIOR TO OPERATION. ALL FIRE SUPPRESSION AND FIRE ALARM TESTING WILL OCCUR SIMLTANEOUSLY TO EXPEDITE COMMISSIONING.

6.

THE BUILDING FIRE PROTECTION WATER SUPPLY IS SERVED BY EXISTING FIRE PUMPS.

7.

WHERE PIPES PASS THROUGH FIRE WALLS, FIRE BARRIERS, FIRE PARTITION, OR FLOORS, A FIRE SEAL WILL BE PLACED BETWEEN THE PIPE AND SLEEVE IN ACCORDANCE WITH SECTION 07 84 00 FIRESTOPPING.

8.

SLEEVES PENETRATING CONCRETE, MASONRY WALLS OR CONCRETE FLOORS WILL BE CUT FLUSH WITH EACH SURFACE. SLEEVE SIZES AND CLEARANCE BETWEEN PIPE AND SLEEVE WILL BE IN ACCORDANCE WITH NFPA 13.

9.

SPRINKLERS WILL BE SPACED IN ACCORDANCE WITH NFPA 13 OBSTRUCTION REQUIREMENTS. PROVIDE SPRINKLERS UNDER STAIRS, CATWALKS, PLATFORMS, SHED STRUCTURES, ETC. AS REQUIRED PER NFPA 13.

10.

PROVIDE HEAD GUARDS IN AREAS SUBJECT TO DAMAGE OR HEADS INSTALLED LOWER THAN SEVEN FEET ABOVE FLOOR.

11.

PROVIDE HEAD GUARDS WITH WATER SHIELDS FOR ALL HEADS INSTALLED BENEATH OPEN GRATED PLATFORMS.

12.

VALVES LOCATED MORE THAN 8 FOOT ABOVE FINISHED FLOOR AND NOT READILY ACCESSIBLE FROM MEZZANINE WILL BE PROVIDED WITH CHAIN OPERATORS.

13.

PROVIDE ACCESS DOORS AND SIGNAGE WHERE ACCESS IS REQUIRED TO CONCEALED SPRINKLER EQUIPMENT, VALVES, AND CONTROLS. LOCATIONS TO BE APPROVED BY CONTRACTING OFFICER.

14.

PROVIDE PERMANENT LABELS ON WET-PIPE RISERS TO INDICATE WHICH ZONE EACH ONE SERVES.

15.

PROVIDE PERMANENT LABELS INDICATING NORMAL OPERATING POSITION ON ALL VALVES INCLUDING, BUT NOT LIMITED TO, SECTIONAL VALVES, INSPECTOR'S TEST VALVES, AND DRAIN VALVES.

16.

MODIFIED SYSTEM, CONSTRUCTION (SHOP) DRAWINGS AND MUST PREPARED BY AN INDIVIDUAL THAT HAS OBTAINED NATIONAL INSTITUTE FOR CERTIFICATION IN ENGINEERING TECHNOLOGIES, FIRE ALARM SYSTEMS, LEVEL III CERTIFICATION, AT A MINIMUM. THE QPFE MUST REVIEW THE SHOP DRAWINGS, AND MATERIALS SUBMITTALS. THE SHOP DRAWINGS MUST BEAR THE REVIEW STAMP OF THE QPFE PRIOR TO SUBMITTING THE FIRE SPRINKLER SHOP DRAWINGS TO THE GOVERNMENT.

17.

SUBMIT SHOP DRAWINGS AND PRODUCT DATA TO THE GOVERNMENT FOR REVIEW, IN A MANNER AS REQUIRED PER NFPA 13 AND UFC 3-600-01. SUBMIT EQUIPMENT DATA SHEETS FOR A COMPLETE INSTALLATION OF THE FIRE SPRINKLER SYSTEM. APPROVED SHOP DRAWINGS, TESTING PLANS, AND DATA SHEETS ARE REQUIRED PRIOR TO COMMENCEMENT OF WORK. THE FIRE SPRINKLER SYSTEM SUBMITTAL SHALL BE A COMPLETE PACKAGE, PARTIAL SUBMITTAL WILL NOT BE ACCEPTED.

TINKER AIR FORCE BASE, OKLAHOMA

RELOCATE FIRE ALARM CIRCUIT, B3001, O-P AISLE

WWWK250003

PROJECT INFORMATION

MARK

DATE

DESCRIPTION

1

23MAR26


SOLICITATION AMENDMENT #1

ISSUE

35%
DESIGN

PROJECT INFORMATION
WWYK250003
RELOCATE FIRE ALARM
CIRCUIT, B3001, O-P AISLE
TINKER AIR FORCE BASE, OKLAHOMA

REVISIONS		DATE	DESCRIPTION
MARK	1	23MAR26	SOLICITATION AMENDMENT #1
MANAGEMENT INFORMATION		ISSUE DATE: 10/15/2025	DESIGN GROUP: TEPA-CSAG
		DESIGNED BY: A McPHERSON	DRAWN BY: S STARR
		CHECKED BY: B JIMOH	DESIGN FILE LOCATION: Eng\Design\2020\2025\20250003\Support\Drawings\Model

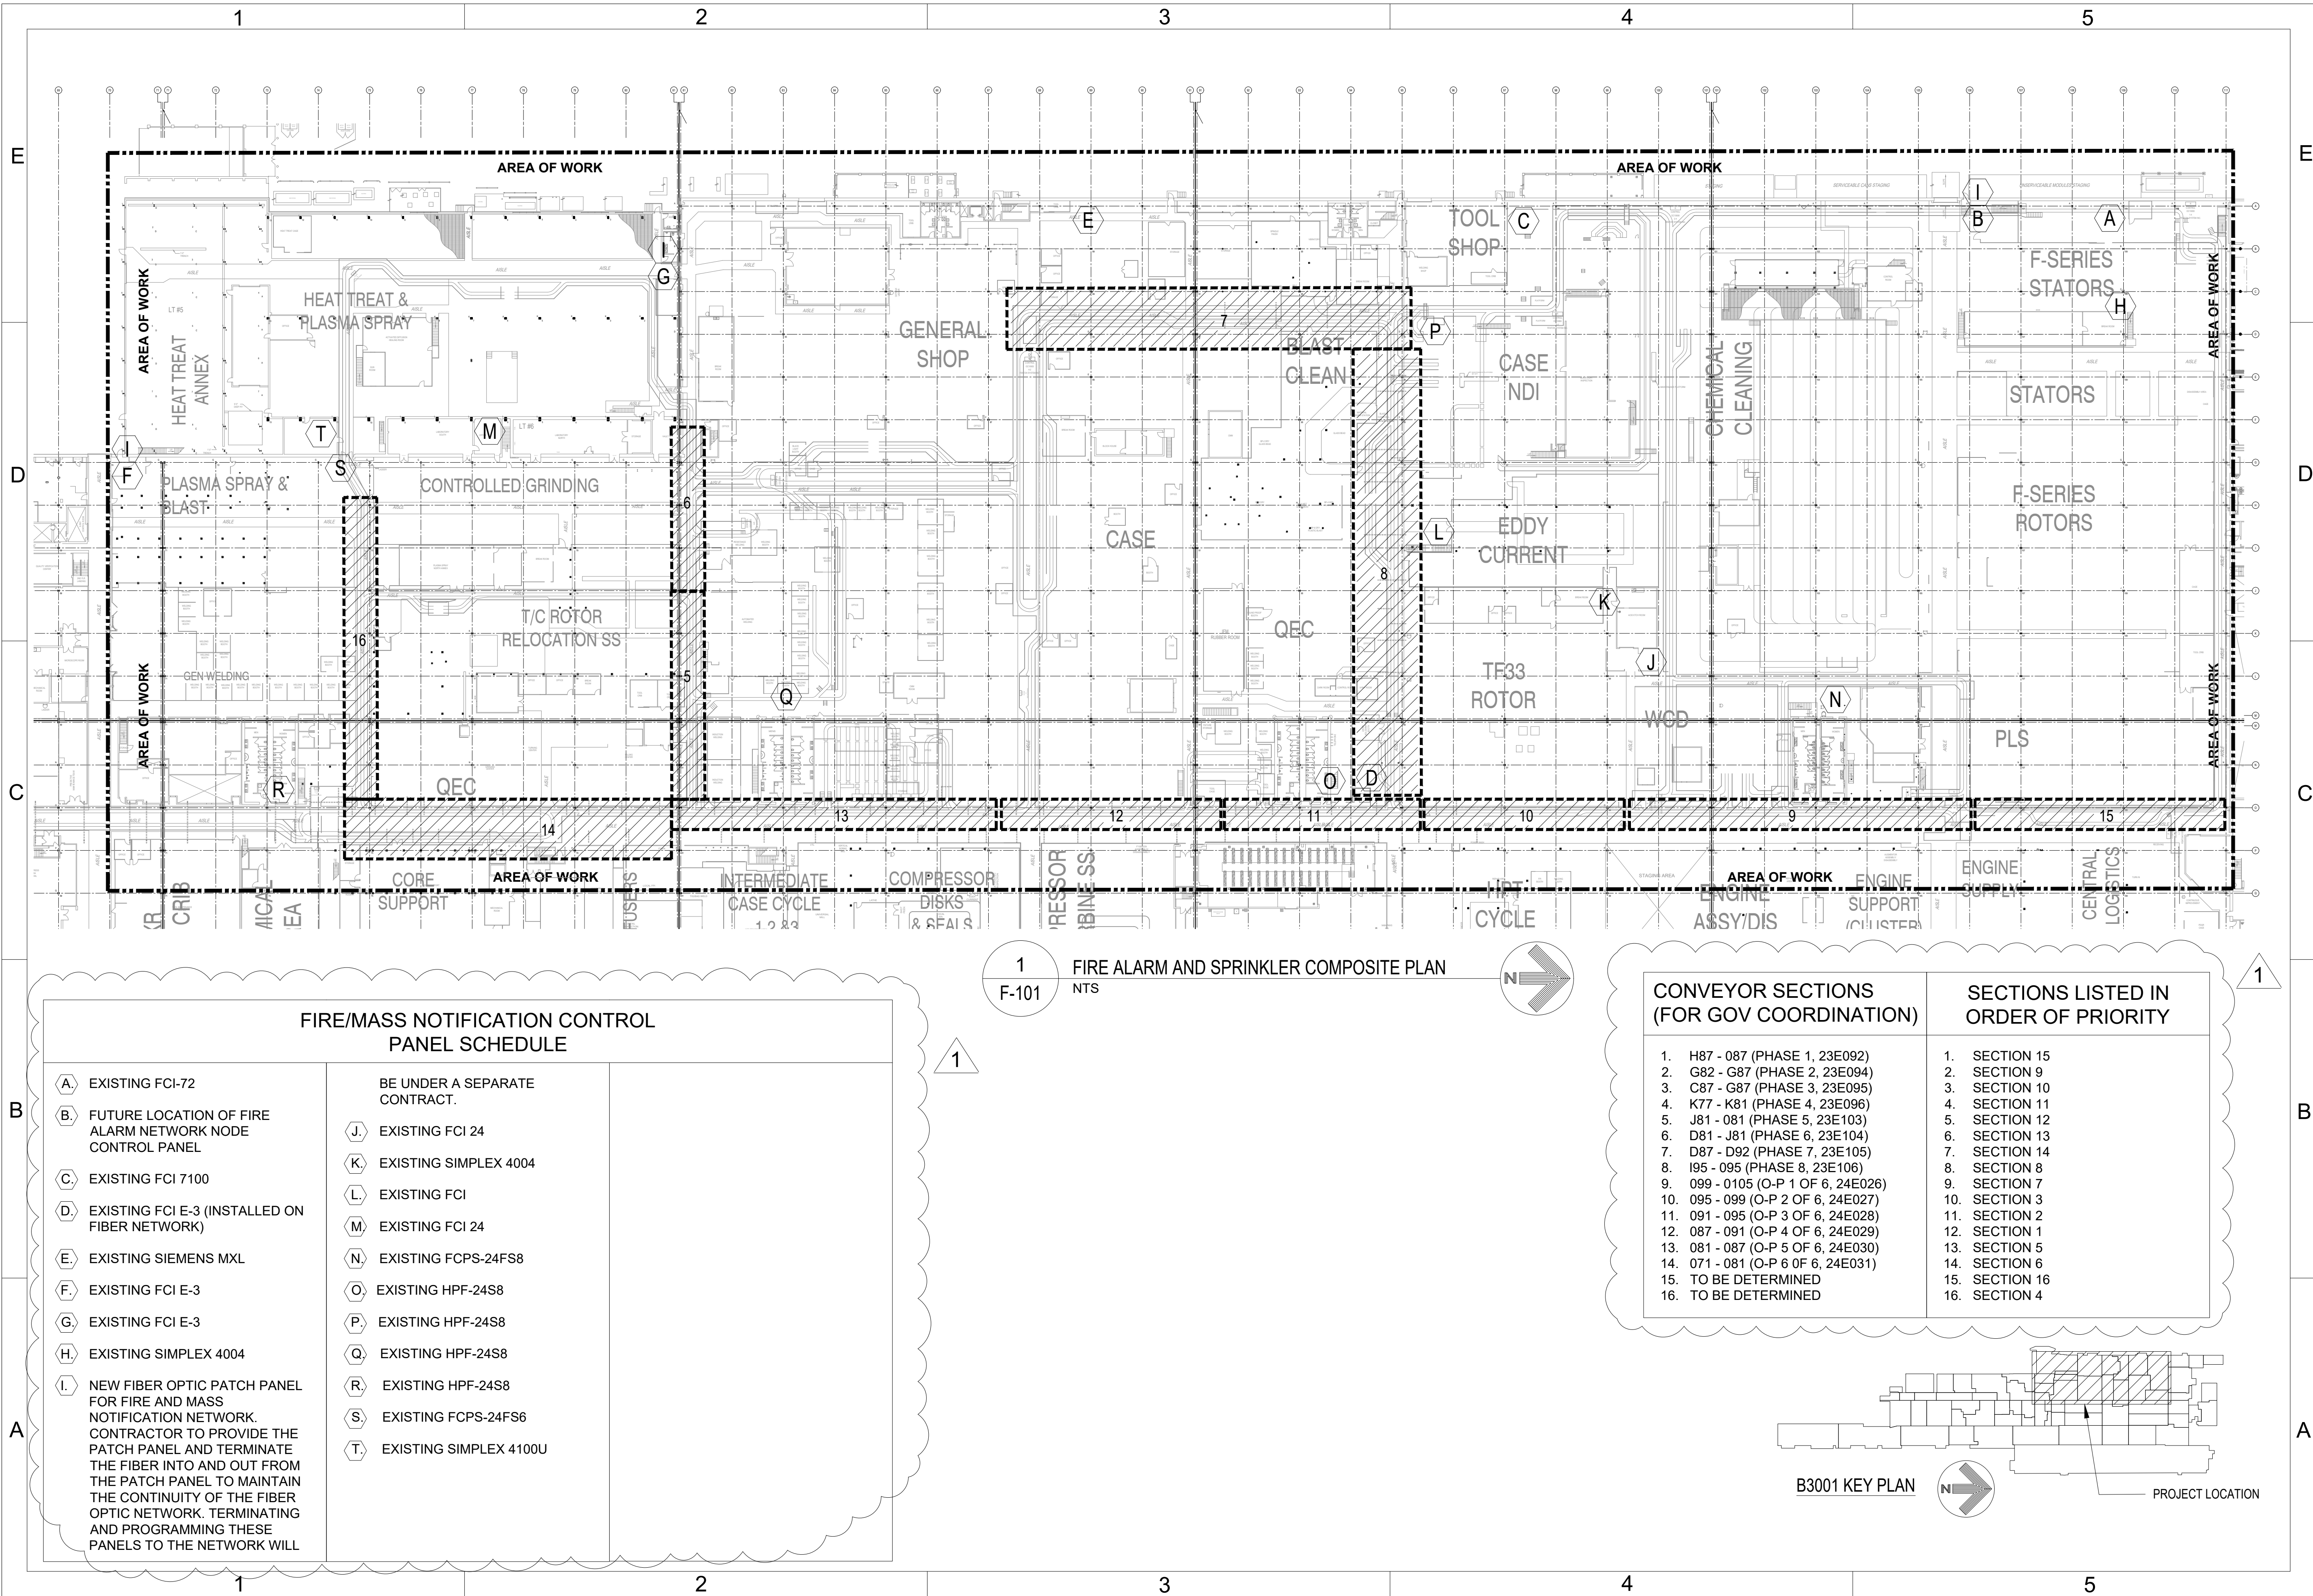

FIRE/MASS NOTIFICATION CONTROL
PANEL SCHEDULE

A EXISTING FCI-72	BE UNDER A SEPARATE CONTRACT.
B FUTURE LOCATION OF FIRE ALARM NETWORK NODE CONTROL PANEL	J EXISTING FCI 24
C EXISTING FCI 7100	K EXISTING SIMPLEX 4004
D EXISTING FCI E-3 (INSTALLED ON FIBER NETWORK)	L EXISTING FCI
E EXISTING SIEMENS MXL	M EXISTING FCI 24
F EXISTING FCI E-3	N EXISTING FCPS-24FS8
G EXISTING FCI E-3	O EXISTING HPF-24S8
H EXISTING SIMPLEX 4004	P EXISTING HPF-24S8
I NEW FIBER OPTIC PATCH PANEL FOR FIRE AND MASS NOTIFICATION NETWORK. CONTRACTOR TO PROVIDE THE PATCH PANEL AND TERMINATE THE FIBER INTO AND OUT FROM THE PATCH PANEL TO MAINTAIN THE CONTINUITY OF THE FIBER OPTIC NETWORK. TERMINATING AND PROGRAMMING THESE PANELS TO THE NETWORK WILL	Q EXISTING HPF-24S8
	R EXISTING HPF-24S8
	S EXISTING FCPS-24FS6
	T EXISTING SIMPLEX 4100U

1
F-101
FIRE ALARM AND SPRINKLER COMPOSITE PLAN
NTS

CONVEYOR SECTIONS
(FOR GOV COORDINATION)

1. H87 - 087 (PHASE 1, 23E092)
2. G82 - G87 (PHASE 2, 23E094)
3. C87 - G87 (PHASE 3, 23E095)
4. K77 - K81 (PHASE 4, 23E096)
5. J81 - 081 (PHASE 5, 23E103)
6. D81 - J81 (PHASE 6, 23E104)
7. D87 - D92 (PHASE 7, 23E105)
8. I95 - 095 (PHASE 8, 23E106)
9. 099 - 0105 (O-P 1 OF 6, 24E026)
10. 095 - 099 (O-P 2 OF 6, 24E027)
11. 091 - 095 (O-P 3 OF 6, 24E028)
12. 087 - 091 (O-P 4 OF 6, 24E029)
13. 081 - 087 (O-P 5 OF 6, 24E030)
14. 071 - 081 (O-P 6 OF 6, 24E031)
15. TO BE DETERMINED
16. TO BE DETERMINED

SECTIONS LISTED IN
ORDER OF PRIORITY

1. SECTION 15
2. SECTION 9
3. SECTION 10
4. SECTION 11
5. SECTION 12
6. SECTION 13
7. SECTION 14
8. SECTION 8
9. SECTION 7
10. SECTION 3
11. SECTION 2
12. SECTION 1
13. SECTION 5
14. SECTION 6
15. SECTION 16
16. SECTION 4

B3001 KEY PLAN



PROJECT LOCATION

RELOCATE FIRE ALARM
CIRCUIT, B3001, O-P AISLE


LINKER AIR FORCE BASE, OKLAHOMA


MARK	DATE	DESCRIPTION
1	23MAR26	SOLICITATION AMENDMENT #1
	ISSUE DATE:10/15/2025	
	DESIGN GROUP:TEPA-CSAG	
	DESIGNED BY:A McPHERSON	
	DRAWN BY:S STARR	
	CHECKED BY:B JIMOH	
	DESIGN FILE LOCATION:	
	Eng\Design\2020\2025\20250003\Support\Drawings\Model	

FIRE ALARM
AND SPRINKLER
COMPOSITE PLAN

HEET NUMBER **F-102**

HEET **04** OF **06**

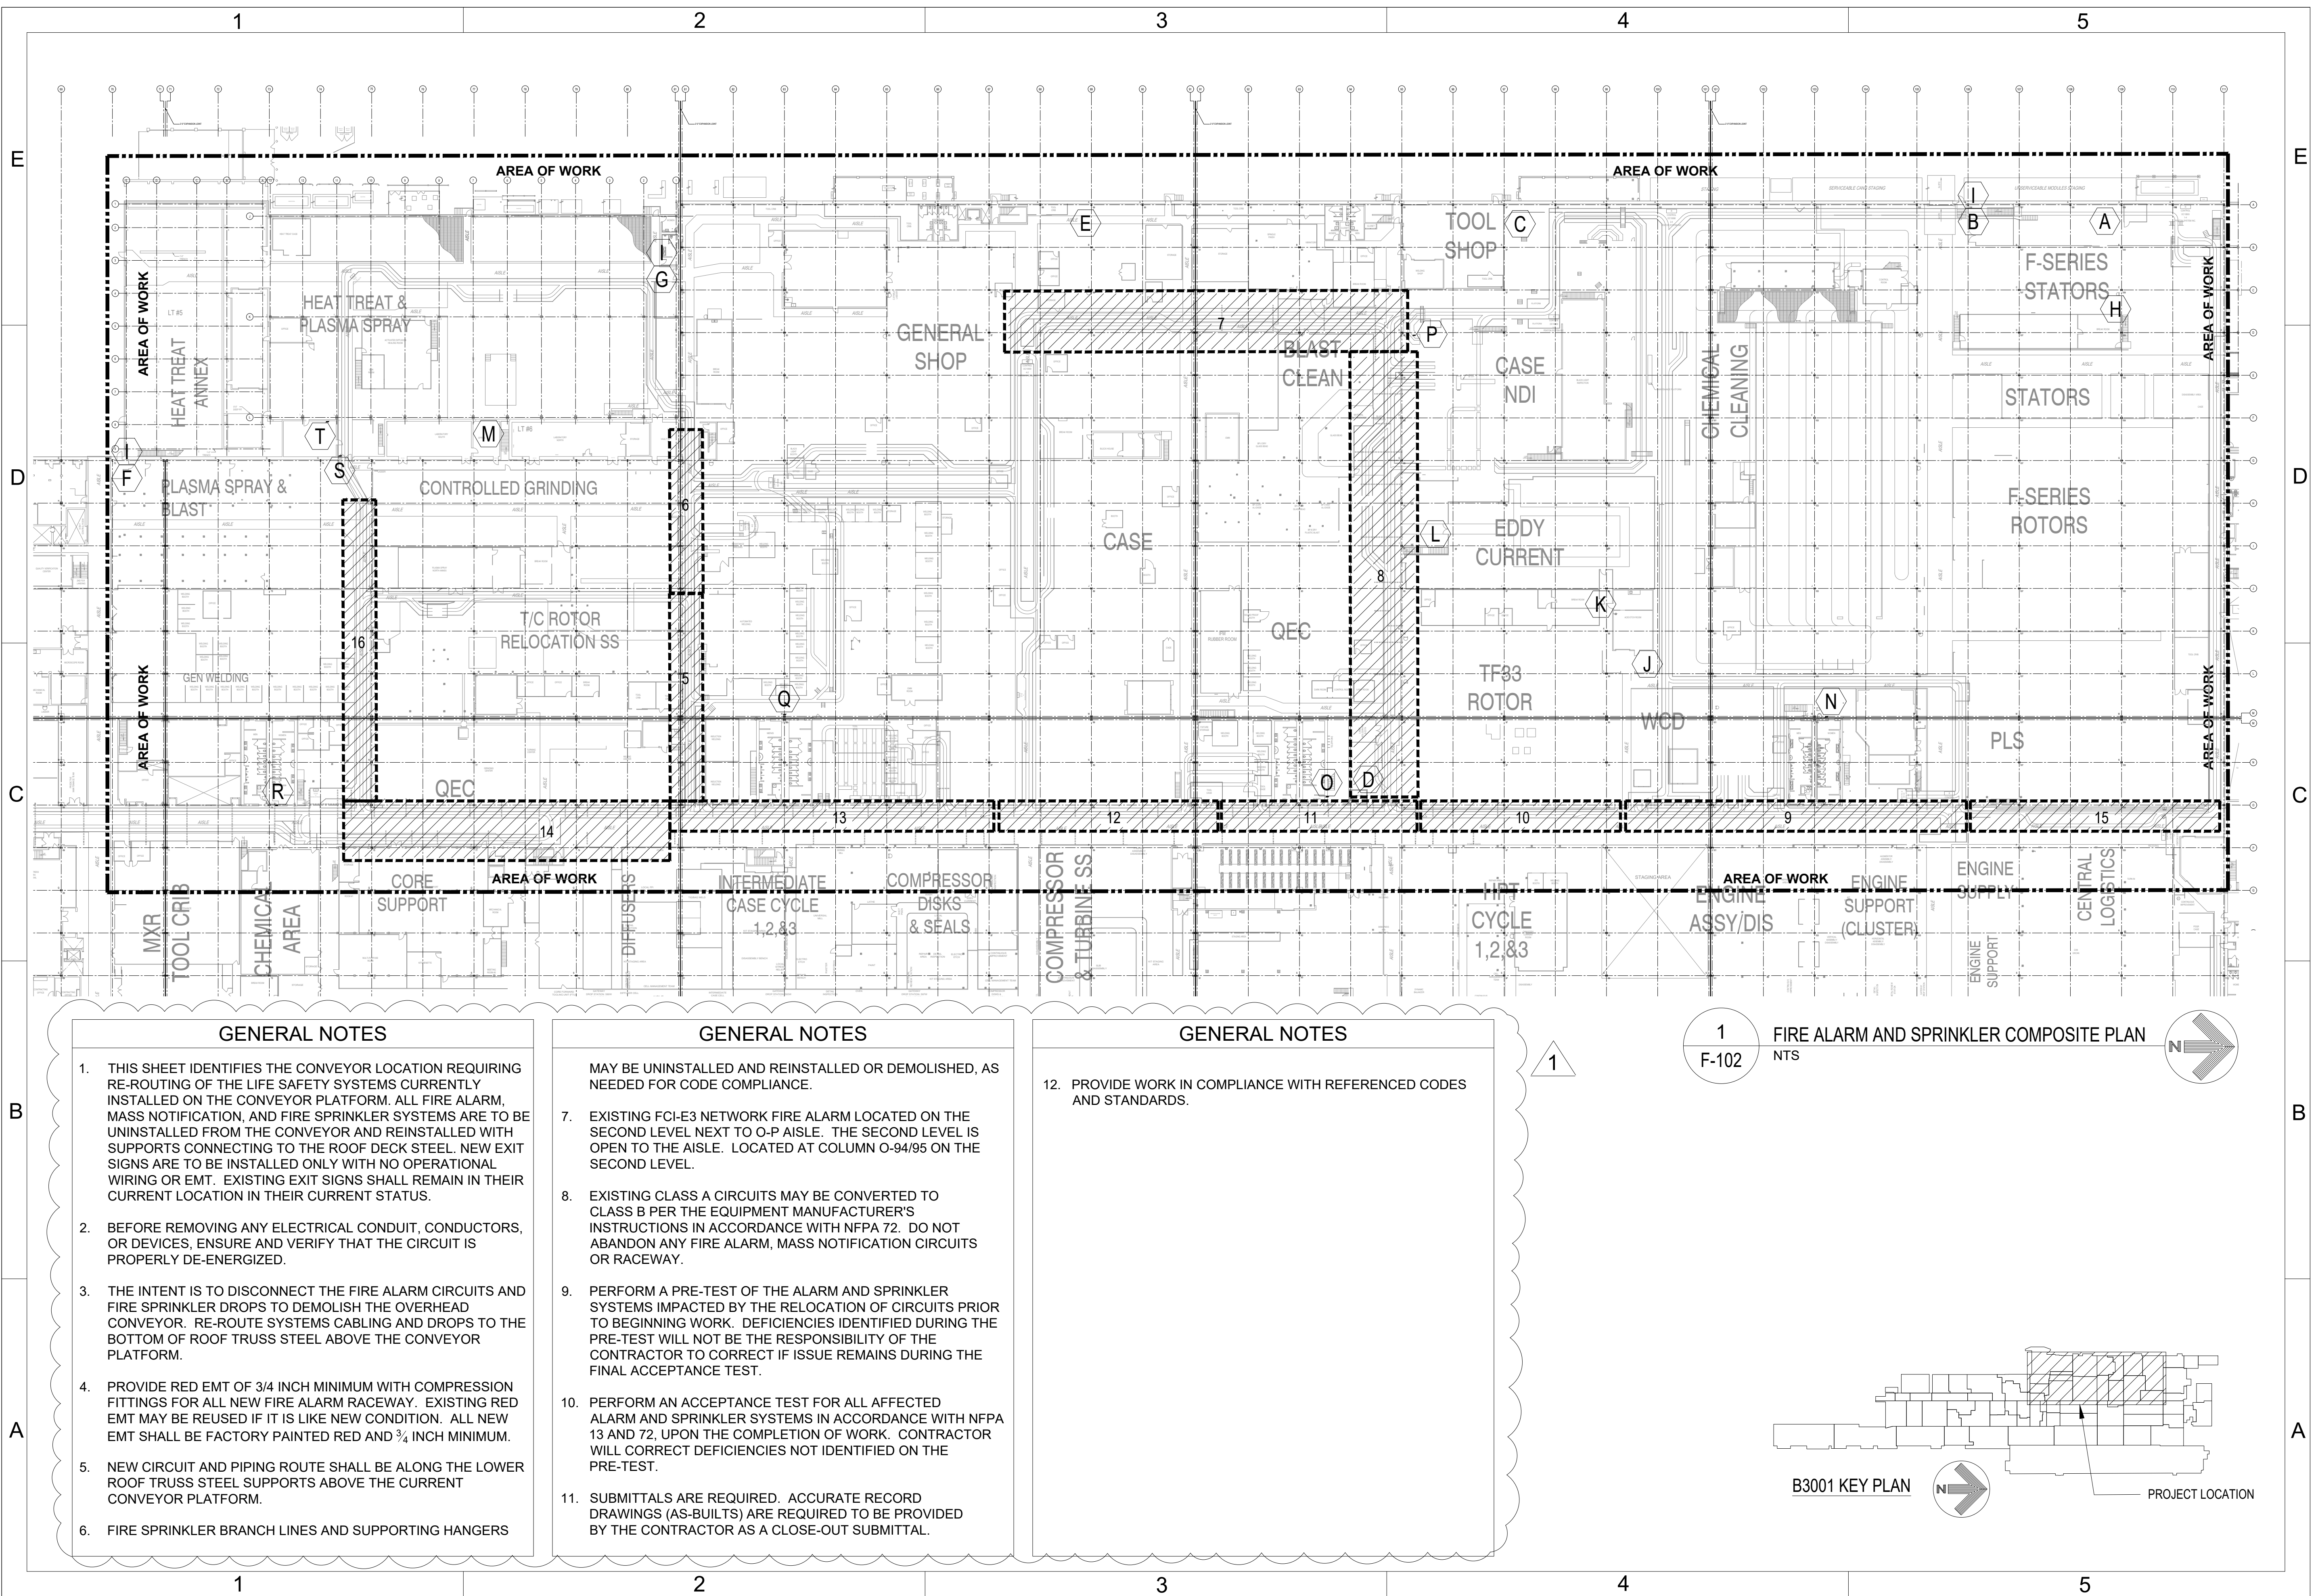

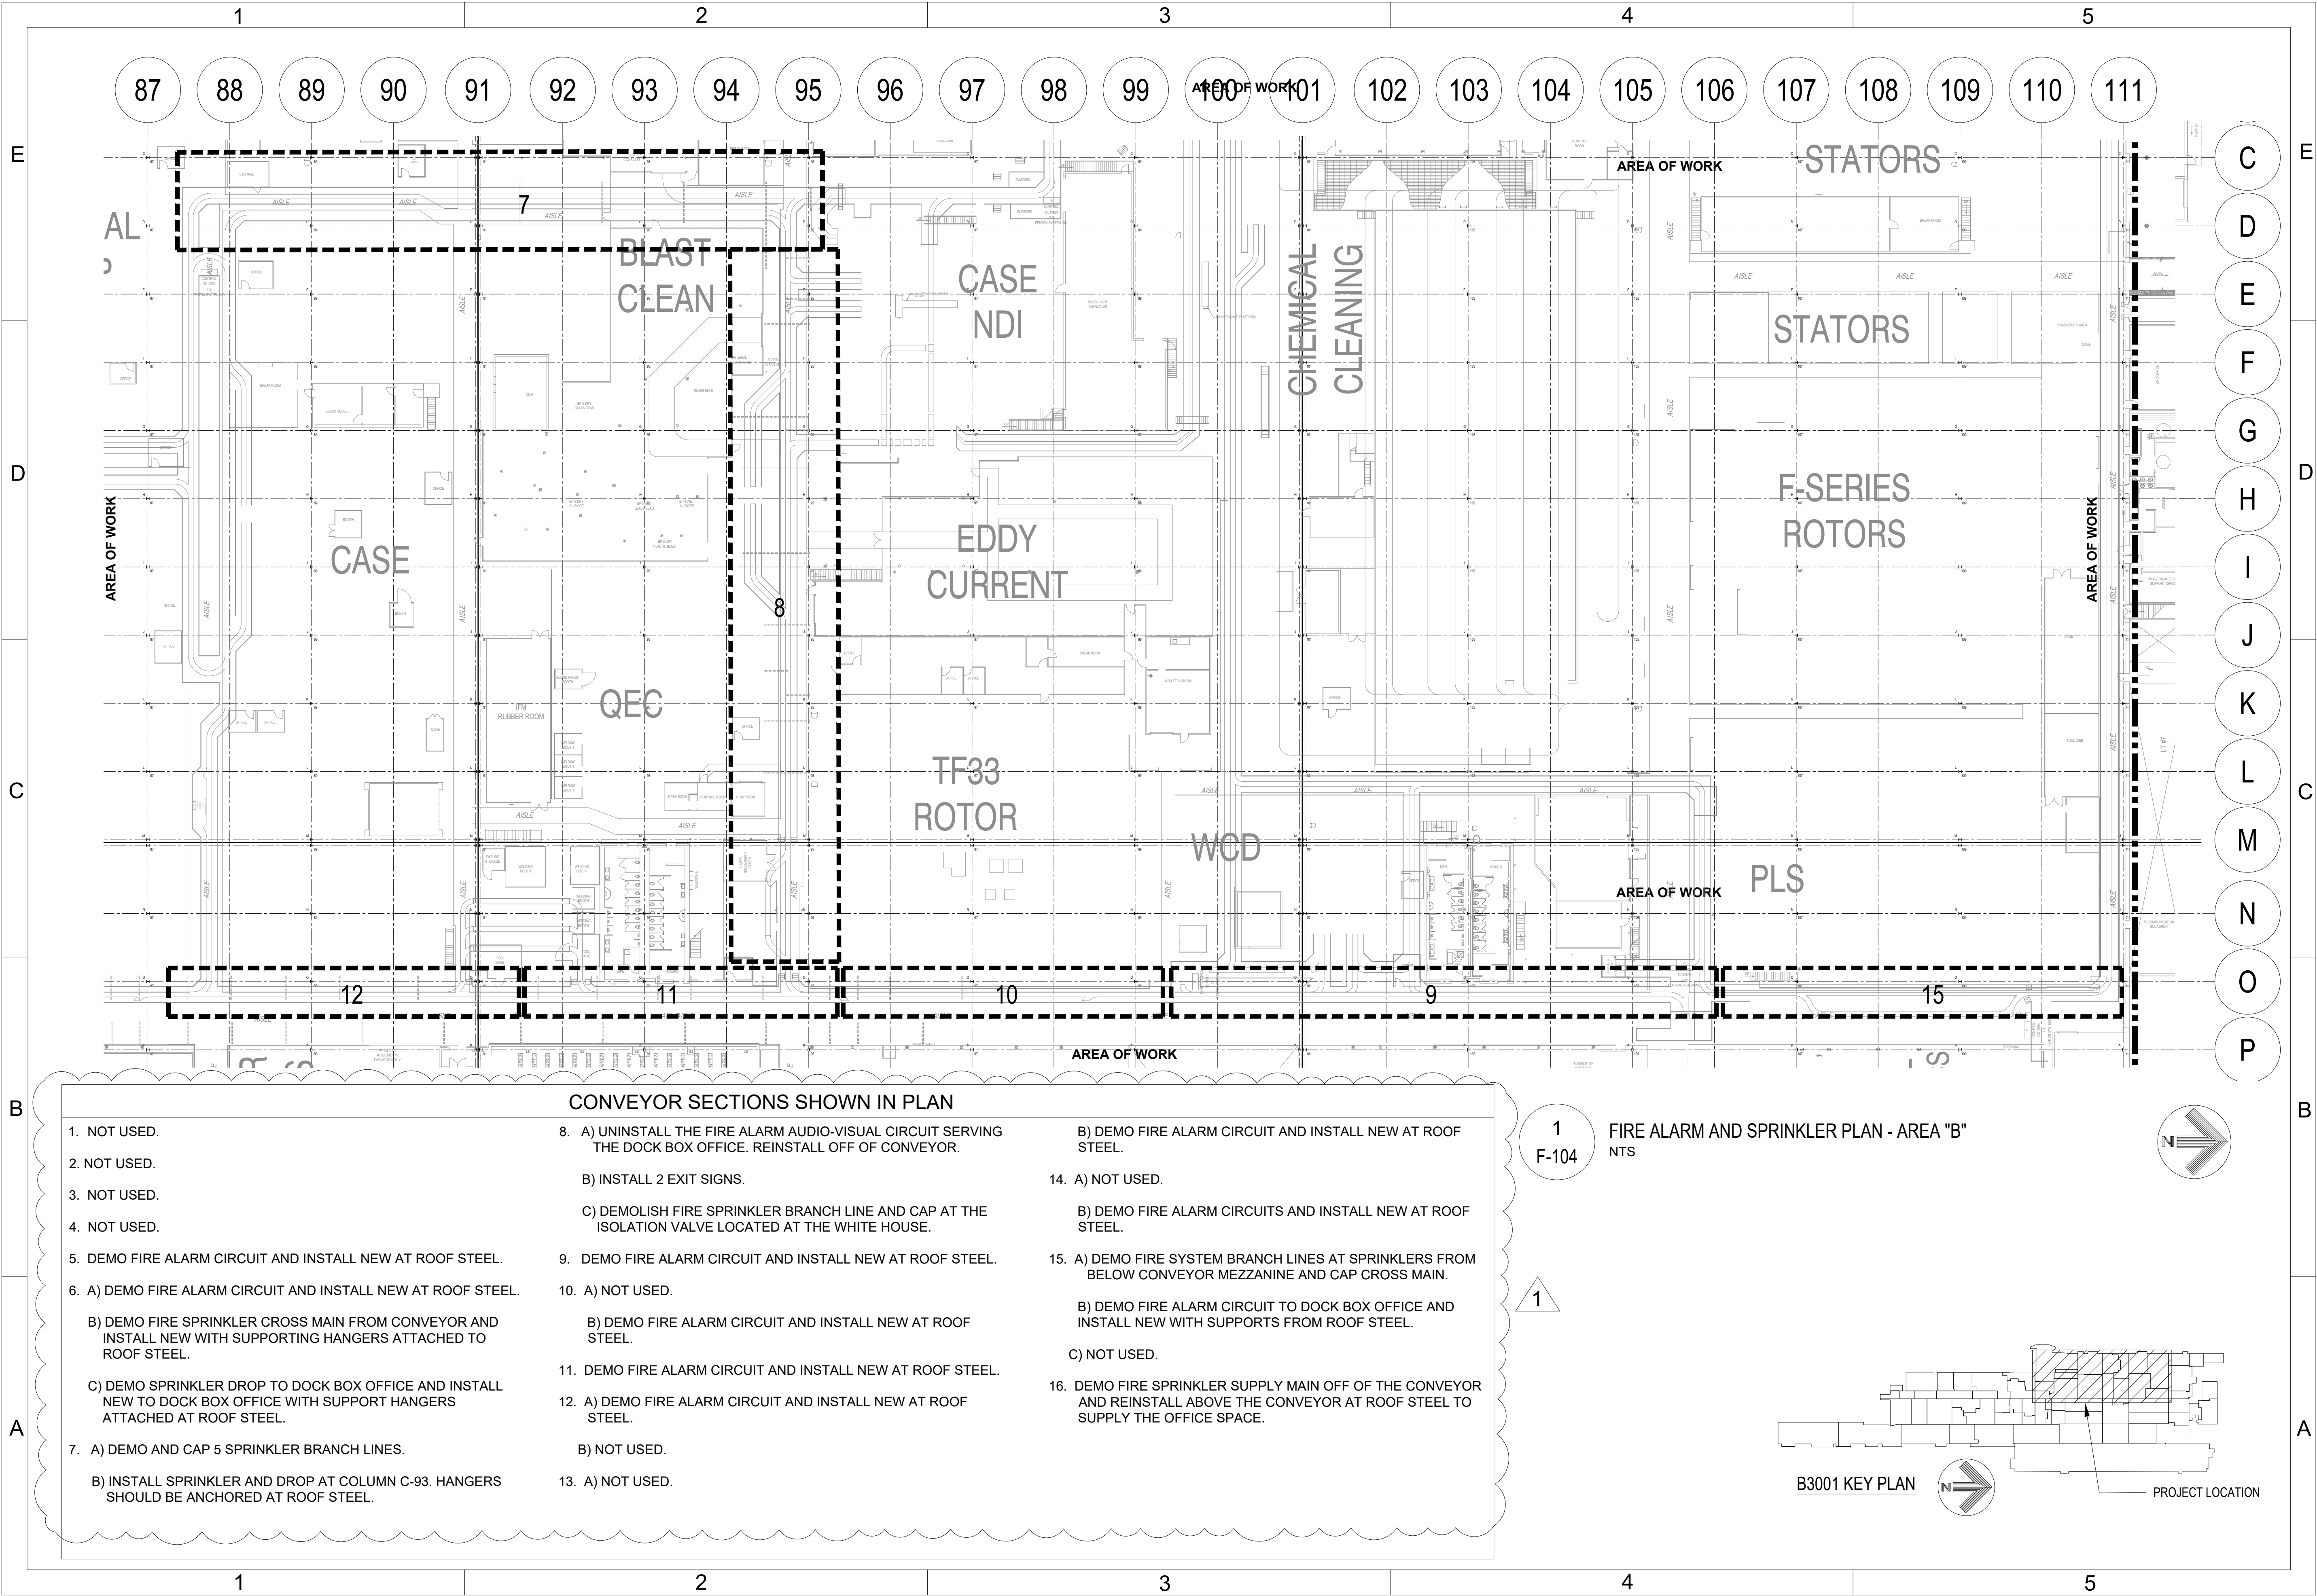

CONVEYOR SECTIONS SHOWN IN PLAN

1. NOT USED.

2. NOT USED.

3. NOT USED.

4. NOT USED.

5. DEMO FIRE ALARM CIRCUIT AND INSTALL NEW AT ROOF STEEL.

6. A) DEMO FIRE ALARM CIRCUIT AND INSTALL NEW AT ROOF STEEL.

B) DEMO FIRE SPRINKLER CROSS MAIN FROM CONVEYOR AND INSTALL NEW WITH SUPPORTING HANGERS ATTACHED TO ROOF STEEL.

C) DEMO SPRINKLER DROP TO DOCK BOX OFFICE AND INSTALL NEW TO DOCK BOX OFFICE WITH SUPPORT HANGERS ATTACHED AT ROOF STEEL.

7. A) DEMO AND CAP 5 SPRINKLER BRANCH LINES.

B) INSTALL SPRINKLER AND DROP AT COLUMN C-93. HANGERS SHOULD BE ANCHORED AT ROOF STEEL.
8. A) UNINSTALL THE FIRE ALARM AUDIO-VISUAL CIRCUIT SERVING THE DOCK BOX OFFICE. REINSTALL OFF OF CONVEYOR.

B) INSTALL 2 EXIT SIGNS.

C) DEMOLISH FIRE SPRINKLER BRANCH LINE AND CAP AT THE ISOLATION VALVE LOCATED AT THE WHITE HOUSE.

9. DEMO FIRE ALARM CIRCUIT AND INSTALL NEW AT ROOF STEEL.

10. A) NOT USED.

B) DEMO FIRE ALARM CIRCUIT AND INSTALL NEW AT ROOF STEEL.

11. DEMO FIRE ALARM CIRCUIT AND INSTALL NEW AT ROOF STEEL.

12. A) DEMO FIRE ALARM CIRCUIT AND INSTALL NEW AT ROOF STEEL.

B) NOT USED.

13. A) NOT USED.
- B) DEMO FIRE ALARM CIRCUIT AND INSTALL NEW AT ROOF STEEL.

14. A) NOT USED.

B) DEMO FIRE ALARM CIRCUITS AND INSTALL NEW AT ROOF STEEL.

15. A) DEMO FIRE SYSTEM BRANCH LINES AT SPRINKLERS FROM BELOW CONVEYOR MEZZANINE AND CAP CROSS MAIN.


B) DEMO FIRE ALARM CIRCUIT TO DOCK BOX OFFICE AND INSTALL NEW WITH SUPPORTS FROM ROOF STEEL.

C) NOT USED.

16. DEMO FIRE SPRINKLER SUPPLY MAIN OFF OF THE CONVEYOR AND REINSTALL ABOVE THE CONVEYOR AT ROOF STEEL TO SUPPLY THE OFFICE SPACE.

1
F-104
FIRE ALARM AND SPRINKLER PLAN - AREA "B"
NTS

1

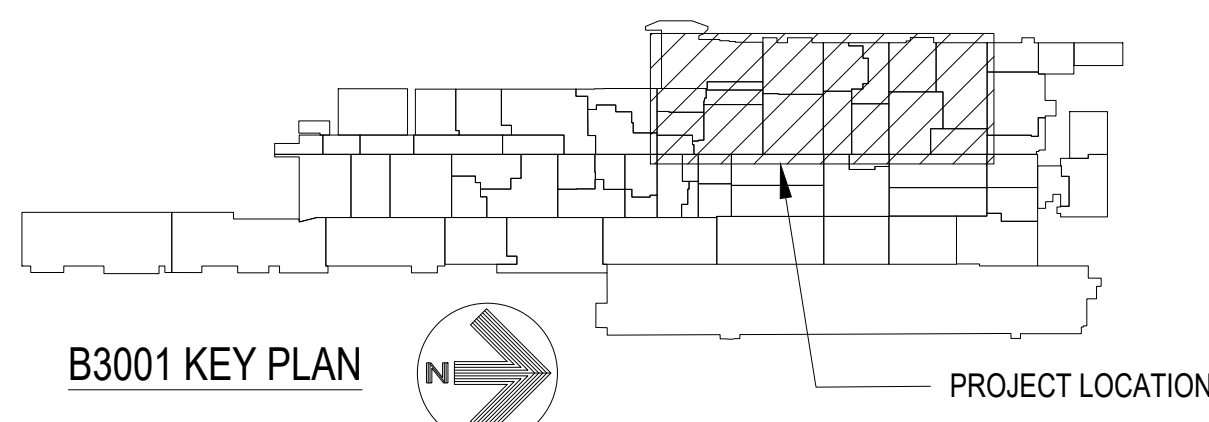



AIR FORCE MATERIAL COMMAND
72 ARMY CIVIL ENGINEER DIRECTORATE
TINKER AFB, OK

35%
DESIGN

PROJECT INFORMATION

WWYK250003
RELOCATE FIRE ALARM
CIRCUIT, B3001, O-P AISLE

TINKER AIR FORCE BASE, OKLAHOMA

MANAGEMENT INFORMATION		REVISIONS	
ISSUE DATE	DATE	MARK	DESCRIPTION
10/15/2025	23/MAR/26	1	SOLICITATION AMENDMENT #1
DESIGN GROUP: TEPA-CSAG			
DESIGNED BY: A McPHERSON			
DRAWN BY: S STARR			
CHECKED BY: B JIMOH			
DESIGN FILE LOCATION: Engr\Design\2020\2025\20250003\Support\Drawings\Model			

SHEET TITLE

FIRE ALARM AND
SPRINKLER PLAN AREA "B"

SHEET NUMBER

F-104

SHEET 06 OF 06