


VICINITY MAP


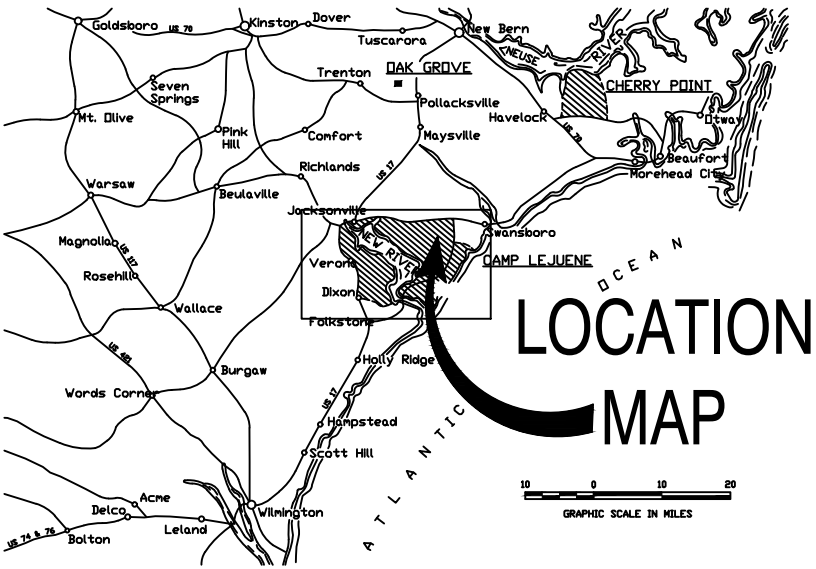


25-0427
HANDICAP RAMP
BLDG 66
CAMP LEJEUNE, N.C.

LOCATION MAP

AREA MAP

DRAWING INDEX

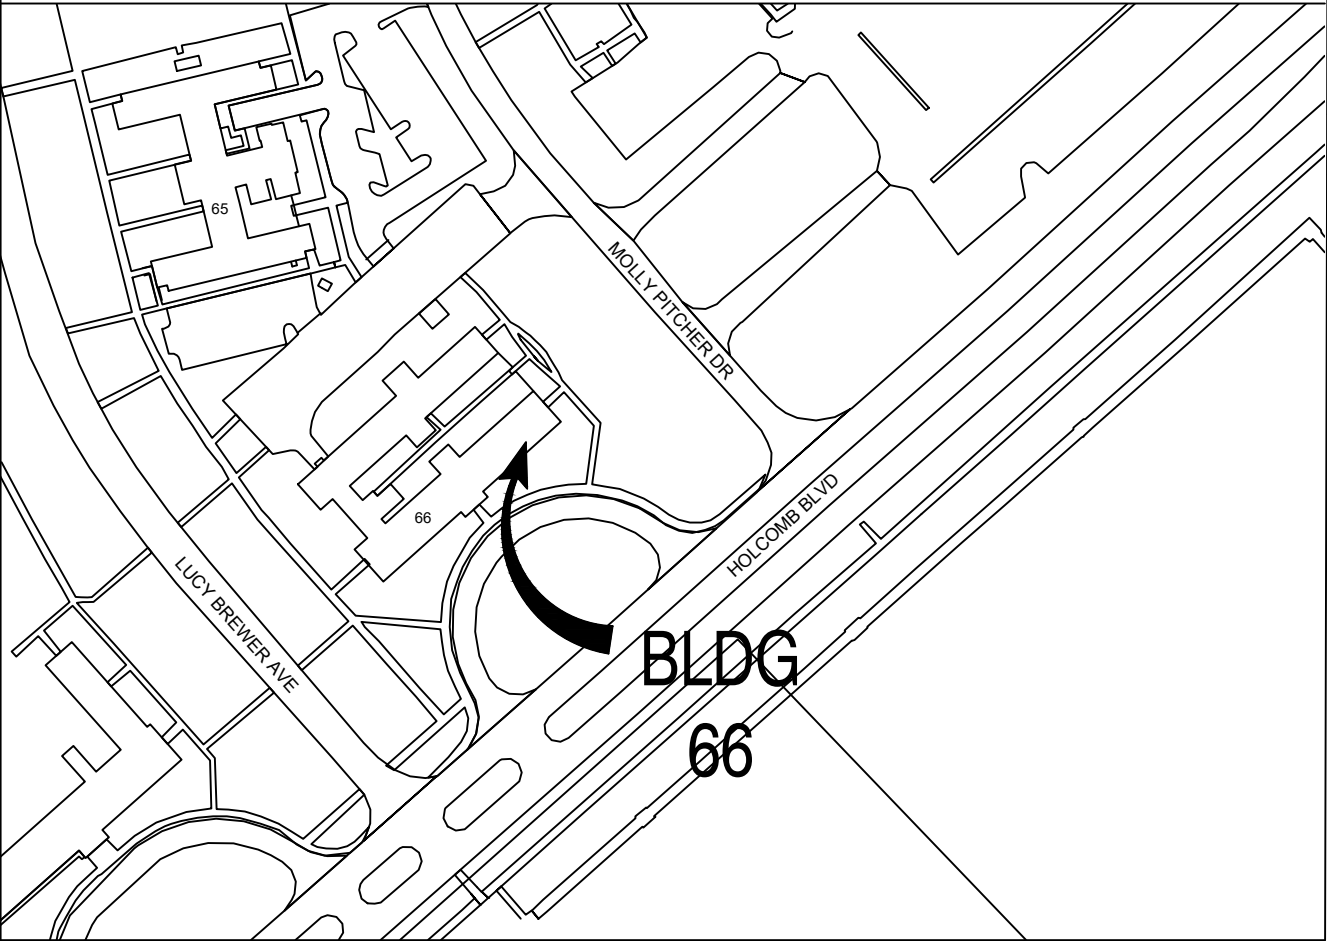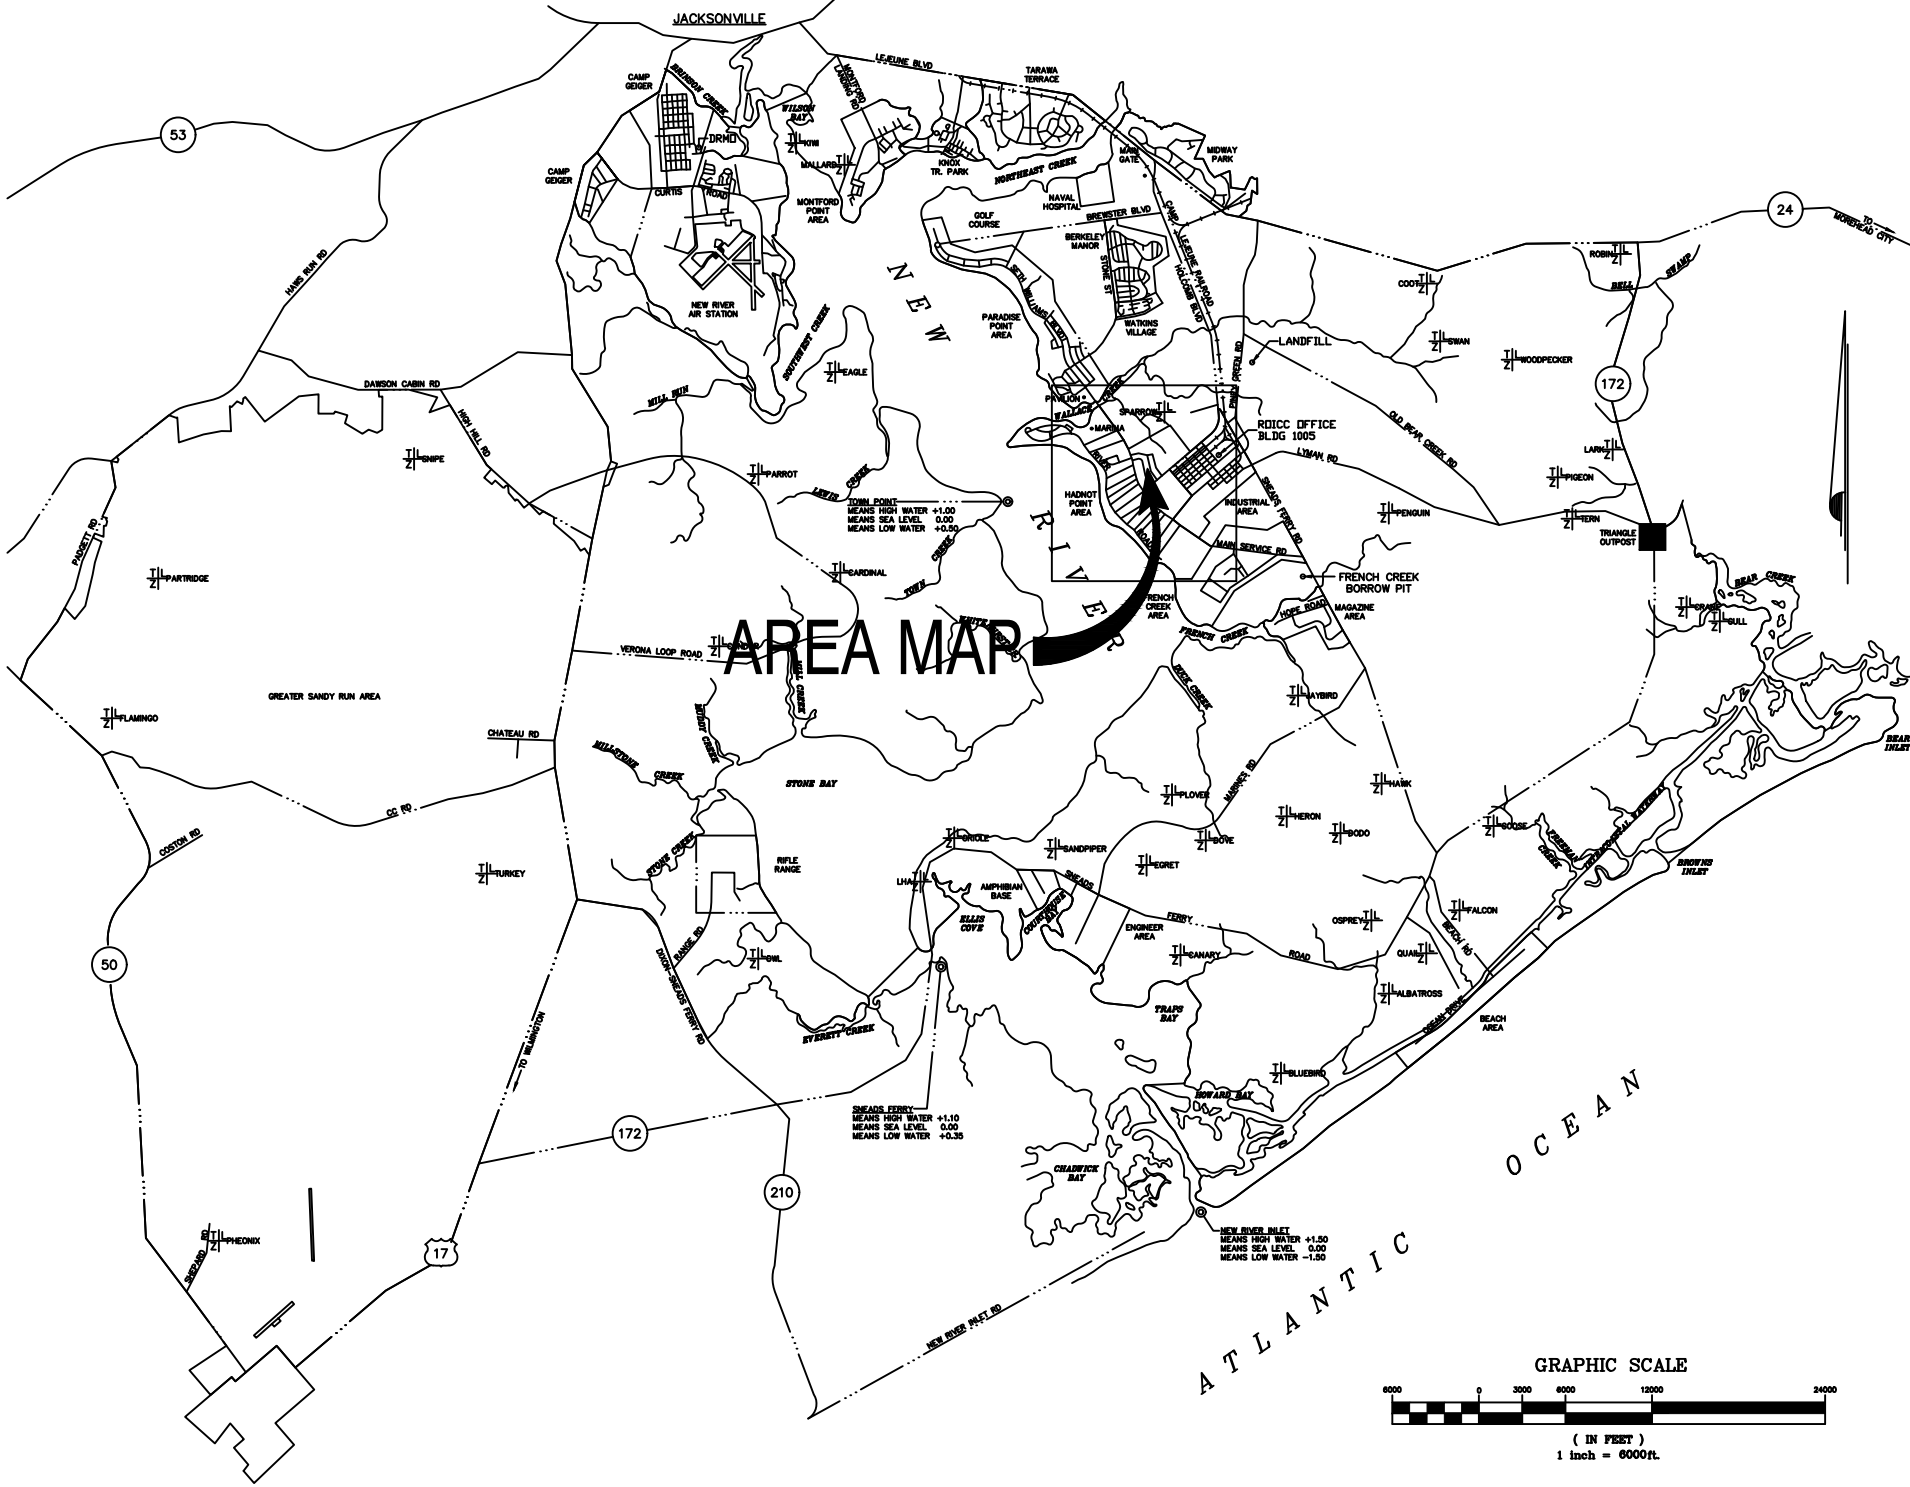

SHEET #	SHEET NAME
T-1	TITLE SHEET, AREA MAPS
A1	NOTES/OVERALL PLAN
A2	H.C. RAMP PLANS
A3	DETAILS
A4	NOTES; DETAILS

BLDG 66	SHEET 1 OF 5
CONTRACT # 25-0427	
DWG. MARK RANSIELL	PROJECT # 25M054CN

HANDICAP RAMP
BLDG 66
USMC CAMP LEJEUNE

T1

1005 OFFICE REPAIRS

SCOPE OF WORK: The contractor shall provide all material, labor, equipment and supervision required to accomplish the following.

GENERAL DESCRIPTION: This scope of work is to be accomplished at Building 66 located on Holcomb BLVD. aboard, Camp Lejeune, North Carolina. The work includes installation of new ADA accessible ramp for the tenant and H.C. Door operator. To accomplish this the contractor will be required to build as indicated on drawings.

DETAILED REQUIREMENTS AND SPECIFICATIONS: The contractor shall take his own field measurements in determining required materials and costs for the following.


SPECIAL SCHEDULING AND ACCESS: Access and scheduling to the work area shall be arranged through Contracting Officer's Representative for the OICC office and the tenant of the building. Point of Contact for access to building is Mark Ramsdell 910-451-0483.

NOTES:

1. The measurements and quantities furnished here are for reference only. The contractor is responsible for actual field verification prior to bidding, ordering material and during every step of construction for existing surfaces, dimensions and conditions.
2. Repair, refinish of areas damaged or disturbed by new work to be provided under this contract.
3. Properly remove, haul, and dispose of all debris. The Base Landfill may be utilized. The contractor shall not utilize the dumpster provided by Camp Lejeune for the occupants of the buildings. The hours of operations are 0730-1530 Monday- Thursday and 0730-1430 on Friday. delivery of acceptable materials (identified above) shall be by appointment only. Appointment made by phone at 1-910-457-5011 or 1-910-451-2946.
4. The Contracting officer will register the contract via E-mail, with the base landfill. All haul vehicles will maintain a secure vehicle placed as a condition to utilize the scale. E-mail the contractors information to the Landfill Clerk, include the name on the Prime contractor, contract number, job name / description, completion date and whether or not any above material will be delivered to the Landfill.
5. Prior to performing "HOT WORK" (welding, cutting, ect.) or operating other flame -producing spark producing devices, a written permit shall be requested from the Fire Division. CONTRACTORS ARE REQUIRED TO MEET ALL CRITERIA BEFORE A PERMIT IS ISSUED. The contractor will provide at least two (2) twenty (20) pound 4A:20 BC rated extinguishers for normal "HOT WORK". All extinguishers shall be current inspection tagged, approved safety pin and tamper resistant seal. It is also mandatory to have a designated FIRE WATCH for any "HOT WORK" done at this activity. The Fire watch shall be trained in accordance with NFPA 51B and remain on site for a minimum of thirty (30) minutes after work is completed.
6. Contractor is to be aware of all rules, regulation and codes required for successful completion of project.

SUBMITTALS:

1. AFTER AWARD: The Contractor shall furnish the DSC-EMI, material, specifications for selection and approval prior to the ordering and installation of said materials.
2. The contractor is required to submit a schedule detailing when they and or any subcontractor will be working. The schedule must be approved by Government before beginning work.
3. The contractor shall submit the manufacture's product specifications, complete with technical products data for all of the material being used in this process. The product specification shall as a minimum, provide the technical details on the following items.
4. Submit:
 - A. SHOP DRAWINGS.
 - B. INSTALLATION DRAWINGS /shop drawings
 - C. PRODUCT DATA
 - C.A. Manufactures technical data Sheet
 - C.B. Material Safety Data Sheets (MADA)
 - C.C. Maintenance Data
 - D. WARRANTY (10 year Commercial Limited Warranty)
6. Qualifications:
 - 6.1. Fabricator Qualifications: Minimum of three years documented experience in construction similar in scope and complexity to this Project. Currently certified by the manufacturer as acceptable fabricator.
 - 6.2. Installer Qualification: Minimum of three years documented installation experience for project similar in scope and complexity to this project and currently certified by manufacturer as an acceptable installer.

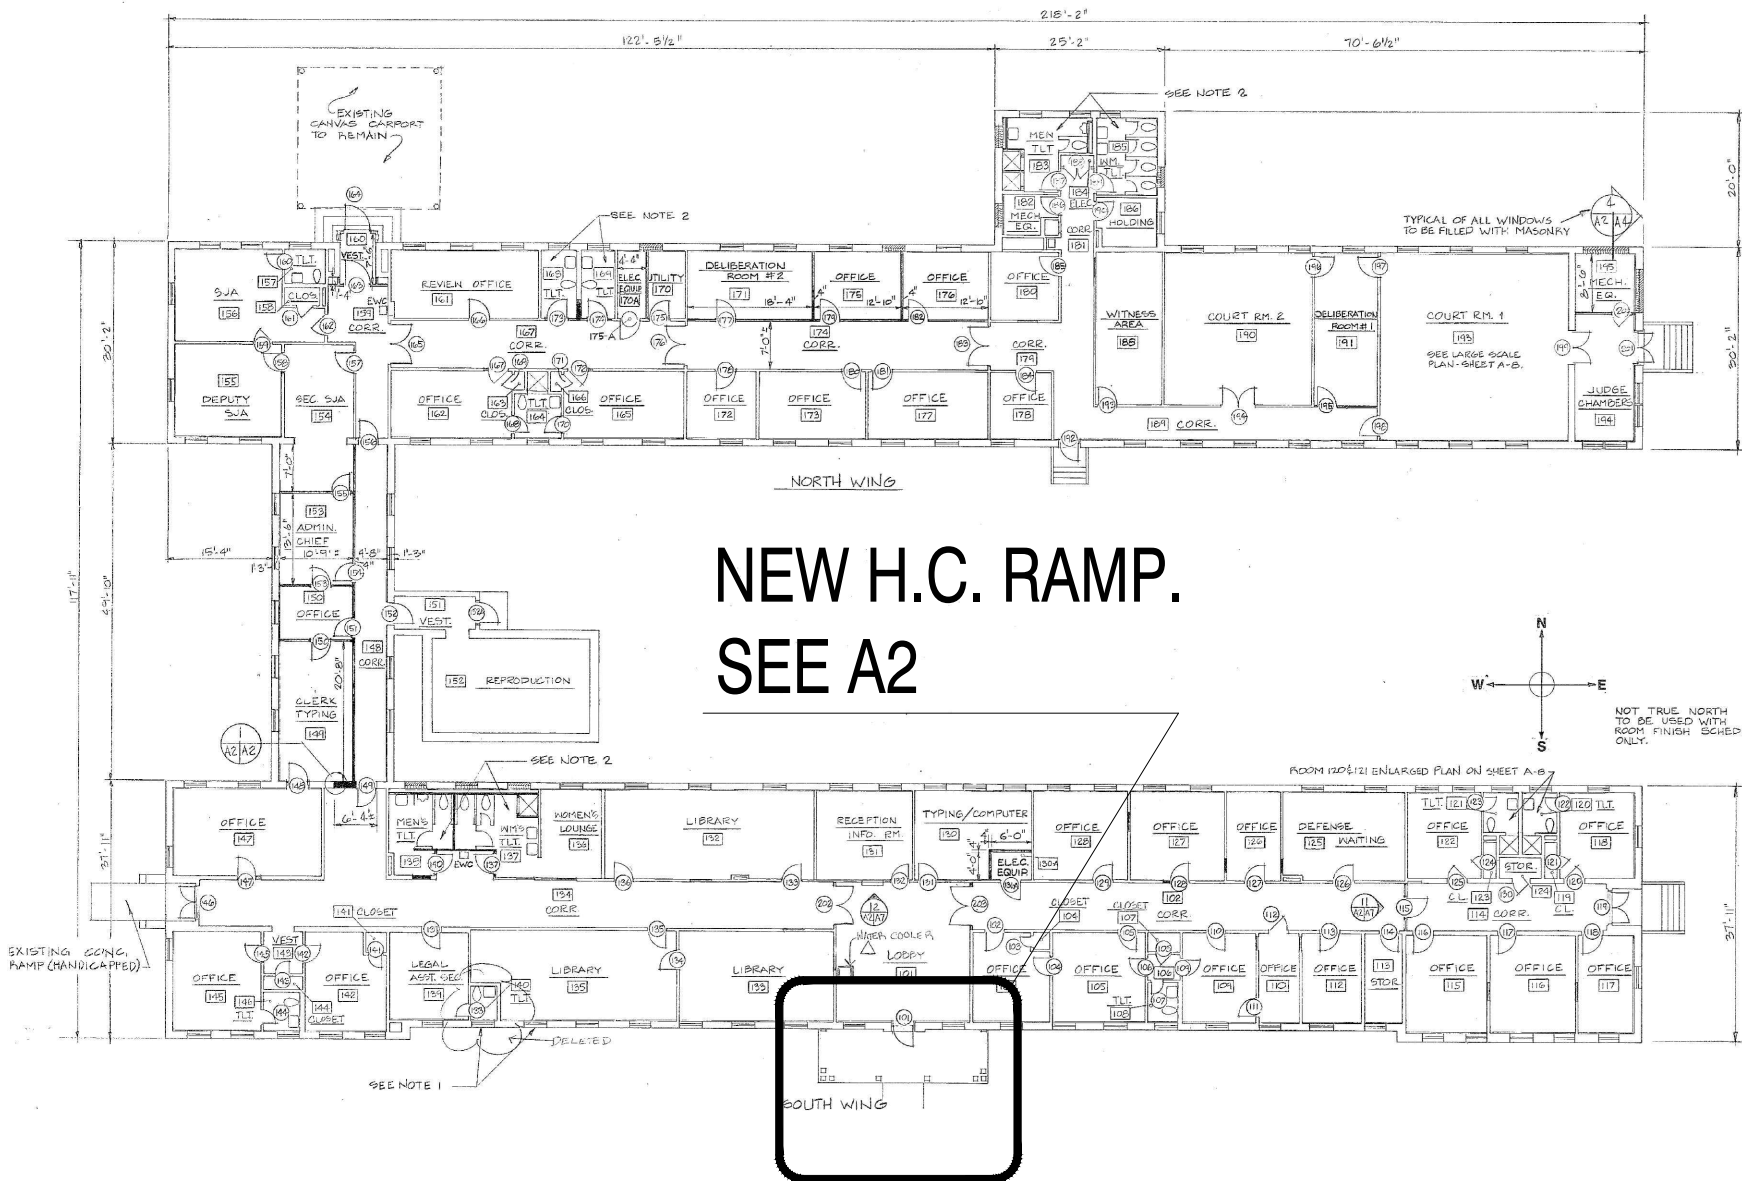

1
A1


66 OVERALL PLAN
NOT TO SCALE

NOTES/OVERALL PLAN


BLDG 66	SHEET 2 OF 5
HANDICAP RAMP BLDG 66	CONTRACT # 25-0427
USMC CAMP LEJEUNE	DWG. MARK RAMSDELL PROJECT # 25M054CN
A1	

DEMOLITION NOTES	
1	LINE OF NEW HANDICAP RAMP/LANDING FOR REFERENCE. SEE RENO PLAN.
2	HATCH PATTERN INDICATES PORTION OF EXISTING CONCRETE SIDEWALK TO BE REMOVED AS REQUIRED TO INSTALL NEW HANDICAP RAMP. WHERE POSSIBLE CUT EXISTING WALK AT EXISTING JOINT LINE.

RENOVATION NOTES	
1	NEW CONCRETE HANDICAP RAMP W/ 1½" DIA. GALV. PIPE RAIL. SEE DETAILS. ENSURE SMOOTH TRANSITION WHERE NEW CONCRETE ABUTS EXISTING CONCRETE.
2	NEW CONC. LANDING. WHERE LANDING MEETS EXISTING SIEWALK, NEW CONCRETE TOP TO BE FLUSH WITH EXISTING. SEE DETAILS
3	NEW ADA COMPLIANT AUTOMATIC DOOR OPENER. INSTALL ADA DOOR OPENER TO OPERATE AT MAIN ENTRANCE TO BLDG. LOCATE 120-VOLT 20AMP CIRCUIT ABOVE CEILING AND INTERCEPT A CONDUIT AND INSTALL A JUNCTION BOX OR USE AN EXISTING JUNCTION BOX WITH A 120V CIRCUIT. THERE IS ALSO AN EXIT LIGHT THAT CAN BE USED TO POWER THE (2) DOOR OPENERS; BRANCH OUT OF JBOX WITH 12/2 BX CABLE TO FEED ADA DOOR OPENER; ALL ELECTRICAL WORK SHALL BE IN FULL COMPLIANCE WITH NFPA 70, THE NORTH CAROLINA STATE BUILDING CODE, ALL LOCAL CODES, AND ORDINANCES AND IN ACCORDANCE WITH THE REQUIREMENTS OF THE LOCAL AUTHORITY HAVING JURISDICTION; ALL MATERIAL SHALL BE UL LISTED AND APPROVED.
4	INSTALL TWO RADIO REMOTE BATTERY POWERED PUSH PLATES HPTD COMPLETE. CENTER OPERATORS 36 INCHES AFF AND AFG. OUTDOOR OPERATOR SHALL BE STAINLESS STEEL, INSTALLED ON NEW GALV. 2"X2" POST ON RIGHT FRONT SIDE OF SLAB AS YOU ENTER. INSIDE OPERATOR TO BE INSTALLED AT RIGHT SIDE OF DOOR FRAME AS YOU EXIT.
5	ALIGN EDGE OF NEW RAMP W/ EDGE OF EXISTING CONC. STEP.

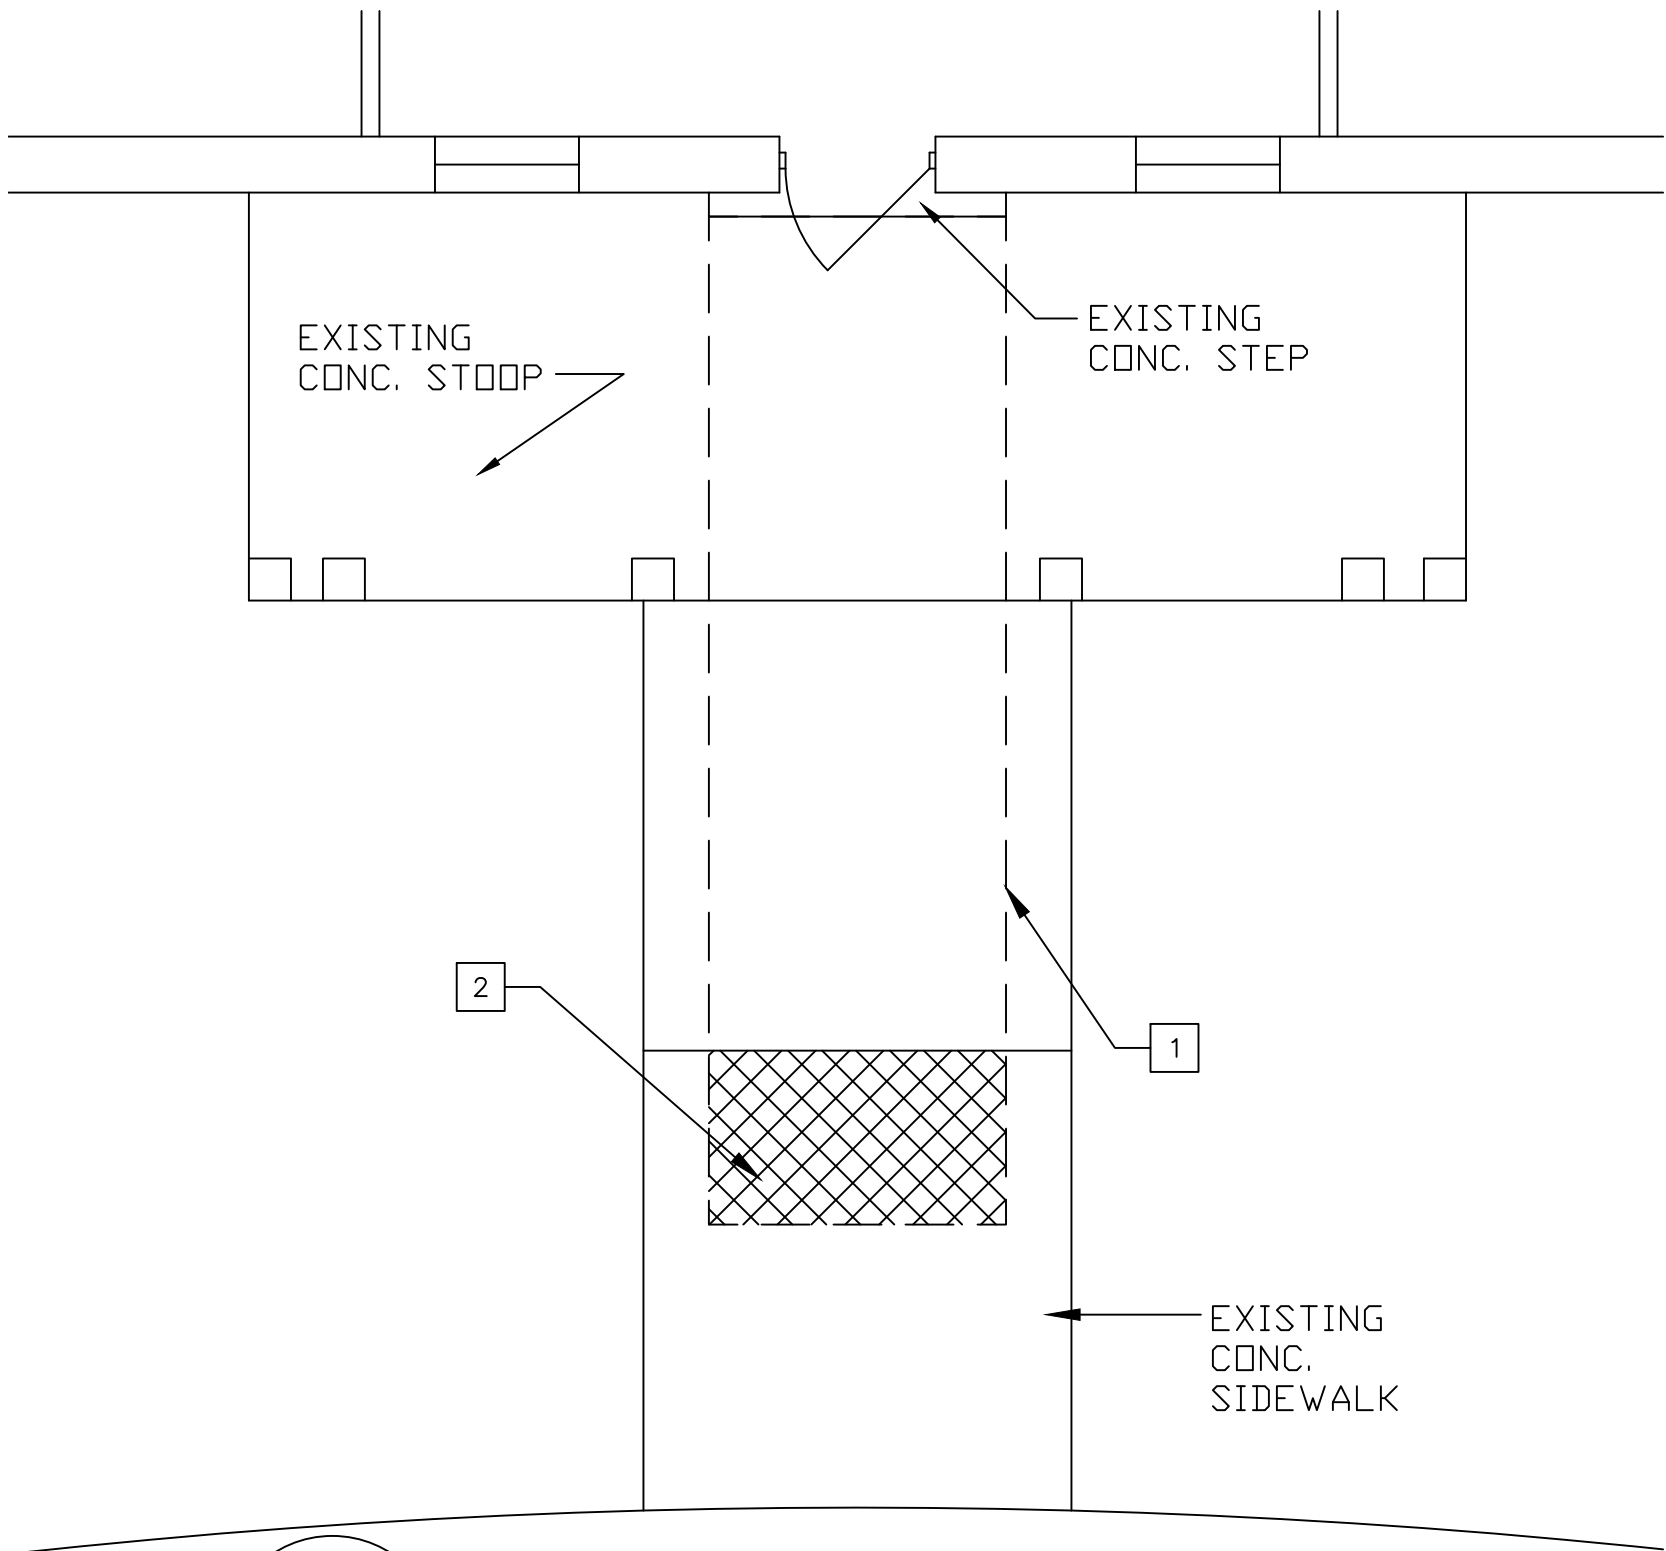


1
A2
NEW H.C. RAMP DEMO PLAN
1/4" = 1'-0"
0 5' 10'

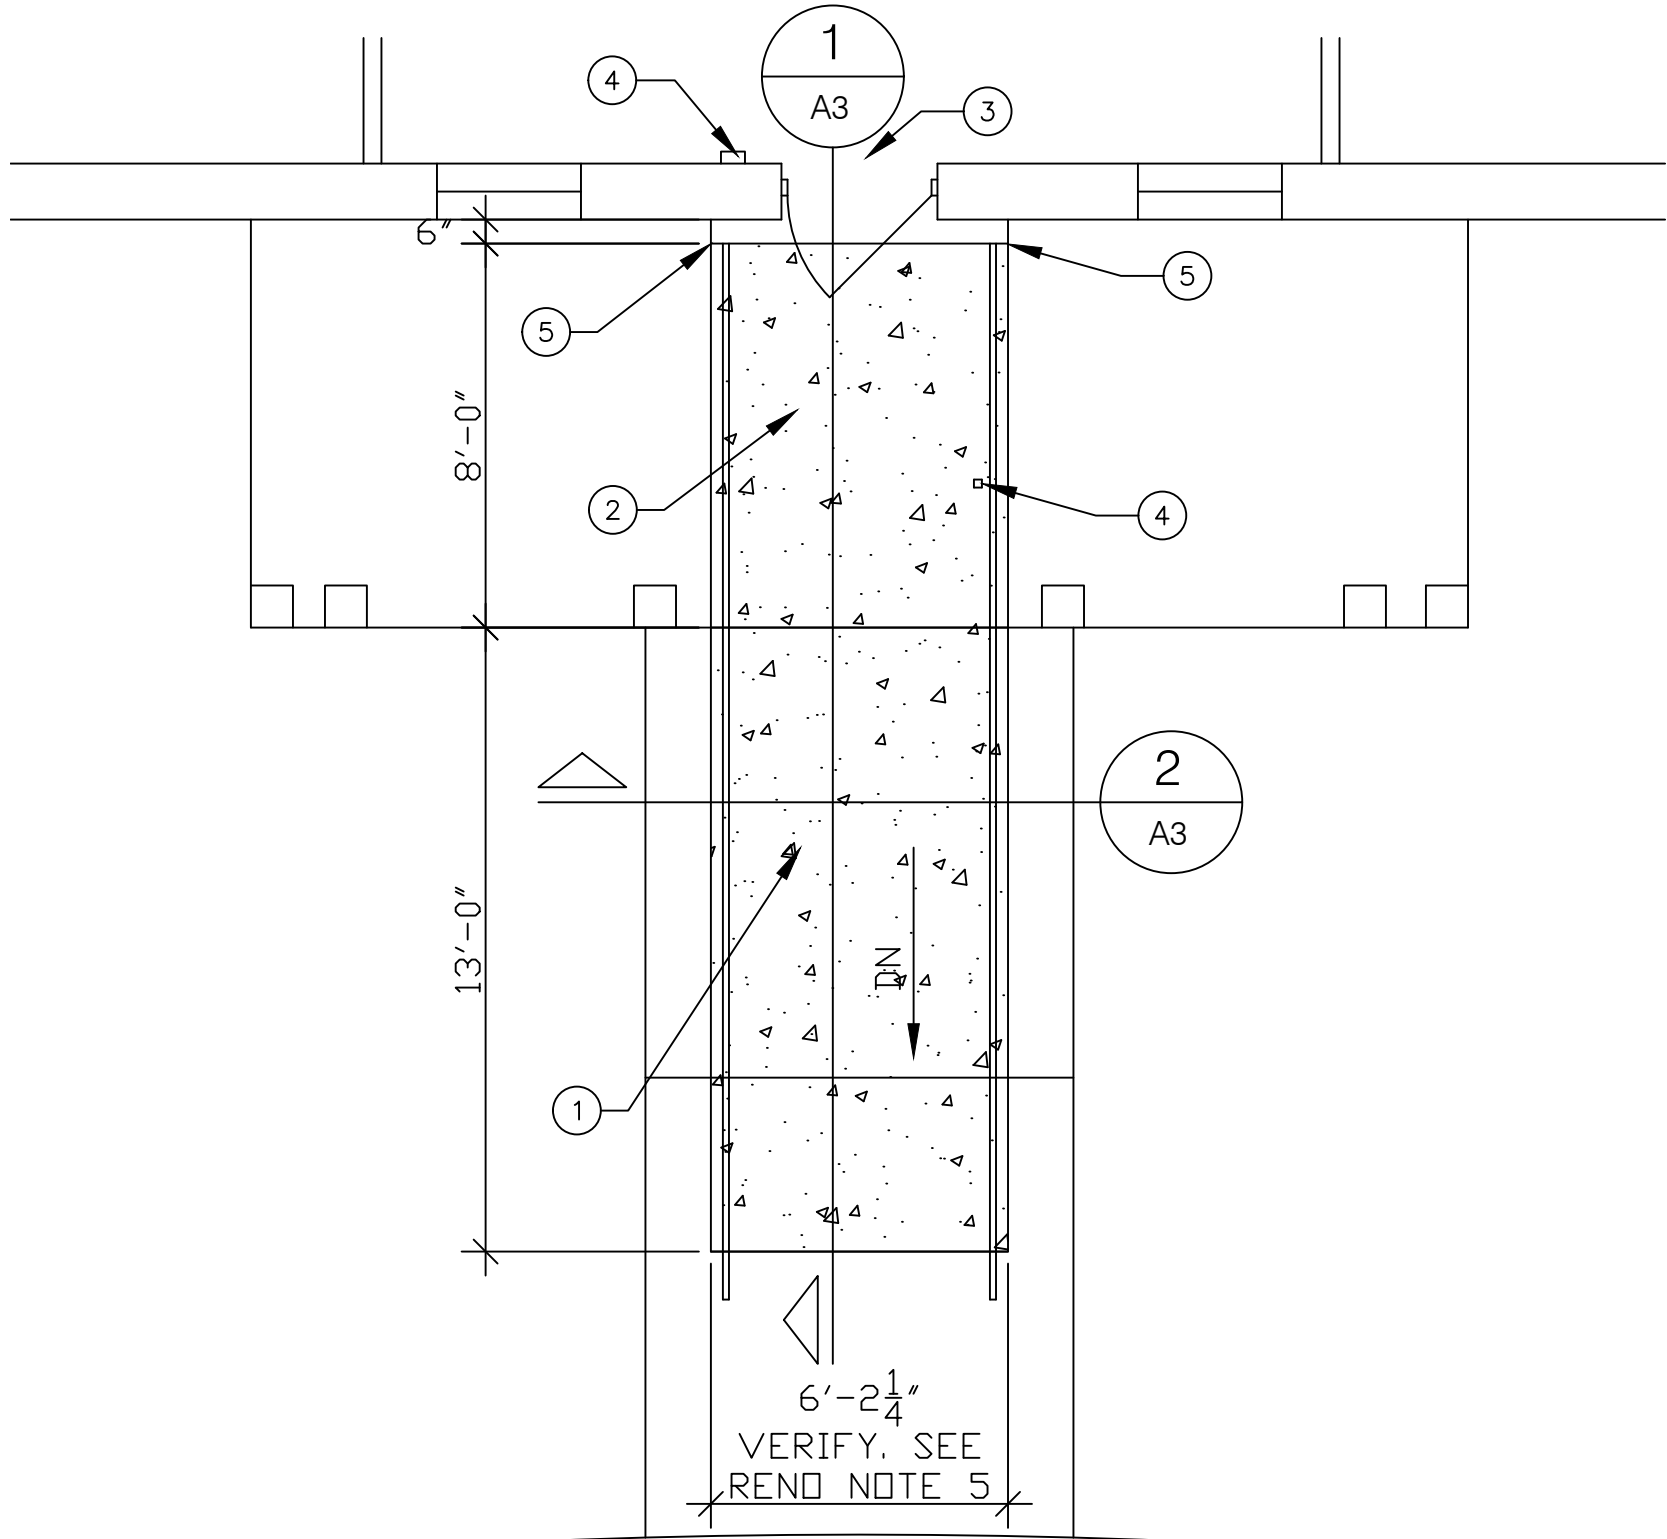


2
A2
NEW H.C. RAMP RENO PLAN
1/4" = 1'-0"
0 5' 10'

BLDG 66	SHEET 3 OF 5
CONTRACT # 25-0427	
DWG. MARK RAMSDELL	PROJECT # 25M054CN
HANDICAP RAMP	
BLDG 66	
USMC CAMP LEBJUNE	
A2	

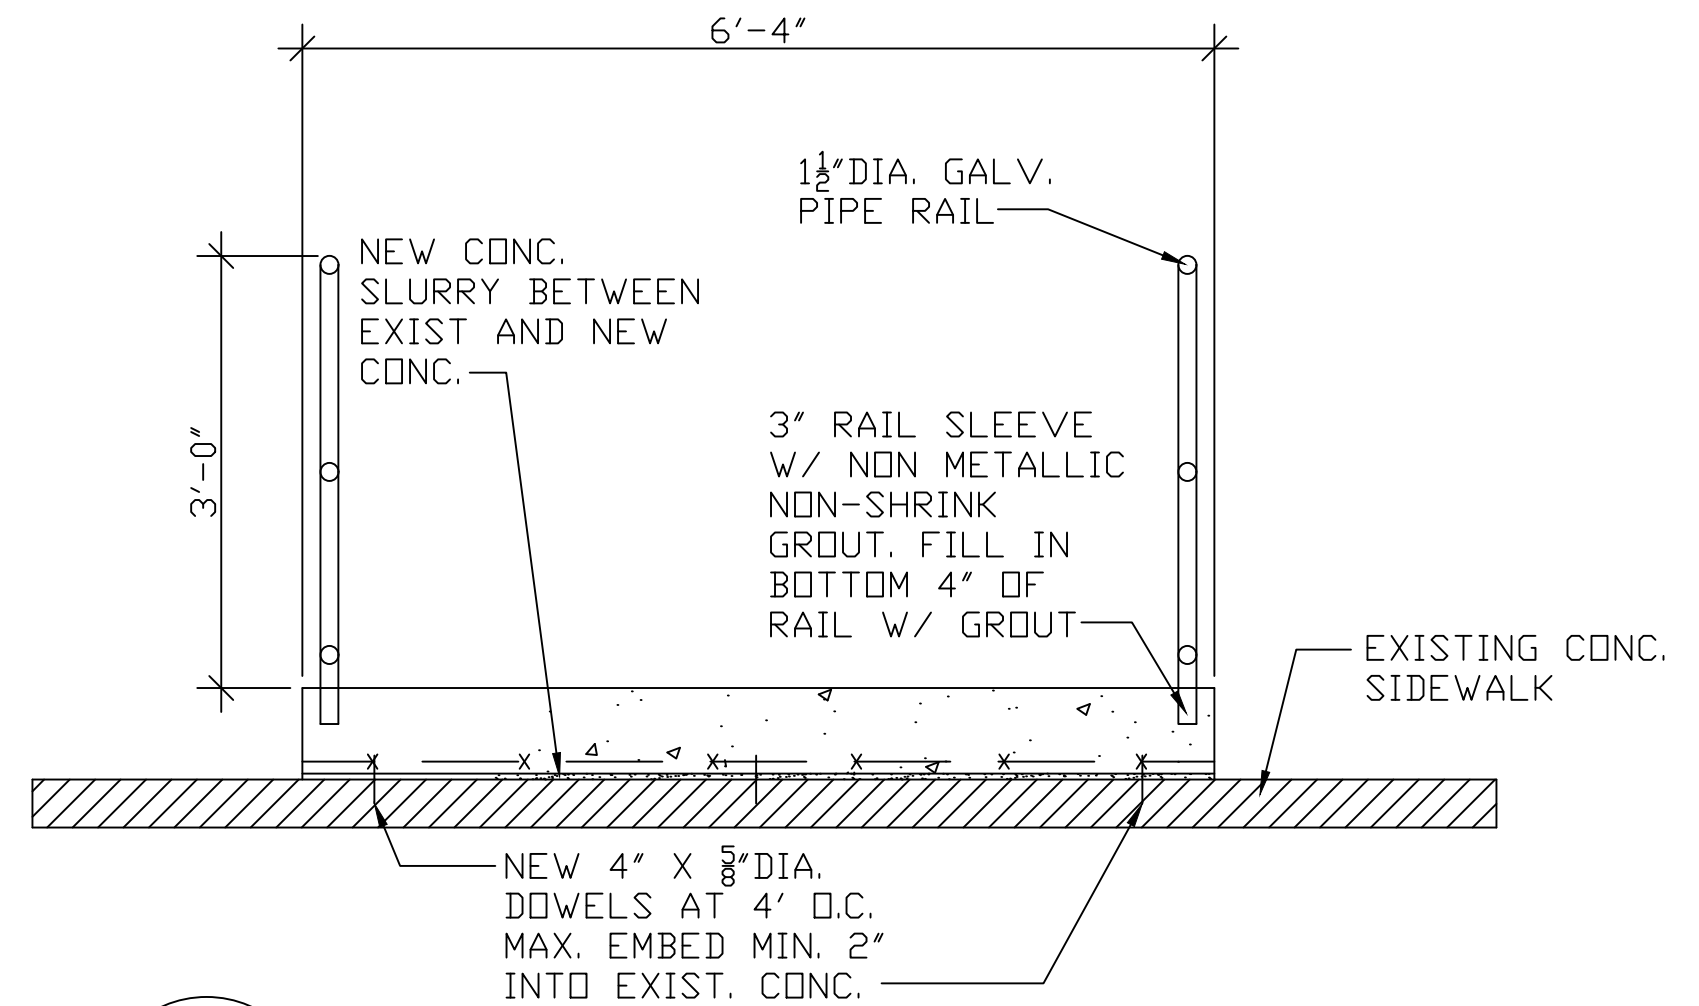

2 NEW RAMP TRANSVERSE SECTION
A3
3/4" = 1'-0"

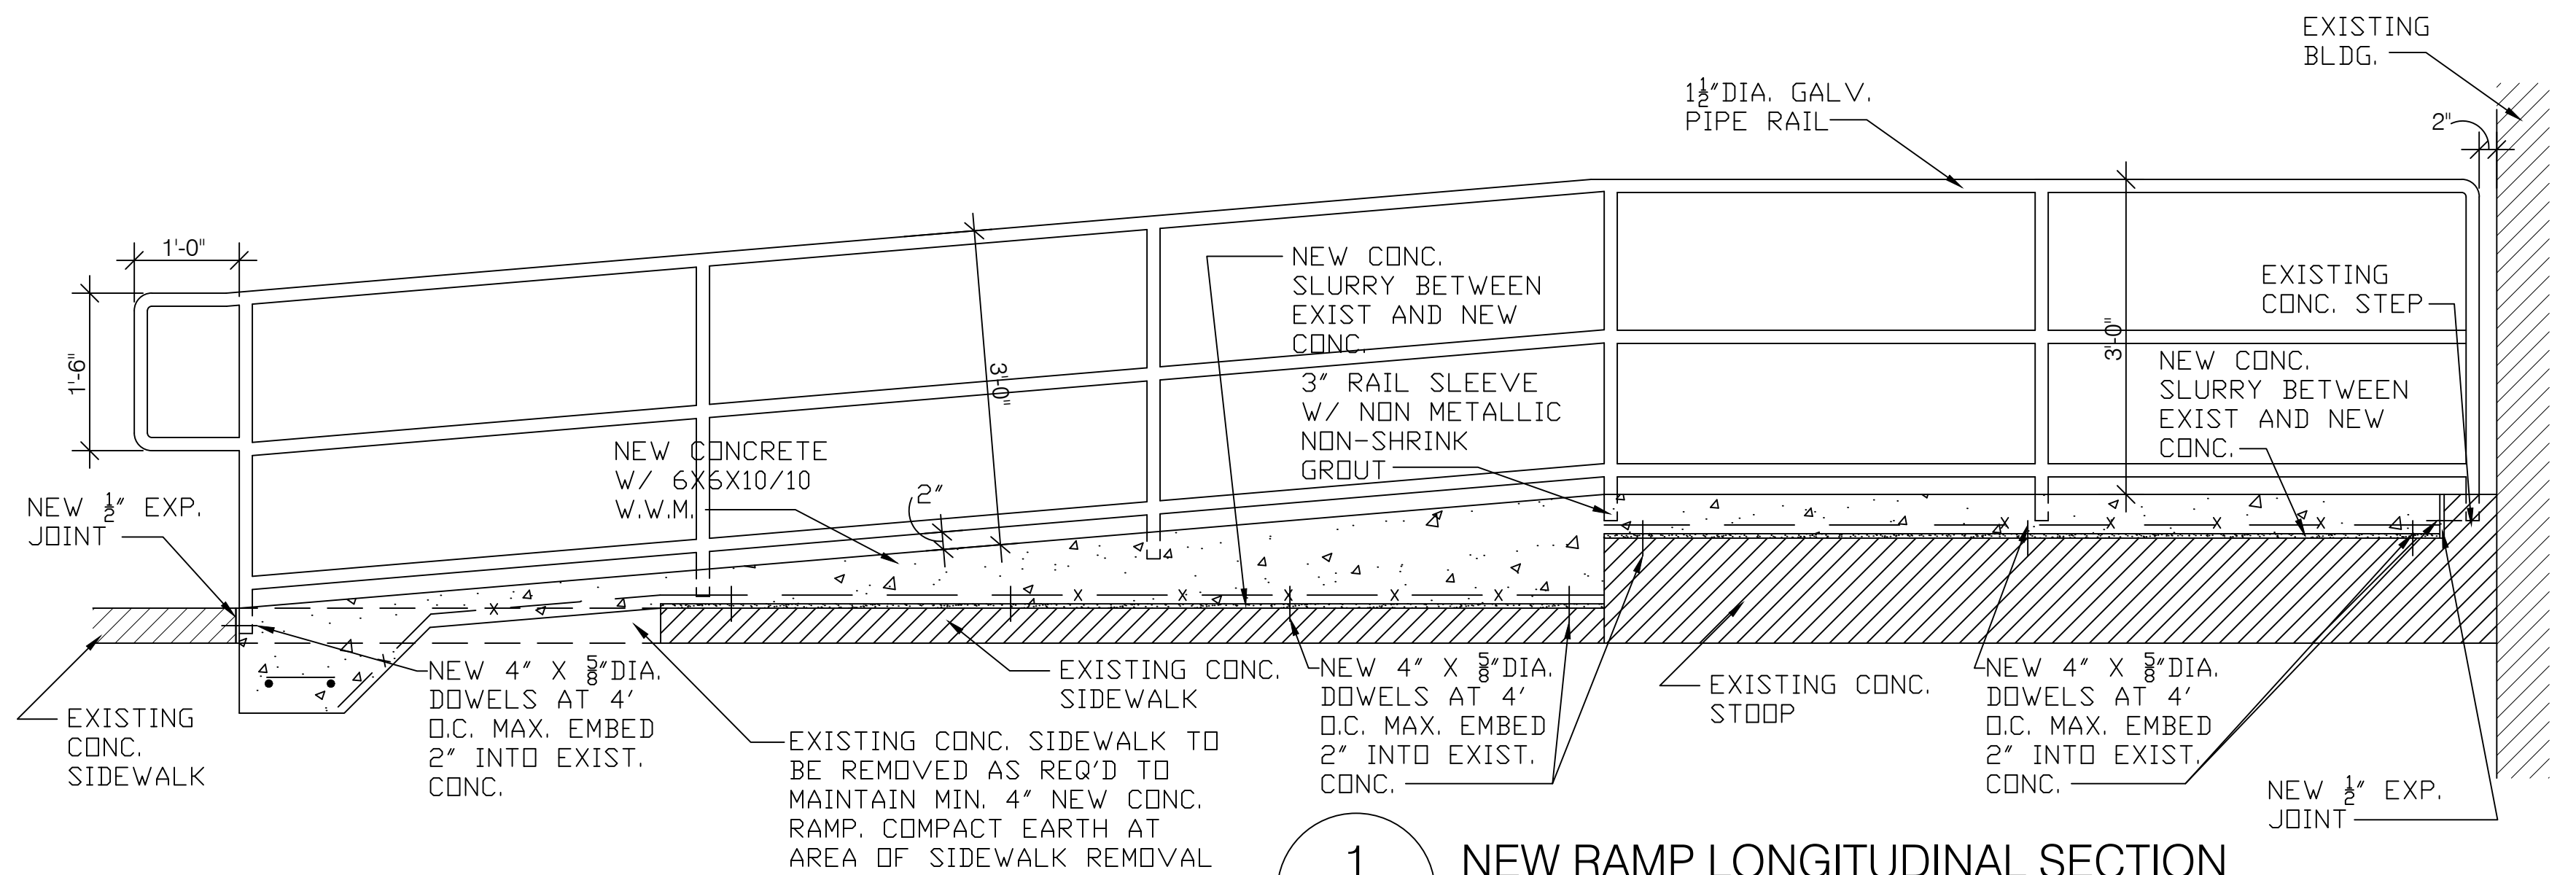

1 NEW RAMP LONGITUDINAL SECTION
A3
3/4" = 1'-0"

BLDG 66	SHEET 4 OF 5
CONTRACT # 25-0427	
DWG. MARK RAMSELL	PROJECT # 25M054CN
HANDICAP RAMP BLDG 66	USMC CAMP LEBJUNE
A3	

DETAILS

Handrails:

- 1.Handrails
- 1.1.Grade A or B steel 1-1/2" diameter pipe
- 1.2.All components shall be hot-dipped galvanized after fabrication.
- 1.3.Coat all field welds with cold applied galvanized coating. Minimum 56% zinc by volume
- 2.Fabrication: Joint posts, rail, and corners by one of the following methods:
- 2.1.Mitered and welded joints made by fitting post to top rail and intermediate rail to post, mitering corners, groove welding joints, and grinding smooth. Butt railing splices and reinforce them by a tight fitting interior sleeve not less than 6 inches long.
- 2.2. Railings may be bent at corners in lieu of jointing, provided bends are made in suitable jigs and the pipe is not crushed.
- 3.Anchor posts in concrete by means of pipe sleeves set and anchored into concrete.
- 3.1.Provide sleeves of galvanized, standard weight, steel pipe, not less than 3 inches long
- 3.2. Inside diameter not less than 1/2-inch greater than the outside diameter of the inserted pipe post.
- 3.3. Provide steel plate closure secured to the bottom of the sleeve, with closure width and length not less than 1-inch greater than the outside diameter of the sleeve.
- 3.4. After posts have been inserted into sleeves, fill the annular space between post and sleeve with molten lead, sulfur, or a quick-setting hydraulic cement.

Handicap Ramp





- 1.New concrete shall be a minimum 4-inch deep, 4000-psi fibrillated fiber reinforced concrete. Height, length and width as shown on plans.
- 1.1.Fibrillated fiber reinforced concrete shall be a minimum of 4000-psi with a maximum 4-inch slump.
- 1.1.1. The water -cement ratio shall not exceed the manufacturer's recommendations. The contractor shall provide a batch ticket to the contracting officer, stating the cement water ratio needed for a 4-inch slump and the amount of water added by the receiver.
- 1.1.2. Fibrillated fiber reinforcement shall have a minimum ratio of 1-1/2 lbs per yard.
- 2.Expansion joints consisting of 1/2" compressible material should be placed wherever the new handicap ramp abuts another rigid structure.
- 3.Surfaces shall have a broom finish. The only means a contractor shall add water to the surface of the concrete for finishing is with fog spray or wet burlap.
- 4.Mechanically cut relief joint no further then 1.5 times the sidewalk width.
- 4.1.Relief joints shall be mechanically cut to into the concrete within 24 hours of the concrete being poured.
- 4.2. Saw cut relief joints to a minimum depth of a ¼- inch for every 1-inch thickness of concrete poured.
- 5.All debris shall be removed from the work site on a daily basis.
- 6.Concrete shall be replaced within 72 hours of removal, weather permitting.
- 7.Forms shall be removed and the ground backfilled, with top soil, around sidewalks to prevent tripping hazards.

SUBMITTALS:

- 1.The contractor shall provide a written report detailing the composition of the concrete mix before commencement of work.
- 2.The contractor shall provide a copy of the batch ticket to the contracting officer upon completion of the pour for verification of the composition of the delivered mix.


Demolition:

1. Cut sidewalks at existing control joints with a concrete saw at each end of the sections being removed, to insure straight edges on adjoining sidewalks.
2. Remove and dispose of approximately 400 square feet damaged concrete sidewalks.
3. The contractor shall remove all organic material.

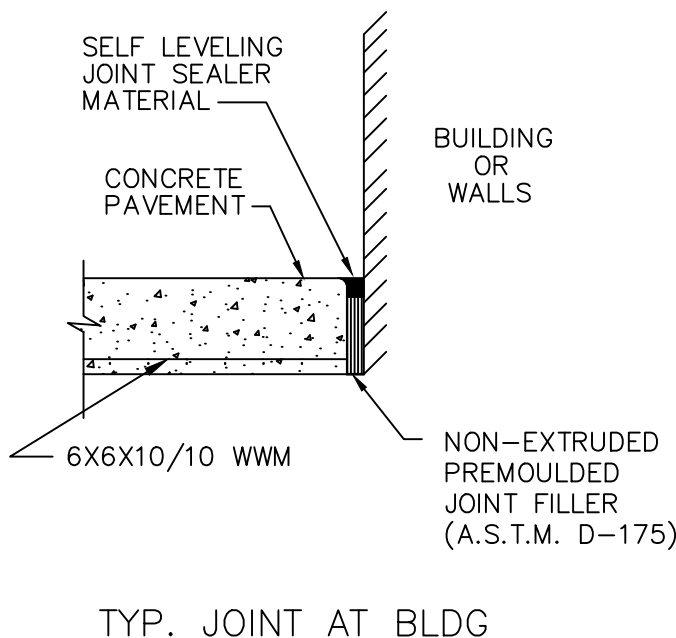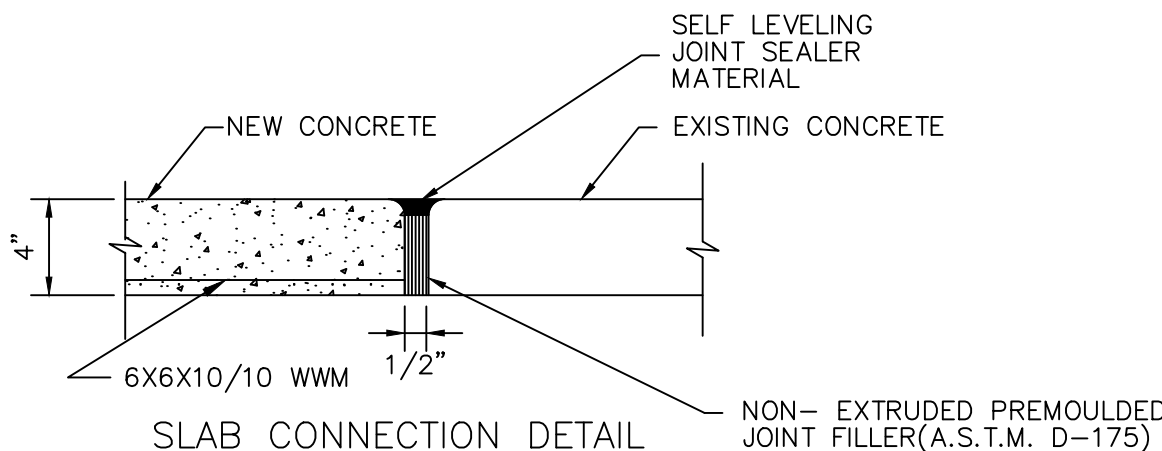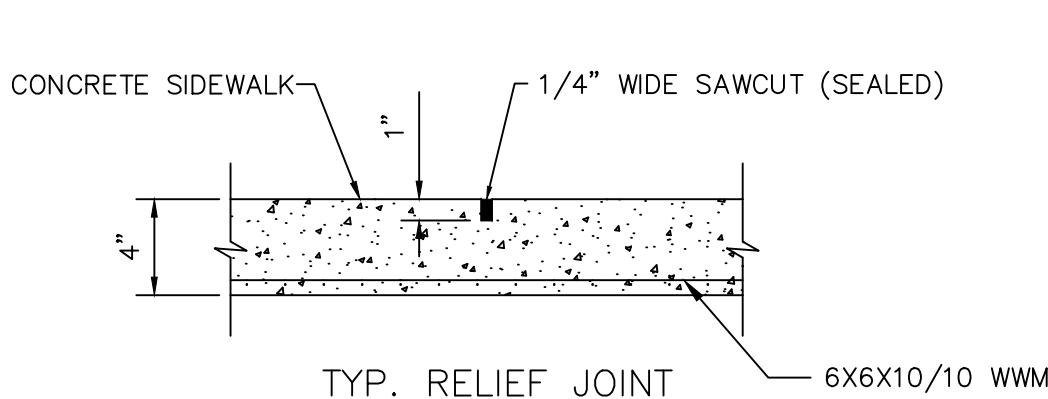

CONCRETE SIDEWALK DETAILS

1-1/2" = 1'-0"



BLDG 66	SHEET 5 OF 5
CONTRACT # 25-0427	
DWG. MARK RAMSDELL	PROJECT # 25M054CN
HANDICAP RAMP	
BLDG 66	
USMC CAMP LEBJUNE	
A5	

NOTES/DETAILS