

INSTALLATION SHALL COMPLY WITH UFC 3-600-01, UFC 1-200-01, UFC 4-010-06, 2023 NATIONAL ELECTRICAL CODE, NFPA 72, NFPA 1, NFPA 101, NFPA 1225, UL 2525, IBC, ABA, ADA, EQUIPMENT MANUFACTURER'S REQUIREMENTS AND NECA STANDARDS OF INSTALLATION.

ALL CONDUCTORS INSTALLED IN EXTERIOR SPACES SHALL BE XHHW, INTERIOR WIRING MAY BE THHW/THHN. UNLESS OTHERWISE NOTED

CONTRACTORS SHALL PROVIDE AND INSTALL AN EQUIPMENT GROUNDING CONDUCTOR IN ALL NEW CONDUITS.

ALL CONDUCTOR SIZES SHOWN ARE BASED ON COPPER.

ALL EQUIPMENT AND MATERIALS ARE UL LISTED WHERE LISTING IS AVAILABLE FOR THAT TYPE OF EQUIPMENT OR CONFORM TO ANSI OR NEMA STANDARDS

WORKMANSHIPS SHALL CONFORM TO CONSTRUCTION PRACTICES RECOMMENDED BY THE AMERICAN ELECTRICIANS HANDBOOK BY CROFT (LATEST EDITION) AND WILL BE SUBJECTED TO THE APPROVAL OF THE AGENCY THAT HAS JURISDICTION AND THE ENGINEER OF THE RECORD.

ALL METALLIC ENCLOSURES, RACEWAYS, AND ELECTRICAL EQUIPMENT SHALL BE GROUNDED IN ACCORDANCE WITH THE REQUIREMENTS OF THE NEC ARTICLE 250, WITH THE GROUND WIRE IN EVERY RACEWAY. RACEWAY SHALL BE SIZED IN ACCORDANCE WITH THE NEC TABLE 250-122.

TEST COMPLETED INSTALLATION AND CORRECT ALL DEFICIENCIES FOUND IN THE SYSTEM OR INSTALLATION.

ELECTRICAL DRAWINGS ARE DIAGRAMMATIC AND DO NOT SHOW ALL CONDUIT AND CONNECTIONS BETWEEN RESPECTIVE DEVICES, FIXTURES, AND EQUIPMENT. CONTRACTOR HAS TO DETERMINE EXACT ROUTING OF CONDUIT CONNECTIONS AND BETWEEN RESPECTIVE DEVICES, FIXTURES, AND EQUIPMENT. REFER TO ARCHITECTURAL PLANS FOR EXACT LOCATIONS.

.CONDUIT TO BE EMT UNLESS OTHERWISE NOTED. PROVIDE JUNCTION BOXES AS REQUIRED BY CODE.

.PAINT EXPOSED CONDUIT, BOXES, AND SUPPORTS TO MATCH ADJACENT SURFACES.

.PROVIDE SEPARATE NEUTRAL CONDUCTOR FOR ALL 120VAC CIRCUITS.

.COORDINATE LOCATION OF ALL TWO WAY COMMUNICATIONS EQUIPMENT AND SIGNAGE WITH ARCHITECT PRIOR TO START OF WORK.

TWO WAY COMMUNICATIONS SYSTEM

- | | |
|---|--|
|  | TWO WAY COMMUNICATIONS EMERGENCY CALL STATION, WALL MTD |
|  | TWO WAY COMMUNICATIONS MASTER STATION, WALL MTD |
|  | TWO WAY COMMUNICATIONS UPS, WALL MOUNTED IN CABINET |
|  | TWO WAY COMMUNICATIONS TWO WAY COMMUNICATION CONTROLLER, WALL MOUNTED IN CABINET |
|  | TWO WAY COMMUNICATIONS INSTRUCTIONAL SIGN, WALL MOUNTED |
|  | TWO WAY COMMUNICATIONS ILLUMINATED SIGN WITH DIRECTIONAL ARROWS AS INDICATED, WALL MOUNTED WITH BATTERY BACKUP |
|  | TWO WAY COMMUNICATIONS TACTILE SIGN, WALL MOUNTED |
|  | TWO WAY COMMUNICATIONS DIRECTIONAL SIGN, WALL MOUNTED |



	VIEW REFERENCE
	NORTH ARROW
	CENTERLINE
	NOTE REFERENCE
	KEYNOTE REFERENCE

ABBREVIATIONS


- | | |
|-----|--------------------------------------|
| AF | ARC FAULT BREAKER |
| C | CONDUIT |
| CLF | CURRENT LIMITING FUSE |
| CP | COPIER |
| DP | DISPOSAL |
| DSN | DEFENSE SWITCHED NETWORK |
| DW | DISHWASHER |
| EL | EVENING LIGHT, TIMESWITCH CONTROLLED |
| EWC | ELECTRONIC WATER COOLER |
| GFI | GROUND FAULT CIRCUIT INTERRUPTER |
| HA | HACR BREAKER |
| I | INSTRUCTIONAL |
| IG | INSULATED GROUND CIRCUIT(S) |
| L | LIGHT(S) |
| LC | LIGHTING CONTACTOR |
| LB | LOCKABLE BREAKER |
| MDP | MAIN DISTRIBUTION PANEL |
| MW | MICROWAVE |
| NL | NIGHT LIGHT, TIMESWITCH CONTROLLED |
| PFB | PROVISIONS FOR BREAKER |
| R | RECEPTACLE(S) |
| REF | REFRIGERATOR |
| S | SPARE BREAKER |
| T | TACTILE |
| TR | TAMPER RESISTANT |
| WP | WEATHERPROOF |
| 4X | NEMA 4X STAINLESS STEEL |

3/11/2025 4:28:22 PM TT-102 C:\Users\tda\Documents\22771_J875 Battle Staff Training_T_F24 rev_tommy.dwg.rvt

1 2ND FLOOR TWO-WAY COMMUNICATION PLAN
3/32" = 1'-0"

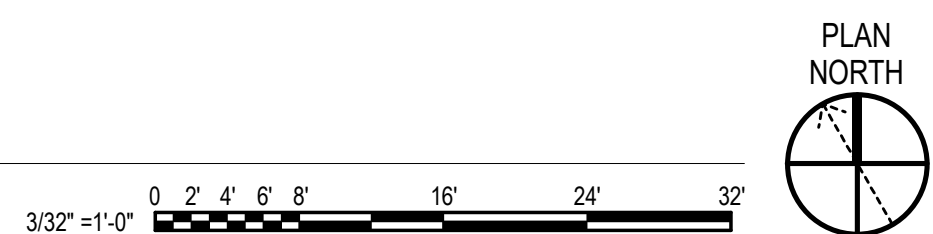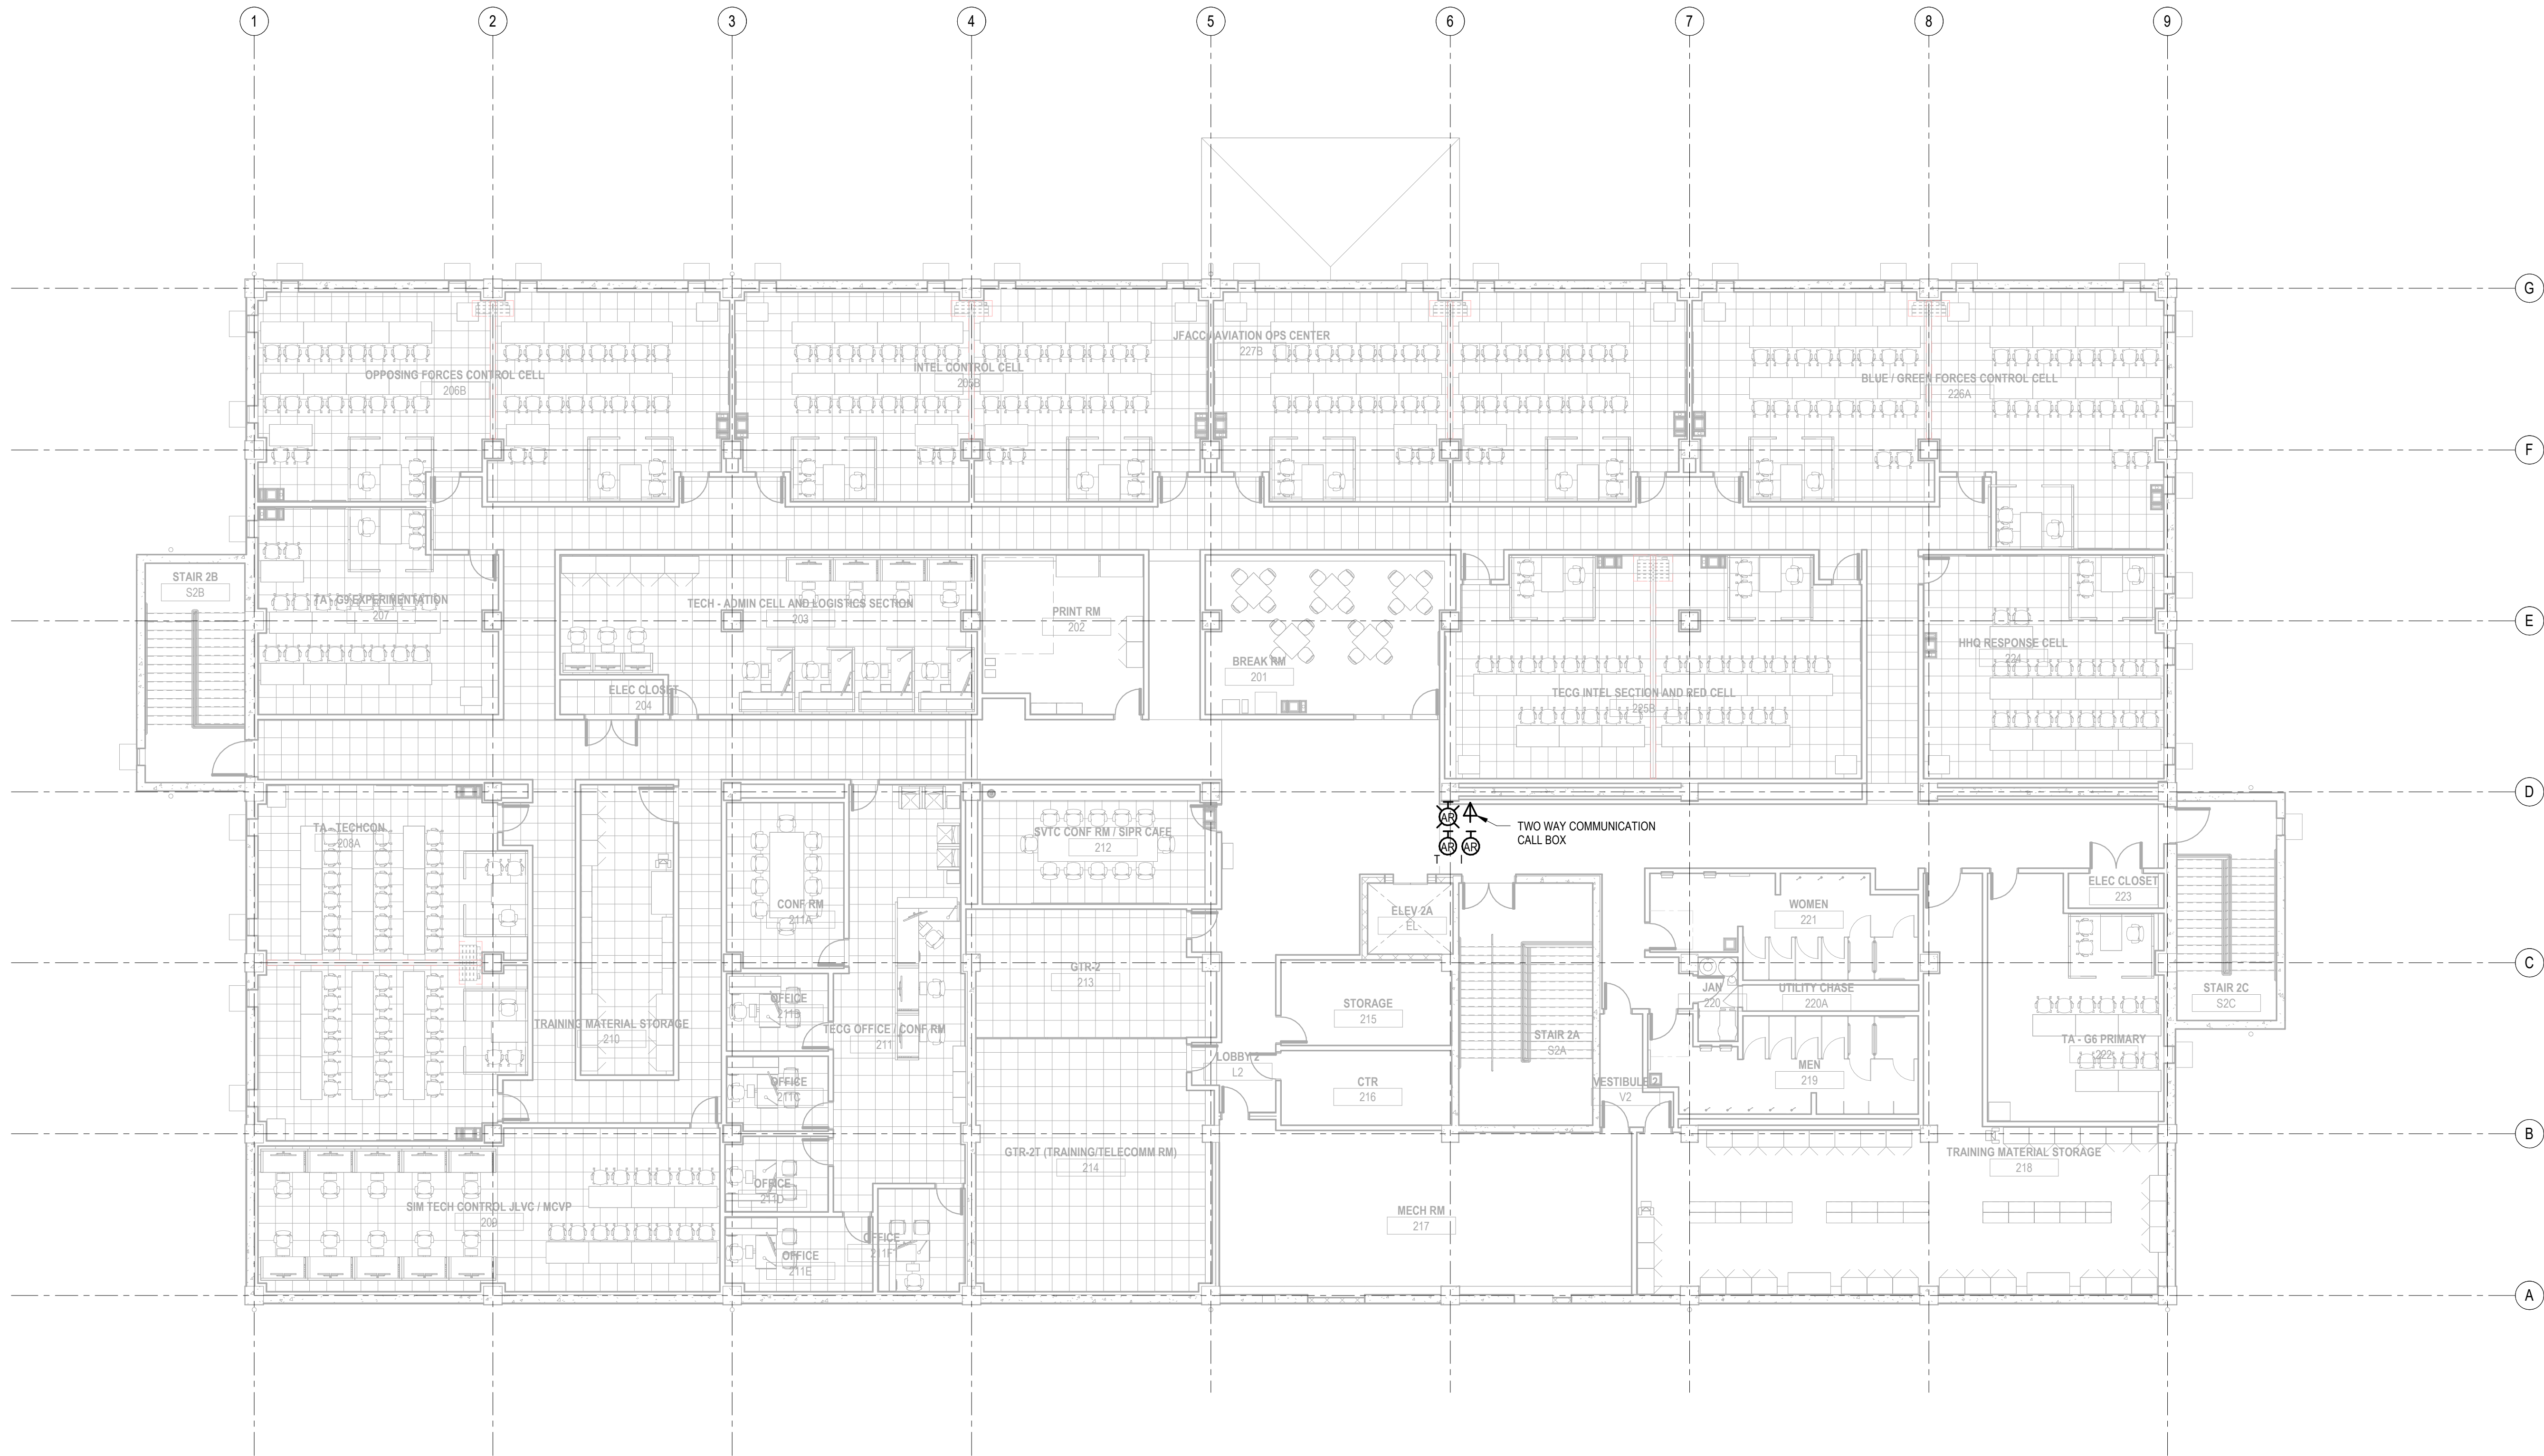

SYN	DESCRIPTION	DATE	APPR




APPROVED			
FOR COMMANDER NAVFAC			
ACTIVITY			
NATHANIEL PYRON, MILCON			
PLANNER, DPPH			
SATISFACTORY TO DATE 3/10/2026			
DES	JH	DRW	LS
CHK	JD		
PM/DM DKS/DMK			
BRANCH MANAGER KYM			
CHIEF ENGINEER KYM			
FIRE PROTECTION RYO			


DEPARTMENT OF THE NAVY NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND NAVFAC PACIFIC MARINE CORPS BASE, CAMP BLAZ	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND PACIFIC MAKALAPA, HAWAII
	FINEGAYAN, GUAM
	JFY 2023 PROJECT J-875 BATTLE STAFF TRAINING FACILITY
	2ND FLOOR TWO-WAY COMMUNICATION PLAN

SCALE: AS NOTED	
PROJECT NO.:	1696746
CONSTR. CONTR. NO.	
NAVFAC DRAWING NO. 17322320	
SHEET 435	OF 468
TT-102	
DRAWING REVISION: 25 AUGUST 2020	

3/11/2025 4:28:23 PM
C:\Users\tda\Documents\22271_J-875 Battle Staff Training_T_R24 rev_1.dwg
TT-501

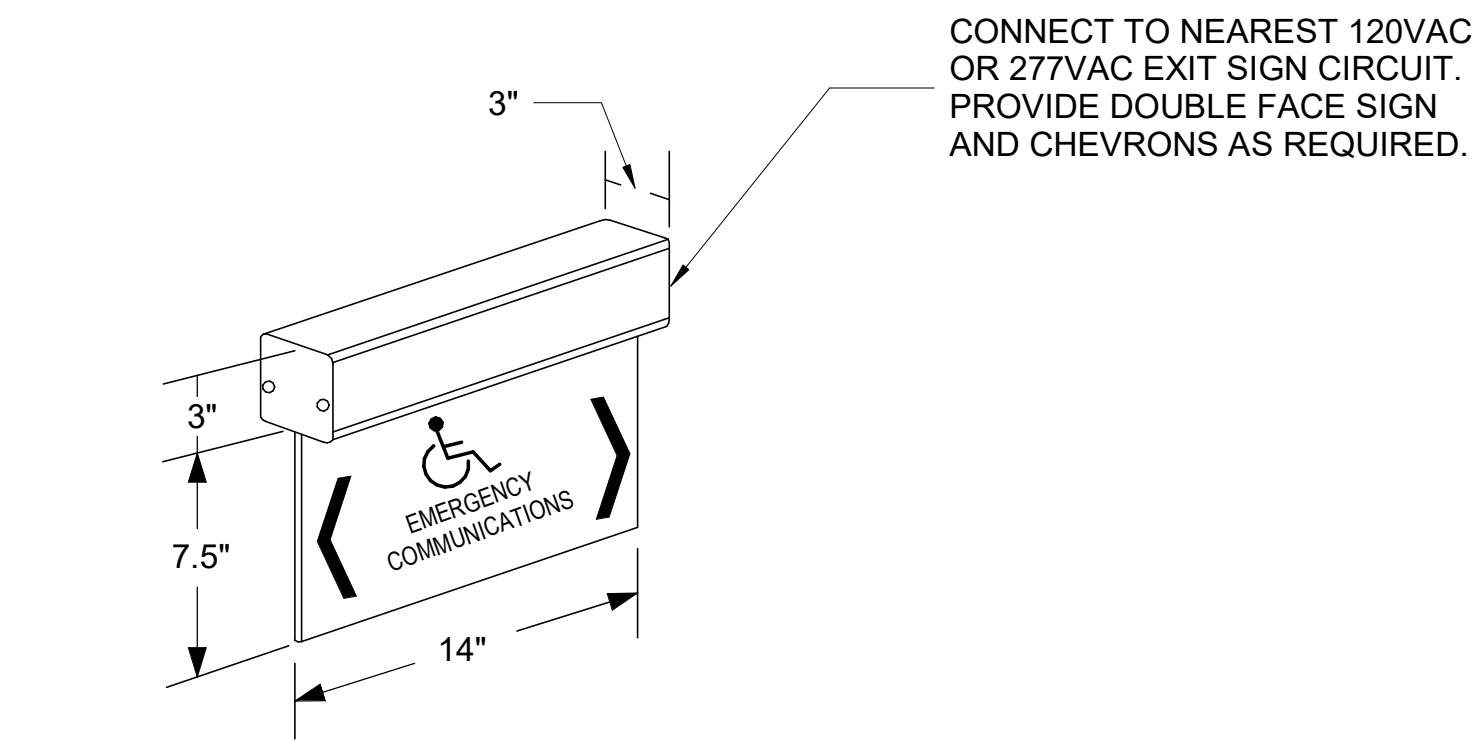


C1 TWO WAY COMMUNICATIONS ILLUMINATED SIGN DETAIL
NTS

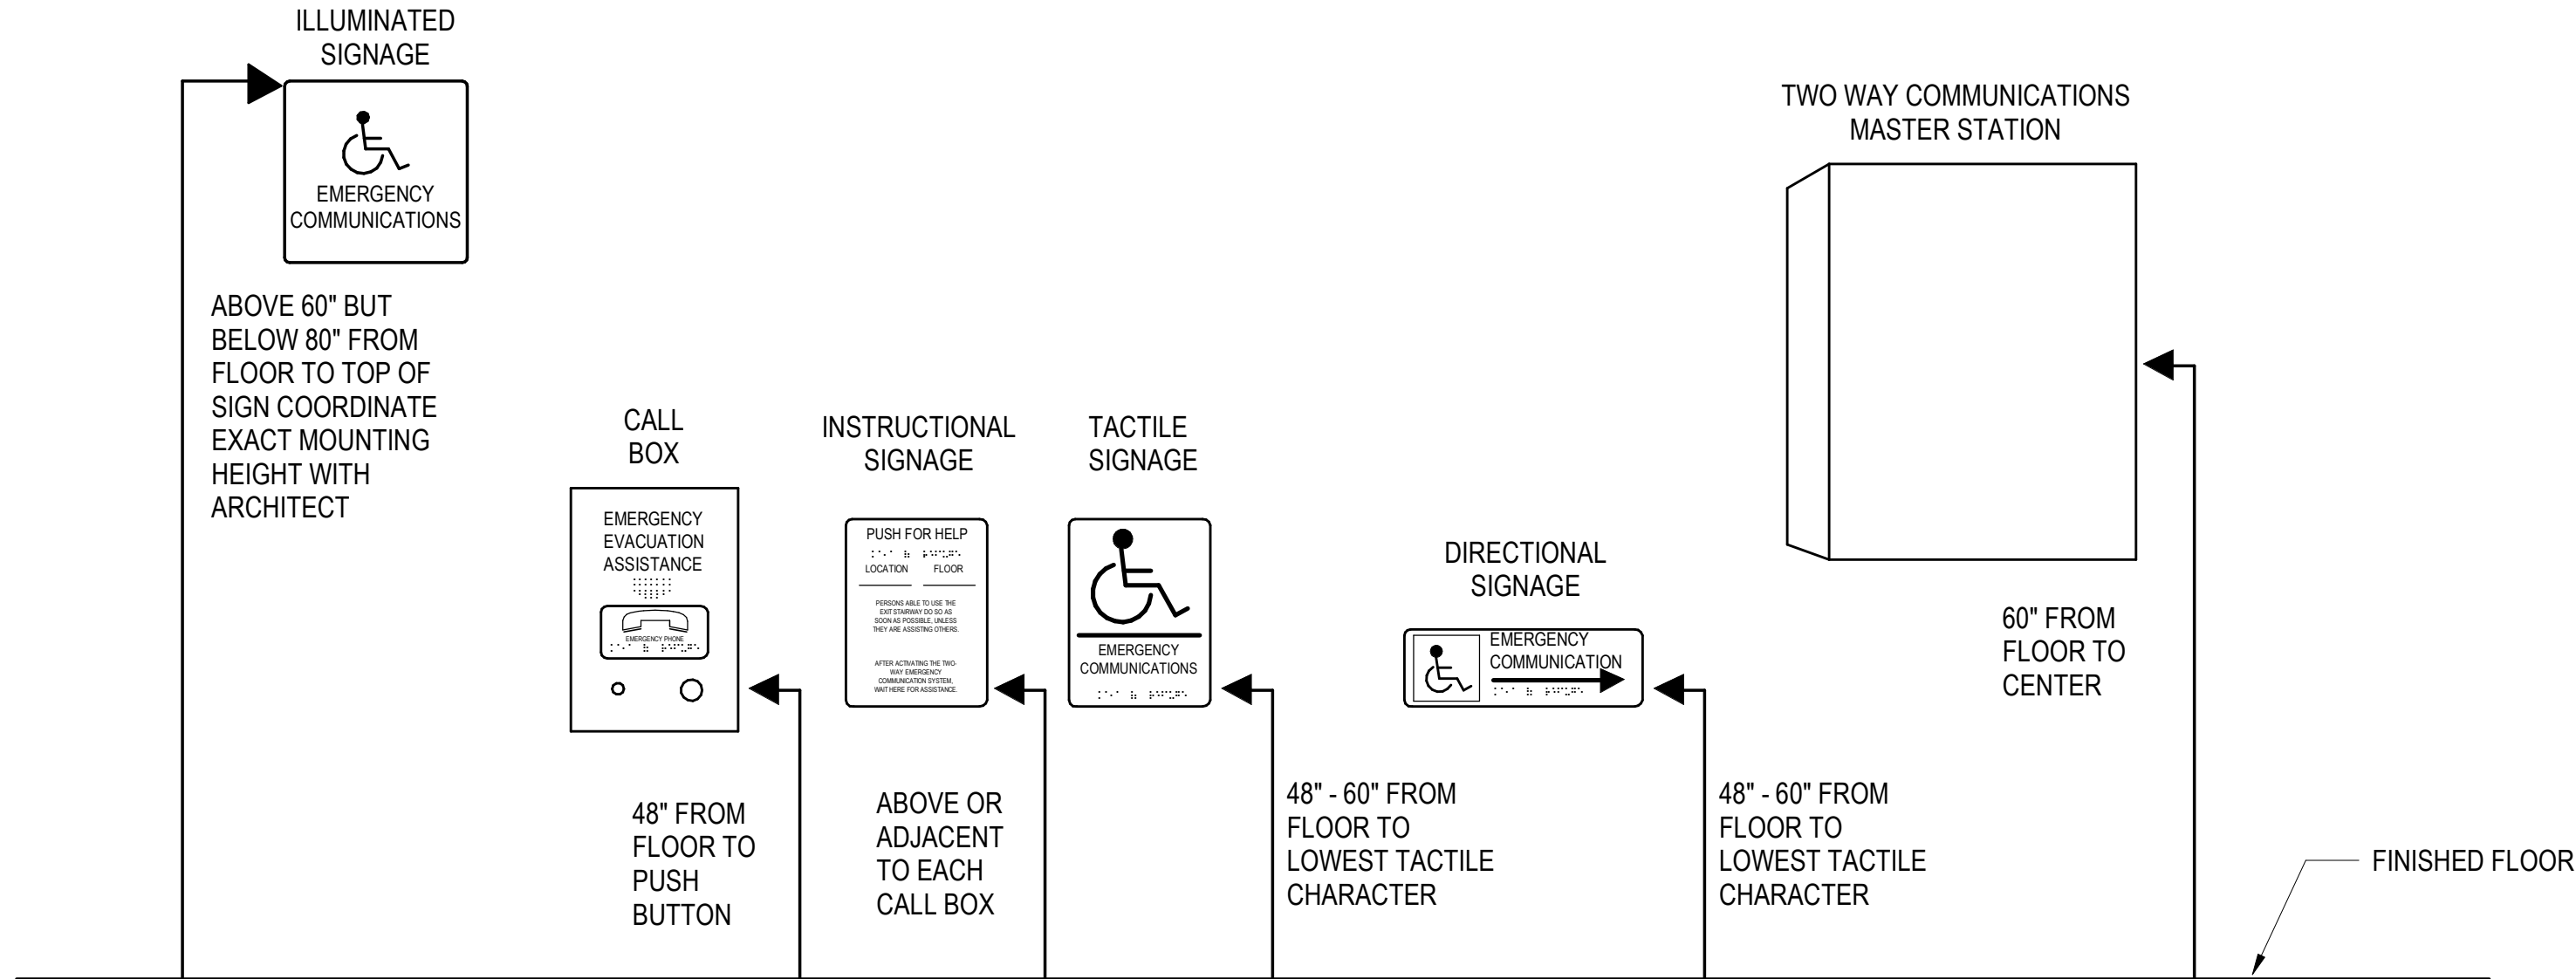

C3 TWO WAY COMMUNICATIONS MOUNTING HEIGHT DETAIL
NTS

DSN PHONE LINE/EXTENSION REQUIREMENTS:

- (1) MINIMUM OF 24V, 20 Ma OFF-HOOK (NO CURRENT IS DRAWN ON-HOOK).
- (2) DSN PHONE LINE/EXTENSION SHOULD PROVIDE EITHER A DISCONNECT PULSE (VOLTAGE DROP AT END OF CALL) OR 30-SECONDS OF SILENCE AFTER HANG-UP (NO RE-ORDER OR HOWLER FEATURE).
- (3) THERE MUST BE NO SPECIAL FEATURES (E.G., HOOK FLASH, CALL WAITING, AUTO-REDIAL WHEN BUSY, VOICEMAIL, ETC.). THE DSN PHONE LINE/EXTENSION MUST BE FEATURE FREE.
- (4) IF THE PHONE LINE DOES NOT PROVIDE A CALLING PARTY DISCONNECT SIGNAL (CPC), PROVIDE A SEPARATE CPC DISCONNECT DEVICE IN THE PHONE LINE TO OBTAIN THE SIGNAL. THE DEVICE SHALL BE POWERED OFF THE PHONE LINE. THE CPC DISCONNECT TIME SHALL BE 1 SECOND NOMINAL.
- (5) PROVIDE A DEDICATED DSN LINE TO THE TWO WAY COMMUNICATION HEAD END EQUIPMENT AND PROGRAM THE MASTER STATION TO AUTOMATICALLY CONNECT WITH THE LOCAL BASE 911 DISPATCH AND VICE VERSA. THE BASE SHALL INSTALL THE DSN LINE TO THE SCHOOL AND THE ELECTRICAL CONTRACTOR SHALL RUN THE LINE FROM THE COMMS ROOM TO THE MASTER STATION.

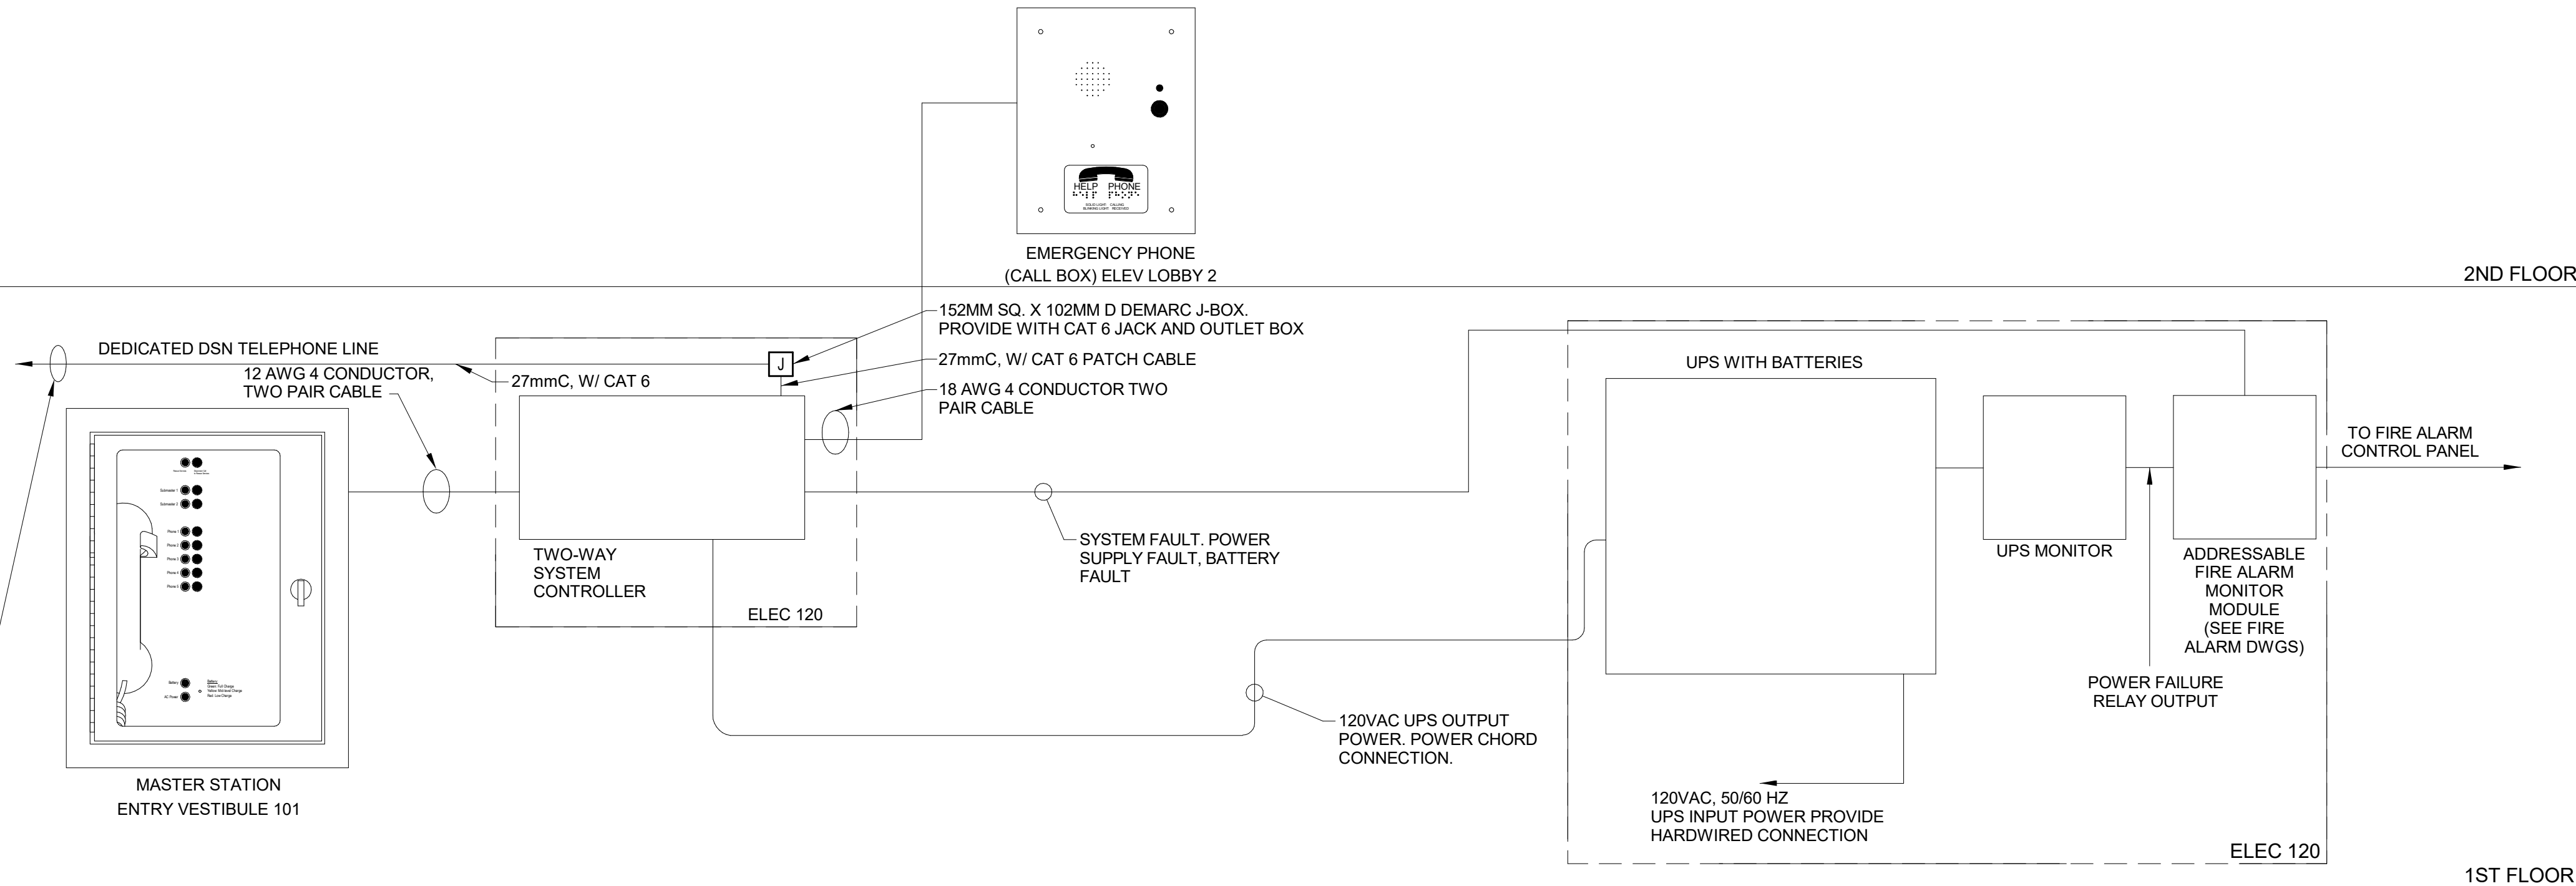


NOTES:

1. ALL WIRING SHALL BE IN METALLIC CONDUIT, 27mm: MINIMUM TRADE SIZE.
2. PROVIDE DEDICATED 120V, 20A CIRCUIT FOR POWER SUPPLY. REFER TO ELECTRICAL DRAWINGS FOR CIRCUIT INFORMATION.
3. ALL COMMUNICATION WIRING SHALL BE 2 HOUR FIRE RATED AND SHALL HAVE A PATHWAY SURVIVABILITY OF 2 HOURS.
4. PROVIDE ALL WIRING PER THE TWO WAY COMMUNICATION SUPPLIER SHOP DRAWINGS.
5. PROVIDE ALL REQUIRED EQUIPMENT MOUNTING HARDWARE PER THE TWO WAY COMMUNICATION SUPPLIER SHOP DRAWINGS.
6. THE UPS SYSTEM FOR THE TWO-WAY EMERGENCY COMMUNICATIONS SYSTEMS SHALL BE CAPABLE OF OPERATING THE SYSTEM UNDER QUIESCENT LOAD FOR A MINIMUM OF 24 HOURS AND THEN SUBSEQUENTLY DURING A FIRE OR OTHER EMERGENCY CONDITION FOR A PERIOD OF 4 HOURS WITH ALL REMOTE CALL STATIONS ACTIVATED AND ALL MASTER CONTROL STATIONS ANNUNCIATING THE CALLS.
7. FAILURE OF EITHER THE PRIMARY OR SECONDARY POWER SUPPLY SHALL RESULT IN A TROUBLE SIGNAL SENT TO THE FIRE ALARM CONTROL PANEL.
8. PROVIDE STANDARD 483MM WALL MOUNT CABINET FOR TWO WAY SYSTEM CONTROLLER, AND UPS/BATTERIES. CABINET SHALL BE LOCKABLE WITH SWINGING HINGED DOOR, REAR ACCESS TYPE HINGED, AND COOLING FANS. CABINET SIZE SHALL BE PER TWO WAY COMMUNICATION SYSTEM SUPPLIER REQUIREMENTS.

A1 TWO WAY COMMUNICATIONS DIAGRAM
NTS

SYN	DESCRIPTION	DATE	APPR

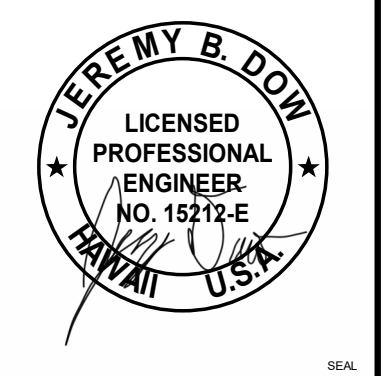

APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

NATHANIEL PYRON, MILCON
PLANNER, DPPH

SATISFACTORY TO DATE 3/10/2026

DES JH BRW LS CHK JD

PMOM DKSDMK

BRANCH MANAGER KYM

CHIEF ENGINEER KYM

FIRE PROTECTION RYO

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND ~ PACIFIC

MAKALAPA, HAWAII

FINEGAYAN, GUAM

JFY 2023 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

TWO WAY COMMUNICATIONS DETAILS & DIAGRAM

SCALE: AS NOTED

PROJECT NO.: 1696746

CONSTR. CONTR. NO.

NAVFAC DRAWING NO. 17322321

SHEET 436 OF 468

TT-501

DRAWING REVISION: 25 AUGUST 2020

1

2

AV SYSTEMS GENERAL NOTES:

1. ADHERE TO GOVERNMENT RULES AND REGULATIONS, DIVISION 01, 11, 26, AND 27. SPECIFICATION SECTIONS, AND DRAWINGS AND GENERAL PROVISIONS OF THE CONTRACT, INCLUDING GENERAL AND SUPPLEMENTARY CONDITIONS AND DIVISION 01 SPECIFICATION SECTIONS.

2. THE DRAWINGS AND SPECIFICATIONS ARE COMPLEMENTARY AND WHAT IS CALLED FOR (OR SHOWN) IN EITHER MUST BE PROVIDED AS IF CALLED FOR IN BOTH. IN CASE OF CONFLICT BETWEEN THE DRAWINGS AND SPECIFICATIONS, THE MORE STRINGENT REQUIREMENT WILL BE ENFORCED, UNLESS THE CONTRACTOR REQUESTS AND RECEIVES WRITTEN CLARIFICATION STATING OTHERWISE.

3. COORDINATE THE SEQUENCE OF WORK AND REPORT DISCREPANCIES BETWEEN THESE CONTRACT DRAWINGS AND ACTUAL FIELD CONDITIONS TO THE CONTRACTING OFFICER.

4. DEFINITIONS:

A. "FURNISH" MEANS TO "SUPPLY" AND USUALLY REFERS TO AN ITEM OF EQUIPMENT, CABLING, OR HARDWARE.

B. "INSTALL" MEANS TO SET IN PLACE, CONNECT, PLACE IN FULL OPERATIONAL ORDER, AND PERFORM REQUIRED VERIFICATION TESTING.

C. "PROVIDE" MEANS TO "FURNISH AND INSTALL."

D. "EQUIVALENT" MEANS "MEETS THE SPECIFICATIONS OF THE REFERENCE PRODUCT OR ITEM IN SIGNIFICANT ASPECTS." SIGNIFICANT ASPECTS MUST BE DETERMINED BY THE CONTRACTING OFFICER.

E. "WORK BY OTHER(S) (CONTRACTOR)" "RE: DIVISION XX," AND SIMILAR EXPRESSIONS MEANS WORK PERFORMED UNDER THE CONTRACT DOCUMENTS, BUT NOT NECESSARILY UNDER THE DIVISION OR SECTION OF THE WORK ON WHICH THE NOTE APPEARS. IT IS THE CONTRACTOR'S SOLE RESPONSIBILITY TO COORDINATE THE WORK OF THE CONTRACT BETWEEN THEIR SUPPLIERS, SUBCONTRACTORS, AND EMPLOYEES. IF CLARIFICATION IS REQUIRED, CONSULT CONTRACTING OFFICER BEFORE SUBMITTING BID.

5. PROVIDE PATHWAYS, RELATED HARDWARE, EQUIPMENT AND CABLING SHOWN ON THESE DRAWINGS EXCEPT WHERE OTHERWISE NOTED.

6. DEDICATED PATHWAYS / RACEWAYS MUST BE PROVIDED TO FULLY SUPPORT SYSTEM CABLING FOR THE ENTIRE DISTANCE. NO CABLING IS PERMITTED TO BE RUN UNSUPPORTED OR LAID OVER CEILING TILES, ELECTRICAL CONDUITS, HVAC DUCTS, PIPING, OR OTHER SUPPORTS OR CEILING MEMBERS NOT INTENDED FOR THAT PURPOSE.

7. COORDINATE WITH OTHER TRADES AND ADJUST AND ADAPT WORK FOR ACTUAL PROJECT CONDITIONS SO FINAL INSTALLATION IS COMPATIBLE WITH MATERIALS, EQUIPMENT, ROUTING, AND CLEARANCES OF TRADES.

A. EXAMINE THE CONTRACT DOCUMENTS OF TRADES (DRAWINGS FOR THE ARCHITECTURAL, REFLECTED CEILING, TELECOMMUNICATIONS, CIVIL, HEMP SHIELDING, MECHANICAL HVAC, ELECTRICAL POWER AND LIGHTING, FIRE PROTECTION, PLUMBING, ETC.).

B. ASSIST OTHER CONTRACTORS IN PREPARING SHOP DRAWINGS FOR COORDINATING INSTALLATION OF WORK (LOCATION, CEILING CLEARANCES, CABLE TRAY ACCESSIBILITY AND PATHWAY CLEARANCES THROUGHOUT, ETC.).

C. REFER TO ARCHITECTURAL DRAWINGS TO DETERMINE MINIMUM CLEARANCE REQUIREMENTS FROM FINISHED FLOOR TO BOTTOM OF DUCTWORK, CONDUIT, CABLE TRAY, LIGHTING, ETC.

8. MAINTAIN A RUNNING UPDATE OF FIELD OR CONTRACT DOCUMENT CHANGES AND UPDATE "AS-BUILT" DRAWINGS AS AN ONGOING PROCESS.

9. PROVIDE PATHWAYS / RACEWAYS FOR THE AV CABLING. THIS INCLUDES, BUT IS NOT LIMITED TO, CONDUIT, SLEEVES, STUB-UPS, WIREWAYS, J-HOOK CABLE SUPPORT PATHS, AND PERMANENTLY INSTALLED JUNCTION BOXES IN FLOORS, WALLS, CEILINGS AND UNDERGROUND.

10. PATHWAYS MUST BE BONDED TO THE TELECOM BONDING AND GROUNDING SYSTEM FOR CONNECTION TO THE BUILDING GROUNDING ELECTRODE SYSTEM IN ACCORDANCE WITH THE SPECIFICATIONS AND ANSI J-STD-607-D. PROVIDE GROUND CONDUCTORS, GROUND CLAMPS, COMPRESSION TAPS, LUGS AND ITEMS REQUIRED FOR CONNECTION TO THE BONDING AND GROUNDING SYSTEM.

11. FOR WALL-MOUNTED AV DEVICES, PROVIDE RECESS-FLUSH MOUNTED BACKBOXES AND EXTENSION RINGS WITH TOTAL DEPTH TO MATCH THICKNESS OF COMPLETE WALL AND INSULATION ASSEMBLY. PROVIDE CONDUITS AS INDICATED IN AV PATHWAY RISER DIAGRAMS.

12. REFER TO SYSTEM SPECIFIC DRAWINGS AND DETAILS FOR BACKBOX REQUIREMENTS SPECIFIC TO EACH TYPE. SELECT DEVICES MAY REQUIRE SPECIALIZED BACKBOX TYPES, SIZES, AND MOUNTING CONDITIONS AS DEPICTED IN DRAWINGS.

13. CONDUITS FOR AV MUST BE SIZED AS INDICATED ON AV PATHWAY RISER DIAGRAMS.

14. CONDUITS FOR AV MUST BE OF NON-FLEXIBLE, RIGID-WALLED CONSTRUCTION, EXCEPT AS OTHERWISE NOTED OR DETAILED ON THE DRAWINGS.

15. COORDINATE WITH CONTRACTING OFFICER AND OTHER TRADES PRIOR TO CONSTRUCTION FOR CONDUIT AND BACKBOX LOCATIONS IN PRECAST WALLS, POURED CONCRETE, MASONRY, ETC.

16. OUTLET MOUNTING HEIGHTS INDICATED ARE TO CENTERLINE OF BOX UNLESS OTHERWISE NOTED.

17. DEVICES INDICATED TO BE INSTALLED AT DIFFERENT MOUNTING HEIGHTS AND LOCATED WITHIN ONE STUD SPACE FROM EACH OTHER MUST ALIGN VERTICALLY ON THE SAME SIDE OF THE STUD.

18. PATHWAY MOUNTING HEIGHTS INDICATED ON PLANS ARE TO THE BOTTOM OF THE PATHWAY SUPPORTS (STRUT CHANNEL TRAPEZE, ANGLE SUPPORT, CONDUIT CLAMP, ETC).

19. PROVIDE SEISMIC BRACING FOR PATHWAYS AND EQUIPMENT REQUIRED BY CODE, LOCAL GOVERNING JURISDICTIONS, AND MANUFACTURERS' SPECIFICATIONS.

20. AV PATHWAY SYSTEMS MUST BE DEDICATED FOR AV CABLING ONLY. OTHER SYSTEMS INCLUDING, BUT NOT LIMITED TO, FIRE ALARM, HVAC CONTROLS, LIGHTING CONTROLS, ETC. MUST BE SUPPORTED BY OTHER MEANS AND MUST NOT BE ROUTED WITHIN THE AV PATHWAYS.

21. PROVIDE CONDUITS / SLEEVES THROUGH WALLS AND ACROSS INACCESSIBLE CEILING SPACES TO ENSURE UNOBSTRUCTED PATHWAY BETWEEN END POINTS INDICATED ON AV PATHWAY RISER DIAGRAMS.

22. AV PATHWAYS ROUTED THROUGH ELECTRICAL ROOMS MUST BE PHYSICALLY CONTINUOUS.

23. PROVIDE NEMA 3R CORROSION RESISTANT OUTLETS, CONDUITS AND WIRING METHODS IN AREAS EXPOSED TO WET CONDITIONS.

24. IN AREAS WHERE CORROSIVE CHEMICALS ARE PRESENT, PROVIDE NEMA 4X OR NEMA 12 FULLY-SEALED/GASKETED CORROSION-RESISTANT ENCLOSURES, OUTLET COVERS, CONDUITS AND WIRING METHODS, CONSTRUCTED OF TYPE 316 STAINLESS STEEL, NO EXCEPTION.

25. INSTALL PATHWAYS PARALLEL OR PERPENDICULAR TO WALL OR STRUCTURAL MEMBERS TO FOLLOW STRUCTURAL SURFACE CONTOURS AND DO NOT OBSTRUCT PASSAGEWAYS. WHERE MULTIPLE RACEWAYS ARE ROUTED THROUGH THE SAME AREA, GROUP SUCH RACEWAYS TOGETHER.

26. INSTALL CONDUIT WITH LARGE-RADIUS BENDS. THE RATIOS FOR MINIMUM BEND RADIUS TO CONDUIT DIAMETER ARE:

A. 6:1 BEND RADIUS OF THE INSIDE CONDUIT DIAMETER FOR CONDUIT SIZES LESS THAN 2 IN.

B. 10:1 BEND RADIUS OF THE INSIDE CONDUIT DIAMETER FOR CONDUIT SIZES EQUAL TO OR GREATER THAN 2 IN.

27. CONDUIT ROUTING MUST NOT EXCEED 180 DEG. FOR THE SUM OF ELBOWS, SWEEPS AND BENDS FOR A PARTICULAR CONDUIT RUN WITHOUT AN APPROVED PULL-BOX, HAND HOLE, OR VAULT. THE MAXIMUM BEND FOR ANY LOCATION MUST NOT EXCEED 90 DEG. 3-POINT SADDLE BENDS ARE NOT PERMITTED IN CONDUIT ROUTES.

28. INSIDE CONDUIT RUNS MUST NOT EXCEED 100 FT BETWEEN PULL POINTS WITHOUT AN APPROVED PULL-BOX.

29. PROVIDE PULL-BOXES AND HAND HOLES IN STRAIGHT SECTIONS OF CONDUIT ONLY. DO NOT USE PULL-BOXES OR HAND HOLES TO CHANGE PATHWAY DIRECTION, UNLESS SPECIFICALLY SHOWN WITH A CHANGE IN DIRECTION ON THE DRAWINGS.

30. CONDUIT OUTLET BODIES (I.E., CONDULET, C, LB, LL, LR, T), MUST NOT BE USED AS CABLE PULL POINTS OR TO CHANGE PATHWAY DIRECTION IN ANY LOCATIONS. THESE DEVICES ARE COMMONLY USED FOR ELECTRICAL/POWER PATHWAYS AND ARE NOT APPROVED FOR LOW VOLTAGE CABLING. SPECIALTY "SMART LB" CONDUIT OUTLET BODIES DESIGNED FOR LARGE-BEND RADIUS CABLE ENTRY THROUGH EXTERIOR WALLS MAY BE PERMITTED ONLY WHEN SPECIFICALLY INDICATED ON PLANS OR PRE-APPROVED IN WRITING BY THE CONTRACTING OFFICER.

31. PROVIDE PROTECTIVE INSULATED BUSHINGS ON CONDUIT ENDS INCLUDING RISER CONDUITS/SLEEVES, HORIZONTAL CONDUITS, DEVICE CONDUITS, AND SLEEVES.

32. STUB UP RISER CONDUIT A MINIMUM OF 6 IN. AFF.

33. PROVIDE CONDUIT QUANTITIES AND SIZES AS SHOWN. DO NOT COMBINE CONDUIT RUNS WITHOUT THE WRITTEN PERMISSION OF THE CONTRACTING OFFICER.

34. PROVIDE LISTED EXPANSION FITTINGS IN CONDUIT OR RACEWAY CROSSING BUILDING EXPANSION JOINTS. REFERENCE ARCHITECTURAL DRAWINGS FOR EXPANSION JOINT LOCATIONS.

35. PROVIDE EMPTY RACEWAY SYSTEMS WITH A PULL LINE OR TAPE INSTALLED WITH THREE FEET EXTENDING FROM EACH END, KNOTTED AND SECURED TO REMAIN IN PLACE. FOR INDOOR APPLICATIONS, USE PULL LINE HAVING NOT LESS THAN 200 LB. TENSILE STRENGTH. FOR OUTDOOR APPLICATIONS USE PULL TAPE OR WIRE HAVING NOT LESS THAN 1200-LB. TENSILE STRENGTH.

36. SEAL PENETRATIONS THROUGH RATED ASSEMBLIES (WALLS, FLOORS, ETC.) AS INDICATED ON ARCHITECTURAL DRAWINGS TO MAINTAIN THE ASSEMBLY RATING AROUND AND WITHIN THE PATHWAY.

37. PROVIDE APPROVED REMOVABLE PILLOW-TYPE FIRESTOPPING SYSTEMS TO SEAL PENETRATIONS THROUGH RATED WALLS, FLOORS, ASSEMBLIES AND CONDUIT/SLEEVE OPENINGS FOR AV CABLING. FIRESTOPPING SYSTEMS AND MATERIALS MUST BE RATED AND APPROVED FOR PREVENTION OF FLAMES, HOT GASES AND SMOKE WHEN SUBJECT TO THE REQUIREMENTS OF THE TEST STANDARD SPECIFIC FOR APPLICABLE CODES AND AHJ REQUIREMENTS.

38. JUNCTION BOXES AND BACKBOXES FOR DATA, VOICE, VIDEO, POWER, OR OTHER UTILITIES MUST BE SEPARATED BY AT LEAST ONE STUD CAVITY WHEN SERVING OPPOSITE SIDES OF ACOUSTICALLY RATED PARTITIONS. ALL JUNCTION BOXES LOCATED WITHIN THE SAME STUD CAVITY MUST MAINTAIN A MINIMUM OF 24 INCHES SEPARATION OR BE SEALED WITH PUTTY PADS.

39. DATA GIVEN ON THE DRAWINGS IS AS EXACT AS COULD BE SECURED. ABSOLUTE ACCURACY IS NOT GUARANTEED. THE DRAWINGS ARE DIAGRAMMATICAL IN NATURE, AND SYMBOLS AND LINEWORK CONTAINED THEREIN MUST NOT BE SCALED.

40. PATHWAY ROUTING ON THESE DRAWINGS PRIMARILY SHOWS INTERCONNECTIONS BETWEEN TERMINAL POINTS. COORDINATE THE EXACT ROUTING OF PATHWAYS BASED ON FIELD CONDITIONS PRIOR TO SUBMITTING SHOP DRAWINGS OR INITIATING WORK IN THE FIELD. SHOP DRAWINGS SHOWING ROUTING OF THESE PATHWAYS MUST BE SUBMITTED AS SPECIFIED IN DIVISION 27 AND APPROVED BY THE CONTRACTING OFFICER PRIOR TO INSTALLATION. EXTRA TIME MUST BE ALLOWED FOR THE COORDINATION, SUBMITTAL REVIEW AND APPROVAL PROCESS.

41. ANY PROPOSED OR REQUIRED EXCEPTIONS TO THE AV PATHWAY ROUTING REQUIREMENTS IN THESE DRAWINGS AND ASSOCIATED SPECIFICATIONS MUST BE DETAILED IN CONTRACTOR SHOP DRAWINGS AND SUBMITTALS AND APPROVED PRIOR TO INSTALLATION. ANY REMEDIATION TO AV PATHWAY AND ROUTING TO MEET REQUIREMENTS WILL BE THE TOTAL RESPONSIBILITY OF THE CONTRACTOR AT NO ADDITIONAL COST TO THE GOVERNMENT.

42. CONDUITS SMALLER THAN 2 IN. TRADE SIZE HAVE NOT BEEN MODELED OR INDICATED ON THESE DRAWINGS. IT IS THE CONTRACTOR'S RESPONSIBILITY TO DESIGN AND ROUTE CONDUITS SMALLER THAN 2 IN. FROM THE SOURCE TO THE DESTINATION POINTS.

43. SEQUENCING OF SYSTEMS EQUIPMENT AND PROVISIONING WITHIN THE PROJECT SCOPE MUST BE COORDINATED WITH THE CONTRACTING OFFICER FOR GOVERNMENT FURNISHED SYSTEMS AND EQUIPMENT.

44. THE AV DRAWINGS DESCRIBE (A) THE MILCON CONTRACTOR'S BASE "INFRASTRUCTURE" PROVISIONS FOR AV SYSTEMS - SPECIFICALLY INCLUDING AV-RELATED INFRASTRUCTURE (CONDUIT RACEWAYS, BOXES, STRUCTURAL MOUNTING SUBSTRATES, AND AV-SPECIFIC EQUIPMENT CABINETS) TO SUPPORT ALL AV EQUIPMENT, REGARDLESS OF WHICH VENDOR OR INSTALLER IS HANDLING THE AV EQUIPMENT INSTALLATION; AND (B) THE SCOPE OF AV EQUIPMENT/SYSTEMS APPROPRIATED AS AV-SPECIFIC "SPECIALTY" COLLATERAL EQUIPMENT (CEQ) ITEMS BY MEANS OF THE CEQ CONTRACT MODIFICATION PROCESS; AND (C) THE SCOPE OF AV EQUIPMENT/SYSTEMS APPROPRIATED AS GOVERNMENT-FURNISHED, GOVERNMENT-INSTALLED (GFGI) ITEMS BY MISSION USERS AND/OR CAIT-DELEGATED TURN-KEY INSTALLER.

45. REFER TO SPECIFICATION SECTION 27 41 00 "AUDIO-VISUAL SYSTEMS" FOR ADDITIONAL REQUIREMENTS TO COMPLEMENT THESE DRAWINGS.

46. AV EQUIPMENT AND CABLING IDENTIFIED ON THESE DRAWINGS (AND IN THE RELATED SPECIFICATIONS) AS AV-SPECIFIC "SPECIALTY" COLLATERAL EQUIPMENT (CEQ), MUST BE PROVIDED WITHIN THE AV CEQ PACKAGE. REFER TO THE COMPREHENSIVE INTERIOR DESIGN (CID) PACKAGES "AV CEQ" DOCUMENTS (INCLUDING BASIS OF DESIGN NARRATIVE AND AV EQUIPMENT SCHEDULES) FOR ADDITIONAL INFORMATION. THE AV-SPECIFIC "SPECIALTY" COLLATERAL EQUIPMENT (CEQ) MUST BE PROVIDED BY A QUALIFIED AND MANUFACTURER-APPROVED AV TRADE CONTRACTOR SPECIALIZING IN THE SALE AND INSTALLATION OF COMMERCIAL-GRADE AUDIO-VIDEO (AV) SYSTEMS.

47. AV CABLING WILL BE PROVIDED AS PART OF GFGI SCOPE. FOR AV CABLING (WITHOUT EXCEPTION), PROVIDE CABLE RACEWAY INFRASTRUCTURE AS IDENTIFIED ON THESE DRAWINGS.

48. POWER AND DATA COORDINATION REQUIREMENTS ARE CLARIFIED IN THE AV EQUIPMENT SCHEDULES ON THESE DRAWINGS, BUT THE FINAL POWER AND DATA SCOPE IS INDICATED ON THE RESPECTIVE ELECTRICAL POWER AND TELECOMMUNICATIONS DRAWINGS.

49. NOT ALL PARTS AND PIECES ARE NECESSARILY SHOWN FOR A COMPLETE SYSTEM, UNLESS NOTED OTHERWISE, THE CONTRACTOR AND AV-SPECIFIC CEQ VENDOR/INSTALLER ARE RESPONSIBLE FOR PROVIDING ONLY THE COMPONENTS SPECIFIED IN THE AV DRAWINGS AND SPECIFICATIONS.

50. THE MILCON GENERAL CONTRACTOR AND THEIR SUB-CONTRACTORS MUST PROVIDE ALL HARDWARE ATTACHED TO THE BUILDING. THIS INCLUDES, BUT IS NOT LIMITED TO, CEILING-MOUNTED EQUIPMENT SUPPORTS, WALL-MOUNTED BACKING SUPPORTS, CABLE TRAY, J-HOOK CABLE SUPPORT PATHS, RACEWAY AND CONDUIT SYSTEMS, TECHNICAL BONDING/GROUNDING, BRANCH-CIRCUIT POWER OUTLETS/CONNECTIONS, AND TELE/ATA WORK AREA OUTLETS SPECIFIC TO AV EQUIPMENT PROVISIONS.


51. WHERE DIMENSIONS ARE SHOWN FOR EQUIPMENT SIZES OR MOUNTING HEIGHTS, SUCH DIMENSIONS ARE NOMINAL AND MAY REQUIRE SMALL ADJUSTMENTS FOR FINAL INSTALLATION BASED ON EXACT EQUIPMENT PROVIDED. WHERE DIMENSIONS ARE CRITICAL, THEY ARE MARKED AS "CRITICAL".

52. PROVIDE BACKING MATERIAL FOR EQUIPMENT WEIGHT THAT IS RATED TO SUPPORT A MINIMUM OF FIVE TIMES (5X) THE WEIGHT OF THE EQUIPMENT ANCHORED THERETO.

53. THE AV-SPECIFIC CEQ VENDOR/INSTALLER WILL VERIFY THE QUANTITIES OF ALL AV CEQ MATERIALS SCHEDULED HEREIN, AND PROVIDE THOSE QUANTITIES ACCORDINGLY.


54. AV RACEWAYS MUST BE LABELED WITH PERMANENT TYPED/PRINTED LABELS AT BOTH ENDS OF SYSTEM, AND AT INTERMEDIATE PULL BOXES.

1. REFER TO TA001 & TA002 FOR AV REQUIREMENTS AND SYMBOLS SHOWN ON THESE DRAWINGS. WORK MUST BE PERFORMED IN COMPLIANCE WITH DIVISION 27 SPECIFICATIONS.
2. NOT ALL ARCHITECTURAL, TELECOM AND ELECTRICAL ELEMENTS HAVE BEEN INCLUDED ON THE DRAWINGS. CONTRACTOR MUST REFER TO THOSE RESPECTIVE DISCIPLINES' SHEETS FOR ADDITIONAL BUILDING-MOUNTED ELEMENTS AND SCOPE OF WORK THAT MAY INTERFACE WITH, OR IMPACT, THE AV SCOPE OF WORK.

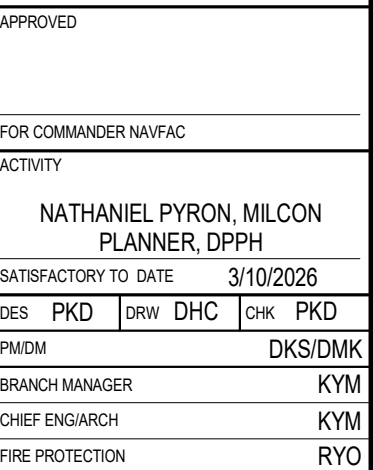
[illegible]

DEPARTMENT OF THE NAVY	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND ~ PACIFIC
NAVFAC-PACIFIC		MAKALAPA, HAWAII
U.S. NAVYSUPPORT	JFY 2022 PROJECT J-875	MCB CAMP BLAZ, GUAM
	BATTLE STAFF TRAINING FACILITY	
	OVERALL AV FIRST FLOOR PLAN	


SCALE: AS NOTED	
EPROJECT NO.:	1696746
CONSTR. CONTR. NO.	
NAVFAC DRAWING NO.	
17322328	
SHEET 440	OF 468
TA101	



1/16" = 1' - 0"

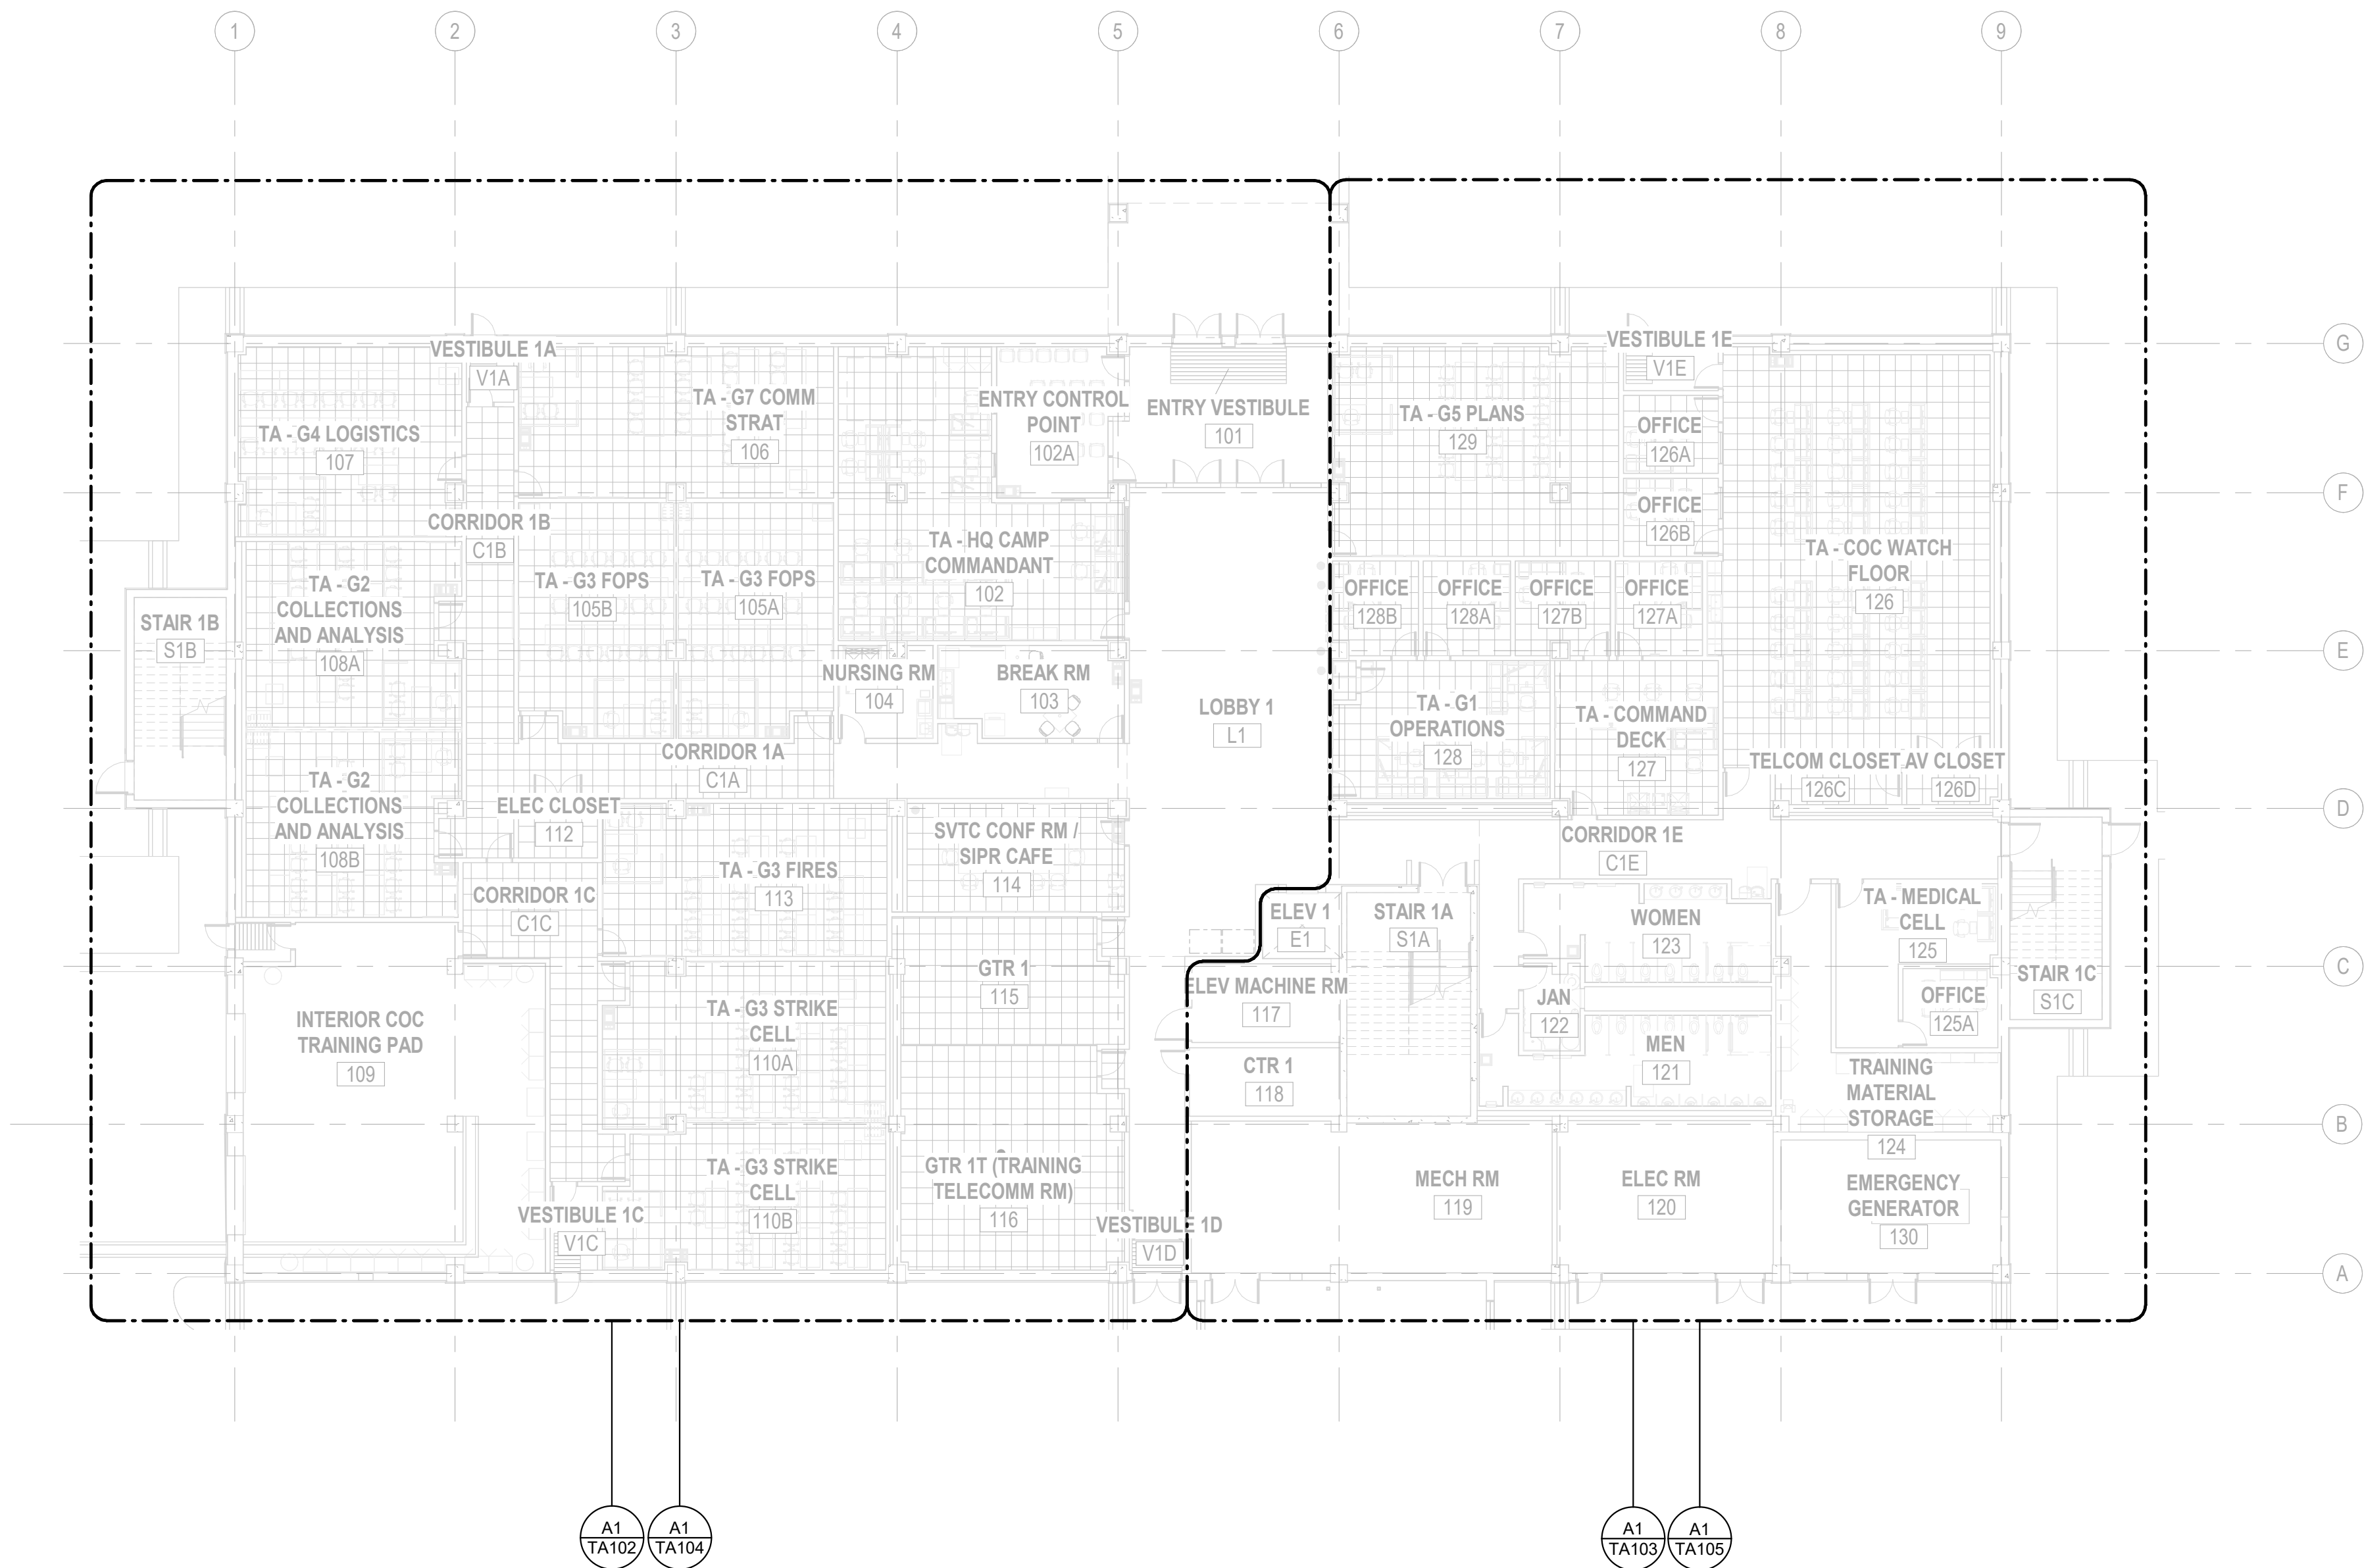
$$1/16'' = 1'-0''$$

3/11/2025 9:15:16 PM TA102
Autodesk Docs/J875 B57F6D63-J875-1696746-TA.rvt

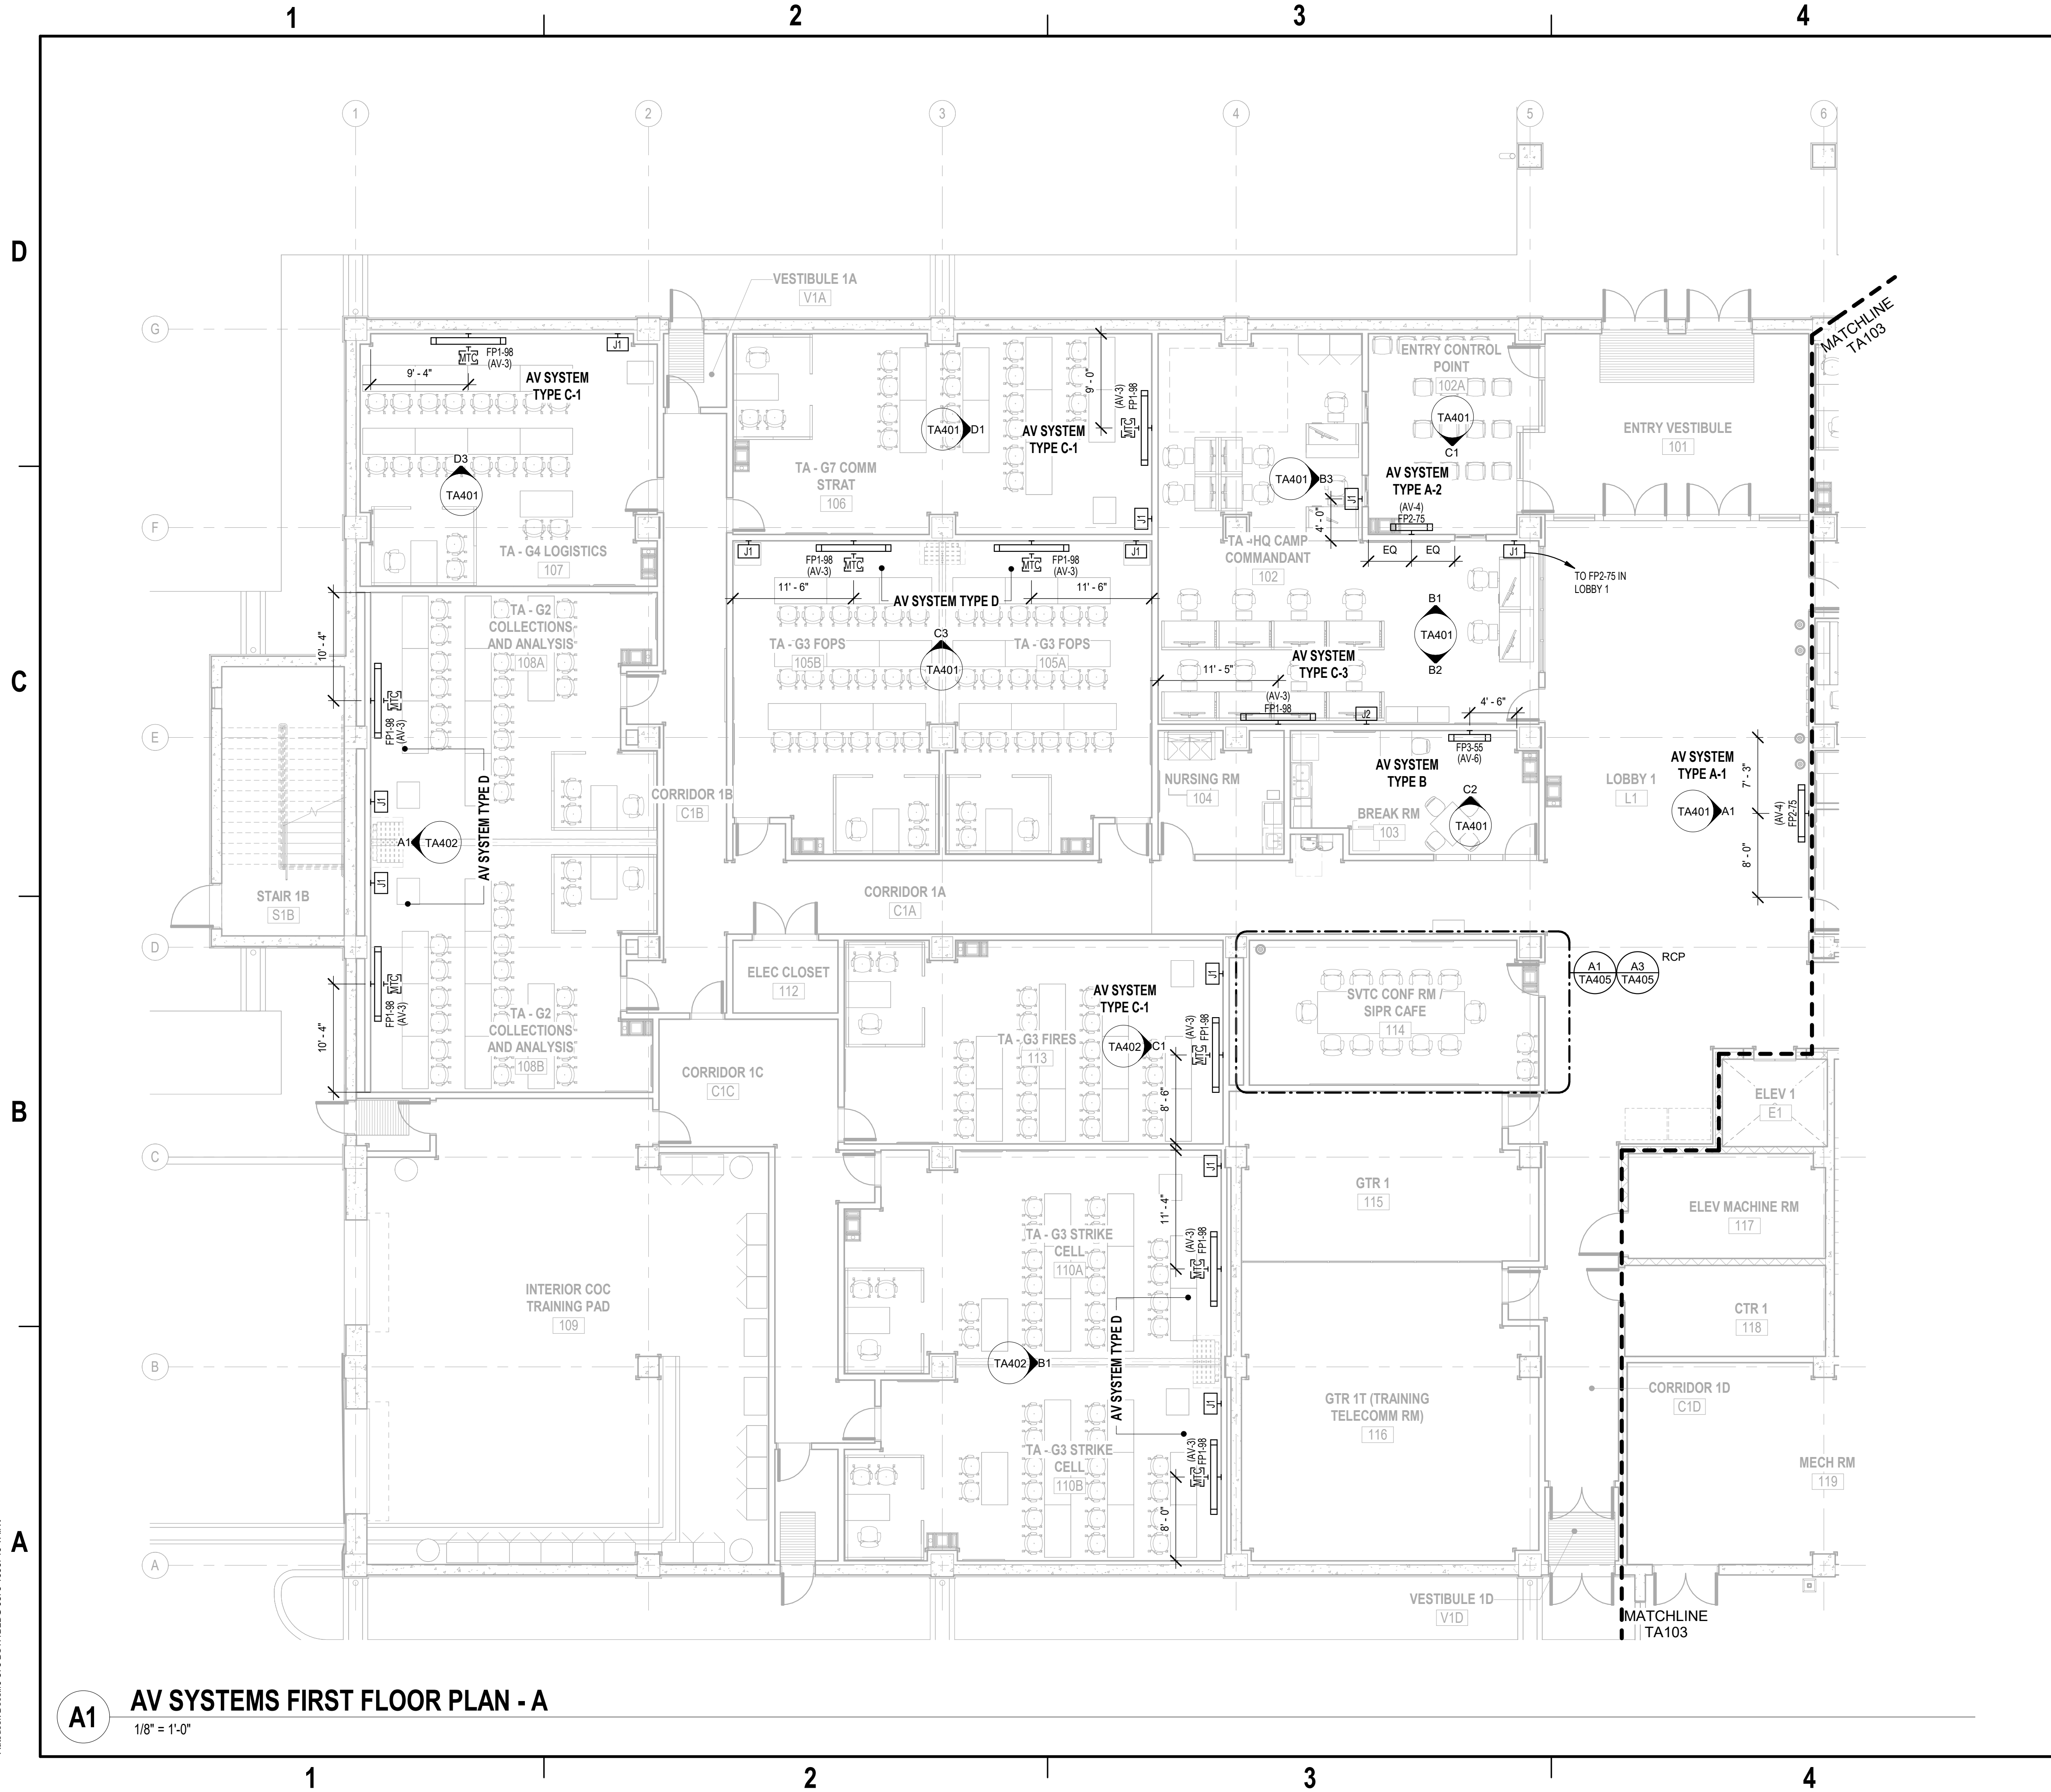

A1 AV SYSTEMS FIRST FLOOR PLAN - A
1/8" = 1'-0"

GENERAL SHEET NOTES

1. REFER TO TA001 & TA002 FOR AV REQUIREMENTS AND SYMBOLS SHOWN ON THESE DRAWINGS. WORK MUST BE PERFORMED IN COMPLIANCE WITH DIVISION 27 SPECIFICATIONS.
2. NOT ALL ARCHITECTURAL, TELECOM AND ELECTRICAL ELEMENTS HAVE BEEN INCLUDED ON THE DRAWINGS. CONTRACTOR MUST REFER TO THOSE RESPECTIVE DISCIPLINES' SHEETS FOR ADDITIONAL BUILDING-MOUNTED ELEMENTS AND SCOPE OF WORK THAT MAY INTERFACE WITH, OR IMPACT, THE AV SCOPE OF WORK.
3. CONDUIT RACEWAYS SHOWN ON PLAN AND RCP VIEWS ARE ONLY SHOWN IF A SPECIFIC ROUTE IS REQUIRED. REFER TO PATHWAY RISER DIAGRAMS FOR CONDUIT RACEWAY REQUIREMENTS. COORDINATE ROUTING AND ROOM ENTRY LOCATIONS FOR AV SYSTEMS CONDUIT AND PATHWAYS DURING SHOP DRAWING PROCESS.
4. VERIFY AND COORDINATE WALL SPACE REQUIREMENTS WITH OTHER TRADES DURING SHOP DRAWING PROCESS TO CONFIRM FINAL PLACEMENT OF AV ROUGH-IN'S AND EQUIPMENT.
5. VERIFY EQUIPMENT ROUGH-IN DIMENSIONS WITH VENDOR/INSTALLER.
6. REFER TO I-SERIES (INTERIOR DESIGN) DRAWINGS FOR FINAL DIMENSIONS OF:
 - a. HORIZONTAL MOUNTING OF WALL-MOUNTED AV-EQUIPMENT
 - b. POSITIONING OF AV-RELATED FURNITURE/FURNISHINGS. FOR AV EQUIPMENT CABINETS, REFER TO DIMENSIONS ON THE TA-SERIES DRAWINGS.



APPROVED



FOR COMMANDER NAVFAC

ACTIVITY

NATHANIEL PYRON, MILCON

PLANNER, DPPH

SATISFACTORY TO DATE 3/10/2026

DES PKD DRW DHC CHK PKD

PMOM DKS/DMK

BRANCH MANAGER KYM

CHIEF ENGINEER KYM

FIRE PROTECTION RYO

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

U.S. NAVY/SUPPACT


JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV FIRST FLOOR PLAN - A

NAVFAC PACIFIC

3/11/2025 9:15:17 PM
Autodesk Docs/J875 B57F6D63-J875-1696746-TA 103

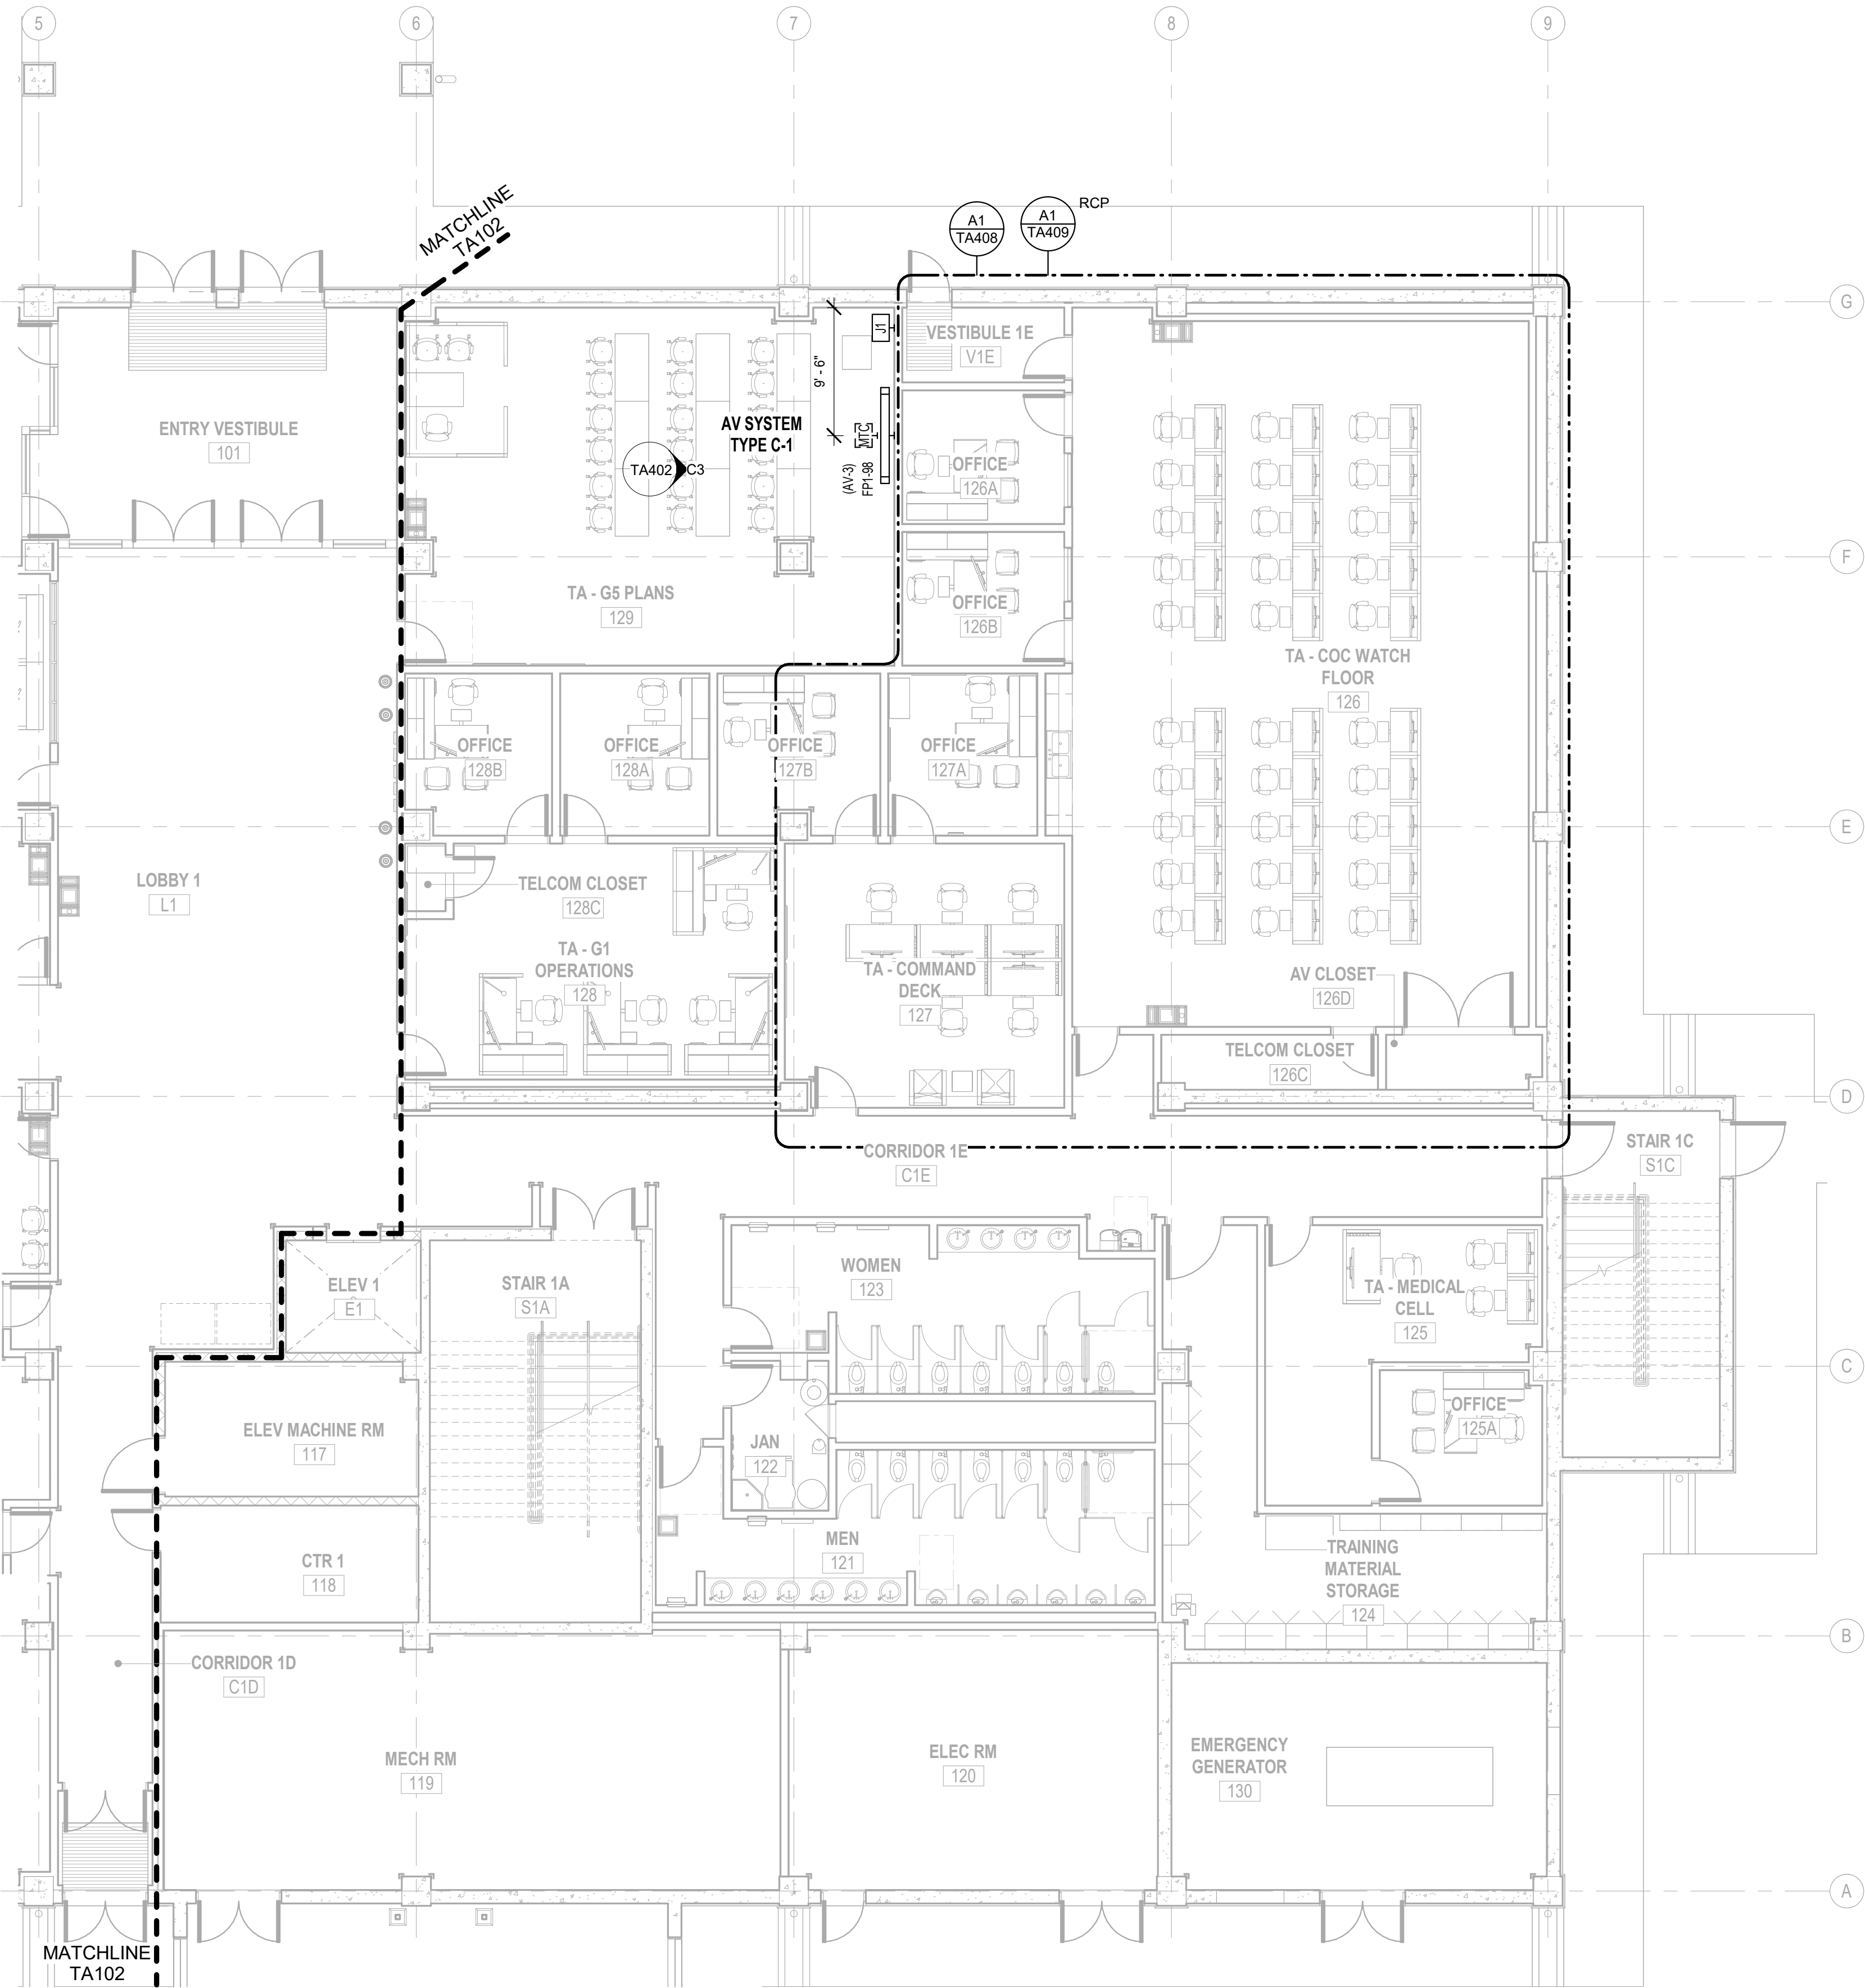

A1 AV SYSTEMS FIRST FLOOR PLAN - B
1/8" = 1'-0"

GENERAL SHEET NOTES

1. REFER TO TA001 & TA002 FOR AV REQUIREMENTS AND SYMBOLS SHOWN ON THESE DRAWINGS. WORK MUST BE PERFORMED IN COMPLIANCE WITH DIVISION 27 SPECIFICATIONS.
2. NOT ALL ARCHITECTURAL, TELECOM AND ELECTRICAL ELEMENTS HAVE BEEN INCLUDED ON THE DRAWINGS. CONTRACTOR MUST REFER TO THOSE RESPECTIVE DISCIPLINES' SHEETS FOR ADDITIONAL BUILDING-MOUNTED ELEMENTS AND SCOPE OF WORK THAT MAY INTERFACE WITH, OR IMPACT, THE AV SCOPE OF WORK.
3. CONDUIT RACEWAYS SHOWN ON PLAN AND RCP VIEWS ARE ONLY SHOWN IF A SPECIFIC ROUTE IS REQUIRED. REFER TO PATHWAY RISER DIAGRAMS FOR CONDUIT RACEWAY REQUIREMENTS. COORDINATE ROUTING AND ROOM ENTRY LOCATIONS FOR AV SYSTEMS CONDUIT AND PATHWAYS DURING SHOP DRAWING PROCESS.
4. VERIFY AND COORDINATE WALL SPACE REQUIREMENTS WITH OTHER TRADES DURING SHOP DRAWING PROCESS TO CONFIRM FINAL PLACEMENT OF AV ROUGH-INS AND EQUIPMENT.
5. VERIFY EQUIPMENT ROUGH-IN DIMENSIONS WITH VENDOR/INSTALLER.
6. REFER TO I-SERIES (INTERIOR DESIGN) DRAWINGS FOR FINAL DIMENSIONS OF:
 - a. HORIZONTAL MOUNTING OF WALL-MOUNTED AV-EQUIPMENT
 - b. POSITIONING OF AV-RELATED FURNITURE/FURNISHINGS. FOR AV EQUIPMENT CABINETS, REFER TO DIMENSIONS ON THE TA-SERIES DRAWINGS.



SIGNATURE: Patrick K. Durham
EXPIRATION DATE OF LICENSE: APRIL 30, 2028



APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

NATHANIEL PYRON, MILCON
PLANNER, DPPH

SATISFACTORY TO DATE: 3/10/2026

DES: PKD | DRW: DHC | CHK: PKD

PM/DW: DKS/DMK

BRANCH MANAGER: KYM

CHIEF ENGINEER: KYM

FIRE PROTECTION: RYO

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND ~ PACIFIC

NAVFAC PACIFIC

U.S. NAVY/SUPPORT

MAKALAPA, HAWAII

MCB CAMP BLAZ, GUAM


JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY


PARTIAL AV FIRST FLOOR PLAN - B



KEY PLAN

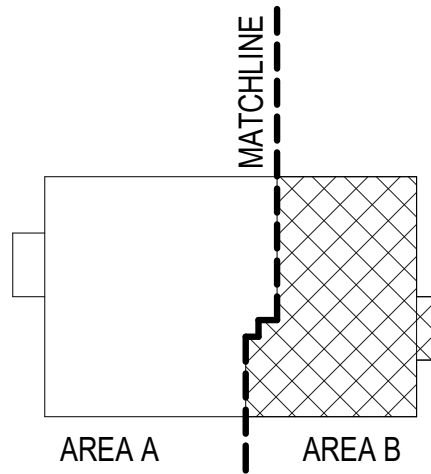

GRAPHIC SCALE(S)



NAVFAC DRAWING NO. 17322330

SHEET 442 OF 468

TA103

DRAWING REVISION: 25 AUGUST 2020

3/11/2025 9:15:18 PM TA104
Autodesk Docs/J875 B57FELD6-J875-1696746-TA.rvt



A1 AV UNDER-RAF CABLE TRAY FIRST FLOOR PLAN - A
1/8" = 1'-0"

GENERAL SHEET NOTES

1. REFER TO TA001 & TA002 FOR AV REQUIREMENTS AND SYMBOLS SHOWN ON THESE DRAWINGS. WORK MUST BE PERFORMED IN COMPLIANCE WITH DIVISION 27 SPECIFICATIONS.
2. NOT ALL ARCHITECTURAL, TELECOM AND ELECTRICAL ELEMENTS HAVE BEEN INCLUDED ON THE DRAWINGS. CONTRACTOR MUST REFER TO THOSE RESPECTIVE DISCIPLINES' SHEETS FOR ADDITIONAL BUILDING-MOUNTED ELEMENTS AND SCOPE OF WORK THAT MAY INTERFACE WITH, OR IMPACT, THE AV SCOPE OF WORK.
3. CONDUIT RACEWAYS SHOWN ON PLAN AND RCP VIEWS ARE ONLY SHOWN IF A SPECIFIC ROUTE IS REQUIRED. REFER TO PATHWAY RISER DIAGRAMS FOR CONDUIT RACEWAY REQUIREMENTS. COORDINATE ROUTING AND ROOM ENTRY LOCATIONS FOR AV SYSTEMS CONDUIT AND PATHWAYS DURING SHOP DRAWING PROCESS.
4. VERIFY AND COORDINATE WALL SPACE REQUIREMENTS WITH OTHER TRADES DURING SHOP DRAWING PROCESS TO CONFIRM FINAL PLACEMENT OF AV ROUGH-INS AND EQUIPMENT.
5. VERIFY EQUIPMENT ROUGH-IN DIMENSIONS WITH VENDOR/INSTALLER.
6. REFER TO I-SERIES (INTERIOR DESIGN) DRAWINGS FOR FINAL DIMENSIONS OF:
 - a. HORIZONTAL MOUNTING OF WALL-MOUNTED AV-EQUIPMENT
 - b. POSITIONING OF AV-RELATED FURNITURE/FURNISHINGS. FOR AV EQUIPMENT CABINETS, REFER TO DIMENSIONS ON THE TA-SERIES DRAWINGS.



Patrick K. Durham APRIL 30, 2025
SIGNATURE EXPIRATION DATE OF LICENSE 16A



APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

NATHANIEL PYRON, MILCON
PLANNER, DPPH

SATISFACTORY TO DATE 3/10/2026

DES PKD | DRW DHC | CHK PKD

PMOM DKS/DMK

BRANCH MANAGER KYM

CHIEF ENGINEER KYM

FIRE PROTECTION RYO

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND ~ PACIFIC
HAWAIIAN ISLANDS, HAWAII

U.S. NAVY/SUPPACT


MCB CAMP BLAZ, GUAM

JFY 2022 PROJECT J-875
BATTLE STAFF TRAINING FACILITY


PARTIAL AV FIRST FLOOR CABLE TRAY PLAN - A



KEY PLAN

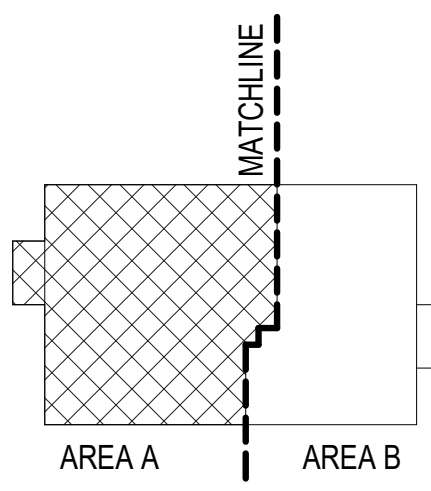

GRAPHIC SCALE(S)



NAVFAC DRAWING NO. 17322331


SHEET 443 OF 468

TA104

DRAWING REVISION: 25 AUGUST 2020

3/11/2025 9:15:19 PM
Autodesk Docs/J875 B57FELD-G-J875-1696746-TA 105

1
2
3
4
5
D
C
B
A

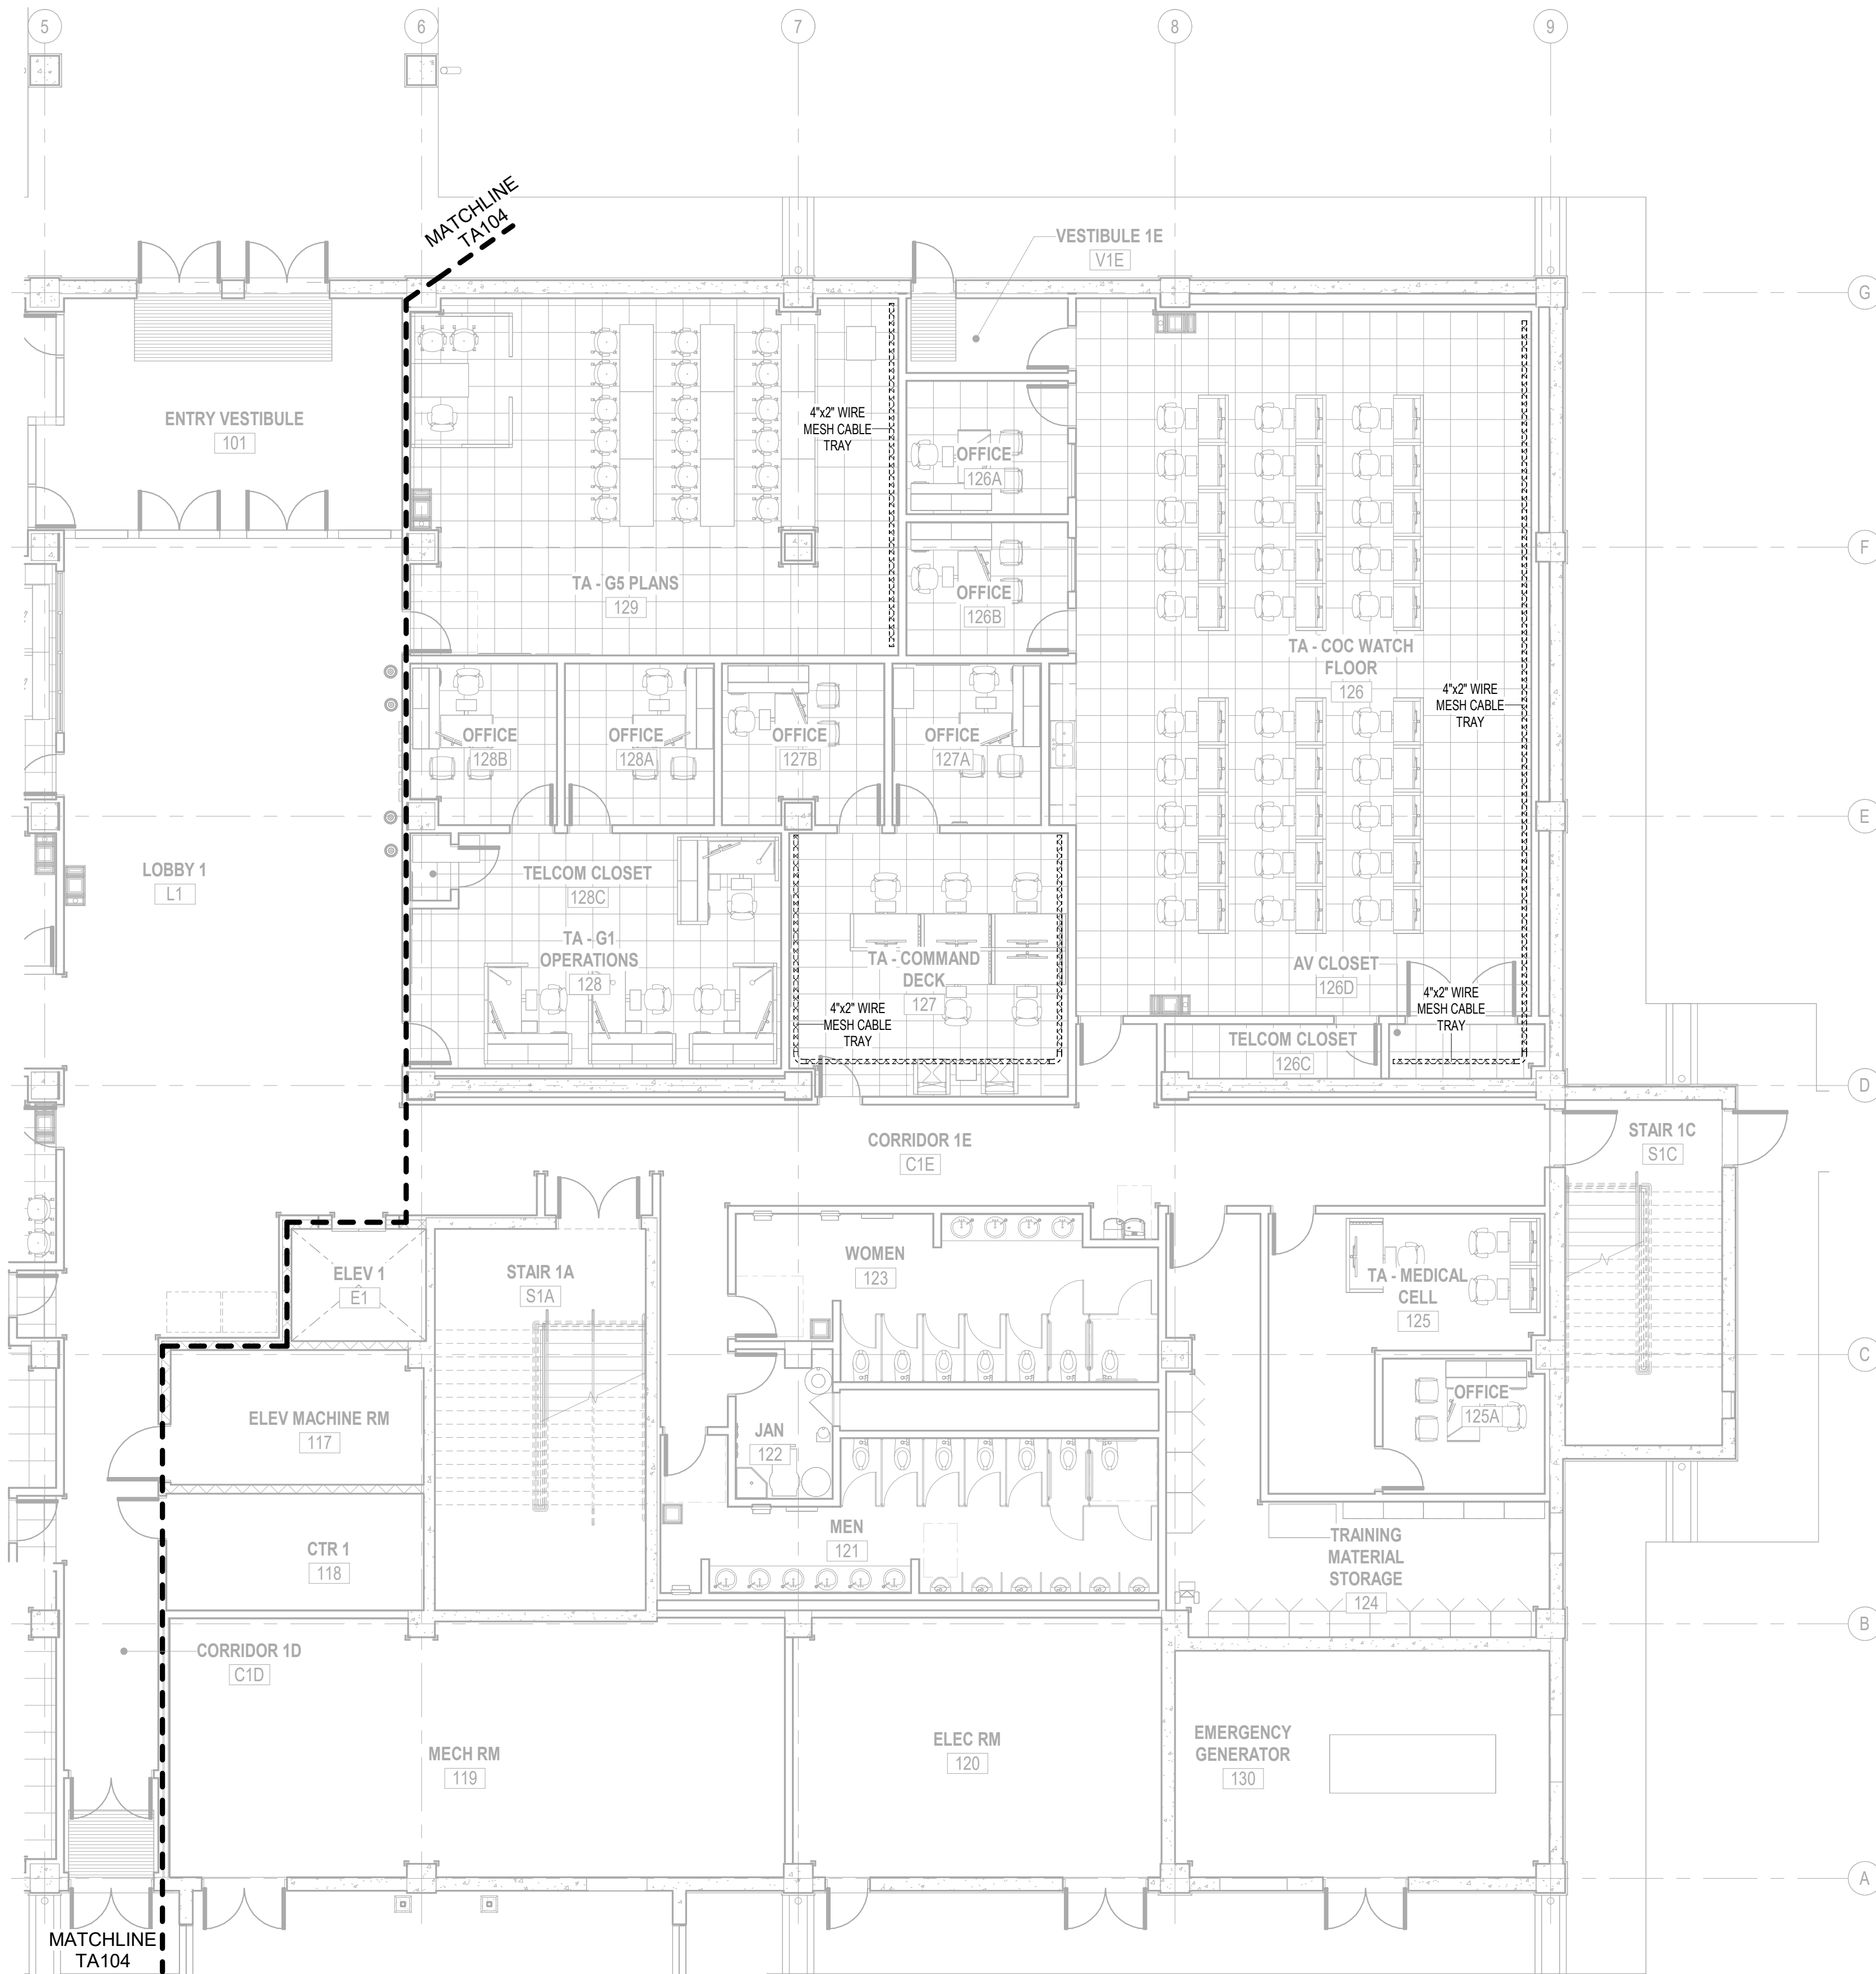

A1

AV UNDER-RAF CABLE TRAY FIRST FLOOR PLAN - B
1/8" = 1'-0"

GENERAL SHEET NOTES

1. REFER TO TA001 & TA002 FOR AV REQUIREMENTS AND SYMBOLS SHOWN ON THESE DRAWINGS. WORK MUST BE PERFORMED IN COMPLIANCE WITH DIVISION 27 SPECIFICATIONS.
2. NOT ALL ARCHITECTURAL, TELECOM AND ELECTRICAL ELEMENTS HAVE BEEN INCLUDED ON THE DRAWINGS. CONTRACTOR MUST REFER TO THOSE RESPECTIVE DISCIPLINES' SHEETS FOR ADDITIONAL BUILDING-MOUNTED ELEMENTS AND SCOPE OF WORK THAT MAY INTERFACE WITH, OR IMPACT, THE AV SCOPE OF WORK.
3. CONDUIT RACEWAYS SHOWN ON PLAN AND RCP VIEWS ARE ONLY SHOWN IF A SPECIFIC ROUTE IS REQUIRED. REFER TO PATHWAY RISER DIAGRAMS FOR CONDUIT RACEWAY REQUIREMENTS. COORDINATE ROUTING AND ROOM ENTRY LOCATIONS FOR AV SYSTEMS CONDUIT AND PATHWAYS DURING SHOP DRAWING PROCESS.
4. VERIFY AND COORDINATE WALL SPACE REQUIREMENTS WITH OTHER TRADES DURING SHOP DRAWING PROCESS TO CONFIRM FINAL PLACEMENT OF AV ROUGH-INS AND EQUIPMENT.
5. VERIFY EQUIPMENT ROUGH-IN DIMENSIONS WITH VENDOR/INSTALLER.
6. REFER TO I-SERIES (INTERIOR DESIGN) DRAWINGS FOR FINAL DIMENSIONS OF:
 - a. HORIZONTAL MOUNTING OF WALL-MOUNTED AV-EQUIPMENT
 - b. POSITIONING OF AV-RELATED FURNITURE/FURNISHINGS. FOR AV EQUIPMENT CABINETS, REFER TO DIMENSIONS ON THE TA-SERIES DRAWINGS.



Patrick K. Durham APR 30, 2025
SIGNATURE EXPIRATION DATE OF LICENSE SEA



APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

NATHANIEL PYRON, MILCON
PLANNER, DPPH

SATISFACTORY TO DATE 3/10/2026

DES PKD DRW DHC CHK PKD

PMOM DKS/DMK

BRANCH MANAGER KYM

CHIEF ENGINEER KYM

FIRE PROTECTION RYO

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVFAC PACIFIC
NAVFAC CAMP BLAZ, GUAM

JFY 2022 PROJECT J-875
BATTLE STAFF TRAINING FACILITY

U.S. NAVY/SUPPACT
PARTIAL AV FIRST FLOOR CABLE TRAY PLAN - B


NAVFAC DRAWING NO. 17322332

SHEET 444 OF 468


TA105

DRAWING REVISION: 25 AUGUST 2020


KEY PLAN

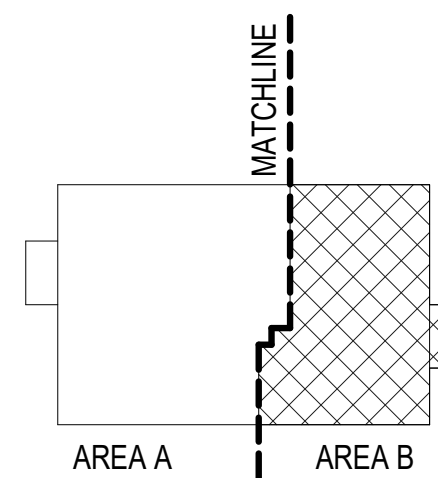

GRAPHIC SCALE(S)



3/11/2025 9:15:21 PM TA106
Autodesk Docs/J875 B57P/ELDG-J875-1696746-TA.rvt

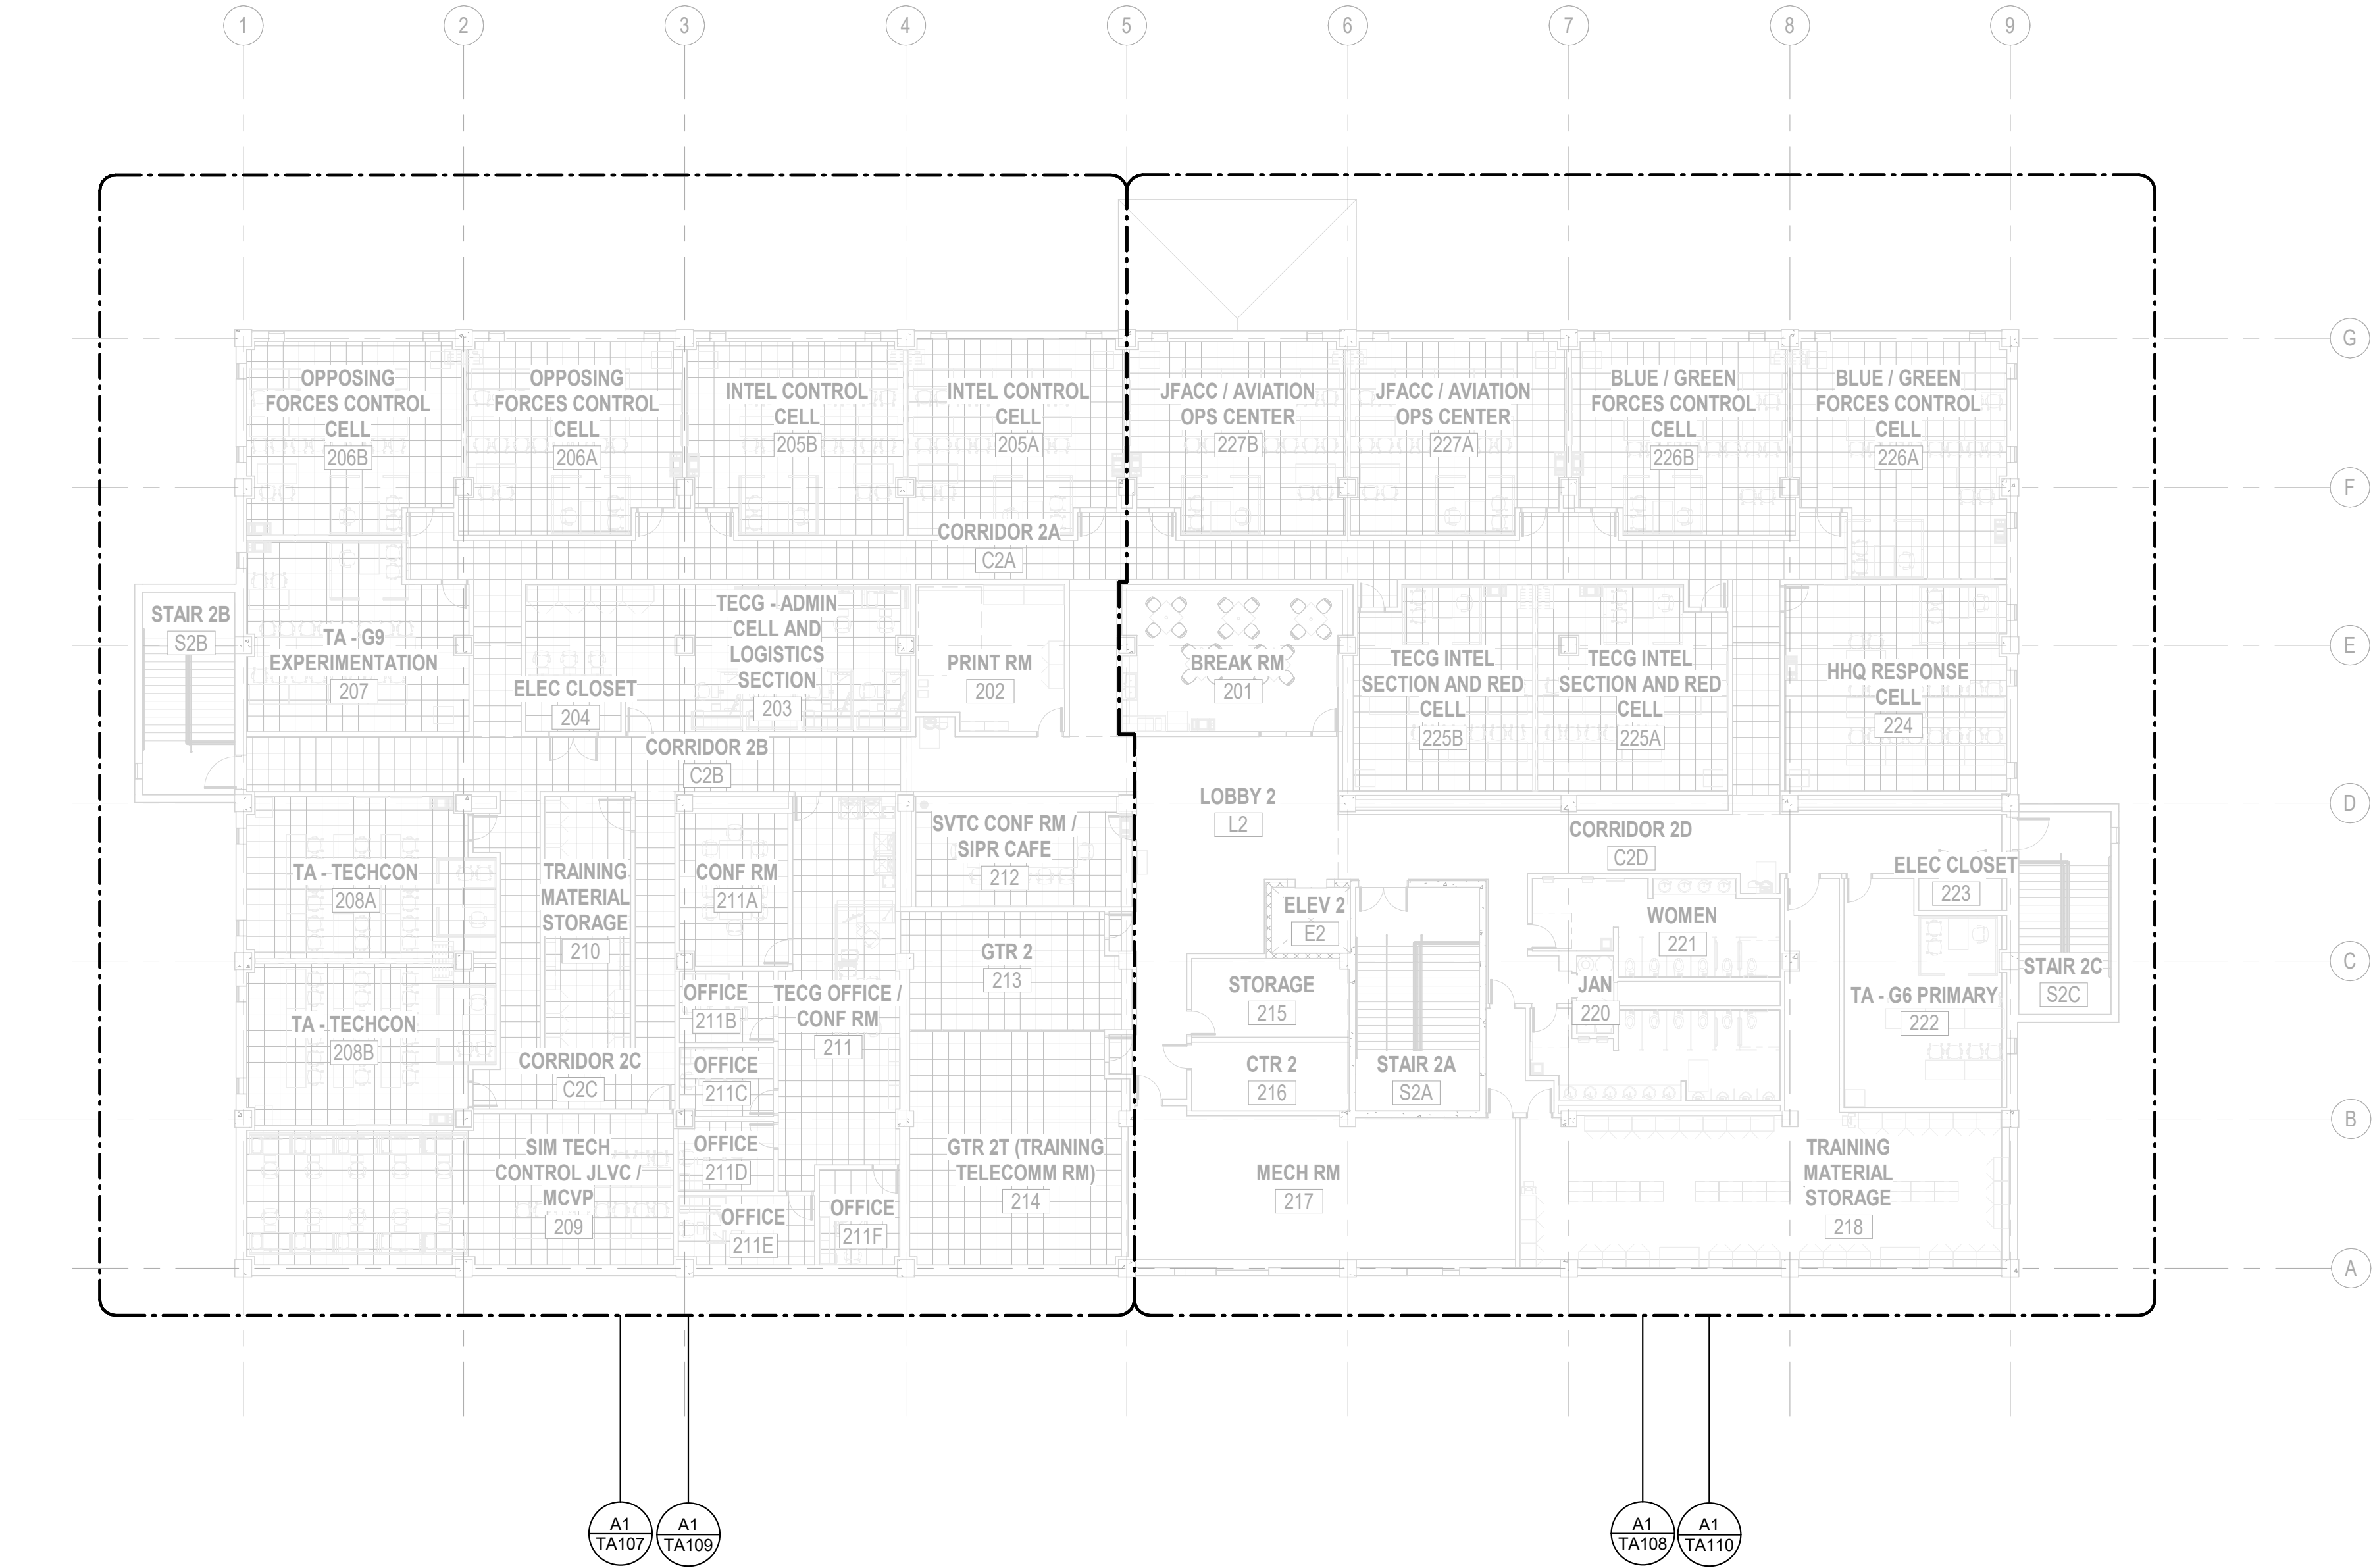

A1

OVERALL AV SYSTEMS SECOND FLOOR PLAN

1/16" = 1'-0"

GENERAL SHEET NOTES

1. REFER TO TA001 & TA002 FOR AV REQUIREMENTS AND SYMBOLS SHOWN ON THESE DRAWINGS. WORK MUST BE PERFORMED IN COMPLIANCE WITH DIVISION 27 SPECIFICATIONS.
2. NOT ALL ARCHITECTURAL, TELECOM AND ELECTRICAL ELEMENTS HAVE BEEN INCLUDED ON THE DRAWINGS. CONTRACTOR MUST REFER TO THOSE RESPECTIVE DISCIPLINES' SHEETS FOR ADDITIONAL BUILDING-MOUNTED ELEMENTS AND SCOPE OF WORK THAT MAY INTERFACE WITH, OR IMPACT, THE AV SCOPE OF WORK.



APR 30, 2025
SIGNATURE EXPIRATION DATE OF LICENSE



AVE INFO

APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

NATHANIEL PYRON, MILCON

PLANNER, DPPH

SATISFACTORY TO DATE 3/10/2026

DES PKD BRW DHC CHK PKD

PMOM DKS/DMK

BRANCH MANAGER KYM

CHIEF ENGINEER KYM

FIRE PROTECTION RYO

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND ~ PACIFIC

NAVFAC PACIFIC

U.S. NAVY/SUPPORT

MAKALAPA, HAWAII

MCB CAMP BLAZ, GUAM

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

OVERALL AV SECOND FLOOR PLAN

SCALE: AS NOTED

PROJECT NO.: 1696746

CONSTR. CONTR. NO.


NAVFAC DRAWING NO. 17322333

SHEET 445 OF 468


TA106

DRAWING REVISION: 25 AUGUST 2020


KEY PLAN

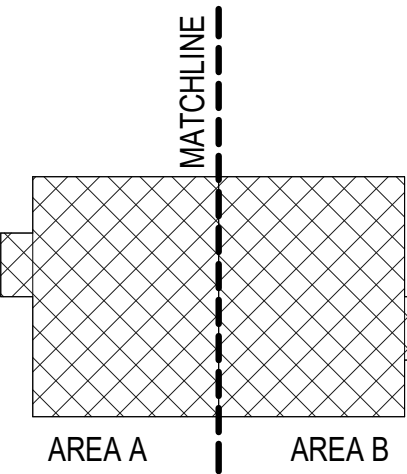

GRAPHIC SCALE(S)



3/11/2025 9:15:22 PM TA107
Autodesk Docs/J4875 BSYFIELDG-J875-1696746-TA.rvt

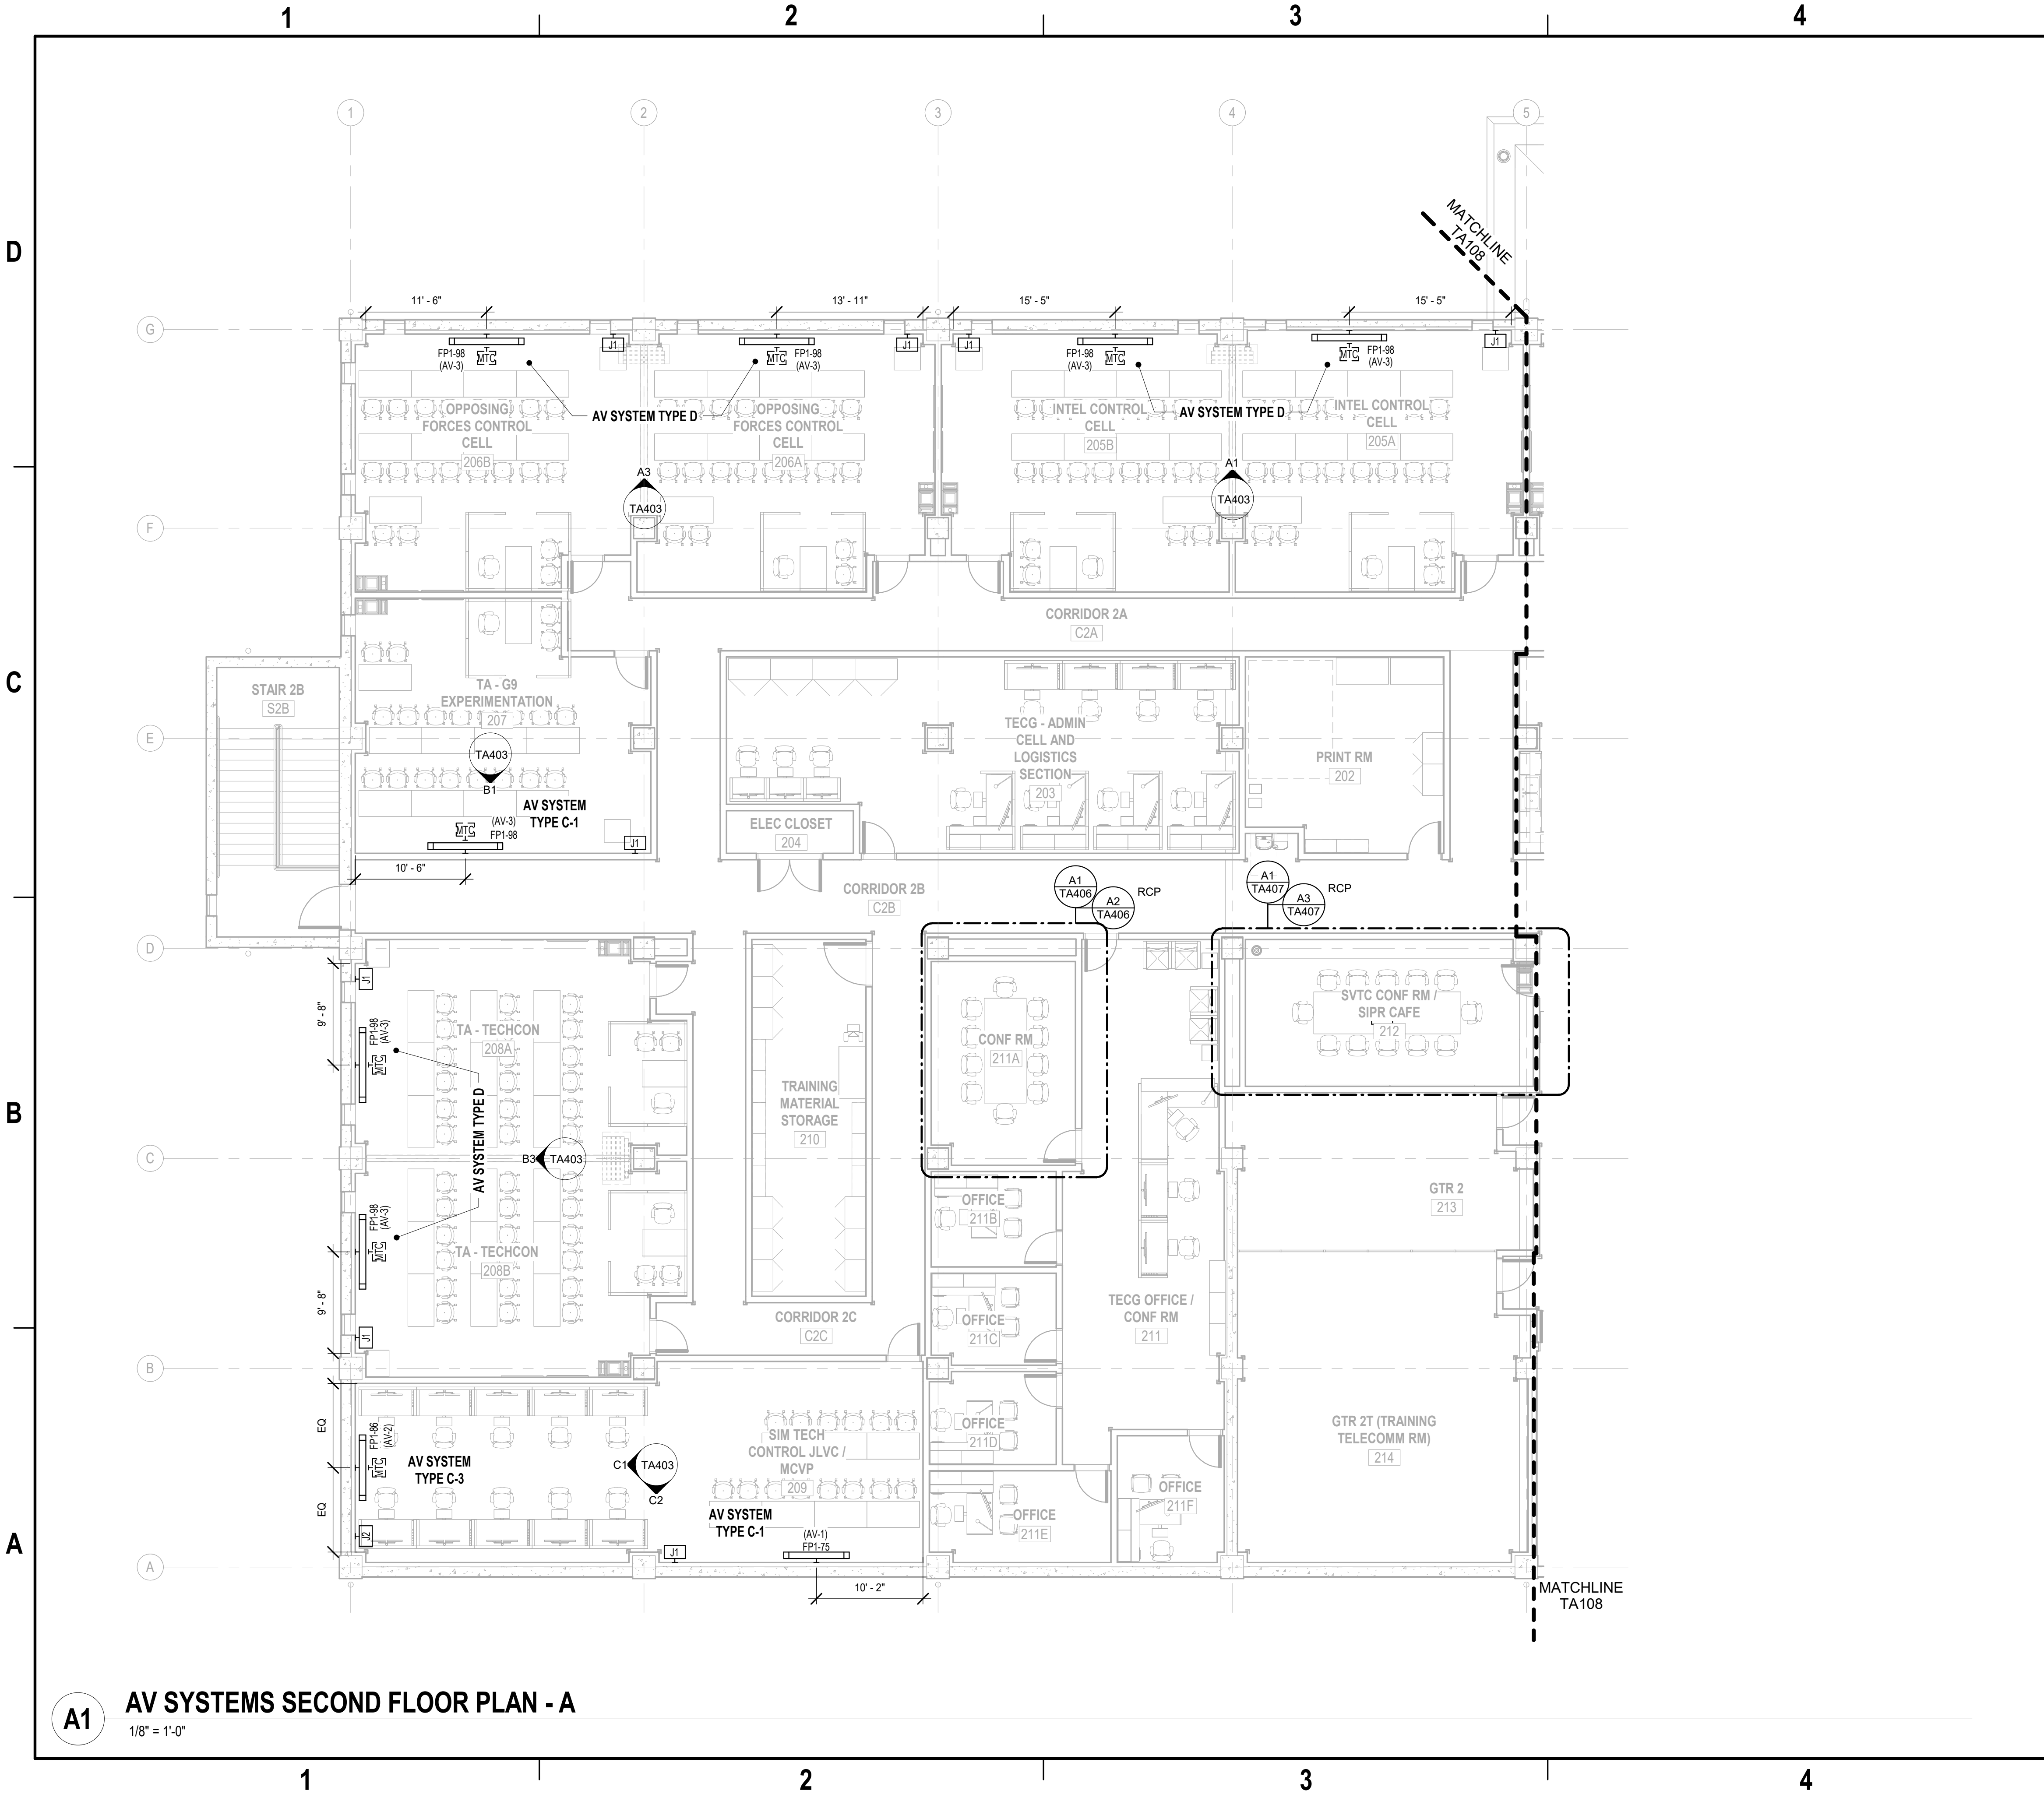

GENERAL SHEET NOTES

1. REFER TO TA001 & TA002 FOR AV REQUIREMENTS AND SYMBOLS SHOWN ON THESE DRAWINGS. WORK MUST BE PERFORMED IN COMPLIANCE WITH DIVISION 27 SPECIFICATIONS.

2. NOT ALL ARCHITECTURAL, TELECOM AND ELECTRICAL ELEMENTS HAVE BEEN INCLUDED ON THE DRAWINGS. CONTRACTOR MUST REFER TO THOSE RESPECTIVE DISCIPLINES' SHEETS FOR ADDITIONAL BUILDING-MOUNTED ELEMENTS AND SCOPE OF WORK THAT MAY INTERFACE WITH, OR IMPACT, THE AV SCOPE OF WORK.

3. CONDUIT RACEWAYS SHOWN ON PLAN AND RCP VIEWS ARE ONLY SHOWN IF A SPECIFIC ROUTE IS REQUIRED. REFER TO PATHWAY RISER DIAGRAMS FOR CONDUIT RACEWAY REQUIREMENTS. COORDINATE ROUTING AND ROOM ENTRY LOCATIONS FOR AV SYSTEMS CONDUIT AND PATHWAYS DURING SHOP DRAWING PROCESS.

4. VERIFY AND COORDINATE WALL SPACE REQUIREMENTS WITH OTHER TRADES DURING SHOP DRAWING PROCESS TO CONFIRM FINAL PLACEMENT OF AV ROUGH-INS AND EQUIPMENT.

5. VERIFY EQUIPMENT ROUGH-IN DIMENSIONS WITH VENDOR/INSTALLER.

6. REFER TO I-SERIES (INTERIOR DESIGN) DRAWINGS FOR FINAL DIMENSIONS OF:

a. HORIZONTAL MOUNTING OF WALL-MOUNTED AV-EQUIPMENT

b. POSITIONING OF AV-RELATED FURNITURE/FURNISHINGS. FOR AV EQUIPMENT CABINETS, REFER TO DIMENSIONS ON THE TA-SERIES DRAWINGS.

NAVAC

PATRICK K. DURHAM

LICENSED PROFESSIONAL ENGINEER

No. 20279 - E

3/12/2024

HAWAII U.S.A.

APR 30, 2025

EXPIRATION DATE OF LICENSE

ASMD

LLC.

APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

NATHANIEL PYRON, MILCON

PLANNER, DPPH

SATISFACTORY TO DATE 3/10/2026

DES PKD | DRW DHC | CHK PKD

PM/DW DKS/DMK

BRANCH MANAGER KYM

CHIEF ENGINEER KYM

FIRE PROTECTION RYO

CERTIFIED TECHNOLOGY SPECIALIST

CTS-D

Patrick Durham

#404250

Expires: 11/30/2027

NAV FACILITIES ENGINEERING SYSTEMS COMMAND ~ PACIFIC

MAKALAPA, HAWAII

MCB CAMP BLAZ, GUAM

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV SECOND FLOOR PLAN - A

U.S. NAVY/SUPPACT

DEPARTMENT OF THE NAVY

NAV FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAC PACIFIC

SCALE: AS NOTED

PROJECT NO.: 1696746

CONSTR. CONTR. NO.

NAVAC DRAWING NO. 17322334

SHEET 446 OF 468

TA107

DRAWING REVISION: 25 AUGUST 2020

KEY PLAN

AREA A

AREA B


PLAN NORTH

GRAPHIC SCALE(S)

1/8" = 1' - 0"

0 5' 10' 15' 30'

1. REFER TO TA001 & TA002 FOR AV REQUIREMENTS AND SYMBOLS SHOWN ON THESE DRAWINGS. WORK MUST BE PERFORMED IN COMPLIANCE WITH DIVISION 27 SPECIFICATIONS.
2. NOT ALL ARCHITECTURAL, TELECOM AND ELECTRICAL ELEMENTS HAVE BEEN INCLUDED ON THE DRAWINGS. CONTRACTOR MUST REFER TO THOSE RESPECTIVE DISCIPLINES' SHEETS FOR ADDITIONAL BUILDING-MOUNTED ELEMENTS AND SCOPE OF WORK THAT MAY INTERFACE WITH, OR IMPACT, THE AV SCOPE OF WORK.
3. CONDUIT RACEWAYS SHOWN ON PLAN AND RCP VIEWS ARE ONLY SHOWN IF A SPECIFIC ROUTE IS REQUIRED. REFER TO PATHWAY RISER DIAGRAMS FOR CONDUIT RACEWAY REQUIREMENTS. COORDINATE ROUTING AND ROOM ENTRY LOCATIONS FOR AV SYSTEMS CONDUIT AND PATHWAYS DURING SHOP DRAWING PROCESS.
4. VERIFY AND COORDINATE WALL SPACE REQUIREMENTS WITH OTHER TRADES DURING SHOP DRAWING PROCESS TO CONFIRM FINAL PLACEMENT OF AV ROUGH-INS AND EQUIPMENT.
5. VERIFY EQUIPMENT ROUGH-IN DIMENSIONS WITH VENDOR/INSTALLER.
6. REFER TO I-SERIES (INTERIOR DESIGN) DRAWINGS FOR FINAL DIMENSIONS OF:
 - a. HORIZONTAL MOUNTING OF WALL-MOUNTED AV-EQUIPMENT
 - b. POSITIONING OF AV-RELATED FURNITURE/FURNISHINGS. FOR AV EQUIPMENT CABINETS, REFER TO DIMENSIONS ON THE TA-SERIES DRAWINGS.

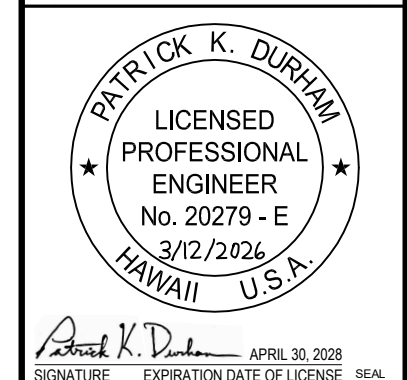[illegible]

DEPARTMENT OF THE NAVY	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVFAC PACIFIC	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND ~ PACIFIC
U.S. NAVYSUPPORT	MAKALAPA, HAWAII
	MCB CAMP BLAZ, GUAM
	JFY 2022 PROJECT J-875
	BATTLE STAFF TRAINING FACILITY
	PARTIAL AV SECOND FLOOR PLAN - B


SCALE: AS NOTED		
EPROJECT NO.:		1696746
CONSTR. CONTR. NO.		
NAVFAC DRAWING NO.		
		17322335
SHEET	447	OF 468
TA108		



The diagram shows a cross-section of a wall. A vertical dashed line labeled 'MATCHLINE' separates 'AREA A' on the left from 'AREA B' on the right. Area A is a plain rectangle. Area B is a rectangle filled with a cross-hatch pattern. A small rectangular protrusion is shown on the left side of Area A, and a small rectangular cutout is shown on the right side of Area B.


1/8" = 1' - 0"

A horizontal graphic scale bar with a black and white checkered pattern for the first 5 feet, followed by solid black segments for the remaining 25 feet. The bar is marked with '0', '5'', '10'', '15'', and '30' at regular intervals.

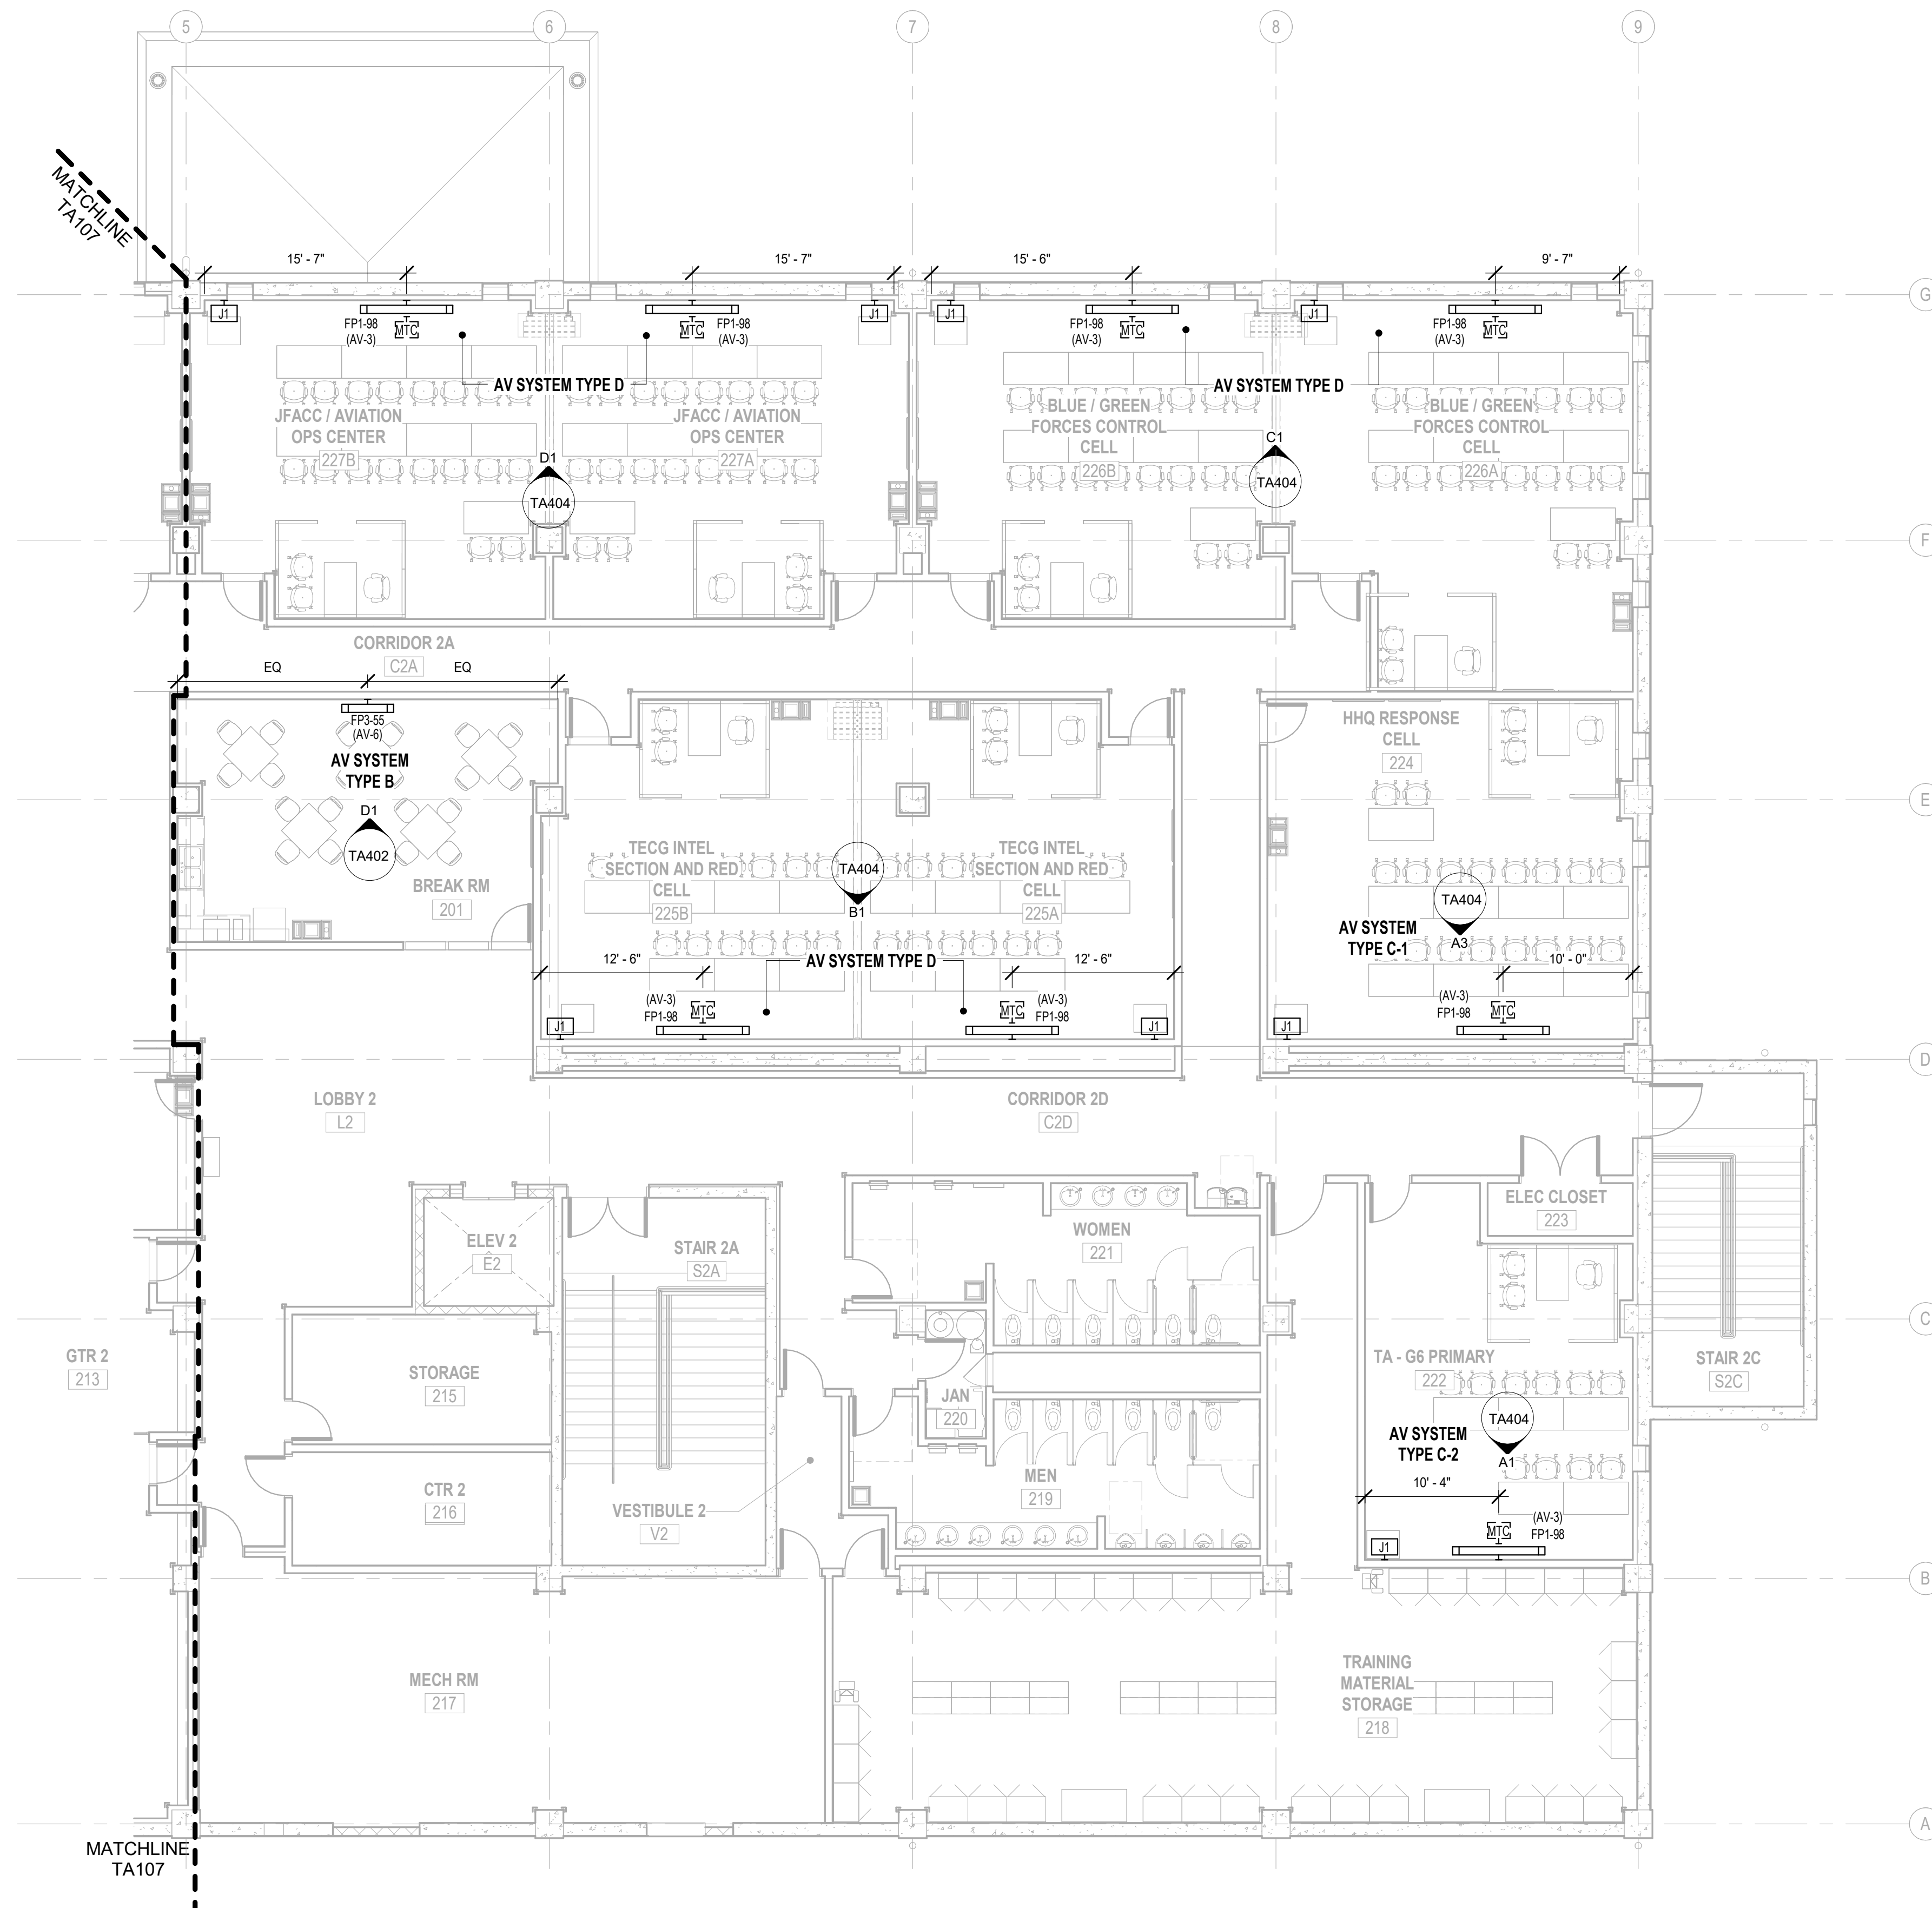

A1 **AV SYSTEMS SECOND FLOOR PLAN - B**
1/8" = 1'-0"

3/11/2025 9:15:25 PM
Autodesk Docs/J4875 BSYFELDG-J875-1696746-TA110

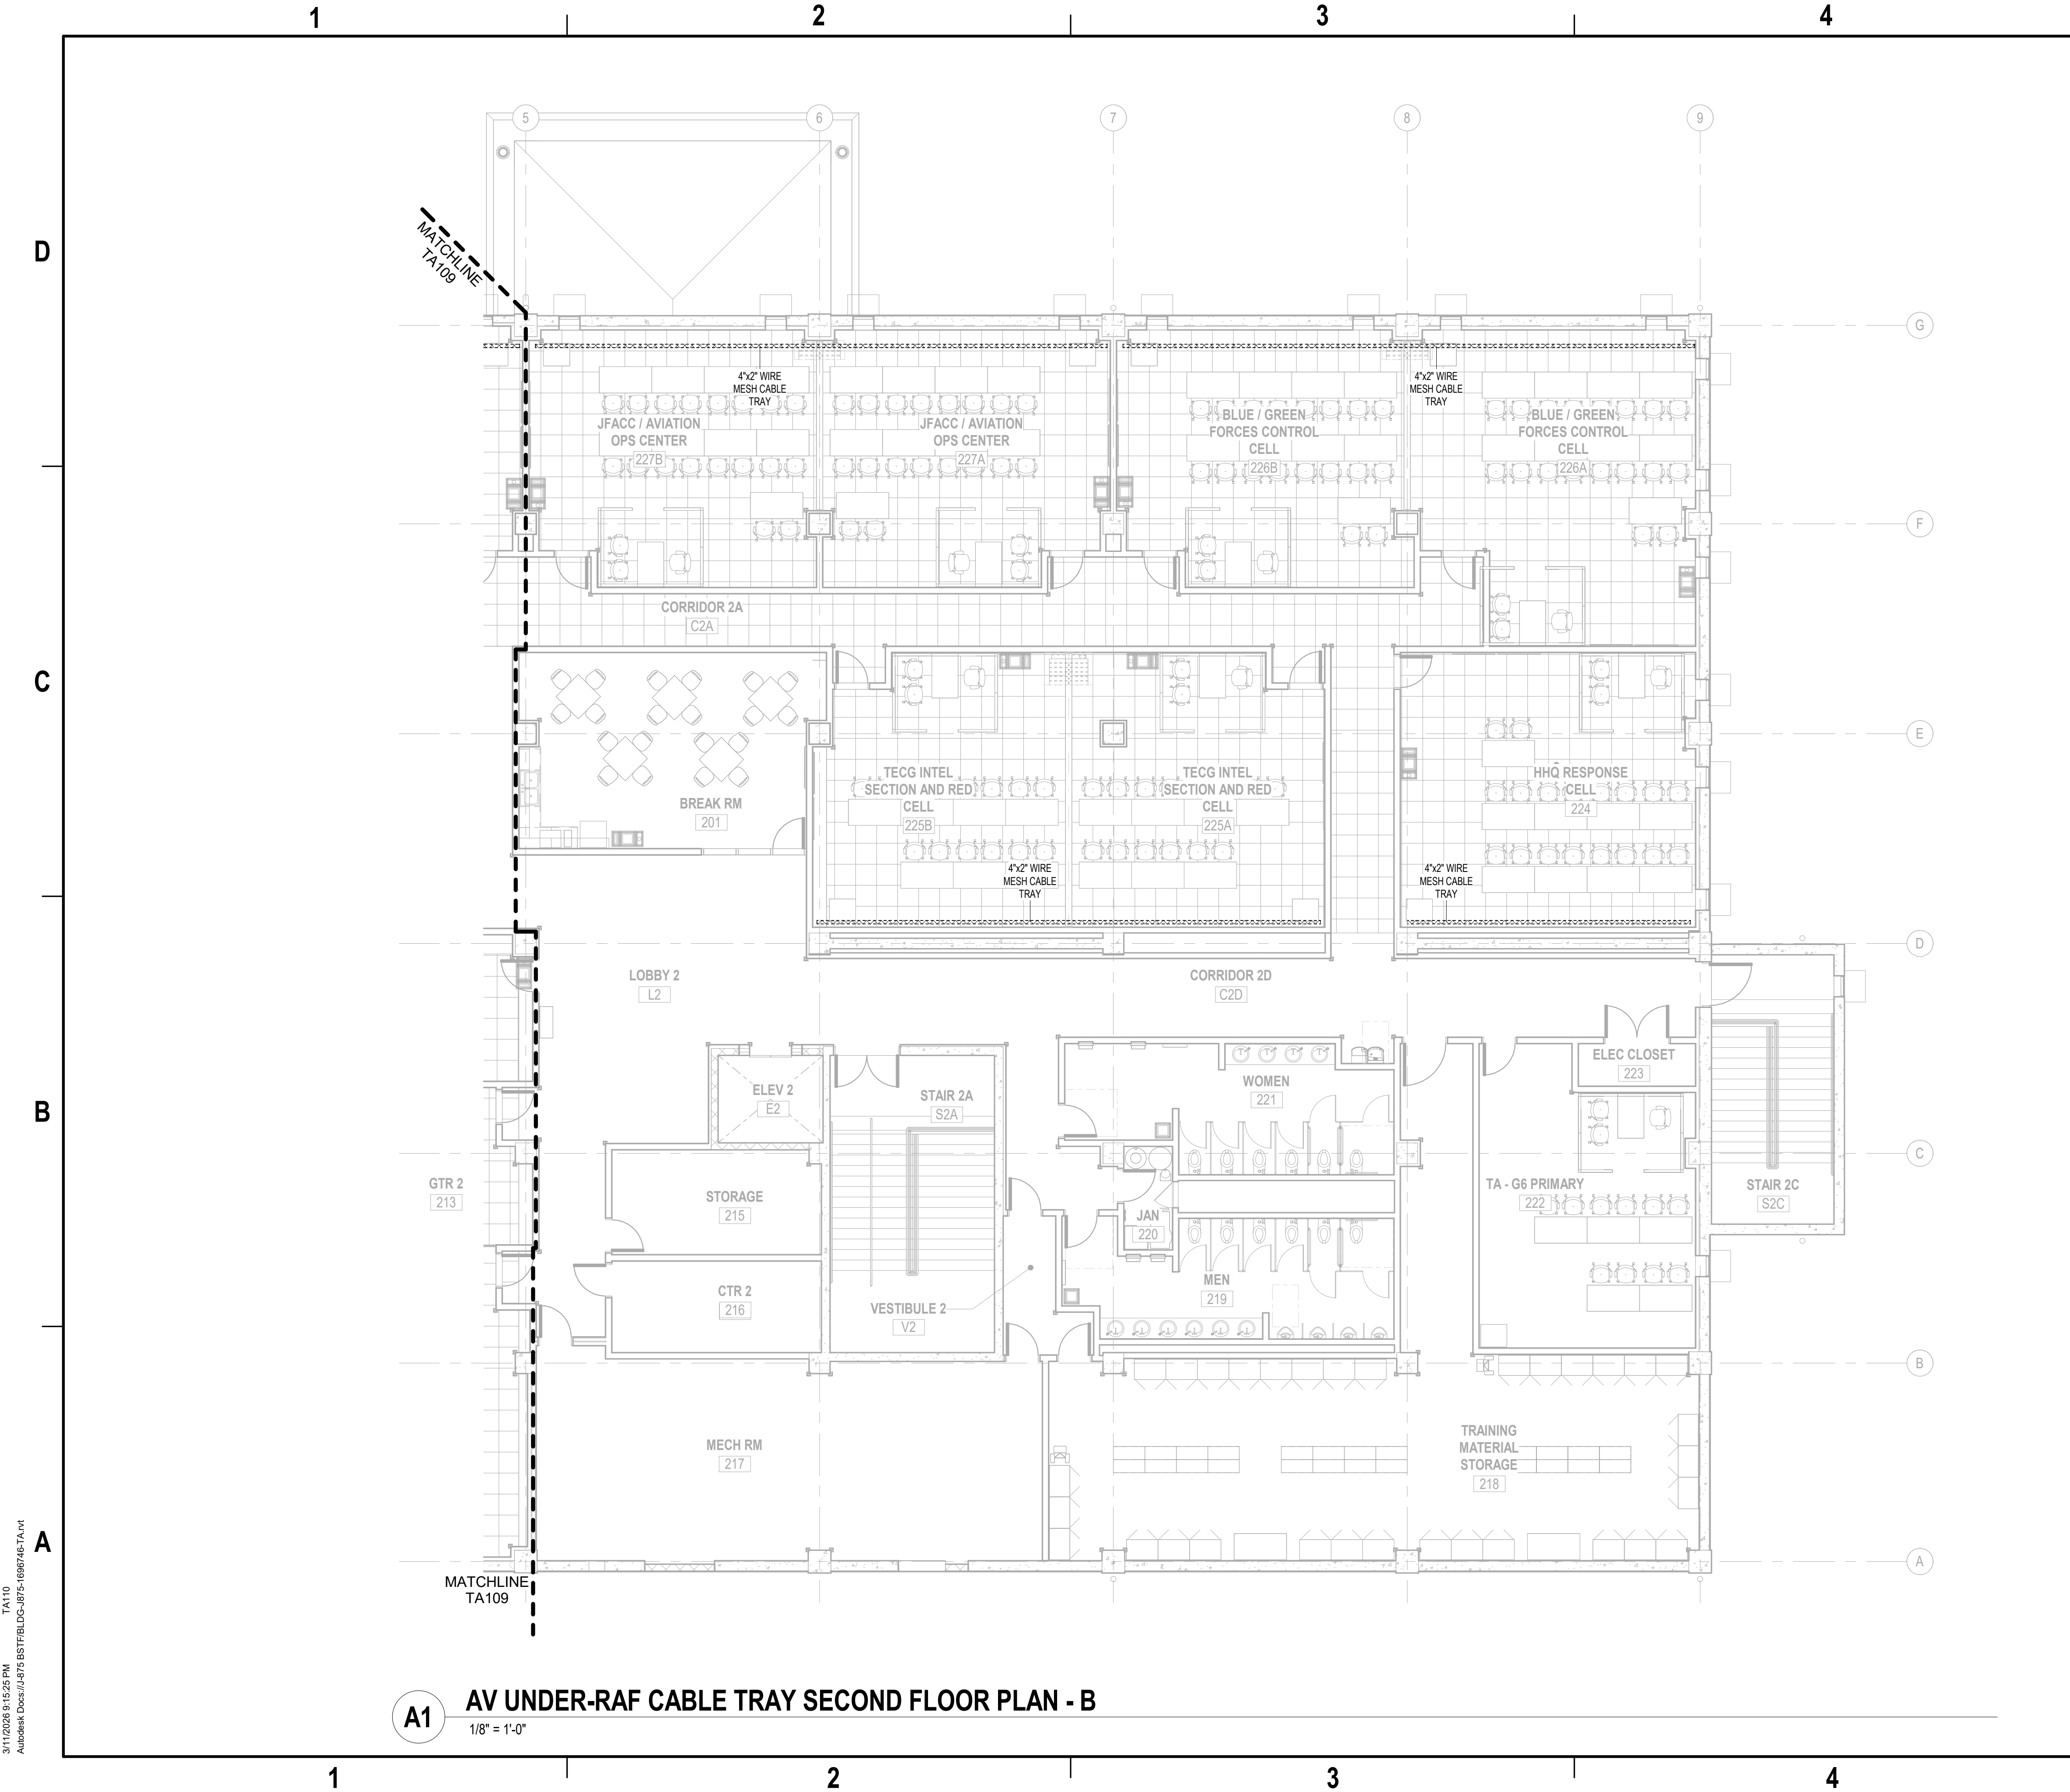

A1 AV UNDER-RAF CABLE TRAY SECOND FLOOR PLAN - B
1/8" = 1'-0"

GENERAL SHEET NOTES

1. REFER TO TA001 & TA002 FOR AV REQUIREMENTS AND SYMBOLS SHOWN ON THESE DRAWINGS. WORK MUST BE PERFORMED IN COMPLIANCE WITH DIVISION 27 SPECIFICATIONS.
2. NOT ALL ARCHITECTURAL, TELECOM AND ELECTRICAL ELEMENTS HAVE BEEN INCLUDED ON THE DRAWINGS. CONTRACTOR MUST REFER TO THOSE RESPECTIVE DISCIPLINES' SHEETS FOR ADDITIONAL BUILDING-MOUNTED ELEMENTS AND SCOPE OF WORK THAT MAY INTERFACE WITH, OR IMPACT, THE AV SCOPE OF WORK.
3. CONDUIT RACEWAYS SHOWN ON PLAN AND RCP VIEWS ARE ONLY SHOWN IF A SPECIFIC ROUTE IS REQUIRED. REFER TO PATHWAY RISER DIAGRAMS FOR CONDUIT RACEWAY REQUIREMENTS. COORDINATE ROUTING AND ROOM ENTRY LOCATIONS FOR AV SYSTEMS CONDUIT AND PATHWAYS DURING SHOP DRAWING PROCESS.
4. VERIFY AND COORDINATE WALL SPACE REQUIREMENTS WITH OTHER TRADES DURING SHOP DRAWING PROCESS TO CONFIRM FINAL PLACEMENT OF AV ROUGH-INS AND EQUIPMENT.
5. VERIFY EQUIPMENT ROUGH-IN DIMENSIONS WITH VENDOR/INSTALLER.
6. REFER TO I-SERIES (INTERIOR DESIGN) DRAWINGS FOR FINAL DIMENSIONS OF:
 - a. HORIZONTAL MOUNTING OF WALL-MOUNTED AV-EQUIPMENT
 - b. POSITIONING OF AV-RELATED FURNITURE/FURNISHINGS. FOR AV EQUIPMENT CABINETS, REFER TO DIMENSIONS ON THE TA-SERIES DRAWINGS.



Patrick K. Durham APRIL 30, 2025
SIGNATURE EXPIRATION DATE OF LICENSE SEA



APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

NATHANIEL PYRON, MILCON
PLANNER, DPPH

SATISFACTORY TO DATE 3/10/2026

DES PKD | DRW DHC | CHK PKD

PM/DW DKS/DMK

BRANCH MANAGER KYM

CHIEF ENGINEER KYM

FIRE PROTECTION RYO

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND ~ PACIFIC

MAKALAPA, HAWAII

MCB CAMP BLAZ, GUAM

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

PARTIAL AV SECOND FLOOR CABLE TRAY PLAN - B

U.S. NAVY/SUPPACT

SCALE: AS NOTED

PROJECT NO.: 1696746

CONSTR. CONTR. NO.


NAVFAC DRAWING NO. 17322337

SHEET 449 OF 468


TA110


DRAWING REVISION: 25 AUGUST 2020

KEY PLAN

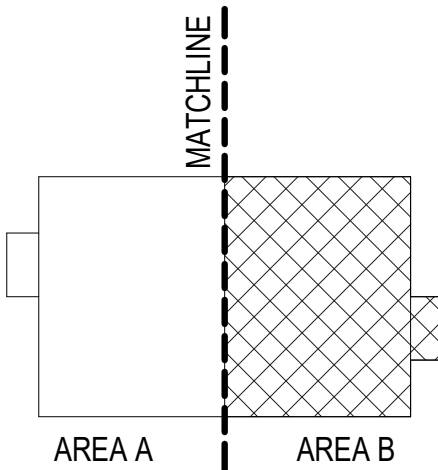


GRAPHIC SCALE(S)



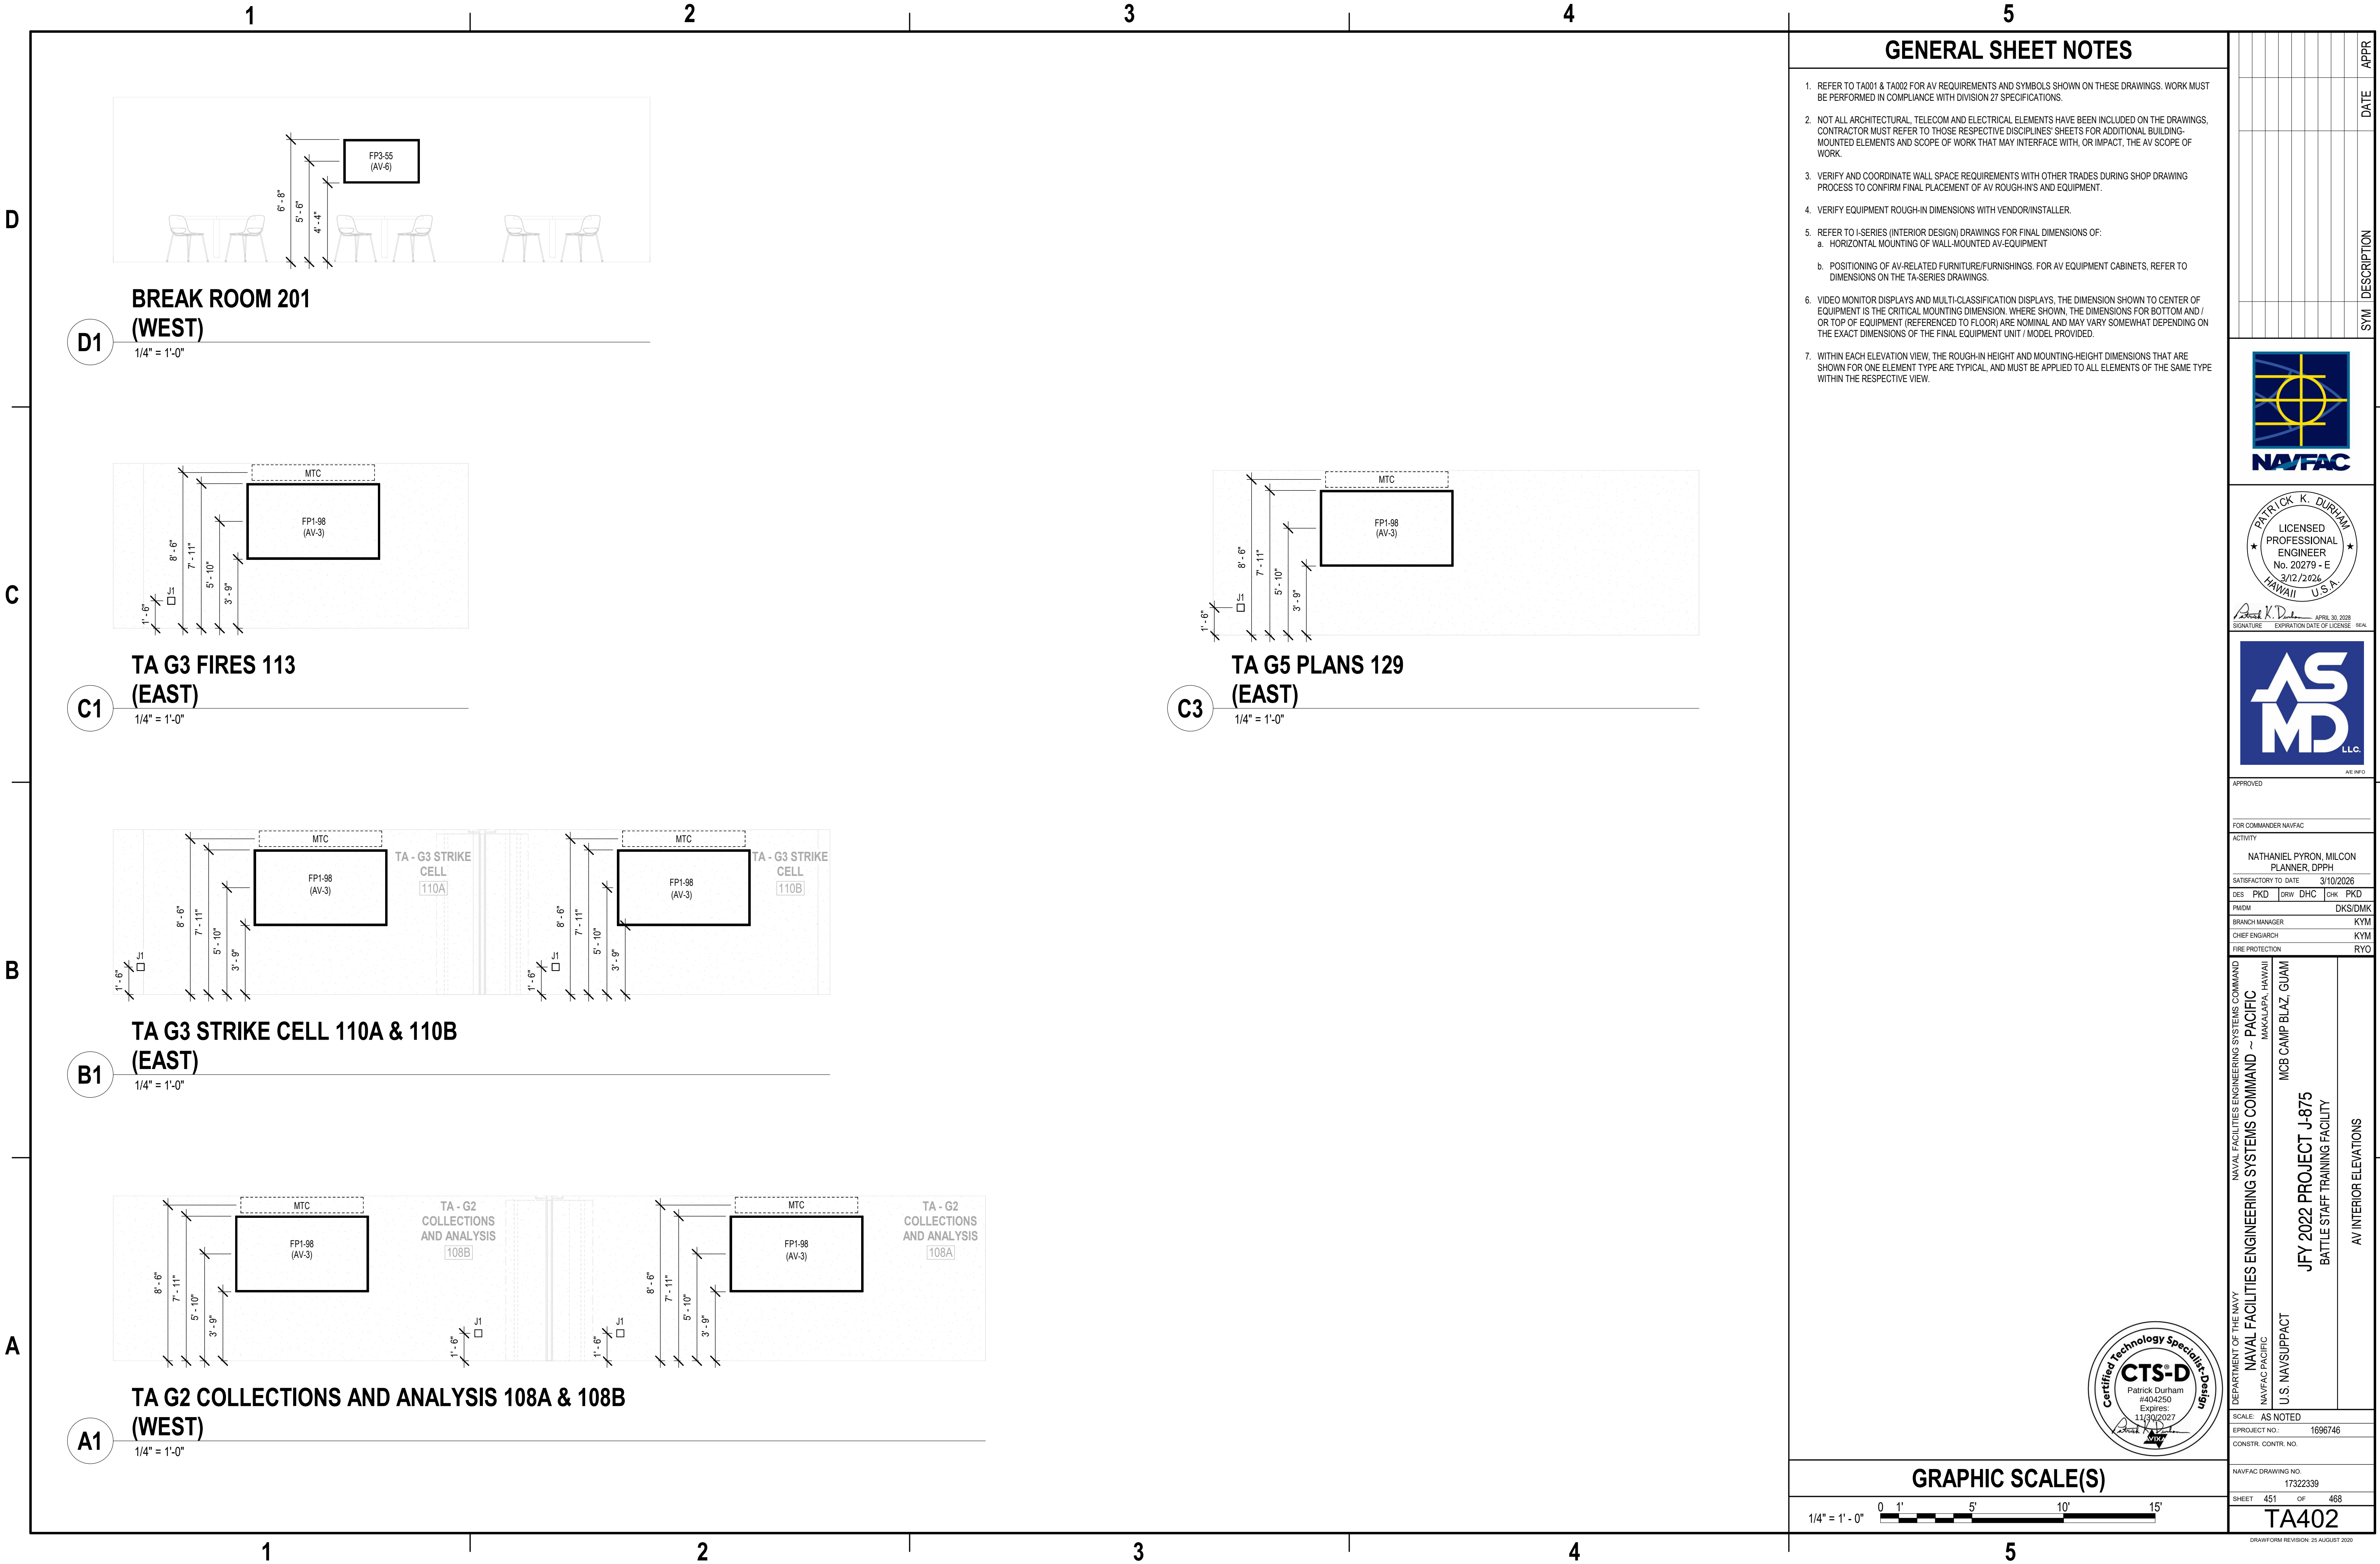

GENERAL SHEET NOTES

- REFER TO TA001 & TA002 FOR AV REQUIREMENTS AND SYMBOLS SHOWN ON THESE DRAWINGS. WORK MUST BE PERFORMED IN COMPLIANCE WITH DIVISION 27 SPECIFICATIONS.
- NOT ALL ARCHITECTURAL, TELECOM AND ELECTRICAL ELEMENTS HAVE BEEN INCLUDED ON THE DRAWINGS. CONTRACTOR MUST REFER TO THOSE RESPECTIVE DISCIPLINES SHEETS FOR ADDITIONAL BUILDING-MOUNTED ELEMENTS AND SCOPE OF WORK THAT MAY INTERFACE WITH, OR IMPACT, THE AV SCOPE OF WORK.
- VERIFY AND COORDINATE WALL SPACE REQUIREMENTS WITH OTHER TRADES DURING SHOP DRAWING PROCESS TO CONFIRM FINAL PLACEMENT OF AV ROUGH-INS AND EQUIPMENT.
- VERIFY EQUIPMENT ROUGH-IN DIMENSIONS WITH VENDOR/INSTALLER.
- REFER TO I-SERIES (INTERIOR DESIGN) DRAWINGS FOR FINAL DIMENSIONS OF:
 - HORIZONTAL MOUNTING OF WALL-MOUNTED AV-EQUIPMENT
 - POSITIONING OF AV-RELATED FURNITURE/FURNISHINGS. FOR AV EQUIPMENT CABINETS, REFER TO DIMENSIONS ON THE TA-SERIES DRAWINGS.
- VIDEO MONITOR DISPLAYS AND MULTI-CLASSIFICATION DISPLAYS, THE DIMENSION SHOWN TO CENTER OF EQUIPMENT IS THE CRITICAL MOUNTING DIMENSION; WHERE SHOWN, THE DIMENSIONS FOR BOTTOM AND / OR TOP OF EQUIPMENT (REFERENCED TO FLOOR) ARE NOMINAL AND MAY VARY SOMEWHAT DEPENDING ON THE EXACT DIMENSIONS OF THE FINAL EQUIPMENT UNIT / MODEL PROVIDED.
- WITHIN EACH ELEVATION VIEW, THE ROUGH-IN HEIGHT AND MOUNTING-HEIGHT DIMENSIONS THAT ARE SHOWN FOR ONE ELEMENT TYPE ARE TYPICAL, AND MUST BE APPLIED TO ALL ELEMENTS OF THE SAME TYPE WITHIN THE RESPECTIVE VIEW.



SIGNATURE: Patrick K. Durham APRIL 30, 2025 EXPIRATION DATE OF LICENSE: 16A



APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

NATHANIEL PYRON, MILCON PLANNER, DPPH

SATISFACTORY TO DATE: 3/10/2026

DES: PKD | DRW: DHC | CHK: PKD

PM/DM: DKS/DMK

BRANCH MANAGER: KYM

CHIEF ENGINEER: KYM

FIRE PROTECTION: RYO

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND ~ PACIFIC

MAKALAPA, HAWAII

MCB CAMP BLAZ, GUAM

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

AV INTERIOR ELEVATIONS

U.S. NAVY/SUPPACT

SCALE: AS NOTED

PROJECT NO.: 1696746

CONSTR. CONTR. NO.


NAVFAC DRAWING NO. 17322339


SHEET 451 OF 468

TA402

DRAWING REVISION: 25 AUGUST 2020

GRAPHIC SCALE(S)



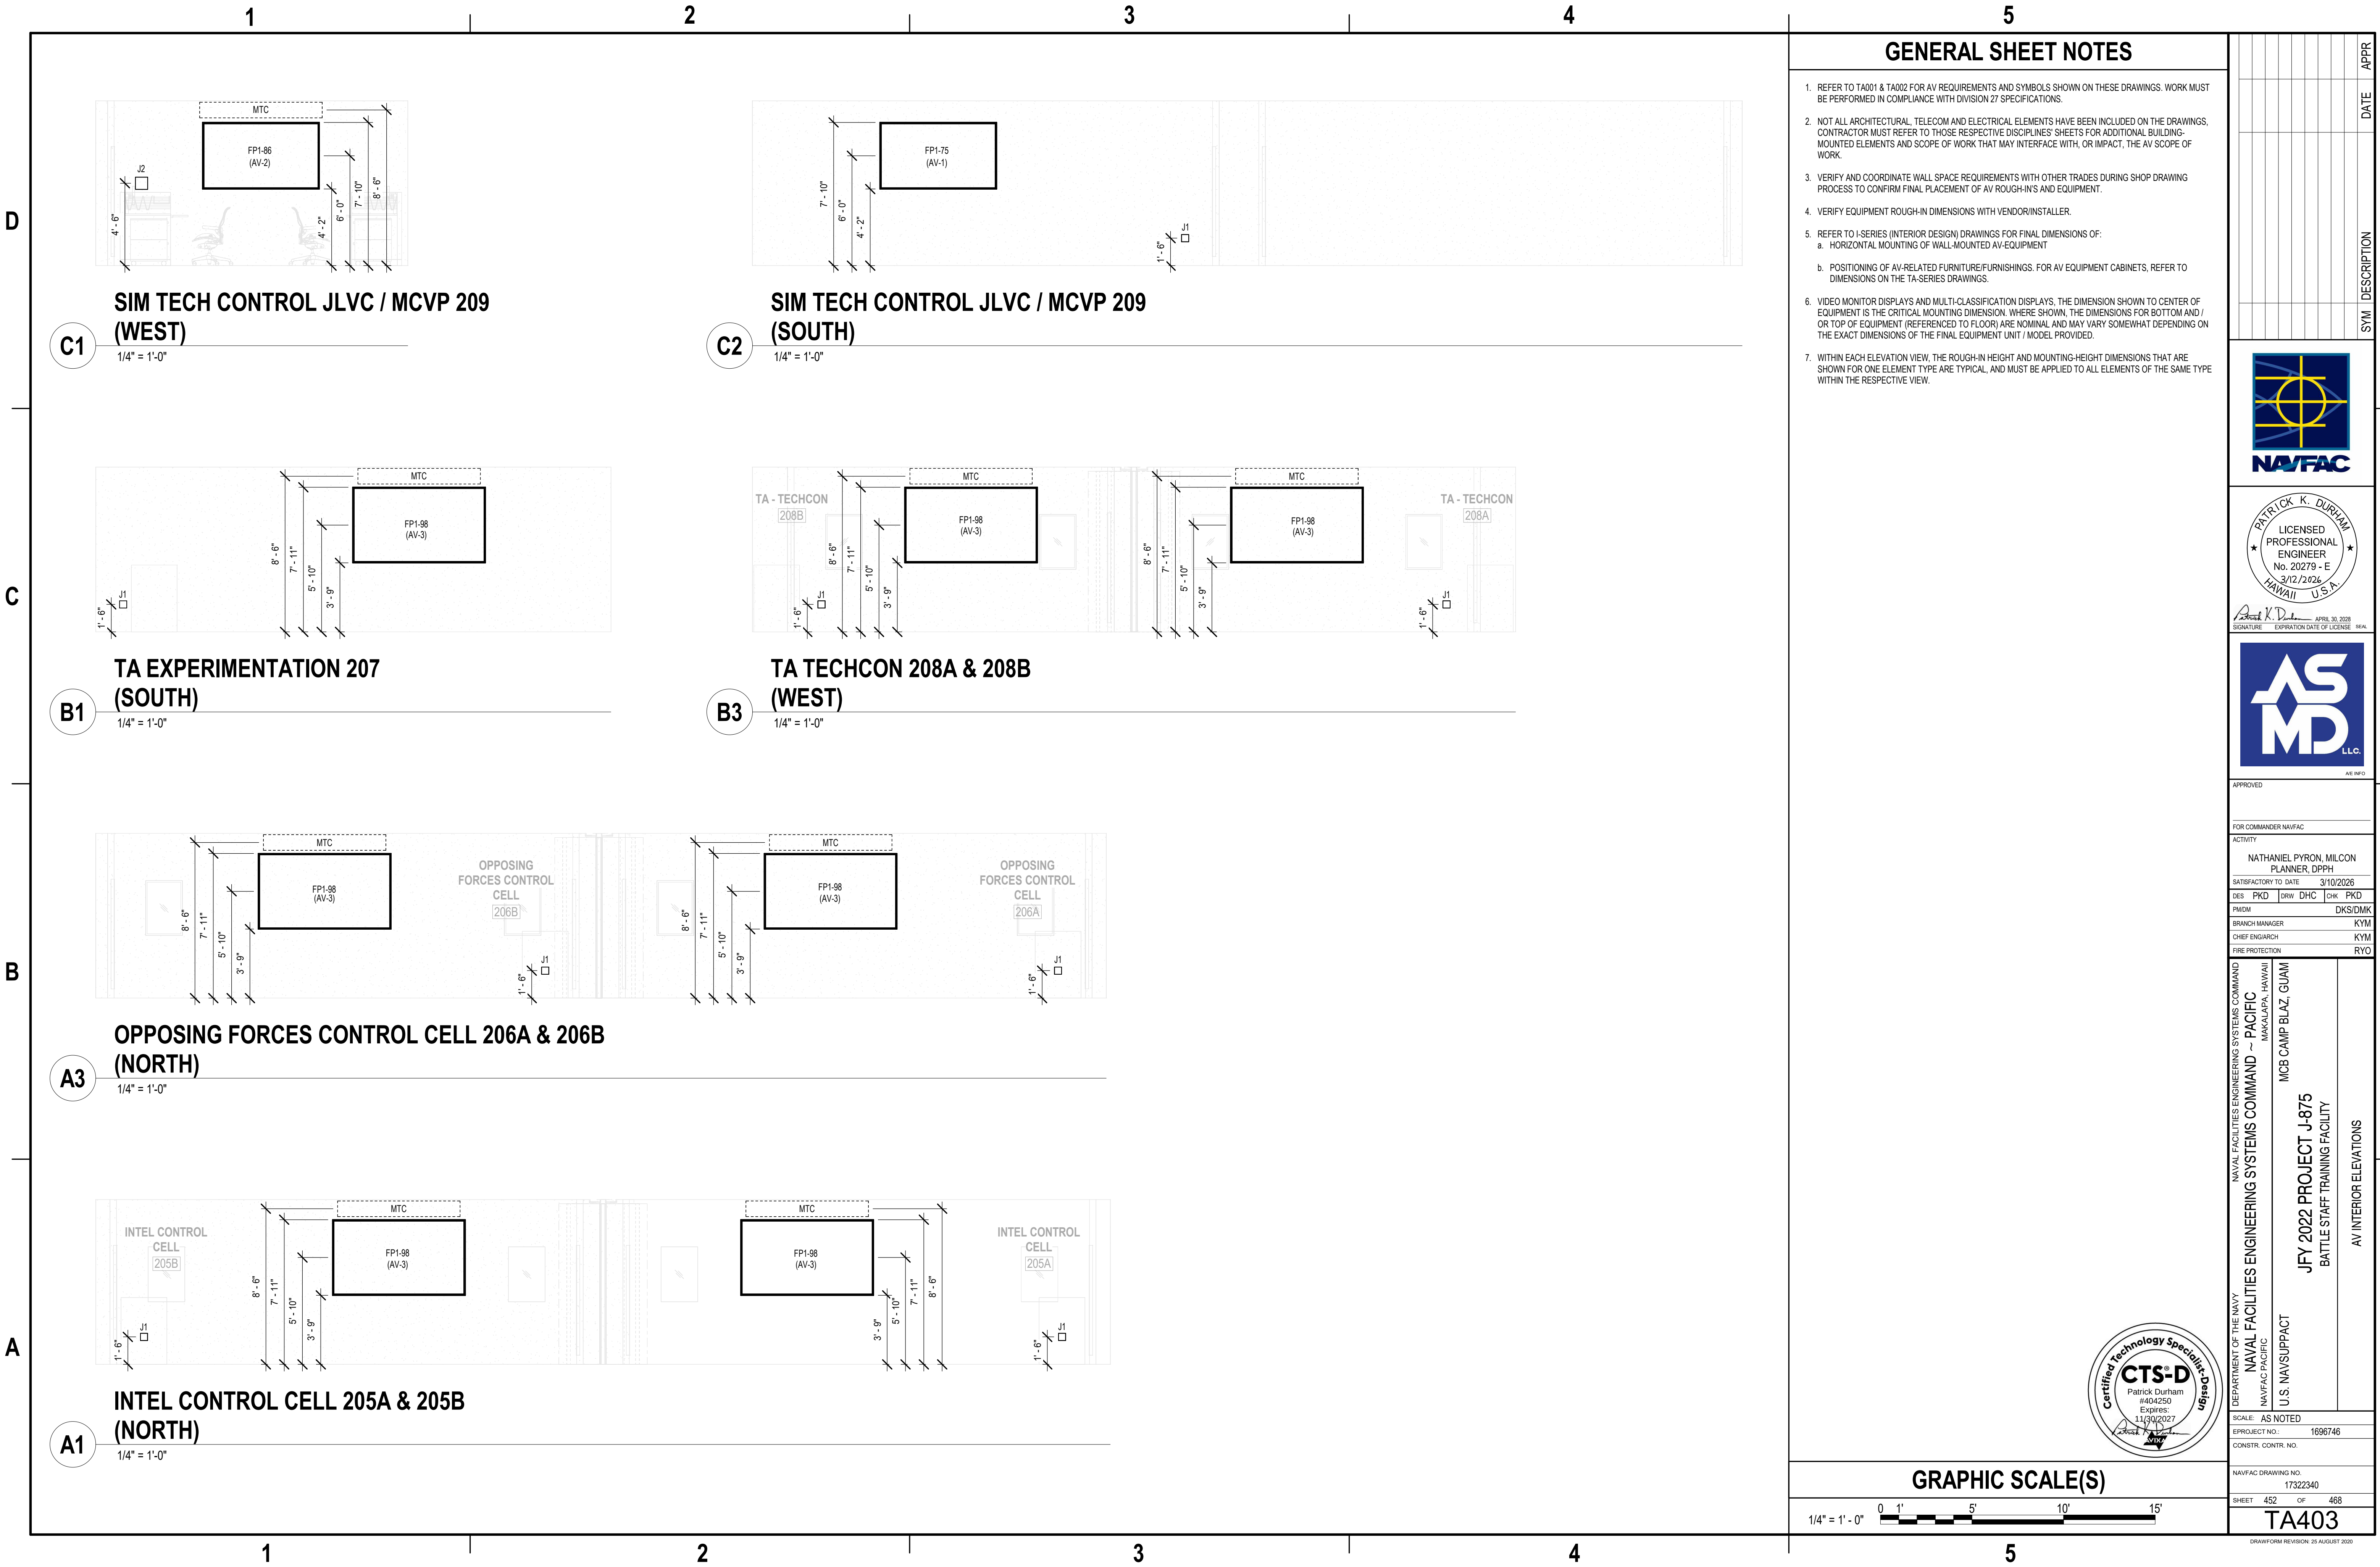

3/11/2025 9:15:31 PM TA406
Autodesk Docs/J4875 BSTD/PLD-G-J875-1696746-TA.rvt

1

2

3

4


5

D

C

B


A

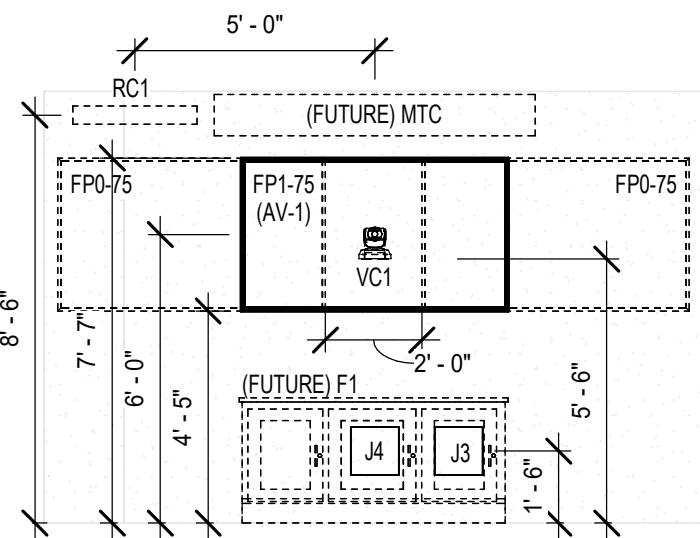

**CONFERENCE ROOM 211A
(NORTH)**

C1


1/4" = 1'-0"

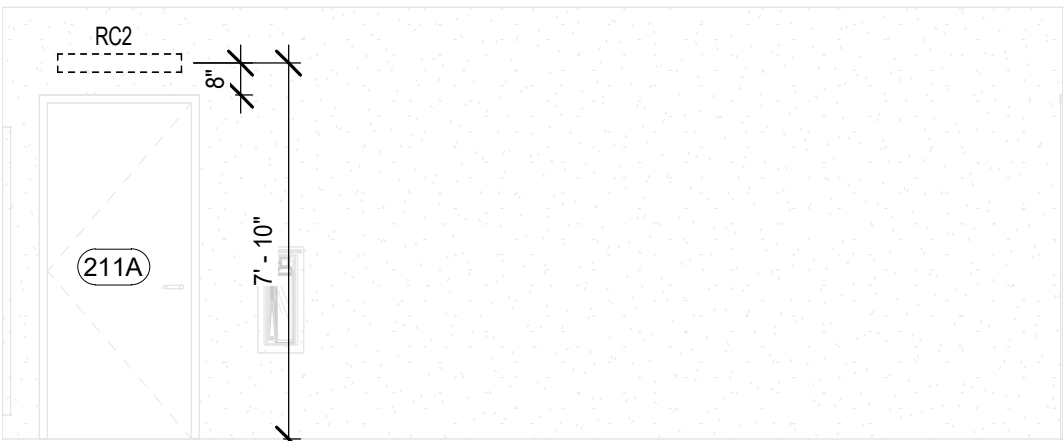

**TEGG OFFICE / CONF RM 211
(WEST)**

C2


1/4" = 1'-0"

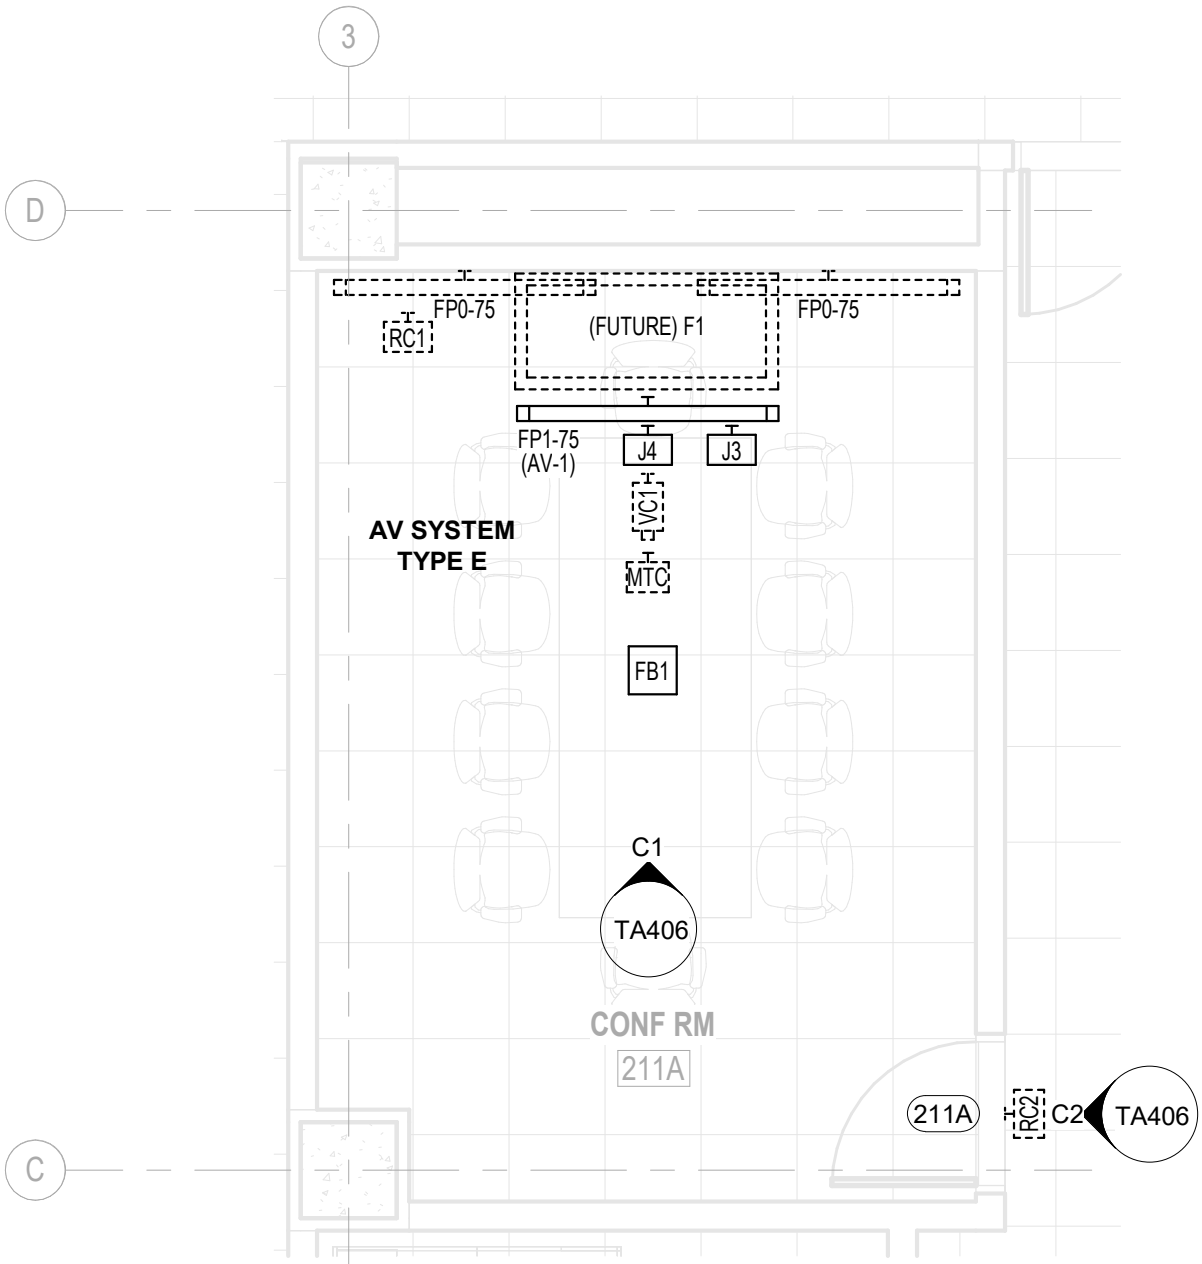

**ENLARGED AV FLOOR PLAN
CONF RM 211A**

A1

1/4" = 1'-0"

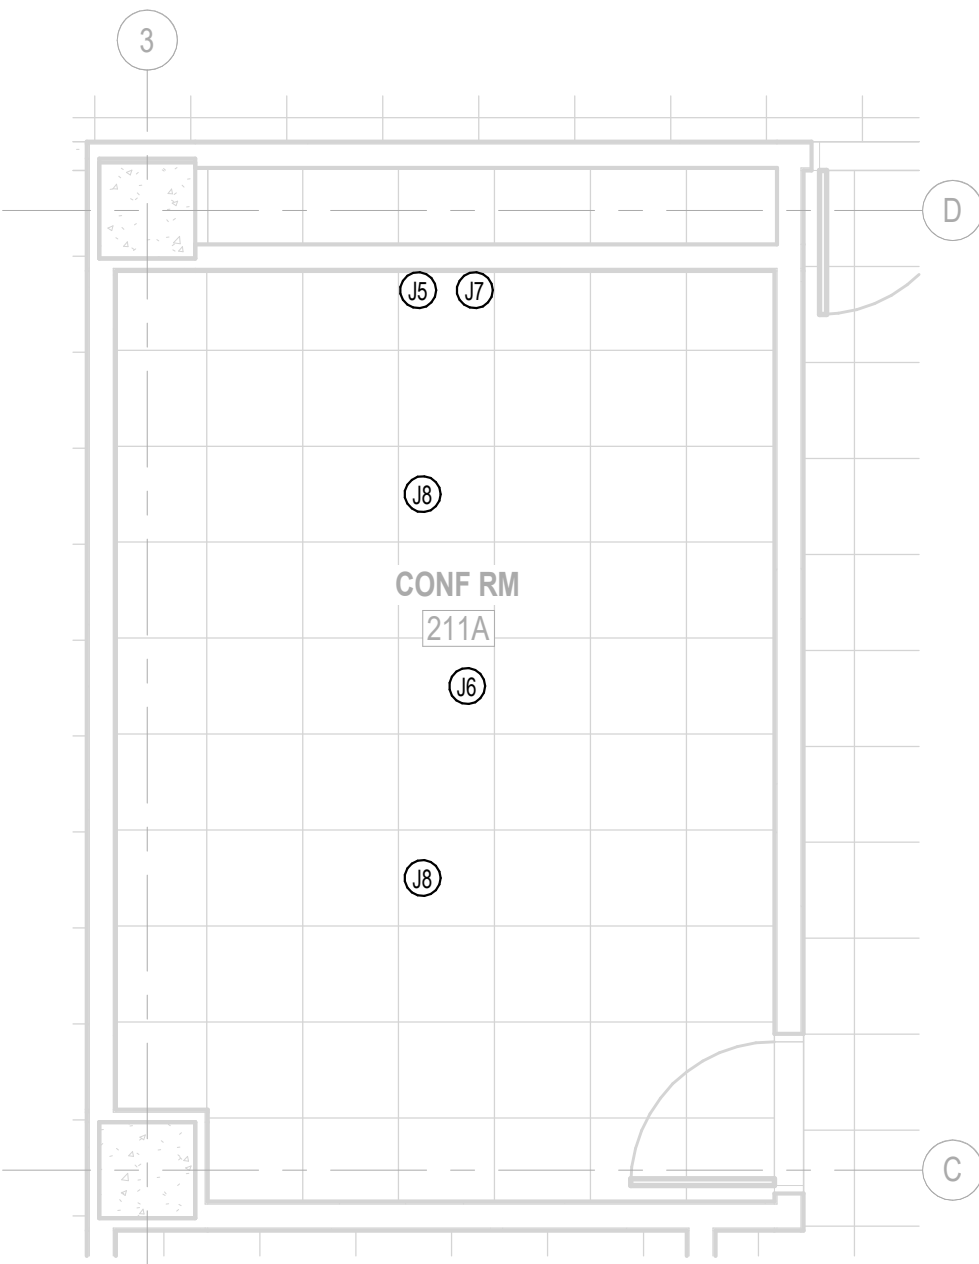

**ENLARGED AV RCP -
CONF RM 211A**

A2

1/4" = 1'-0"

GENERAL SHEET NOTES

1. REFER TO TA001 & TA002 FOR AV REQUIREMENTS AND SYMBOLS SHOWN ON THESE DRAWINGS. WORK MUST BE PERFORMED IN COMPLIANCE WITH DIVISION 27 SPECIFICATIONS.
2. NOT ALL ARCHITECTURAL, TELECOM AND ELECTRICAL ELEMENTS HAVE BEEN INCLUDED ON THE DRAWINGS. CONTRACTOR MUST REFER TO THOSE RESPECTIVE DISCIPLINES SHEETS FOR ADDITIONAL BUILDING-MOUNTED ELEMENTS AND SCOPE OF WORK THAT MAY INTERFACE WITH, OR IMPACT, THE AV SCOPE OF WORK.
3. CONDUIT RACEWAYS SHOWN ON PLAN AND RCP VIEWS ARE ONLY SHOWN IF A SPECIFIC ROUTE IS REQUIRED. REFER TO PATHWAY RISER DIAGRAMS FOR CONDUIT RACEWAY REQUIREMENTS. COORDINATE ROUTING AND ROOM ENTRY LOCATIONS FOR AV SYSTEMS CONDUIT AND PATHWAYS DURING SHOP DRAWING PROCESS.
4. VERIFY AND COORDINATE WALL SPACE REQUIREMENTS WITH OTHER TRADES DURING SHOP DRAWING PROCESS TO CONFIRM FINAL PLACEMENT OF AV ROUGH-INS AND EQUIPMENT.
5. VERIFY EQUIPMENT ROUGH-IN DIMENSIONS WITH VENDOR/INSTALLER.
6. REFER TO I-SERIES (INTERIOR DESIGN) DRAWINGS FOR FINAL DIMENSIONS OF:
 - a. HORIZONTAL MOUNTING OF WALL-MOUNTED AV-EQUIPMENT
 - b. POSITIONING OF AV-RELATED FURNITURE/FURNISHINGS. FOR AV EQUIPMENT CABINETS, REFER TO DIMENSIONS ON THE TA-SERIES DRAWINGS.
7. VIDEO MONITOR DISPLAYS AND MULTI-CLASSIFICATION DISPLAYS. THE DIMENSION SHOWN TO CENTER OF EQUIPMENT IS THE CRITICAL MOUNTING DIMENSION. WHERE SHOWN, THE DIMENSIONS FOR BOTTOM AND / OR TOP OF EQUIPMENT (REFERENCED TO FLOOR) ARE NOMINAL AND MAY VARY SOMEWHAT DEPENDING ON THE EXACT DIMENSIONS OF THE FINAL EQUIPMENT UNIT / MODEL PROVIDED.
8. WITHIN EACH ELEVATION VIEW, THE ROUGH-IN HEIGHT AND MOUNTING-HEIGHT DIMENSIONS THAT ARE SHOWN FOR ONE ELEMENT TYPE ARE TYPICAL, AND MUST BE APPLIED TO ALL ELEMENTS OF THE SAME TYPE WITHIN THE RESPECTIVE VIEW.



SIGNATURE: Patrick K. Durham EXPIRATION DATE OF LICENSE: APRIL 30, 2028



APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

NATHANIEL PYRON, MILCON
PLANNER, DPPH

SATISFACTORY TO DATE: 3/10/2026

DES PKD BRW DHC CHK PKD

PMOM DKS/DMK

BRANCH MANAGER KYM

CHIEF ENGINEER KYM

FIRE PROTECTION RYO

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND ~ PACIFIC

MAKALAPA, HAWAII

MCB CAMP BLAZ, GUAM

JFY 2022 PROJECT J-875

BATTLE STAFF TRAINING FACILITY

ENLARGED AV PLANS & INTERIOR ELEVATIONS

U.S. NAVY/SUPPACT

SCALE: AS NOTED

PROJECT NO.: 1696746

CONSTR. CONTR. NO.

NAVFAC DRAWING NO. 17322343

SHEET 455 OF 468

TA406

DRAWING REVISION: 25 AUGUST 2020

GRAPHIC SCALE(S)

1/4" = 1' - 0" 0 1' 5' 10' 15'

1

2

3

4

5


D

C

B

A

3/11/2025 9:15:33 PM TA408
Autodesk Docs/J875 BSYFIELDG-J875-1696746-TA.rvt

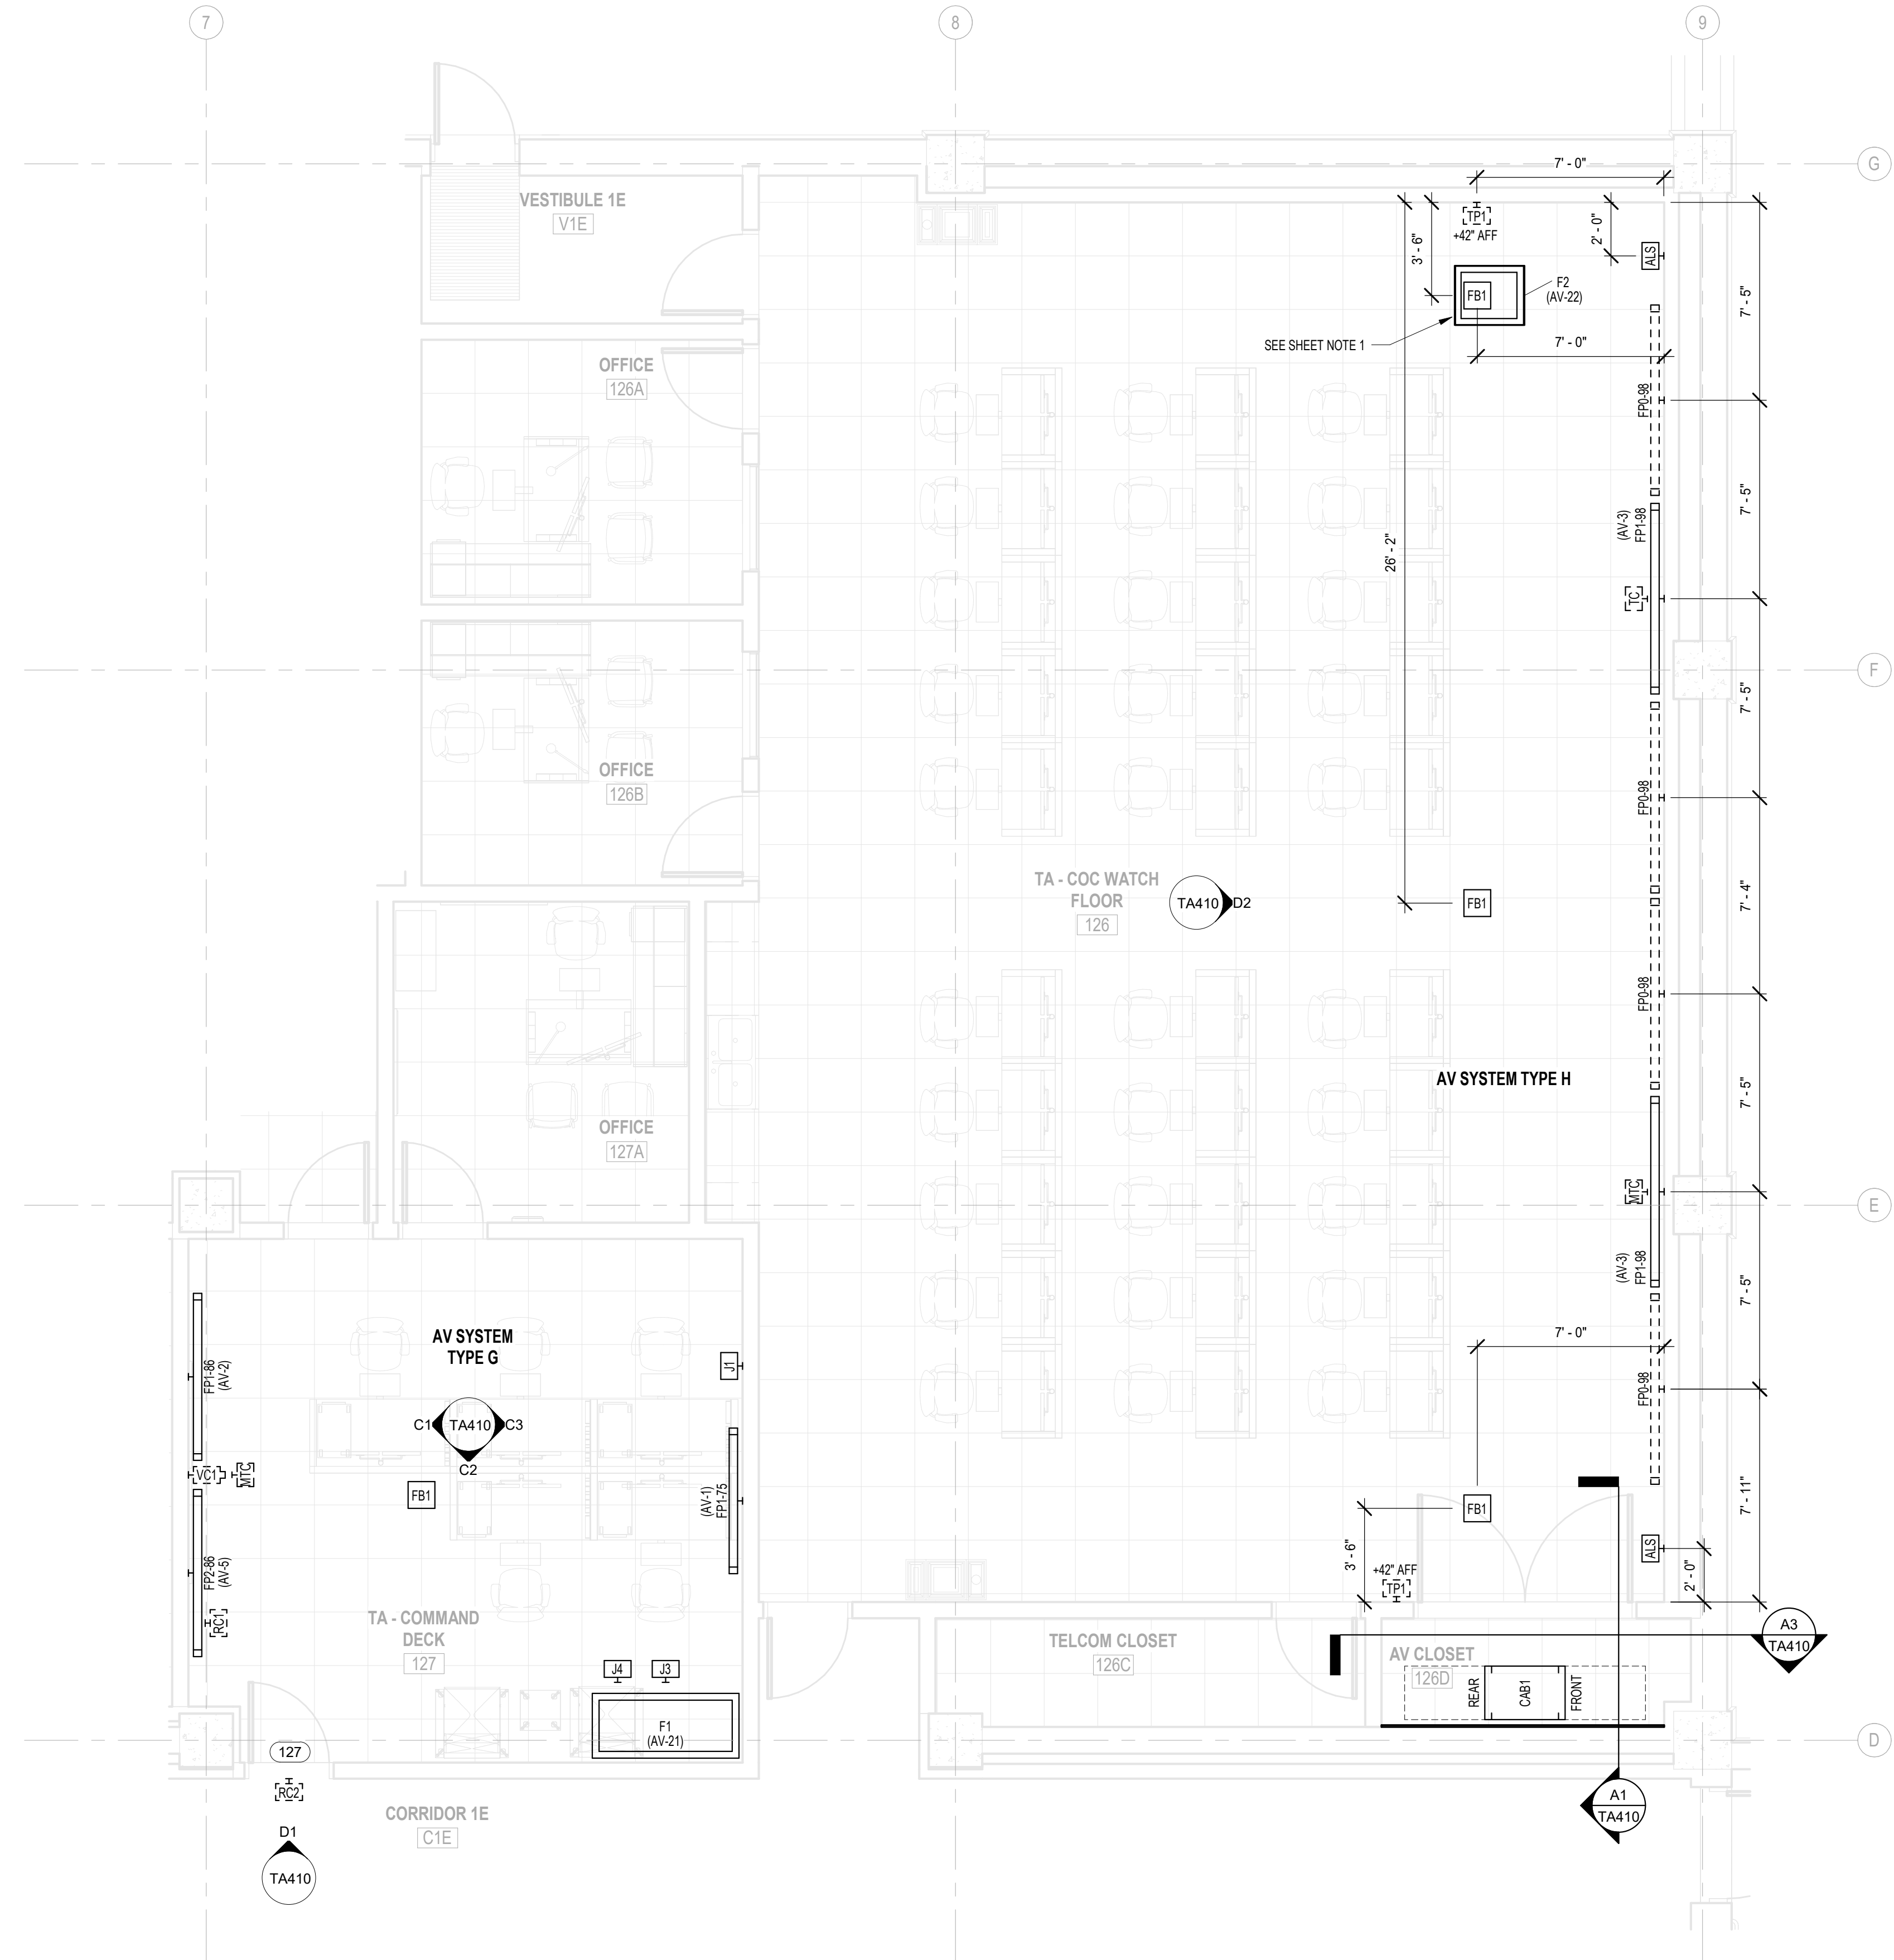

ENLARGED AV FLOOR PLAN
TA COC WATCH FLOOR 126 & TA COMMAND DECK 127

A1
1/4" = 1'-0"

GENERAL SHEET NOTES

- REFER TO TA001 & TA002 FOR AV REQUIREMENTS AND SYMBOLS SHOWN ON THESE DRAWINGS. WORK MUST BE PERFORMED IN COMPLIANCE WITH DIVISION 27 SPECIFICATIONS.
- NOT ALL ARCHITECTURAL, TELECOM AND ELECTRICAL ELEMENTS HAVE BEEN INCLUDED ON THE DRAWINGS. CONTRACTOR MUST REFER TO THOSE RESPECTIVE DISCIPLINES SHEETS FOR ADDITIONAL BUILDING-MOUNTED ELEMENTS AND SCOPE OF WORK THAT MAY INTERFACE WITH, OR IMPACT, THE AV SCOPE OF WORK.
- CONDUIT RACEWAYS SHOWN ON PLAN AND RCP VIEWS ARE ONLY SHOWN IF A SPECIFIC ROUTE IS REQUIRED. REFER TO PATHWAY RISER DIAGRAMS FOR CONDUIT RACEWAY REQUIREMENTS. COORDINATE ROUTING AND ROOM ENTRY LOCATIONS FOR AV SYSTEMS CONDUIT AND PATHWAYS DURING SHOP DRAWING PROCESS.
- VERIFY AND COORDINATE WALL SPACE REQUIREMENTS WITH OTHER TRADES DURING SHOP DRAWING PROCESS TO CONFIRM FINAL PLACEMENT OF AV ROUGH-INS AND EQUIPMENT.
- VERIFY EQUIPMENT ROUGH-IN DIMENSIONS WITH VENDOR/INSTALLER.
- REFER TO I-SERIES (INTERIOR DESIGN) DRAWINGS FOR FINAL DIMENSIONS OF:
 - HORIZONTAL MOUNTING OF WALL-MOUNTED AV-EQUIPMENT
 - POSITIONING OF AV-RELATED FURNITURE/FURNISHINGS. FOR AV EQUIPMENT CABINETS, REFER TO DIMENSIONS ON THE TA-SERIES DRAWINGS.

SHEET NOTES

- PRESENTER LECTERN IS PORTABLE EQUIPMENT AND PLUGS INTO 1 OF 3 RECESSED FLOOR BOXES.



Patrick K. Durham APR 30, 2025
SIGNATURE EXPIRATION DATE OF LICENSE 16FA



APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

NATHANIEL PYRON, MILCON
PLANNER, DPPH

SATISFACTORY TO DATE 3/10/2026

DES PKD BRW DHC CHK PKD

PMIDM DKS/DMK

BRANCH MANAGER KYM

CHIEF ENGINEER KYM

FIRE PROTECTION RYO

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND ~ PACIFIC
MAKALAPA, HAWAII
MCB CAMP BLAZ, GUAM

JFY 2022 PROJECT J-875
BATTLE STAFF TRAINING FACILITY
ENLARGED AV PLANS

U.S. NAVY/SUPPACT
NAVFAC PACIFIC
DEPARTMENT OF THE NAVY

SCALE: AS NOTED
PROJECT NO.: 1696746
CONSTR. CONTR. NO.

NAVFAC DRAWING NO. 17322345


SHEET 457 OF 468

TA408

DRAWING REVISION: 25 AUGUST 2020




GRAPHIC SCALE(S)



3/11/2025 9:15:33 PM TA409
Autodesk Docs/J875 BSTDG-J875-1696746-TA.rvt

1
2
3
4
5
D
C
B
A

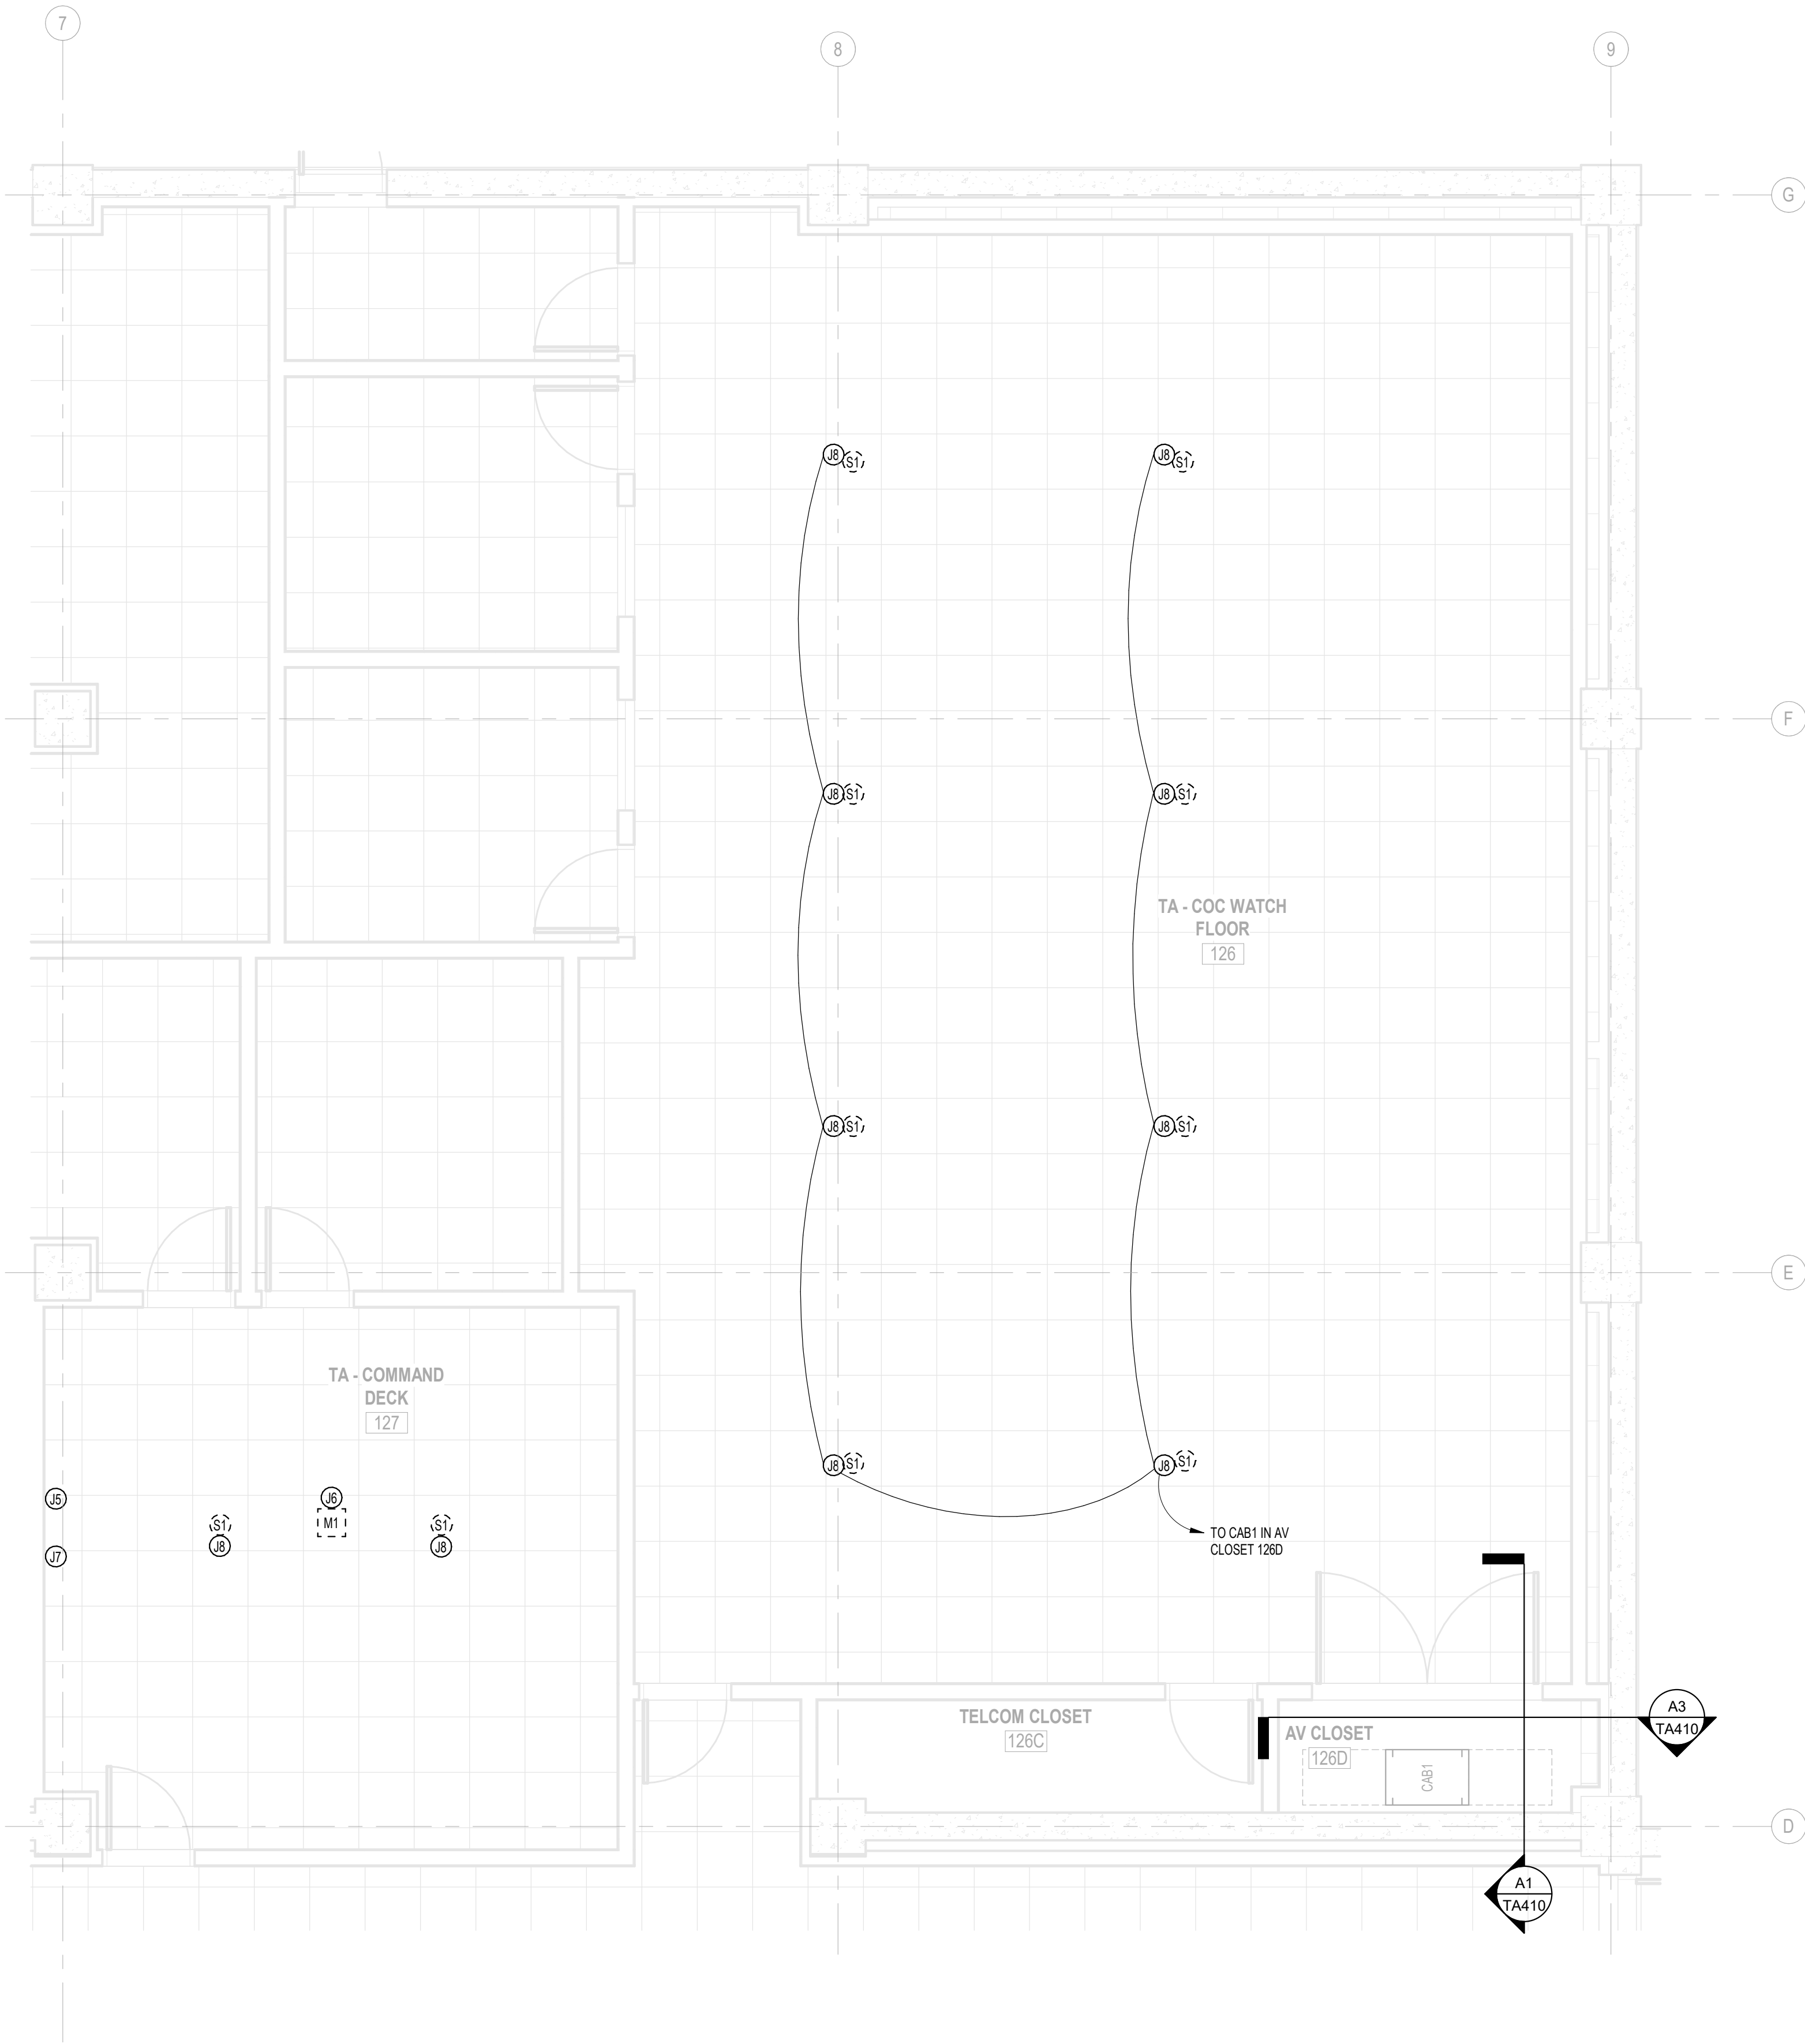

A1 ENLARGED AV SYSTEMS REFLECTED CEILING PLAN - ROOM 126
1/4" = 1'-0"

GENERAL SHEET NOTES

1. REFER TO TA001 & TA002 FOR AV REQUIREMENTS AND SYMBOLS SHOWN ON THESE DRAWINGS. WORK MUST BE PERFORMED IN COMPLIANCE WITH DIVISION 27 SPECIFICATIONS.
2. NOT ALL ARCHITECTURAL, TELECOM AND ELECTRICAL ELEMENTS HAVE BEEN INCLUDED ON THE DRAWINGS. CONTRACTOR MUST REFER TO THOSE RESPECTIVE DISCIPLINES SHEETS FOR ADDITIONAL BUILDING-MOUNTED ELEMENTS AND SCOPE OF WORK THAT MAY INTERFACE WITH, OR IMPACT, THE AV SCOPE OF WORK.
3. CONDUIT RACEWAYS SHOWN ON PLAN AND RCP VIEWS ARE ONLY SHOWN IF A SPECIFIC ROUTE IS REQUIRED. REFER TO PATHWAY RISER DIAGRAMS FOR CONDUIT RACEWAY REQUIREMENTS. COORDINATE ROUTING AND ROOM ENTRY LOCATIONS FOR AV SYSTEMS CONDUIT AND PATHWAYS DURING SHOP DRAWING PROCESS.
4. VERIFY AND COORDINATE WALL SPACE REQUIREMENTS WITH OTHER TRADES DURING SHOP DRAWING PROCESS TO CONFIRM FINAL PLACEMENT OF AV ROUGH-INS AND EQUIPMENT.
5. VERIFY EQUIPMENT ROUGH-IN DIMENSIONS WITH VENDOR/INSTALLER.
6. REFER TO I-SERIES (INTERIOR DESIGN) DRAWINGS FOR FINAL DIMENSIONS OF:
 - a. HORIZONTAL MOUNTING OF WALL-MOUNTED AV-EQUIPMENT
 - b. POSITIONING OF AV-RELATED FURNITURE/FURNISHINGS. FOR AV EQUIPMENT CABINETS, REFER TO DIMENSIONS ON THE TA-SERIES DRAWINGS.



SIGNATURE: Patrick K. Durham APR 30, 2025
EXPIRATION DATE OF LICENSE: 04/30/2028



APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

NATHANIEL PYRON, MILCON

PLANNER, DPPH

SATISFACTORY TO DATE 3/10/2026

DES PKD | DRW DHC | CHK PKD

PM/DM DKS/DMK

BRANCH MANAGER KYM

CHIEF ENGINEER KYM

FIRE PROTECTION RYO

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND ~ PACIFIC
MAKALAPA, HAWAII
U.S. NAVY/SUPPORT
JFY 2022 PROJECT J-875
BATTLE STAFF TRAINING FACILITY
ENLARGED AV PLANS
MCB CAMP BLAZ, GUAM



SCALE: AS NOTED

PROJECT NO.: 1696746

CONSTR. CONTR. NO.


NAVFAC DRAWING NO. 17322346

SHEET 458 OF 468


TA409

DRAWING REVISION: 25 AUGUST 2020

GRAPHIC SCALE(S)



D
C
B
A

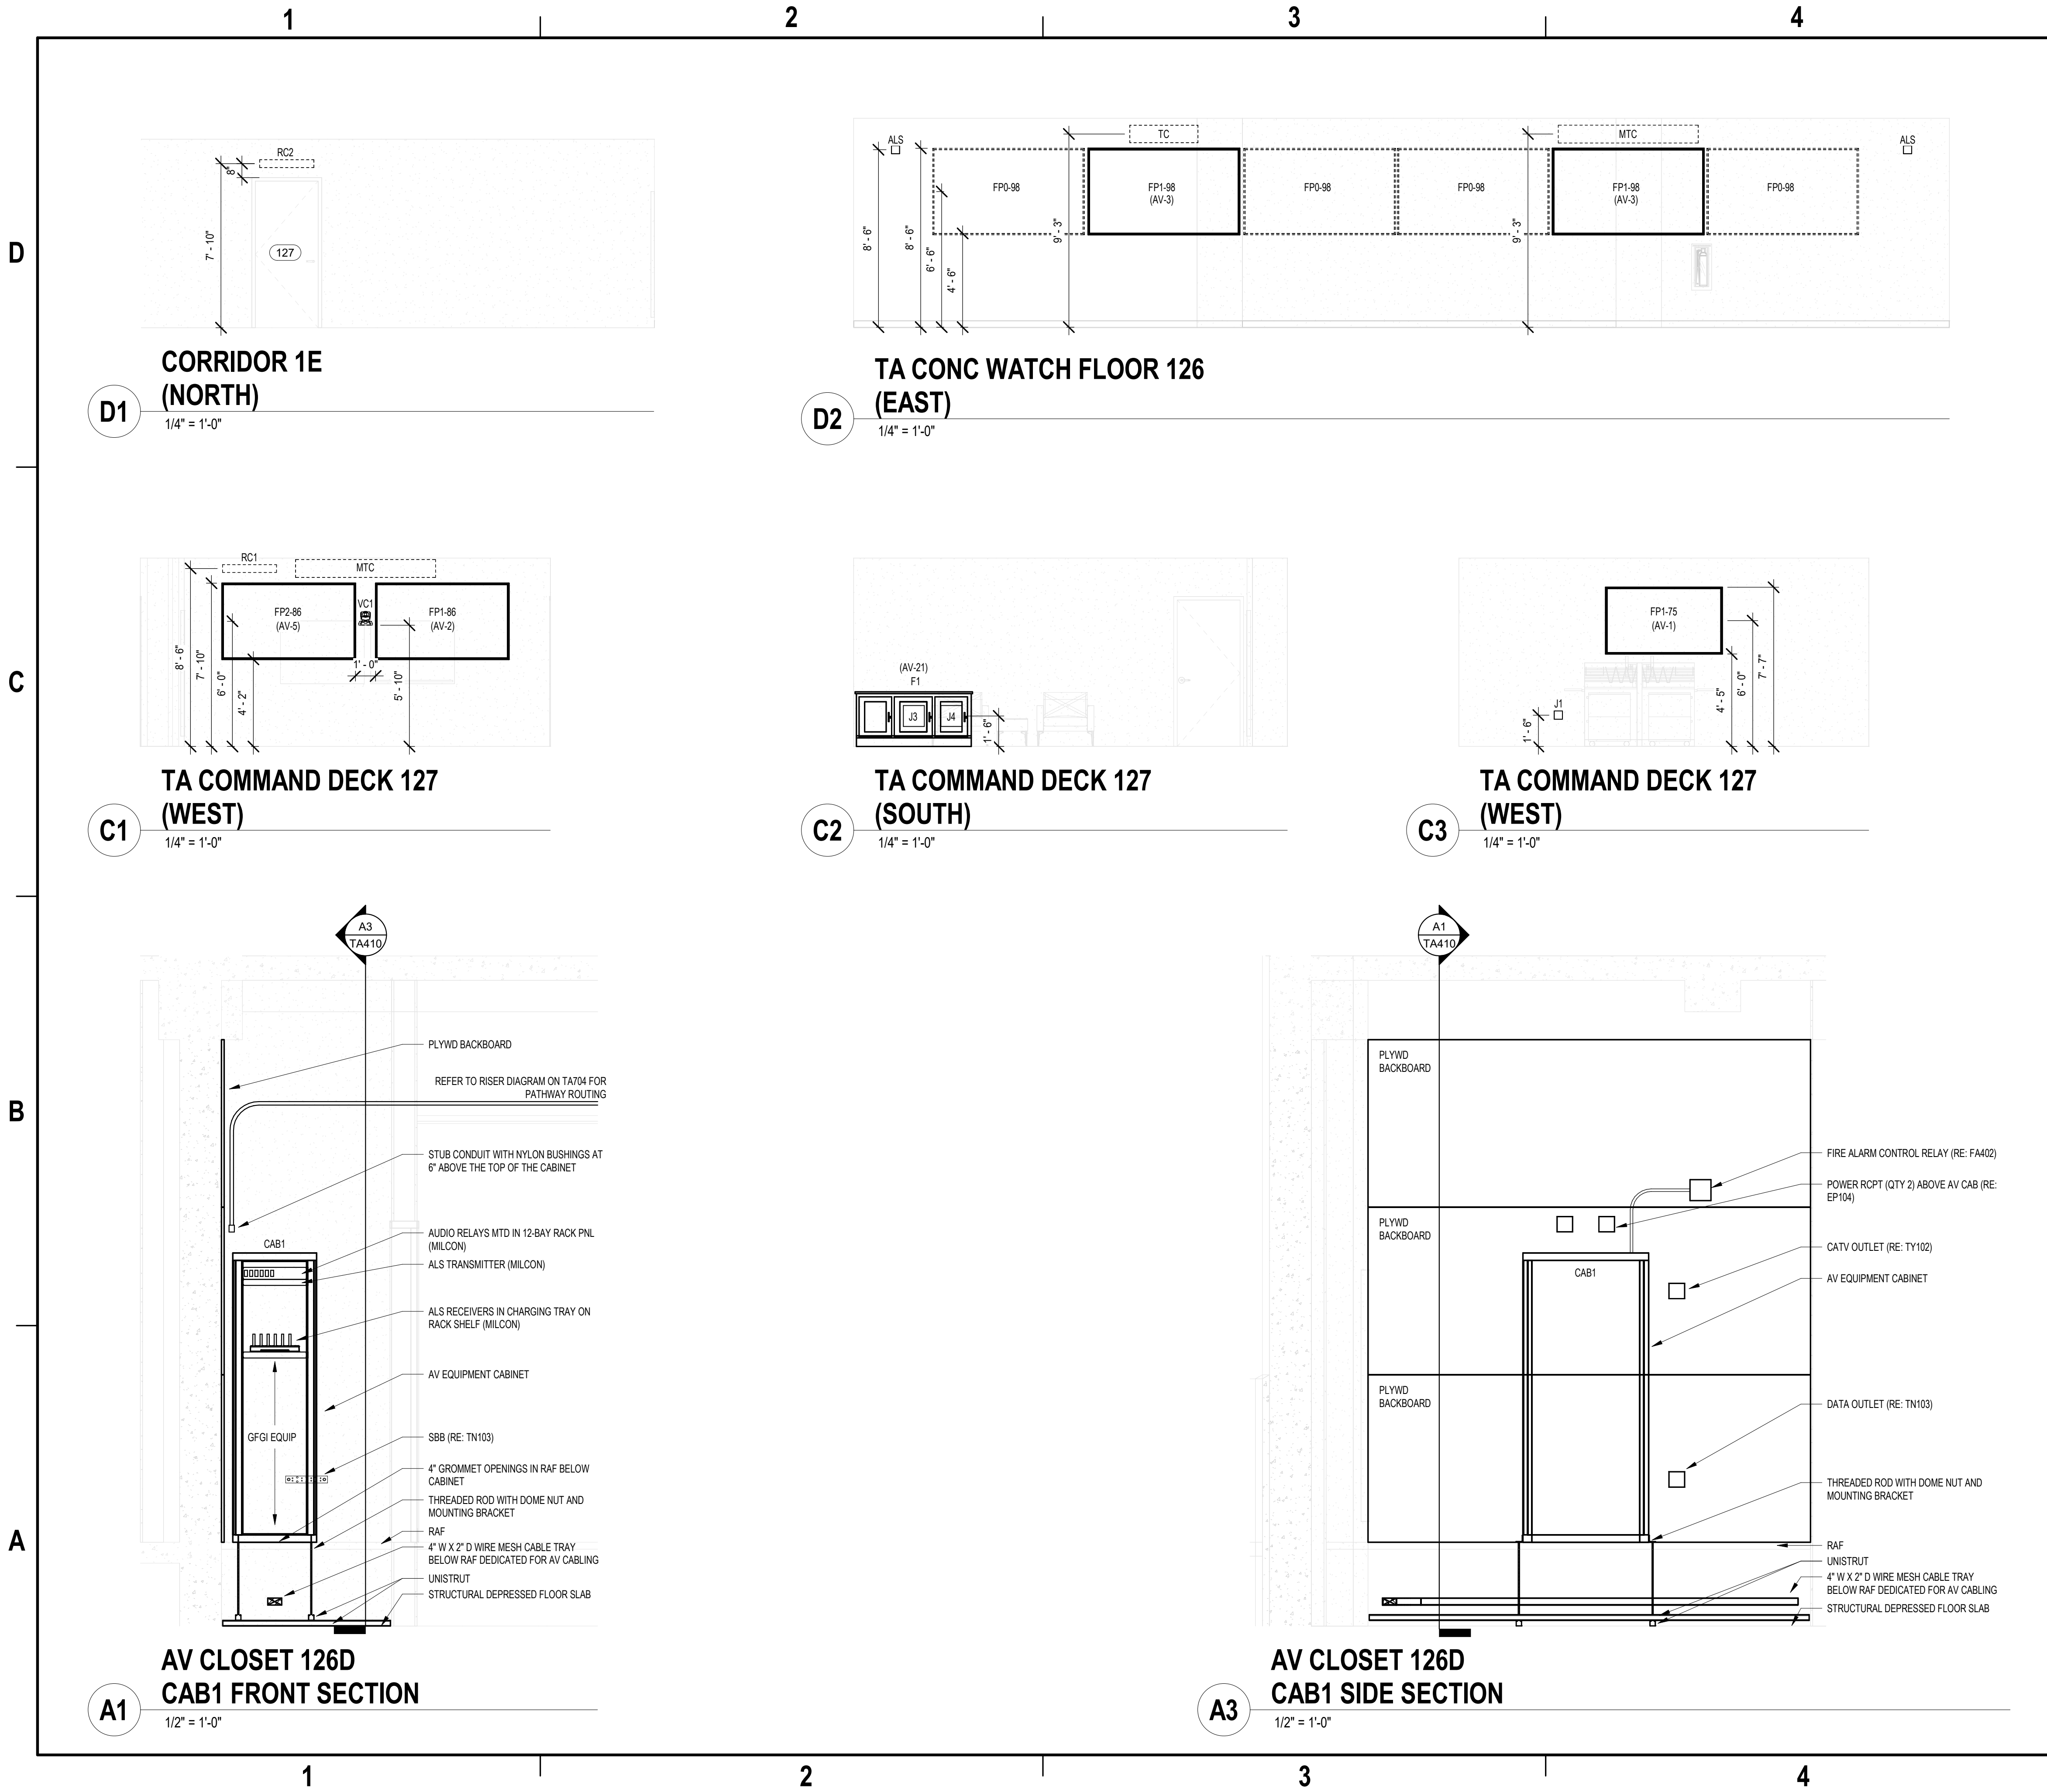

GENERAL SHEET NOTES

- REFER TO TA001 & TA002 FOR AV REQUIREMENTS AND SYMBOLS SHOWN ON THESE DRAWINGS. WORK MUST BE PERFORMED IN COMPLIANCE WITH DIVISION 27 SPECIFICATIONS.
- NOT ALL ARCHITECTURAL, TELECOM AND ELECTRICAL ELEMENTS HAVE BEEN INCLUDED ON THE DRAWINGS. CONTRACTOR MUST REFER TO THOSE RESPECTIVE DISCIPLINES SHEETS FOR ADDITIONAL BUILDING-MOUNTED ELEMENTS AND SCOPE OF WORK THAT MAY INTERFACE WITH, OR IMPACT, THE AV SCOPE OF WORK.
- VERIFY AND COORDINATE WALL SPACE REQUIREMENTS WITH OTHER TRADES DURING SHOP DRAWING PROCESS TO CONFIRM FINAL PLACEMENT OF AV ROUGH-INS AND EQUIPMENT.
- VERIFY EQUIPMENT ROUGH-IN DIMENSIONS WITH VENDOR/INSTALLER.
- REFER TO I-SERIES (INTERIOR DESIGN) DRAWINGS FOR FINAL DIMENSIONS OF:
 - HORIZONTAL MOUNTING OF WALL-MOUNTED AV-EQUIPMENT
 - POSITIONING OF AV-RELATED FURNITURE/FURNISHINGS. FOR AV EQUIPMENT CABINETS, REFER TO DIMENSIONS ON THE TA-SERIES DRAWINGS.
- VIDEO MONITOR DISPLAYS AND MULTI-CLASSIFICATION DISPLAYS, THE DIMENSION SHOWN TO CENTER OF EQUIPMENT IS THE CRITICAL MOUNTING DIMENSION; WHERE SHOWN, THE DIMENSIONS FOR BOTTOM AND / OR TOP OF EQUIPMENT (REFERENCED TO FLOOR) ARE NOMINAL AND MAY VARY SOMEWHAT DEPENDING ON THE EXACT DIMENSIONS OF THE FINAL EQUIPMENT UNIT / MODEL PROVIDED.
- WITHIN EACH ELEVATION VIEW, THE ROUGH-IN HEIGHT AND MOUNTING-HEIGHT DIMENSIONS THAT ARE SHOWN FOR ONE ELEMENT TYPE ARE TYPICAL, AND MUST BE APPLIED TO ALL ELEMENTS OF THE SAME TYPE WITHIN THE RESPECTIVE VIEW.

PATRICK K. DURHAM
LICENSED PROFESSIONAL ENGINEER
No. 20279 - E
3/12/2024
HAWAII U.S.A.

APRIL 30, 2025
SIGNATURE EXPIRATION DATE OF LICENSE

APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

NATHANIEL PYRON, MILCON
PLANNER, DPPH

SATISFACTORY TO DATE 3/10/2026

DES PKD DRW DHC CHK PKD

PMIDM DKS/DMK

BRANCH MANAGER KYM

CHIEF ENGINEER KYM

FIRE PROTECTION RYO

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND ~ PACIFIC
HAWAIIAN ISLANDS, HAWAII

MCB CAMP BLAZ, GUAM

JFY 2022 PROJECT J-875
BATTLE STAFF TRAINING FACILITY

AV INTERIOR ELEVATIONS & SECTIONS

U.S. NAVY/SUPPACT

SCALE: AS NOTED

PROJECT NO.: 1696746

CONSTR. CONTR. NO.

NAVFAC DRAWING NO. 17322347


SHEET 459 OF 468

TA410

DRAWING REVISION: 25 AUGUST 2020


12345					12345				
D					D				
C					C				
B					B				
A					A				

- NOTES:
- 16 GAUGE STEEL CONSTRUCTION, UL LISTED.
 - BOX VOLUME: 500 CUBIC IN.
 - NEMA TYPE 1 SCREW COVER ENCLOSURE WITH NO KNOCKOUTS.
 - PAINTED INSIDE AND OUTSIDE USING ANSI 61 GRAY POLYESTER POWDER-COAT PAINT FINISH.
 - PROVIDE WITH GROUNDING LUG KIT.
 - PROVIDE WITH STANDARD PAINTED 4-SCREW COVER.
 - MOUNT RECESSED IN WALL ASSEMBLY, FLUSH TO FACE OF FINISHED WALL.

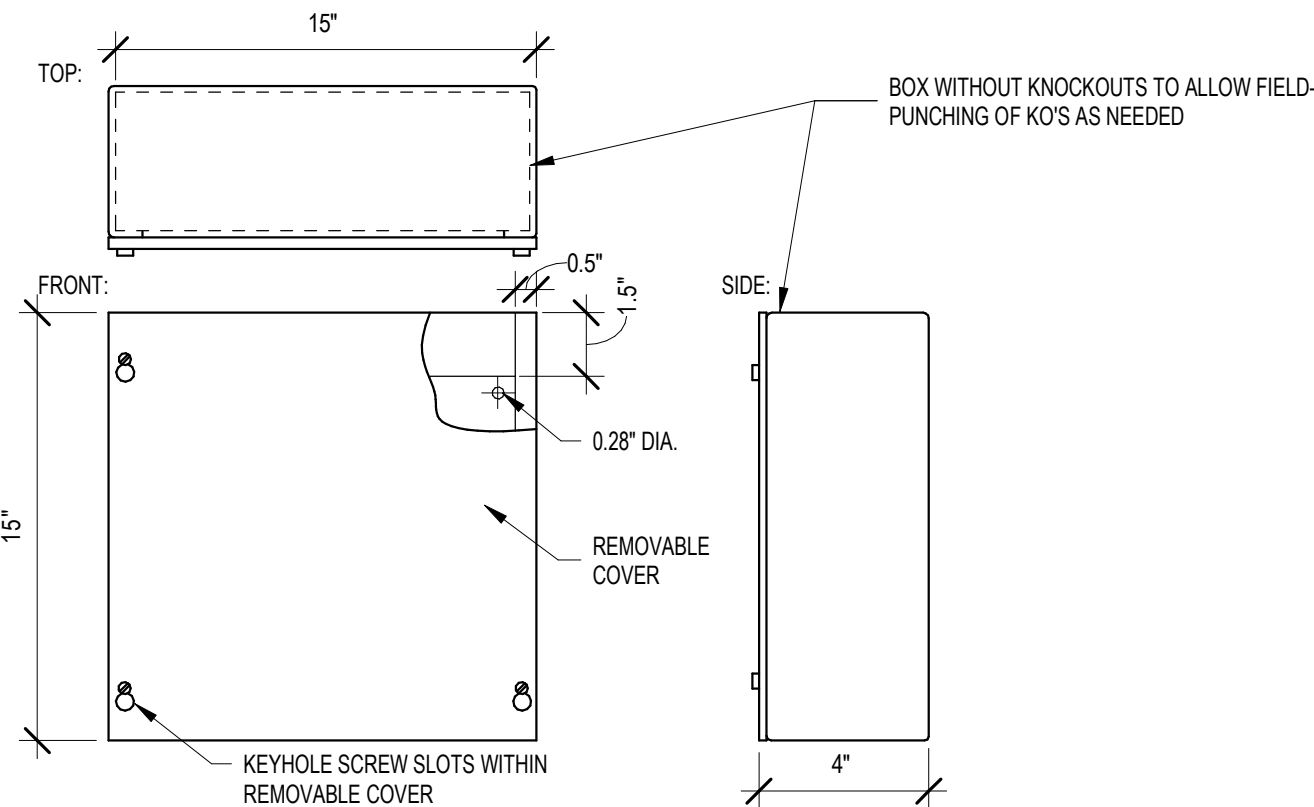


A1 AV BACKBOX FOR J3 LOCATIONS
NTS

- NOTES:
- 16 GAUGE STEEL CONSTRUCTION, UL LISTED.
 - BOX VOLUME: 250 CUBIC IN.
 - NEMA TYPE 1 SCREW COVER ENCLOSURE WITH NO KNOCKOUTS.
 - PAINTED INSIDE AND OUTSIDE USING ANSI 61 GRAY POLYESTER POWDER-COAT PAINT FINISH.
 - PROVIDE WITH GROUNDING LUG KIT.
 - PROVIDE WITH STANDARD PAINTED 4-SCREW COVER.
 - MOUNT RECESSED IN WALL ASSEMBLY, FLUSH TO FACE OF FINISHED WALL.

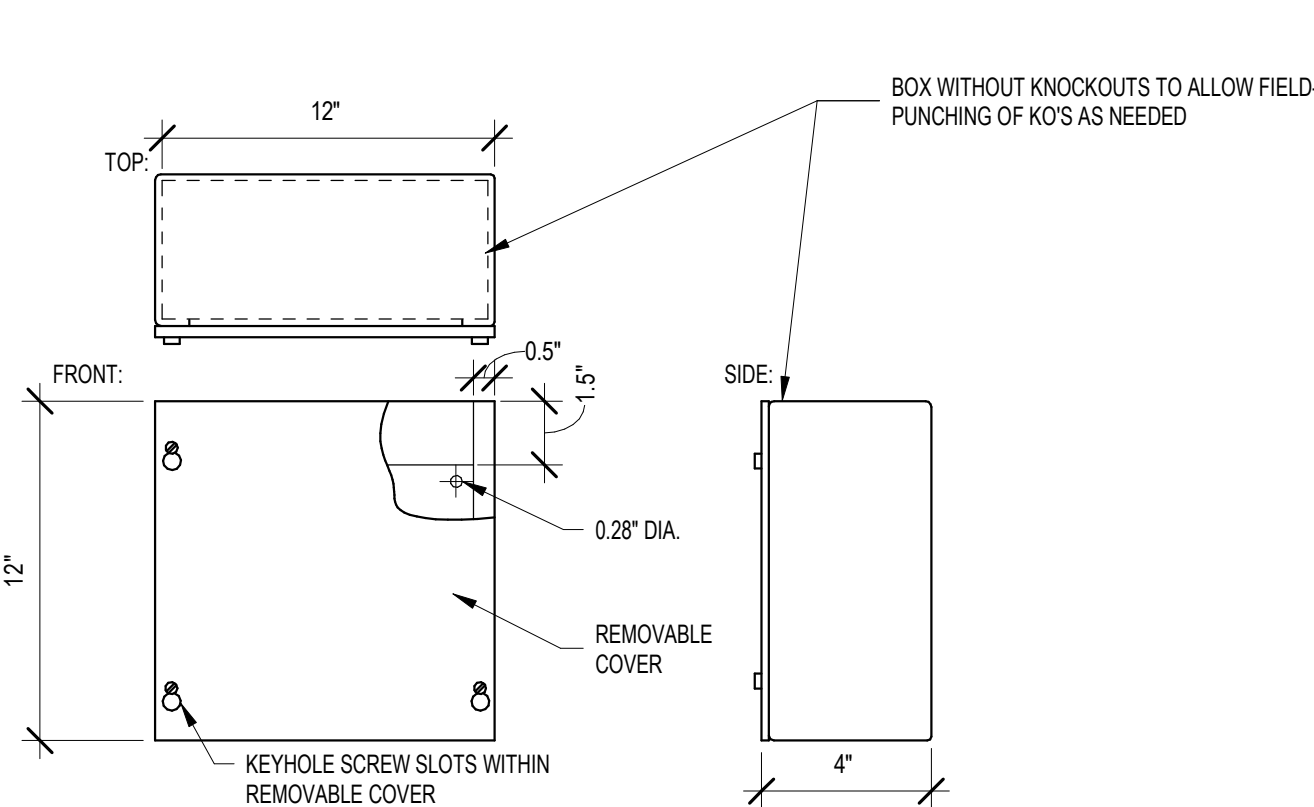


A2 AV BACKBOX FOR J4 LOCATIONS
NTS

- NOTES:
- WELDED STEEL CONSTRUCTION, UL LISTED.
 - BOX VOLUME: 66 CUBIC IN.
 - REMOVABLE FAR SIDE (WALL) SUPPORT BRACKET INCLUDED.
 - INCLUDE REMOVABLE/REPOSITIONABLE STUD MOUNTING BRACKET.
 - PROVIDE WITH GREEN #10-32 GROUND SCREW(S).
 - PROVIDE 4 11/16" SQUARE COVER SPECIFIED ON SHEET

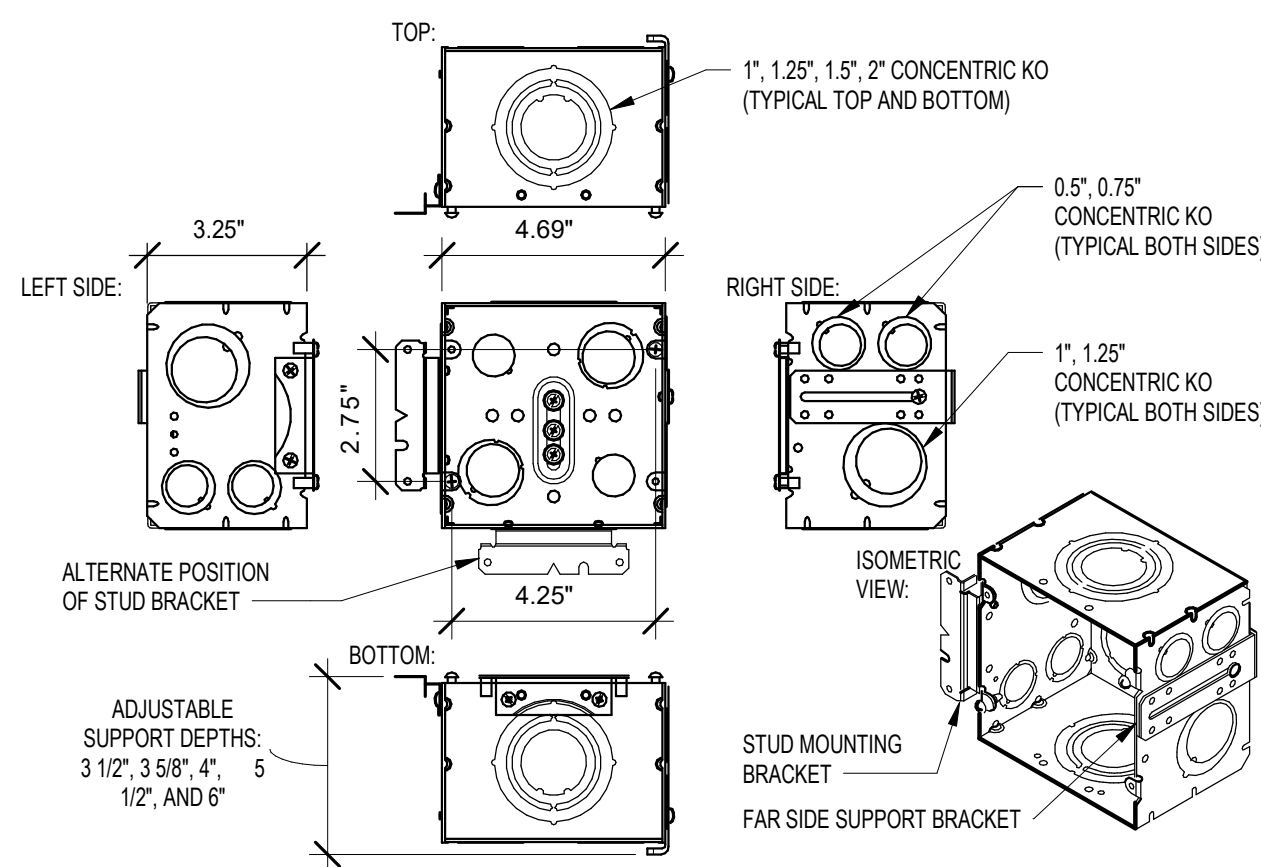

A3 AV BACKBOX FOR FP1-xx, FP2-xx, FP3-xx, J1, J2, TP1, ALS, & VC1 LOCATIONS
NTS

- NOTES:
- WELDED STEEL CONSTRUCTION, UL LISTED.
 - BOX VOLUME: 30.3 CUBIC IN.
 - PROVIDE WITH GREEN #10-32 GROUND SCREW(S).
 - PROVIDE 4" SQUARE BLANK COVER.

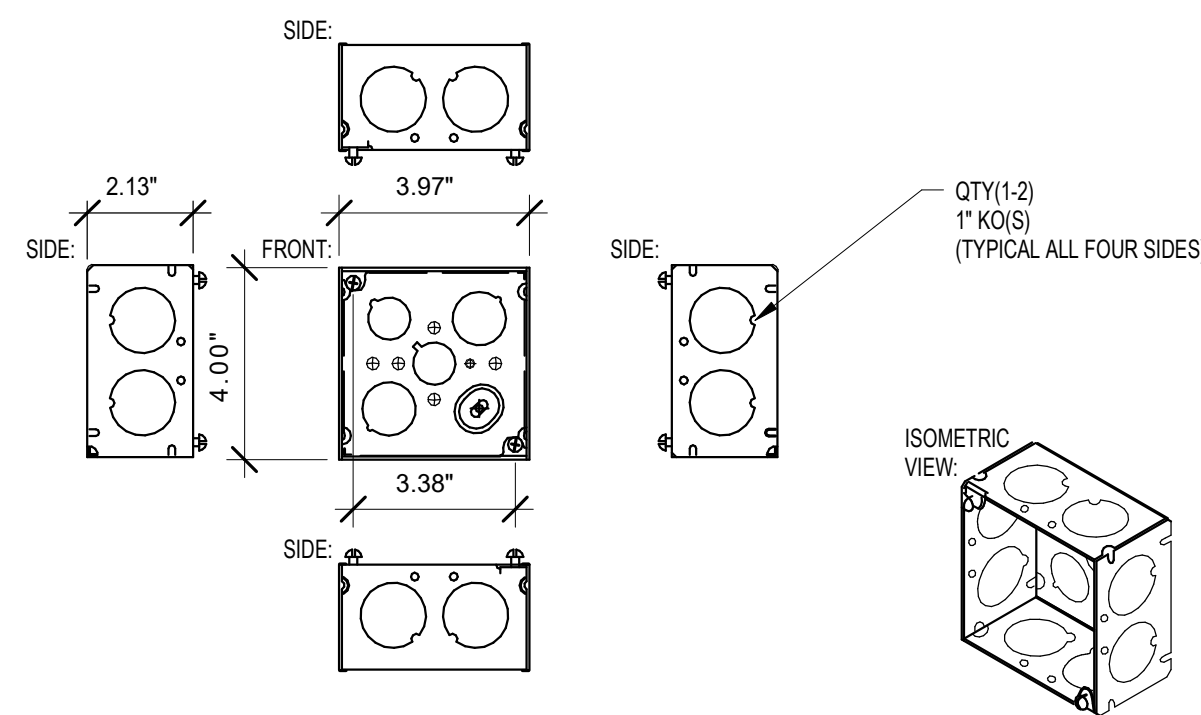


A4 AV BACKBOX FOR J5, J6, J7, J8, RC1, RC2 LOCATIONS
NTS



FOR COMMANDER NAVFAC			
ACTIVITY			
NATHANIEL PYRON, MILCON PLANNER, DPPH			
SATISFACTORY TO DATE 3/10/2026			
DES	PKD	BRW	DHC
CHK	PKD		
PRDMM DKS/DMK			
BRANCH MANAGER KYM			
CHIEF ENGINEER KYM			
FIRE PROTECTION RYO			

DEPARTMENT OF THE NAVY NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND NAVFAC PACIFIC U.S. NAVY/SUPPACT	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
	PACIFIC
	MAKALAPA, HAWAII
	MCB CAMP BLAZ, GUAM
JFY 2022 PROJECT J-875	
BATTLE STAFF TRAINING FACILITY	
AV INFRASTRUCTURE DETAILS	

SCALE: AS NOTED	
PROJECT NO.:	1696746
CONSTR. CONTR. NO.	
NAVFAC DRAWING NO. 17322350	
SHEET 462	OF 468
TA503	

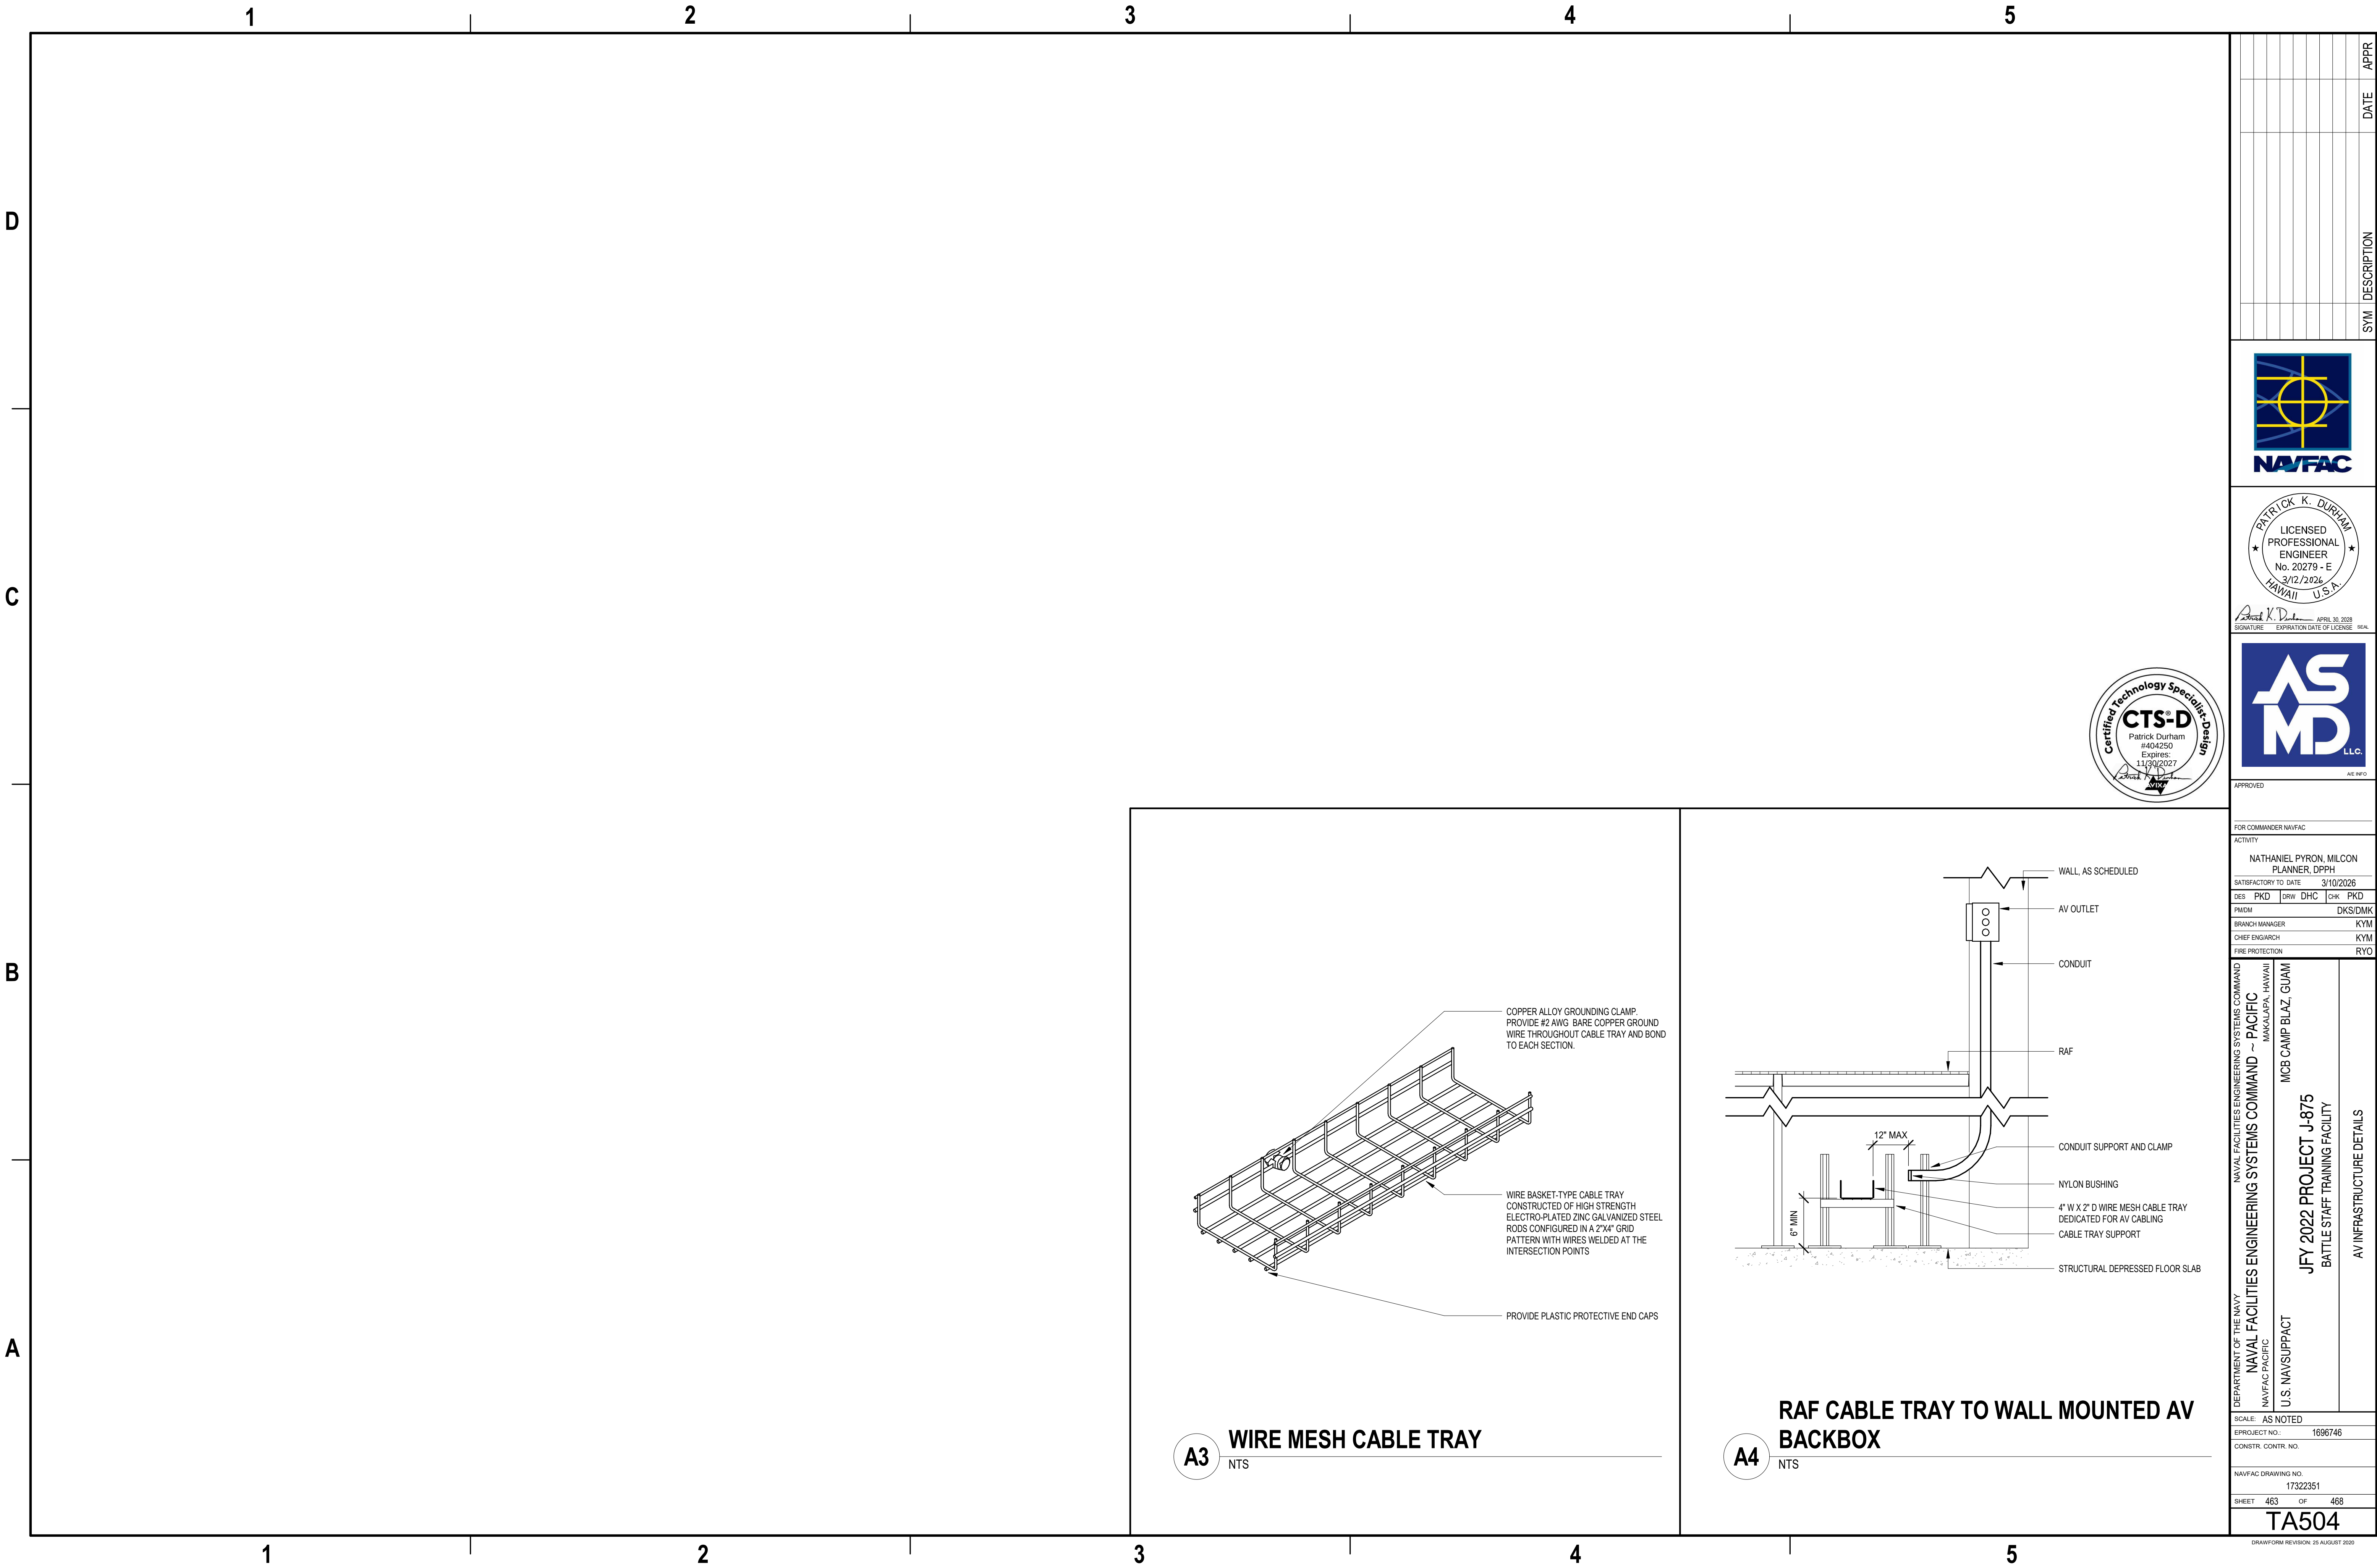

A

A

1. PATHWAY DIAGRAMS ARE NOTIONAL AND ONLY DEPICT END-TO-END CONNECTIVITY OF RACEWAY SYSTEMS. THEY DO NOT REFLECT EXACT ROUTING OF CONDUITS, NOR DO THEY REFLECT ANY NECESSARY INTERMEDIATE PULL BOXES OR FITTINGS.



APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

NATHANIEL PYRON, MILCON

SATISFACTORY TO DATE	3/10/2026
----------------------	-----------

DES	PKD	DRW	DHC	CHK	PKD
-----	-----	-----	-----	-----	-----

PM/DM DKS/DMK

BRANCH MANAGER	KYM
----------------	-----


CHIEF ENG/ARCH KYM

PACIFIC MAKALAPA, HAWAII MP BLAZ, GUAM	
--	--

JFY 2022 PROJECT J-875

U.S. NAVSUPPORT
NAVFAC PACIFIC
NAVAL FACILITIES
DEPARTMENT OF THE NAVY

SCALE: AS NOTED			
EPROJECT NO.:		1696746	
CONSTR. CONTR. NO.			
NAVFAC DRAWING NO.			
		17322354	
SHEET	466	OF	468
TA702			

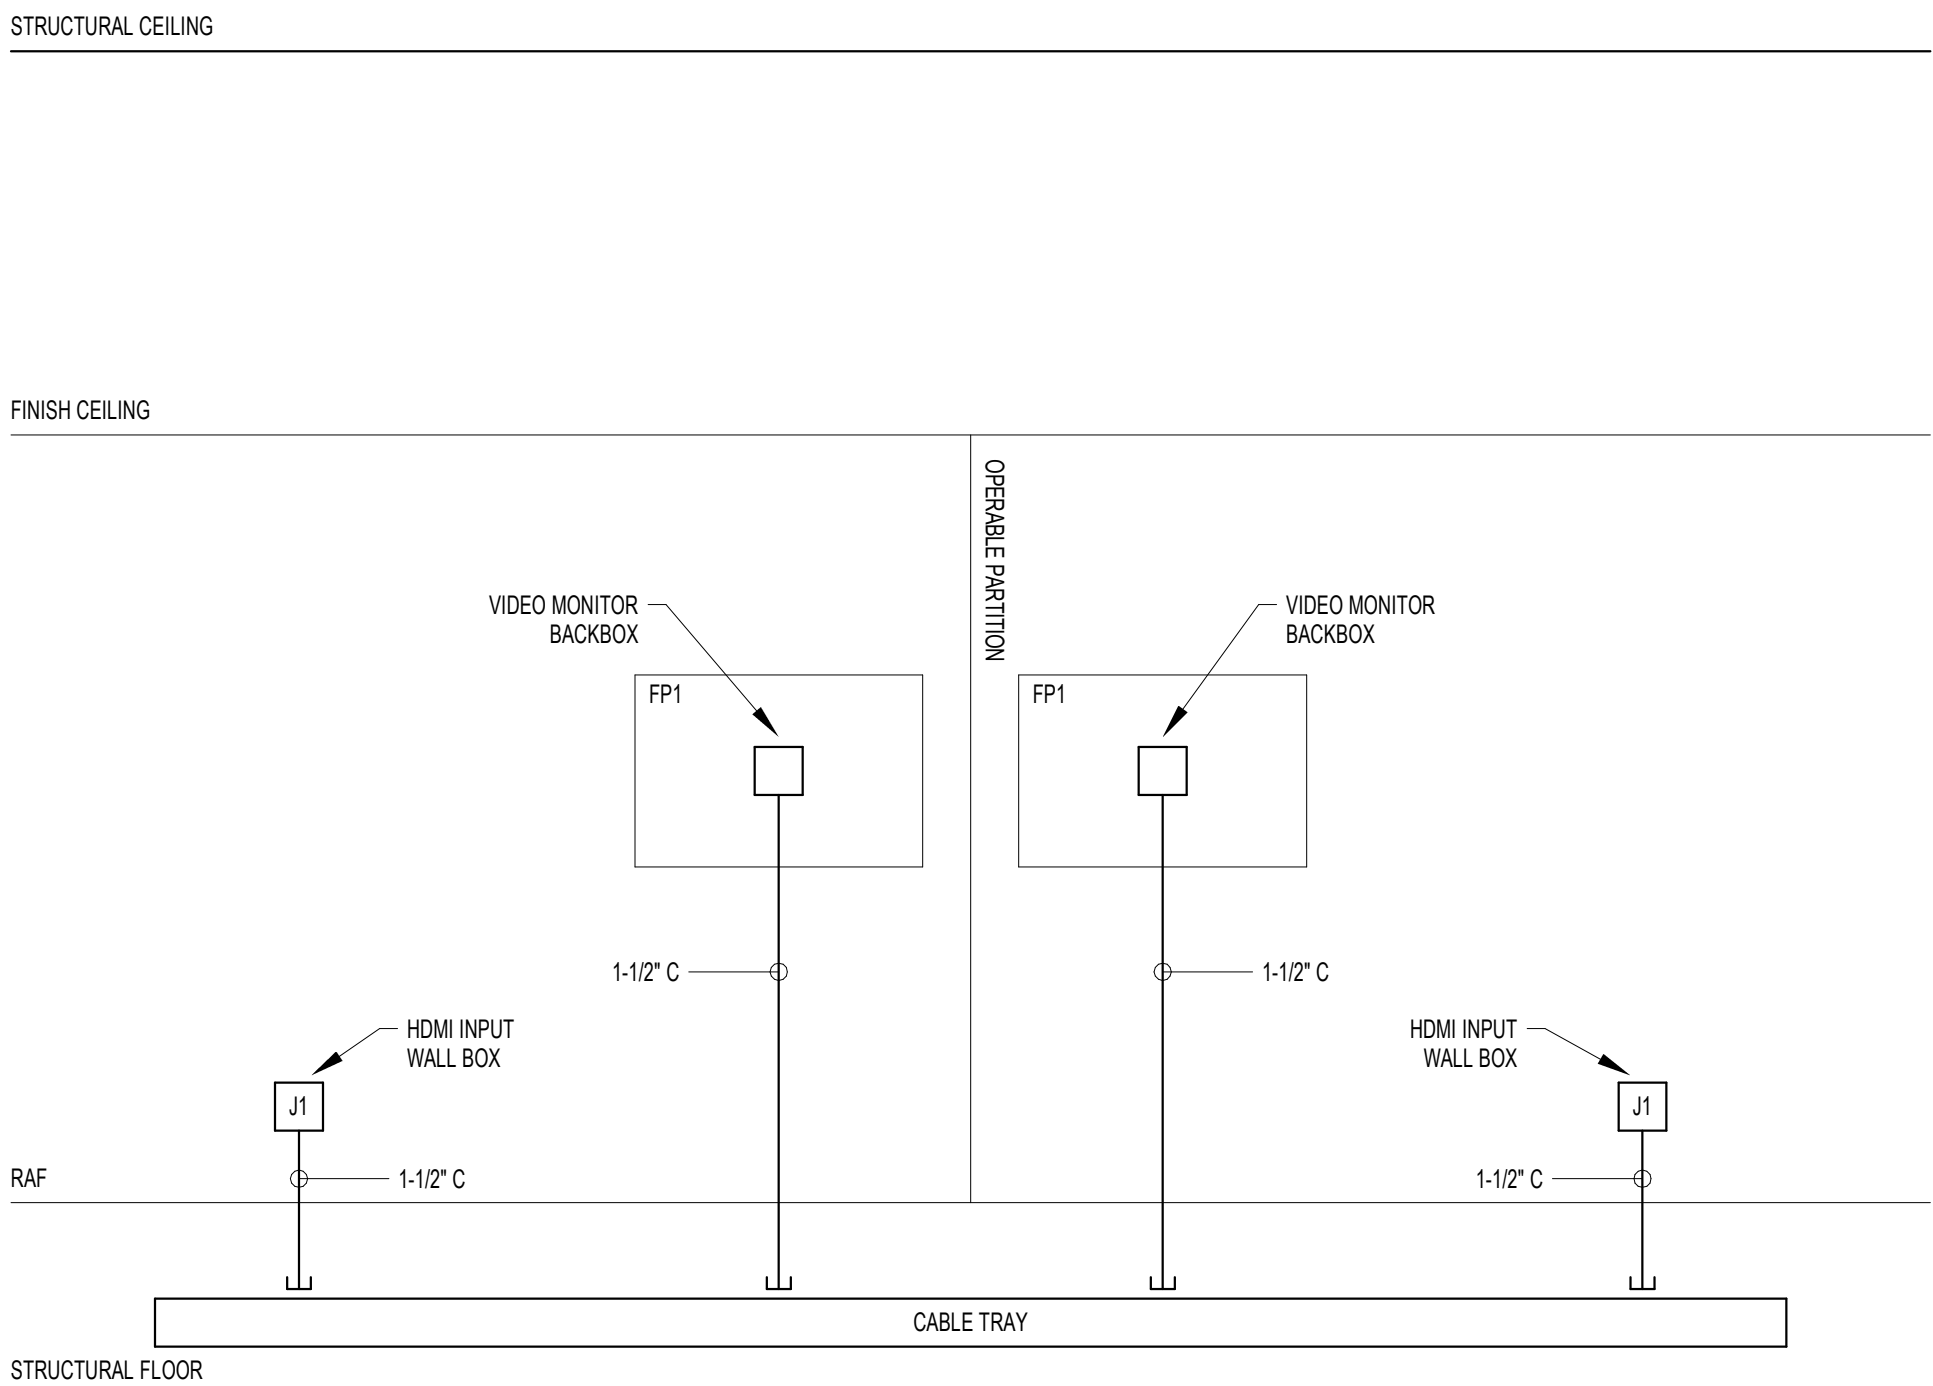

NTS

NTS



