



HAZARDOUS BUILDING MATERIALS SURVEY REPORT

B300 Roof and HVAC Repair
Pre-Renovation Services

B300, Portsmouth Naval Shipyard
Kittery, ME 03904

Mabbett Project No. R2023006.000

September 11, 2024_Rev 1

Prepared For:
Weston & Sampson
55 Walkers Brook Drive , Suite 100
Reading, MA 01867

Mabbett & Associates, Inc.
105 Central Street, Suite 4100
Stoneham, MA 02180-1260
T. 781-275-6050
F: 781-954-5155

www.mabbett.com

Massachusetts | Virginia | Rhode Island | New York

ACKNOWLEDGEMENT

This Hazardous Building Materials Survey Report has been prepared by Mabbett & Associates, Inc. (Mabbett®) for the Pre-Renovation Services at the Portsmouth Naval Shipyard, Building 300 (B300) located in Kittery, Maine, Contract No. N40085-21-D-0005. The information presented herein is based on the facts and information conveyed to or received by Mabbett during the preparation of this report. If any of the information provided to Mabbett that was used in preparing this report is incorrect, incomplete, or subject to change, Mabbett would wish to alter its opinion(s) accordingly. In addition, the professional opinions and information contained in this report are based solely on the requirements of the applicable regulations and technical data as known to Mabbett as of the date of this report and considered applicable to this report.

Mabbett does not claim to have identified all hazardous materials that could be present in the building. Mabbett has conducted this assessment with reasonable care and has performed this project in accordance with industry standards. There can be no assurances, and Mabbett makes no assurances, that the information, research, and technology used to prepare this report may not change in the future, thus affecting the results reported herein.

The attached Hazardous Building Materials Survey Report was prepared by Mr. Jacob T. Walsh, Environmental, Health & Safety Specialist of Mabbett & Associates, Inc.

This report has been reviewed and approved by:

Michael F. Delaney
Digitally signed by
Michael F. Delaney
Date: 2024.09.11
17:16:56 -04'00'

Michael F. Delaney
Director, Building Sciences Group

JTW/MFD/fmz

TABLE OF CONTENTS

<u>SECTION</u>	<u>PAGE</u>
1.0 INTRODUCTION.....	1
1.1 Purpose and Objectives	1
1.2 Background Information	1
1.3 Summary of Survey Results.....	2
2.0 ASBESTOS CONTAINING MATERIAL SURVEY	3
2.1 Sampling Methodology.....	3
2.2 Analytical Methodology.....	4
2.3 ACM Results.....	4
3.0 LEAD, Cadmium, and Chromium CONTAINING PAINT SAMPLING	5
3.1 Sampling Methodology.....	5
3.2 Analytical Methodology.....	5
3.3 Sampling Results	5
4.0 DUST SAMPLING (RCRA 8 METALS)	9
4.1 Sampling Methodology.....	9
4.2 Analytical Methodology.....	9
4.3 Dust Sampling Results	9
5.0 BUILDING MATERIAL PCB EVALUATION	13
6.0 INVENTORY OF OTHER HAZARDOUS MATERIALS.....	14
7.0 RECOMMENDATIONS	15
7.1 Asbestos	15
7.2 Paint	15
7.3 Dust Sampling (RCRA 8 Metals).....	15
7.4 Polychlorinated Biphenyls	16
7.5 Other Hazardous Materials.....	16

TABLES

Table 1 - Estimated Quantities of Asbestos Containing Materials
Table 2 - Paint Chip Analytical Results
Table 3 - Dust Sampling (RCRA 8 Metals) Analytical Results
Table 4 - PCB Analytical Results
Table 5 - Inventory of OHMs

FIGURES

RBM-1 – First Floor Regulated Building Materials Sampling Location Plan
RBM-2 – Second Floor Regulated Building Materials Sampling Location Plan
RBM-3 – Second Floor Regulated Building Materials Sampling Location Plan
RBM-4 – Roof Regulated Building Materials Sampling Location Plan

APPENDICES

APPENDIX A - ACM Bulk Sample Results
APPENDIX B - ACM Laboratory Report and Chain of Custody Documentation
APPENDIX C - Paint Chip Laboratory Report and Chain of Custody Documentation
APPENDIX D - Dust Sampling (RCRA 8 Metals) Laboratory Report and Chain of Custody Documentation
APPENDIX E - PCB Laboratory Report and Chain of Custody Documentation
APPENDIX F - Photo Log

1.0 INTRODUCTION

Mabbett and Associates, Inc. (Mabbett®) performed a survey for hazardous building materials as part of the pre-renovation evaluations of building materials for the B300 Roof and HVAC Repair project at the Portsmouth Naval Shipyard located in Kittery, Maine, Contract No. N40085-21-D-0005. The purpose of the survey was to assess the building for the presence of hazardous and regulated building materials, including asbestos-containing materials (ACMs), lead containing paint (LCP), RCRA 8 metals and other hazardous materials (OHMs). The survey was performed by Mr. Kevin M. Donovan and Mr. Jacob T. Walsh of Mabbett on June 26th, 27th, and 28th, 2023. Additional survey work was conducted on October 11th, 2023, and consisted of the following activities:

- An Asbestos Containing Material (ACM) survey of suspect materials (analysis using polarized light microscopy [PLM]) and PLM NOB with gravimetric reduction preparation method for analysis of Non-Friable Organically Bound (NOB) materials.
- Lead Containing Paint (LCP) sampling (analysis by atomic absorption [AA] spectroscopy).
- Paint sampling for Cadmium and Chromium (analysis by Inductively Coupled Plasma [ICP]).
- Polychlorinated Biphenyls (PCB) Containing Building Materials Sampling (analysis performed by SW-846 Method 8082A).
- Dust wipe sampling for RCRA 8 (Resource Conservation and Recovery Act) metals (arsenic, barium, cadmium, chromium, lead, mercury, selenium, and silver (analysis by ICP); and
- A visual estimation and inventory of universal waste and other hazardous materials (OHM).

At the time of the survey B300 was occupied. Areas that could be affected by upgrades and repairs to the electrical, HVAC and fire protection systems and replacement of the roof were surveyed. Areas and materials outside of this scope of work were not surveyed by Mabbett. All hazardous material investigations, surveying, testing, and reporting comply with Mabbett's, Hazardous Materials Sampling Plan (HMSP) dated June 15, 2023_Rev 2.

1.1 Purpose and Objectives

This hazardous building material survey was comprised of four primary project tasks including:

- Evaluation of existing site conditions and formulation of a sampling plan.
- Site survey to collect building material samples for laboratory analysis.
- Conduct visual assessment and develop inventory of universal waste and other hazardous materials.
- Development of this Hazardous Building Materials Survey Report.

This inspection was designed to accomplish three primary objectives: (1) to collect a representative number of building materials for laboratory analysis and reporting (2) conduct visual assessment and develop an inventory of universal waste and other hazardous material; and (3) to use data from the laboratory analysis efforts to estimate the volume of hazardous and regulated building materials present within the building's interior and roof for subsequent use in development of an abatement scope. These three objectives were met through a combination of a site inspection to collect building material samples and dust wipe samples for laboratory analysis; interpretation of qualitative data collected in the field; and the quantitative laboratory data generated from analysis of the building materials samples as summarized in this survey report and create a universal waste inventory.

1.2 Background Information

B300 is a mixed-use building used primarily for industrial manufacturing with an overall area of 168,900 square feet. Plans for the building include upgrades and repairs to the electrical, HVAC and fire protection systems and replacement of the roof.

1.3 Summary of Survey Results

As required by State and Federal regulations, bulk samples of suspected ACM were collected by Mabbett and submitted using chain of custody (COC) procedures to Aerobiology of Woburn, Massachusetts. Aerobiology is a Maine certified asbestos analysis laboratory that is accredited by the American Industrial Hygiene Association (AIHA) and participates in the National Voluntary Laboratory Accreditation Program (NVLAP Lab Code 200090-0). The Maine Department of Environmental Protection (Maine DEP) define any material that contains greater than or equal to one percent ($>1\%$) asbestos as ACM.

Paint chip samples and dust wipe samples were collected by Mabbett for analysis using AA spectroscopy and ICP and submitted using COC procedures to Scientific Analytical Institute, Inc (SAI) of Greensboro, North Carolina. 19 paint chip samples were not analyzed for Chromium of Hexavalent Chromium and 3 samples were not analyzed for Cadmium due to insufficient amounts of material being collected during initial survey efforts. Follow up visits were conducted with additional tools in order to ensure that the required amount of material was collected for each sample. Similar paint colors and substrates indicated that initial results provided a sufficient amount of data to identify the appropriate level of information for waste characterization and worker protection needed prior to the disturbance of the material during construction/renovation activities, and therefore additional sampling was not warranted during this survey.

PCB building material samples were collected and submitted under COC procedures for PCB extraction using Analytical method 3660B to Alpha Analytical of Westborough, Massachusetts. Alpha is certified by the National Environmental Laboratory Accreditation Program (NELAP).

Current survey efforts yielded the following results:

- Ninety-nine-nine (99) bulk samples for suspect ACM were collected for laboratory analysis and reporting. Two (2) materials were determined to contain asbestos.
- Twenty-nine (29) paint chip samples were collected from painted building surfaces for laboratory analysis and reporting. Zero (0) revealed concentrations of lead in paint that exceed the U.S. Department of Housing and Urban Development (HUD) threshold of 0.5 percent by weight.
- 15 Dust wipe samples analyzed for RCRA 8 metals.
- Eight (8) suspect PCB building material samples were collected and submitted for laboratory analysis as part of this survey. Based on laboratory analysis the materials were non-detect for PCBs above the TSCA regulated material threshold.
- An Inventory of universal waste and other hazardous materials was developed and provided in this inspection report in Section 5. An Inventory of other hazardous materials can be found in Table 4, Inventory of OHMs.

2.0 ASBESTOS CONTAINING MATERIAL SURVEY

The asbestos survey was performed from June 26th to June 28th 2023, and on October 11th, 2023 by Mabbett's Maine licensed asbestos inspectors, Mr. Kevin M. Donovan (AI-0415) and Mr. Jacob T. Walsh (AI-0917). Prior to collecting samples, a visual screening assessment was conducted to identify locations of suspect ACM and develop a sampling plan. Only areas that were accessible during the field work phase were included in the survey, with reasonable efforts made to access areas needed to complete the asbestos survey and sampling program. Any unsampled or new suspect materials discovered during demolition activities must be sampled and submitted to a laboratory for analysis. Destructive investigation of operating equipment was not conducted.

2.1 Sampling Methodology

Mabbett complied with the following requirements:

- Samples were collected in accordance with applicable EPA, OSHA, and state regulations preventing airborne exposure to asbestos fibers to the extent possible. The sampling locations were repaired by Mabbett.
- The amount of sample collected was of sufficient size for analysis. Each layer was analyzed separately.
- Field personnel properly donned and doffed appropriate PPE where hazards existed and were identified.
- Mabbett performed the inspection between normal duty hours of 8:00 a.m. and 4:00 p.m.
- Bulk samples for asbestos analysis were collected using EPA National Emissions Standards for Hazardous Air Pollutants (NESHAP), 40 CFR Part 763, and Asbestos Hazard Emergency Response Act (AHERA) protocols. Bulk suspect ACM sampling was conducted according to the following standard sampling protocol:
 - Friable surfacing material:
 - At least three bulk samples shall be collected from each homogeneous area of surfacing material that is 1,000 ft² or less.
 - At least five bulk samples shall be collected from each homogeneous area of surfacing material that is greater than 1,000 ft² but less than or equal to 5,000 ft².
 - At least seven bulk samples shall be collected from each homogeneous area of surfacing material that is greater than 5,000 ft².
 - Thermal system insulation:
 - At least three bulk samples shall be collected from each homogeneous area of thermal system insulation.
 - At least three bulk samples shall be collected from each homogeneous patched area of thermal system insulation.
 - Sufficient samples shall be collected from elbows and fittings.
 - Bulk samples shall not be collected from any homogeneous area where the state-licensed asbestos inspector determines that the thermal system insulation is fiberglass, foam glass, rubber, or other non-ACM.
 - Miscellaneous material (e.g., joint compound, roofing, gaskets, floor coverings, decorative coatings, wire insulation):
 - At least three bulk samples shall be collected from each homogeneous area of miscellaneous material that is less than 100 ft².
 - At least three bulk samples shall be collected from each homogeneous area of miscellaneous material that is greater than 100 ft².

The survey included accessible interior areas, the roof, and materials associated with the upgrades and repairs to the electrical, HVAC, and fire protection systems of the building.

Areas with limited access or where the survey was limited to visual observation only:

- within enclosed pipe/duct chases
- inside mechanical equipment
- energized electrical equipment

2.2 Analytical Methodology

Ninety-nine (99) bulk samples were collected from twenty (20) homogeneous areas from B300 and submitted using COC procedures to Aerobiology. Bulk samples were analyzed by PLM using EPA Method 600/R-93/116 using stop positive methodology and PLM NOB with gravimetric reduction preparation method for analysis of Non-Friable Organically Bound (NOB) materials, as required by the State of Maine Department of Environmental Protection. Sampling locations are depicted in [Figures RBM-1, 2, 3, & 4](#).

2.3 ACM Results

The EPA, Occupational Safety and Health Administration (OSHA), and the Maine Department of Environmental Protection (Maine DEP) define any material that contains greater than or equal to one percent (>1%) asbestos as ACM. Three (3) of the materials sampled and analyzed by PLM as part of this survey effort were found to contain greater than or equal to one percent (>1%) ACM. Bulk Sample Results are provided in [Appendix A](#). The laboratory report and COC documentation are provided in [Appendix B](#).

Estimated quantities of materials identified as ACM during this survey are presented in Table 1.

TABLE 1 Estimated Quantities of Asbestos Containing Materials B300 Roof and HVAC Repair Kittery, ME				
Sample Location	Description of Material	Percent and Type of Asbestos	Estimated Quantity	
			Amount	Units
B300 Interior North, East, and West Sides: on HV6, HV7, HV8, HV9 and associated ducts	Gray Sealant*	.60% - 5% Chrysotile	650	LF
North, East, and West Sides: HV1, HV2, HV3, HV4, HV5, HV6, HV7 HV8 HV9, HV10, HV11 & HV12, behind fiberglass insulation on each HV system	Square Head Stick Pin Adhesive Associated with HV units	.65% - 30% Chrysotile	3,000	SF
B300 Interior North, East, and West Sides: DH3, HV5, and associated ducts	Red Sealant**	1.29% - 3.13% Chrysotile	50	LF
Notes: SF= Square Feet, LF= Linear Feet *all gray sealant is assumed to contain asbestos **all red sealant is assumed to contain asbestos				

3.0 LEAD, Cadmium, and Chromium CONTAINING PAINT SAMPLING

Lead, Cadmium, and Chromium sampling was conducted by collecting and analyzing paint chips from painted surfaces and systems that may be impacted by the planned renovation.

3.1 Sampling Methodology

Paint chip samples were collected using a sharp hand tool to score and peel paint off an approximate 1 square inch area of the substrate. Different tools such as chisels, putty knives, and hammers may also be needed in the collection of paint chips. All tools were cleaned after each sample to prevent cross contamination. Collected paint chip samples were submitted under COC procedures to an accredited laboratory and analyzed via flame atomic absorption (AA).

3.2 Analytical Methodology

The regulations addressing Lead, Cadmium, and Chromium in non-residential buildings are focused on occupational exposures involved with paint-disturbing activities and related waste-disposal activities. Occupational exposure to lead is regulated by OSHA regulation 29 CFR 1926.62, Lead in Construction, as well as other applicable state and local regulations.

A paint chip survey cannot determine a safe level of lead for the purpose of paint-disturbing/waste-disposal activities but is intended to provide guidance as to the locations of surfaces containing lead, cadmium, and hexavalent chromium.

Contractors may use this information to better determine where worker exposures to airborne lead and other hazards may occur. They can then assess the potential magnitude of exposure to their employees and identify the controls necessary to limit health risks. This information can also be used for pre-characterization of demolition waste streams prior to toxicity characteristic leaching procedure (TCLP) sampling in accordance with 40 CFR Part 261.

Twenty-nine (29) samples, each from a different homogenous areas were collected during this survey. Paint chip samples were submitted using COC procedures to Scientific Analytical Institute (SAI) for analysis. Analysis was conducted using EPA SW-846 Test Method 7000B: Flame Atomic Absorption Spectrophotometry and EPA SW-846 3050B: Inductively Coupled Plasma (ICP).

3.3 Sampling Results

OSHA regulations have no low-level threshold, therefore any result above the detection limit should be given proper consideration for worker safety and potential for risk. The results of this LCP sampling survey identify samples that indicate risk and are presented in Table 2. The laboratory report and COC documentation are provided in [Appendix C](#).

TABLE 2 Paint Chip Analytical Results B300 Roof and HVAC Repair Portsmouth Naval Shipyard, Kittery, ME					
Sample No.	Location	Substrate and Component	Color	Element	Result
					(% by weight)
Pb-01	First Floor Columns A2-A3	Concrete Wall	Tan	Pb	0.013%
				Cd	<0.00026
				Cr	0.0041%

TABLE 2 Paint Chip Analytical Results B300 Roof and HVAC Repair Portsmouth Naval Shipyard, Kittery, ME					
Sample No.	Location	Substrate and Component	Color	Element	Result
					(% by weight)
Pb-02	First Floor Column A5	Metal Column	Tan	Pb	0.026%
				Cd	0.00038%
				Cr	NA
Pb-03	First Floor Column A5	Concrete Floor	Gray	Pb	0.0080%
				Cd	<0.00044
				Cr	NA
Pb-04	First Floor Column A18	Metal Column	Tan	Pb	0.17%
				Cd	0.0026%
				Cr	NA
Pb-05	First Floor Column A17	Concrete Wall	Gray	Pb	0.0068%
				Cd	<0.00013%
				Cr	NA
Pb-06	First Floor Column A18	Metal Duct	Tan	Pb	0.079%
				Cd	0.00054%
				Cr	1.6%
Pb-07	First Floor Column B7	Metal Column	Tan	Pb	0.015%
				Cd	0.00043%
				Cr	NA
Pb-08	First Floor Column B8	Metal Duct	Tan	Pb	0.040%
				Cd	0.0011%
				Cr	5.0%
Pb-09	First Floor Column B15	Metal Column	Tan	Pb	0.024%
				Cd	0.00060%
				Cr	NA
Pb-10	First Floor Column B15	Metal Duct	Tan	Pb	0.032%
				Cd	<0.00013%
				Cr	0.0067%
Pb-11	First Floor Column C3	Concrete Block Wall	Tan	Pb	0.0072%
				Cd	0.00032%
				Cr	NA
Pb-12	First Floor Column D19	Metal Duct	Tan	Pb	0.015%
				Cd	0.00030%
				Cr	0.0030%
Pb-13	First Floor Column D10	Metal Column	Tan	Pb	0.032%
				Cd	0.00058%
				Cr	NA
Pb-14	First Floor Column D10	Metal Duct	Tan	Pb	0.016%
				Cd	0.0015%
				Cr	0.22%

TABLE 2 Paint Chip Analytical Results B300 Roof and HVAC Repair Portsmouth Naval Shipyard, Kittery, ME					
Sample No.	Location	Substrate and Component	Color	Element	Result
					(% by weight)
Pb-15	First Floor Columns E16-E17	Metal Duct	White	Pb	0.11%
				Cd	0.0016%
				Cr	1.3%
Pb-16	First Floor Column E16-E17	Concrete Floor	Red	Pb	0.10%
				Cd	0.0053%
				Cr	NA
Pb-17	First Floor Column E9	Metal Truss	Tan	Pb	0.092%
				Cd	NA
				Cr	NA
Pb-18	First Floor Column E9	Metal Duct	Tan	Pb	0.053%
				Cd	0.00031%
				Cr	0.39%
Pb-19	First Floor Column E9	Concrete Floor	Gray	Pb	0.0058%
				Cd	0.00029%
				Cr	NA
Pb-20	First Floor Column E3	Concrete Wall	Tan	Pb	0.0098%
				Cd	<0.000045
				Cr	NA
Pb-21	Second Floor Column D5	Metal Duct	Tan	Pb	0.080%
				Cd	NA
				Cr	NA
Pb-22	Second Floor Column D5	Concrete Floor	Gray	Pb	<0.0063%
				Cd	0.00069%
				Cr	NA
Pb-23	Second Floor Column 2.16	Metal Duct	Tan	Pb	0.11%
				Cd	0.00087%
				Cr	0.014%
Pb-24	Second Floor Column 2.16	Metal Wall	White	Pb	0.048%
				Cd	<0.00020
				Cr	NA
Pb-25	Second Floor Break Room	Gypsum Wall	Green	Pb	<0.0075%
				Cd	<0.000063
				Cr	NA
Pb-26	Second Floor Hall by Men's Room	Gypsum Wall	Blue	Pb	<0.0063%
				Cd	0.00013%
				Cr	NA
Pb-27	Catwalk - HV9	Metal Duct	Tan	Pb	0.0073%
				Cd	0.00022%
				Cr	0.45%

TABLE 2 Paint Chip Analytical Results B300 Roof and HVAC Repair Portsmouth Naval Shipyard, Kittery, ME					
Sample No.	Location	Substrate and Component	Color	Element	Result
					(% by weight)
Pb-28	Center Catwalk - HV5	Metal Truss	Tan	Pb	0.043%
				Cd	NA
				Cr	NA
Pb-29	Catwalk West Side	Metal Duct	Tan	Pb	0.17%
				Cd	0.00022%
				Cr	2.2%
Notes: NA= Not Analyzed					

4.0 DUST SAMPLING (RCRA 8 METALS)

Dust sampling for RCRA 8 metals was conducted by collecting and analyzing dust wipes from the interior, exterior, and on top of HVAC systems that may be impacted by the planned renovation.

4.1 Sampling Methodology

Dust wipe sampling for RCRA 8 metals was conducted on representative surface areas of the B300 ductwork utilizing a 10cm x 10cm template (100 square centimeters). Each sample was collected by wiping in a back and forth “S” pattern over a measured sampling area using a method approved “Ghost Wipe”. Then, the wipe was folded over itself, and the area was wiped again in a direction perpendicular to the first wipe orientation. The wipe sample was then placed into a labeled, clean bag for laboratory analysis. Samplers changed gloves between each sample. The proposed sampling scheme, the number of samples, the sample distribution and general methodology was developed by Mabbett and Associates and is documented in the Hazardous Materials Sampling plan. Specific sample locations were determined by field personnel while on-site prior to sample collection. Ducts were sampled approximately 10-15 feet off the ground and were accessed utilizing a step ladder and cordless drill. Samples were taken inside of the duct and directly off the duct grille.

4.2 Analytical Methodology

Dust samples were analyzed utilizing Inductively Coupled Plasma (ICP) NIOSH 7303/EPA SW-846 3050B and Cold Vapor Atomic Absorption OSHA ID -145. The purpose of this testing was to characterize the presence and concentration of RCRA 8 metals in areas of the building that may impact the project.

4.3 Dust Sampling Results

Any surfaces with heavy metal containing dust present should be managed in accordance with PNSY guidelines, PSHA worker safety rules, and State and EPA regulations. OSHA construction rules do not specify acceptable levels of heavy metals within dust for occupational exposure. Construction work involving heavy metals in dust must be completed in accordance with OSHA regulations. Contractors conducting work in areas where heavy metals are present should be notified, and proper work protocols should be used. Sampling yielded the following results presented in Table 3.

TABLE 3 RCRA 8 Metals Analytical Results B300 Roof and HVAC Repair Kittery, ME				
Sample No.	Description	Element	Symbol	Concentration (µg/ft ²)
DW-01	1st Floor Column A2 Inside Duct Dry (No Oil)	Silver	Ag	630
		Arsenic	As	<2.3
		Barium	Ba	280
		Cadmium	Cd	110
		Chromium	Cr	260
		Lead	Pb	930
		Selenium	Se	15

TABLE 3
RCRA 8 Metals Analytical Results
B300 Roof and HVAC Repair
Kittery, ME

Sample No.	Description	Element	Symbol	Concentration (µg/ft ²)
		Mercury	Hg	<0.69
DW-02	1st Floor Column A18 Inside Duct Dry (No Oil)	Silver	Ag	380
		Arsenic	As	<2.3
		Barium	Ba	570
		Cadmium	Cd	60.
		Chromium	Cr	1600
		Lead	Pb	1500
		Selenium	Se	43
		Mercury	Hg	<0.69
DW-03	1st Floor Column B9 Inside Duct Dry (No Oil)	Silver	Ag	1300
		Arsenic	As	<230
		Barium	Ba	4600
		Cadmium	Cd	690
		Chromium	Cr	1700
		Lead	Pb	1100
		Selenium	Se	<460
		Mercury	Hg	<0.69
DW-04	1st Floor Column B15 Inside Duct Dry (No Oil)	Silver	Ag	1300
		Arsenic	As	<2.3
		Barium	Ba	420
		Cadmium	Cd	390
		Chromium	Cr	640
		Lead	Pb	1800
		Selenium	Se	26
		Mercury	Hg	<0.69
DW-05	1st Floor Column C3 Outside Duct on Grille Dry (No Oil)	Silver	Ag	33
		Arsenic	As	<2.3
		Barium	Ba	320
		Cadmium	Cd	200
		Chromium	Cr	130
		Lead	Pb	160
		Selenium	Se	17
		Mercury	Hg	<0.69
DW-06	1st Floor Back Room Column D19 Inside Duct Dry (Oily)	Silver	Ag	30.
		Arsenic	As	<2.3
		Barium	Ba	360
		Cadmium	Cd	77
		Chromium	Cr	270

TABLE 3
RCRA 8 Metals Analytical Results
B300 Roof and HVAC Repair
Kittery, ME

Sample No.	Description	Element	Symbol	Concentration (µg/ft ²)
		Lead	Pb	320
		Selenium	Se	20.
		Mercury	Hg	<0.69
DW-07	1st Floor Column D10 Outside Duct on Grille Dry (No Oil)	Silver	Ag	210
		Arsenic	As	<2.3
		Barium	Ba	1800
		Cadmium	Cd	400
		Chromium	Cr	340
		Lead	Pb	420
		Selenium	Se	38
		Mercury	Hg	<0.69
DW-08	1st Floor Hydraulic Room Column E17 Inside Duct Fluffy (No Oil) Dry	Silver	Ag	98
		Arsenic	As	<230
		Barium	Ba	1600
		Cadmium	Cd	230
		Chromium	Cr	1100
		Lead	Pb	300
		Selenium	Se	<460
		Mercury	Hg	1.4
DW-09	1st Floor Column E9 Inside Duct Dry (No Oil)	Silver	Ag	490
		Arsenic	As	<23
		Barium	Ba	1900
		Cadmium	Cd	3300
		Chromium	Cr	1500
		Lead	Pb	2500
		Selenium	Se	<46
		Mercury	Hg	2.8
DW-10	1st Floor Main Walkway Column E3 Inside Horizontal Duct Dry (No Oil)	Silver	Ag	370
		Arsenic	As	<23
		Barium	Ba	3000
		Cadmium	Cd	1800
		Chromium	Cr	1600
		Lead	Pb	2400
		Selenium	Se	110
		Mercury	Hg	8.1
DW-11	2nd Floor Column D5 Inside Duct Dry (No Oil)	Silver	Ag	12
		Arsenic	As	<2.3
		Barium	Ba	420
		Cadmium	Cd	190
		Chromium	Cr	140

TABLE 3
RCRA 8 Metals Analytical Results
B300 Roof and HVAC Repair
Kittery, ME

Sample No.	Description	Element	Symbol	Concentration (µg/ft ²)
		Lead	Pb	86
		Selenium	Se	19
		Mercury	Hg	8.2
DW-12	2nd floor Room 220 Column 2.16 Inside Duct Dry (No Oil)	Silver	Ag	430
		Arsenic	As	<23
		Barium	Ba	3500
		Cadmium	Cd	320
		Chromium	Cr	6500
		Lead	Pb	830
		Selenium	Se	300
		Mercury	Hg	0.74
DW-13	2nd Floor Men's Room Duct Grille Outside Duct on Grille Dry (No Oil)	Silver	Ag	42
		Arsenic	As	<2.3
		Barium	Ba	770
		Cadmium	Cd	140
		Chromium	Cr	170
		Lead	Pb	150
		Selenium	Se	33
		Mercury	Hg	2.3
DW-14	Middle Catwalk HV6 Inside Air Handler Dry (No Oil)	Silver	Ag	90.
		Arsenic	As	<2.3
		Barium	Ba	710
		Cadmium	Cd	380
		Chromium	Cr	280
		Lead	Pb	380
		Selenium	Se	20
		Mercury	Hg	0.88
DW-15	Middle Catwalk HV5 Outside Duct Dry (No Oil)	Silver	Ag	370
		Arsenic	As	<23
		Barium	Ba	2600
		Cadmium	Cd	520
		Chromium	Cr	4000
		Lead	Pb	3300
		Selenium	Se	72
		Mercury	Hg	4.2

5.0 BUILDING MATERIAL PCB EVALUATION

Polychlorinated Biphenyls (PCBs) can be found in some common building materials manufactured during the 1950s, 1960s and 1970s. If PCB concentrations in building materials exceed regulatory thresholds, abatement is typically required when the use of PCBs in building materials is defined by the EPA to be an “unauthorized use”.

Disposal of materials with regulated concentrations of PCBs is governed by TSCA regulations. In many cases, if PCBs are discovered in building materials, a remediation work plan for these materials must be approved by the EPA prior to implementation. Based upon the age of the buildings, the building materials most likely to contain PCBs are window or other caulking materials, and waterproofing paints or sealants. PCBs in transformer fluid represent an authorized use under the TSCA regulations and must also be disposed of as PCB waste. Releases of transformer fluids to building materials must be assessed, and remediation plans developed and approved by the EPA prior to implementation.

Inspection and representative sampling of suspect building materials was conducted as part of this hazardous building materials survey. The survey for PCBs included the sampling of paint and mastic materials that may be impacted by the proposed work. Collected samples were submitted using COC procedures to Alpha. Analysis was conducted using Extraction Method EPA 3540C. Laboratory analytical reports are included in [Appendix E](#). Results of the PCB sampling are presented in Table 4.

TABLE 4 PCB Sampling Results B300 Roof and HVAC Repair Kittery, ME			
Sample No.	Sample Location	Description of Material	Total PCB Content (mg/kg)
PCB-01	Bay 3, Catwalk DH3	Red Sealant	ND
PCB-02	Bay 3, Catwalk by DH3	Tan Metal Duct Paint	0.481
PCB-03	Bay 2, Catwalk (West)	Tan Metal Duct Paint	0.93
PCB-04	Bay 1, Column 1A1	Tan Duct Paint	1.14
PCB-05	Bay 2, Column C18	Tan Duct Paint	0.744
PCB-06	Bay 3, Column D8	Tan Duct Paint	0.988
PCB-07	Bay 4, Room 3143	White Duct Paint	ND
PCB-08	Bay 5, Welders Room	Tan Wall Paint	2.89
Note: ND = None Detected			

The existing roof was replaced in 2006. Original roofing materials and coatings may be present that were not removed in 2006. The following materials require sampling, by the contractor, for asbestos and PCB if discovered during roof replacement and equipment removal; Existing insulated curb, if being removed or significantly disturbed evaluate if material requires testing for asbestos and PCBs, existing roof top ventilation unit, paint coatings must be evaluated for PCBs if being removed, existing adhesives or caulks associated with roofing insulation must be evaluated for asbestos and PCBs if being removed; existing flashings and any adhesives used to adhere to the original structure, existing coatings and paints on steel roof deck, paints on existing smoke and access hatches or new roof hatches and original mastics, if present, all must be evaluated for asbestos and PCBs if being disturbed or removed.

6.0 INVENTORY OF OTHER HAZARDOUS MATERIALS

A visual screening was conducted by Mabbett to identify quantities of universal waste and other potential hazardous materials in order to define an inventory of these materials for future relocation or disposal purposes. The survey included a visual estimation of the following suspect materials:

- Light Ballasts (associated with fluorescent light tubes)
- Light Tubes (e.g., fluorescent light tubes and HID lamps that may contain mercury or lead)
- Switches (i.e., mercury switches or gauges)

A summary of this visual inventory is presented in Table 5.

TABLE 5 Inventory of OHMs B300 Roof and HVAC Repair Kittery, ME		
Material	Quantity	Unit
First Floor		
4 - 2 Lamp Light Fixtures and Ballasts	523	EA
Fire Pull	3	EA
Fire Strobe	15	EA
Fire Extinguisher	10	EA
Halogen Hex Lights	3	EA
Second Floor		
4 - 2 Lamp Light Fixtures and Ballasts	68	EA
Fire Pull	2	EA
Fire Strobe	18	EA
Fire Extinguishers	16	EA
High Pressure Sodium Lights	12	EA
Exit Signs	4	EA
Notes: EA= Each		

7.0 RECOMMENDATIONS

This section presents a summary of the conclusions and recommendations from the pre-renovation hazardous building materials survey at the Portsmouth Naval Shipyard, B300. Prior to initiating plans for renovation activities, survey results for the Pre-Renovation Services presented herein should be reviewed to determine whether any of the identified regulated building materials will be disturbed by proposed work activities.

7.1 Asbestos

The planned renovation of B300 will disturb the ACM listed in Table 1 and will require removal of these materials by a licensed asbestos abatement contractor prior to being disturbed. The survey included accessible interior areas, the roof, and materials associated with the upgrades and repairs to the electrical, HVAC, and fire protection systems of the building. Any suspect materials encountered during renovation activities that were not identified in this report as being non-ACM should be assumed to be ACM unless sample results prove otherwise.

7.2 Paint

The purpose of the Lead, Cadmium, and Chromium screening survey was to identify patterns of lead, cadmium, and chromium containing paint. For the purpose of this screening survey a limited amount of representative interior building components were tested. The regulations addressing heavy metals in paint in non-residential buildings are focused on protecting workers involved with paint-disturbing activities and related waste-disposal activities.

Occupational exposure to lead in construction is regulated by OSHA regulation 29 CFR 1926.62 “Lead in Construction”, as well as other applicable state and local regulations. These regulations involve the air monitoring of workers to determine exposure levels when disturbing paint containing measurable concentrations of heavy metals. A paint chip survey cannot determine the safe level of lead for the purpose of paint-disturbing activities but is intended to provide guidance as to the locations of heavy metals in paint. Exposure to heavy metals may cause a wide range of health effects, from behavioral problems, learning disabilities, seizures, and death.

Employers and contractors may use this information to better determine where worker exposures to airborne heavy metals may occur and, through the interpretation of heavy metals concentration data, assess the potential magnitude of exposure to their employees and identify the controls necessary to limit health risk.

Representative samples of heavy metals waste to be generated during building renovation, or following demolition but prior to disposal, should be collected and analyzed using toxicity characteristic leaching procedure (TCLP) in accordance with 40 CFR Part 261. Management and disposal of lead containing waste must be done in accordance with all applicable local, state, and federal regulations. OSHA regulations may require certain procedures for any paint that contains heavy metals, even if it is below these levels. All materials identified, regardless of their heavy metals content, should either be sampled and analyzed by TCLP and then handled/disposed of accordingly, or segregated from other large-scale debris and then managed as hazardous waste in accordance with federal, state, and local hazardous waste disposal regulations.

7.3 Dust Sampling (RCRA 8 Metals)

Surfaces sampled contained varying amounts of lead, cadmium, chromium, and other hazardous metals that may be regulated by RCRA and OSHA when disturbed by renovation, alteration, repair, or demolitions activities. Thresholds, exposures, and engineering controls for cadmium, chromium, or other hazardous metals differ depending on factors including, but not limited to, whether paints are used in operational processes, are painted surfaces of building components or exterior coatings and are disturbed during construction activities. Most of the dust observed during sampling was observed to be non-oily. An image of the typical dust observed is provided in Appendix D. The sample collected at Column D19 was observed to be oily at the time of the investigation. No

other notable characteristics were observed during sampling efforts. When investigation, sampling, renovation, or demolition occurs, there are hazards associated with the generation of dust, debris, and fumes. The OSHA Standards cite requirements for work activities that can create an unsafe condition with regards to worker protection. These include, but are not limited to manual demolition, paint scraping, power tooling without dust collection, cleanup activities with dry abrasives, movement or removal of enclosures, abrasive blasting, welding, cutting, and burning on steel structures. Samples contained concentrations of RCRA 8 metals above laboratory reporting limits. Based on the dust wipes and lead sampling results and to limit personnel exposure to dust during duct removal activities a Mabbett's staff CIH believe that, while we can't say what the airborne concentrations of these metals will be during demolition, dust will present some hazards. Some recommendations that can be used in various combinations based on the chosen work will be the use of half-face respirators with P100 cartridges (purple) during activities where dust may be generated. Without conducting air sampling when the project starts, this would just cover the worst-case scenario of at least one metal's concentration would be above OSHA's PEL or any other government recommended levels. The use of HEPA-filtered vacuum cleaners to remove the dust without releasing back into the air and HEPA filtration for exhausted air. Wet methods for demolition, wetting the dust will keep most of it from becoming airborne. Sealing off the work area with appropriate sheeting (6-mil should be sufficient). After the work is completed, clean the area using wet mop methods and conduct clearance wipe sampling.


7.4 Polychlorinated Biphenyls


Materials containing PCBs were identified. None of the materials sampled contain greater than 50 parts per million PCB. These materials are considered non-TSCA regulated PCB Bulk Product Waste and to meet the TSCA Excluded PCB Product definition. Excluded PCB Product waste can be managed as solid waste at any landfill permitted to accept waste with PCB levels up to those observed.

7.5 Other Hazardous Materials

The purpose of the inventory for other hazardous materials as completed by Mabbett was to identify potential hazardous, and non-building material substances that may require special handling consideration prior to any planned building renovation. Mabbett identified items, that if removed, should be disposed of or recycled in accordance with applicable Federal and State rules for regulated materials. Examples of such materials are light ballasts and fluorescent light tubes.

FIGURES

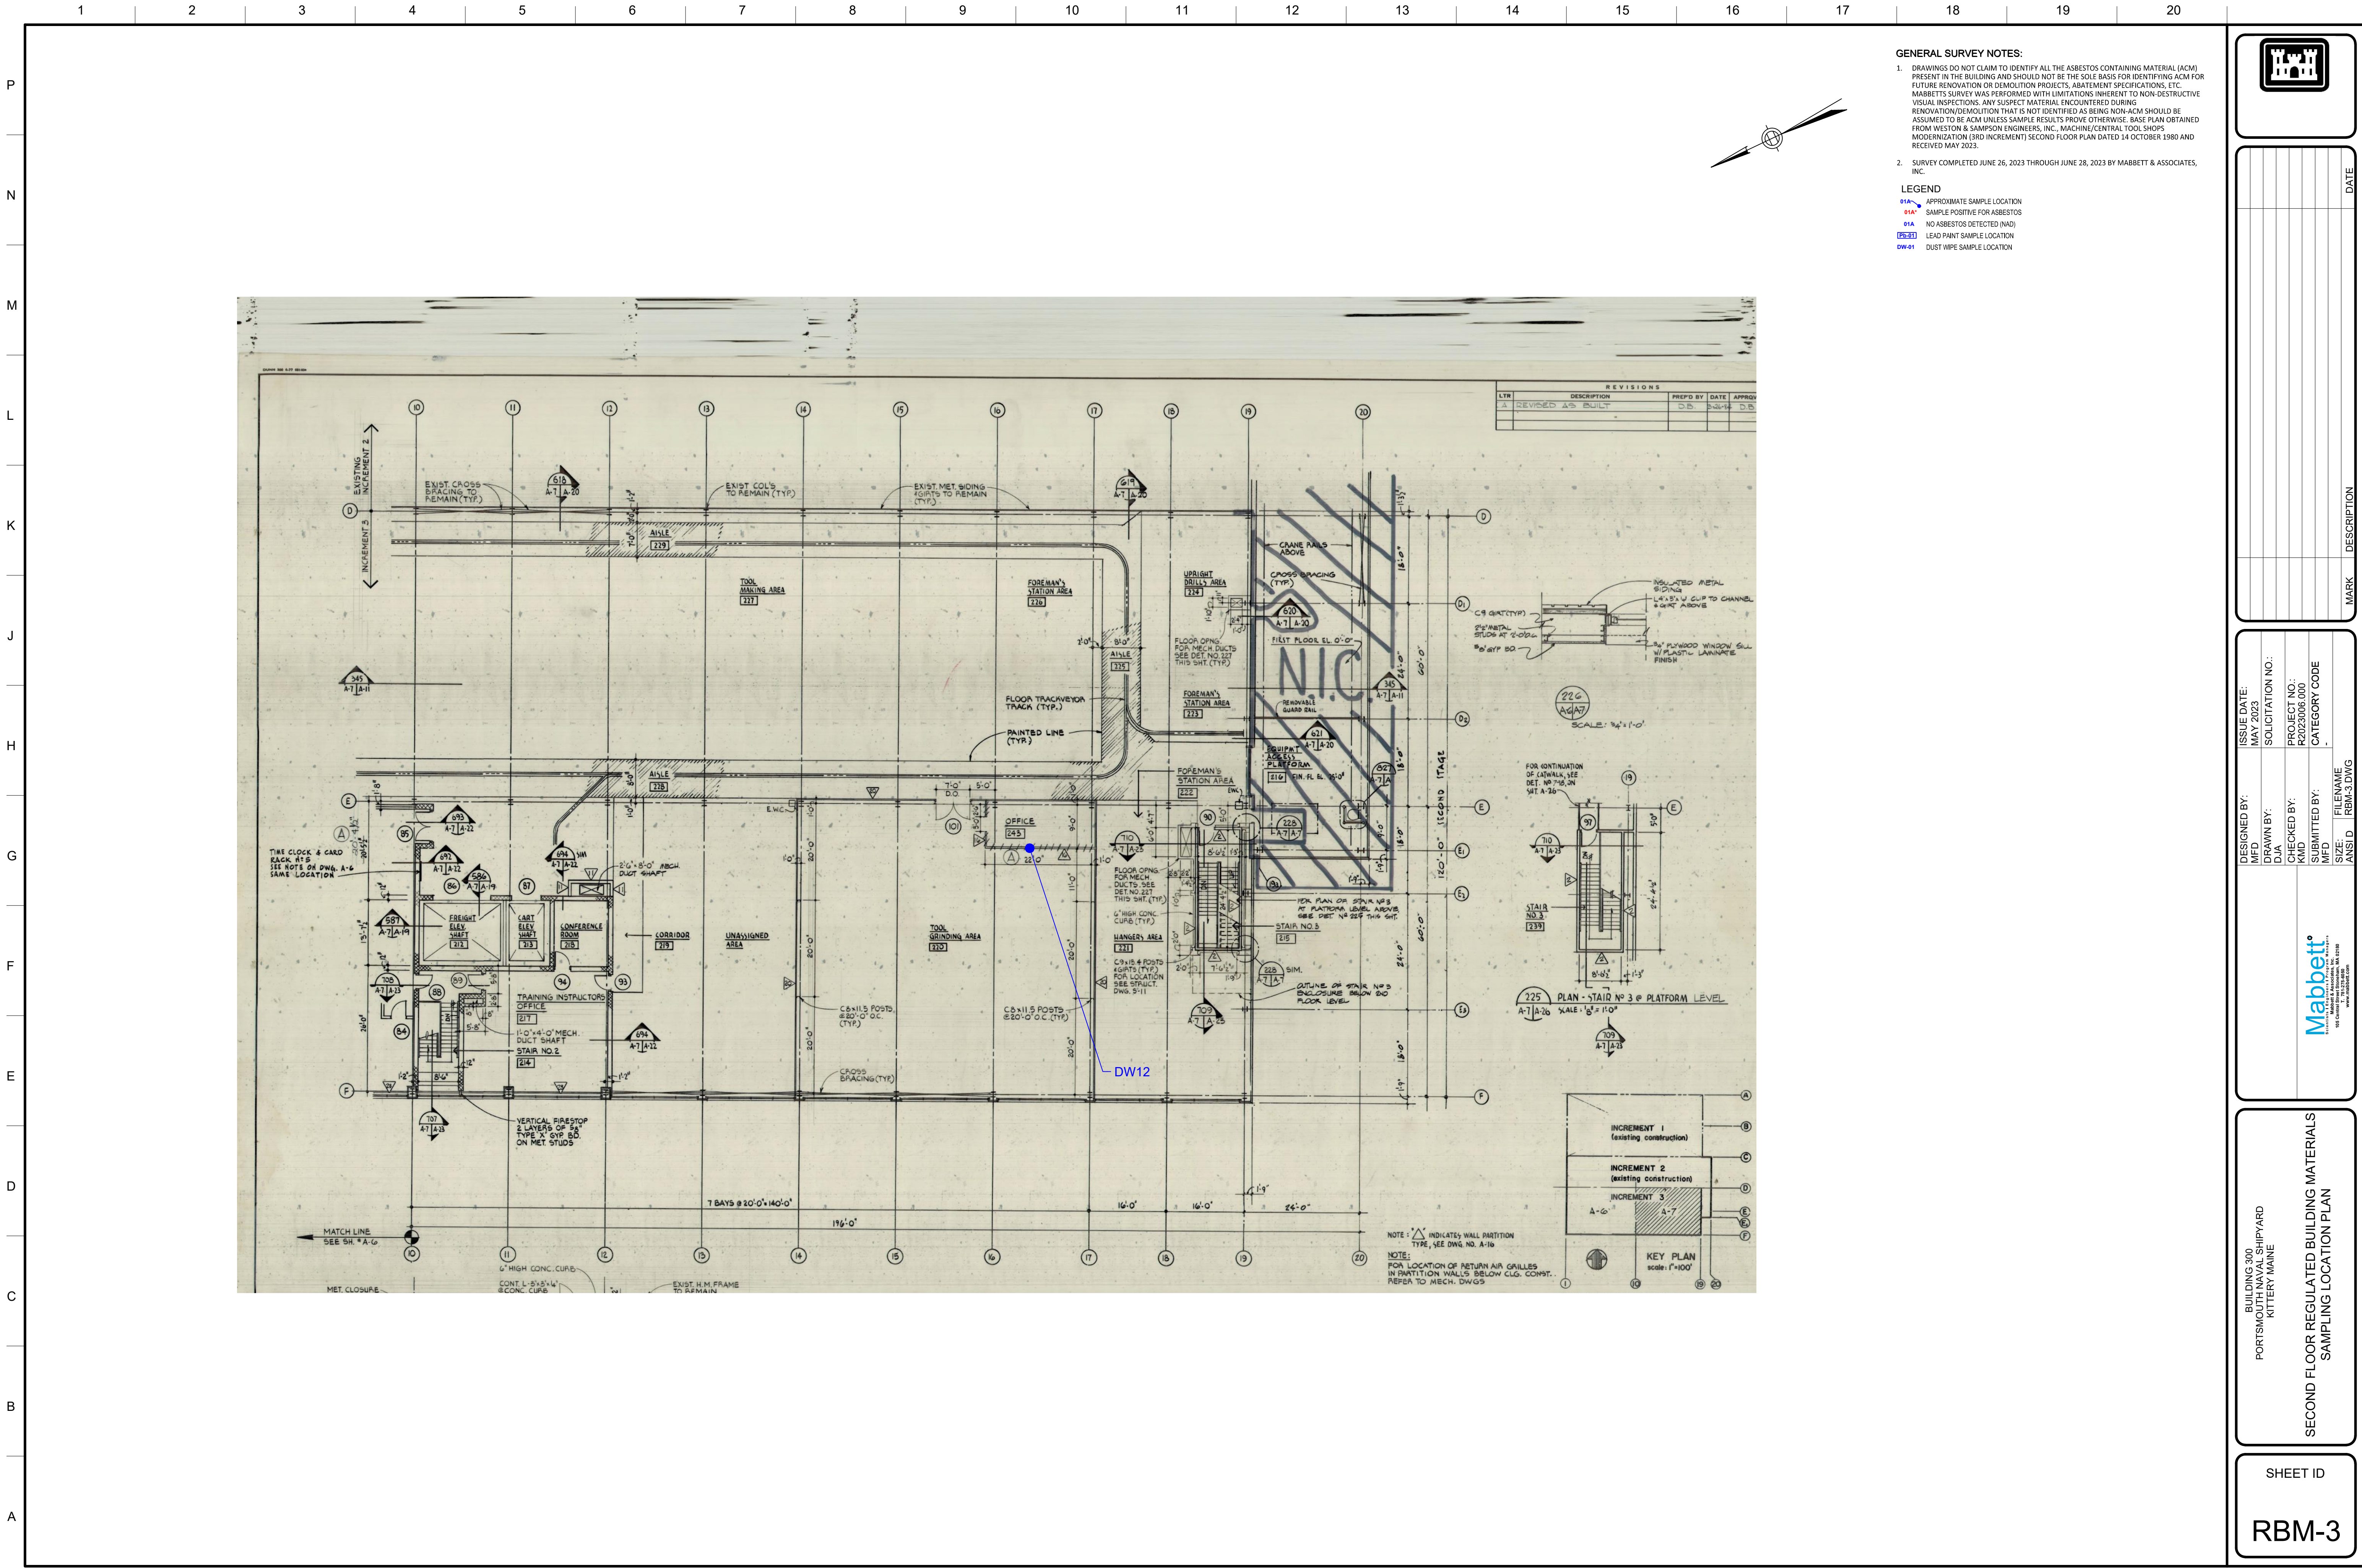

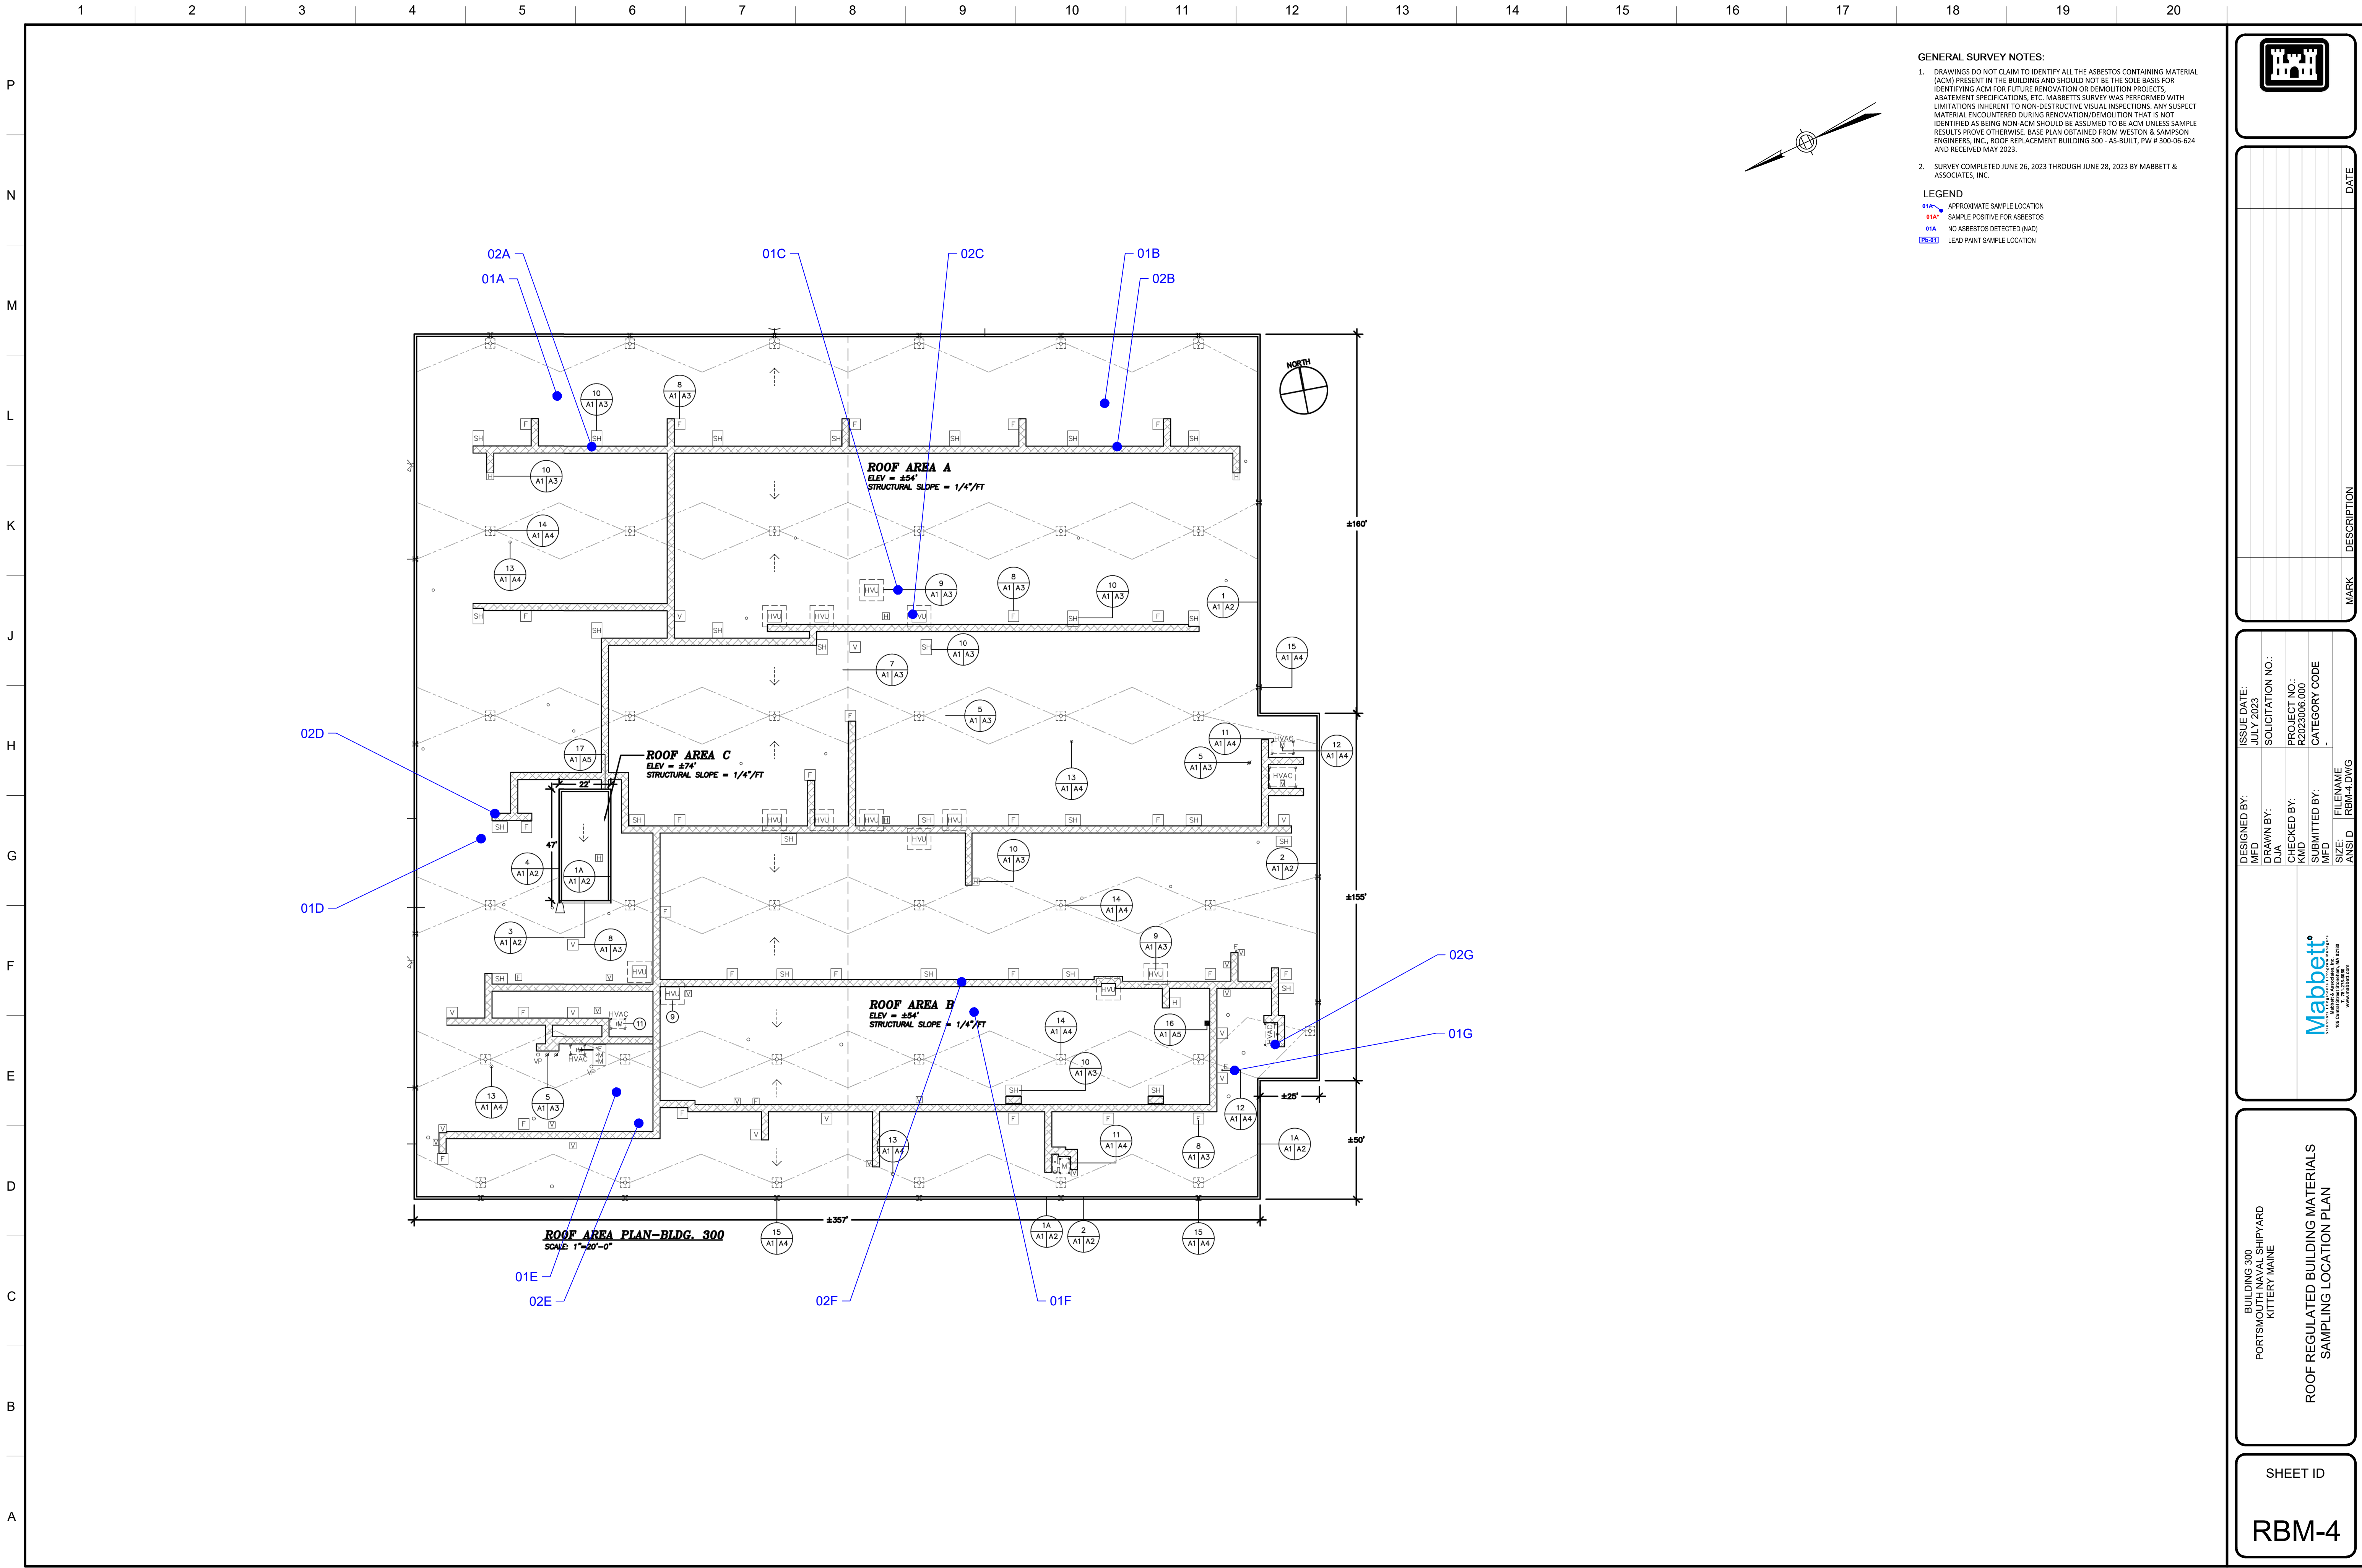

APPENDIX A

ACM Bulk Sample Results

Appendix A Asbestos Containing Material Bulk Sample Results B300 Roof and HVAC Repair Kittery, ME			
Sample No.	Sample Location	Description of Material	Percent and Type of Asbestos
01A	Roof Northwest	Roof Field Cut	NAD
01B	Roof Northeast	Roof Field Cut	NAD
01C	Roof North Center	Roof Field Cut	NAD
01D	Roof West Center	Roof Field Cut	NAD
01E	Roof Southwest	Roof Field Cut	NAD
01F	Roof South Center	Roof Field Cut	NAD
01G	Roof Southeast	Roof Field Cut	NAD
02A	Roof Northwest	Black Flashing	NAD
02B	Roof Northeast	Black Flashing	NAD
02C	Roof North Center	Black Flashing	NAD
02D	Roof West Center	Black Flashing	NAD
02E	Roof Southwest	Black Flashing	NAD
02F	Roof South Center	Black Flashing	NAD
02G	Roof Southeast	Black Flashing	NAD
03A	Center Catwalk HV6	Gray Sealant	5% Chrysotile
03B	Center Catwalk HV8	Gray Sealant	NAD
03C	Center Catwalk HV9	Gray Sealant	5% Chrysotile
04A	Center Catwalk HV5	Black Flex Connector	NAD
04B	Center Catwalk HV7	Black Flex Connector	NAD
04C	Center Catwalk HV8	Black Flex Connector	NAD
04D	Catwalk HV3	Black Flex Connector	NAD
04E	Catwalk HV4	Black Flex Connector	NAD
05A	Duct Above Catwalk Bay Door 2	Red Sealant	NAD
05B	Catwalk HV3	Red Sealant	NAD
05C	Catwalk HV5	Red Sealant	NAD
06A	Catwalk HV3	Stick Pin Adhesive	30% Chrysotile
06B	Catwalk HV4	Stick Pin Adhesive	30% Chrysotile
06C	Catwalk HV5	Stick Pin Adhesive	30% Chrysotile
07A	1st Floor Bathroom	Brown Sealant	NAD
07B	1st Floor Bathroom	Brown Sealant	NAD
07C	1st Floor Bathroom	Brown Sealant	NAD
08A	2nd Floor Main Office	Gray Sealant	NAD
08B	2nd Floor Vending Area	Gray Sealant	NAD
08C	2nd Floor Break Room	Gray Sealant	NAD
09A	Mezzanine Office	2' x 4' White Ceiling Tile Fissured	NAD

Appendix A Asbestos Containing Material Bulk Sample Results B300 Roof and HVAC Repair Kittery, ME			
Sample No.	Sample Location	Description of Material	Percent and Type of Asbestos
09B	Hall by Stairs at Mezzanine	2' x 4' White Ceiling Tile Fissured	NAD
09C	2nd Floor Hallway East	2' x 4' White Ceiling Tile Fissured	NAD
10A	2nd Floor Main Office	Gypsum Wallboard	NAD
10B	2nd Floor Vending Area	Gypsum Wallboard	NAD
10C	2nd Floor Hall by Shop Area	Gypsum Wallboard	NAD
11A	Main Office	Joint Compound	NAD
11B	2nd Floor Vending Area	Joint Compound	NAD
11C	2nd Floor Hall by Shop Area	Joint Compound	NAD
12A	1st Floor Column B10	Sprinkler Pipe Thread Sealant	NAD
12B	2nd Floor Hall at Main Office	Sprinkler Pipe Thread Sealant	NAD
12C	2nd Floor Break Room	Sprinkler Pipe Thread Sealant	NAD
12D	2nd Floor Hall at Shop	Sprinkler Pipe Thread Sealant	NAD
12E	Catwalk West Side	Sprinkler Pipe Thread Sealant	NAD
13A	2nd Floor Main Office	2' x 4' White Ceiling Tile Fissured 2	NAD
13B	2nd Floor Main Office	2' x 4' White Ceiling Tile Fissured 2	NAD
13C	2nd Floor Main Office	2' x 4' White Ceiling Tile Fissured 1	NAD
14A	Bay 2, DH1 (North)	Flex Connector	NAD
14B	Bay 2, DH2 (South)	Flex Connector	NAD
14C	Bay 3, DH3 (West)	Flex Connector	NAD
14D	Bay 2, HV1 (West)	Flex Connector	NAD
14E	Bay 2, HV2 (North)	Flex Connector	NAD
14F	Bay 2, HV3 (South)	Flex Connector	NAD
14G	Bay 2, HV4 (North)	Flex Connector	NAD
14H	Bay 3, HV5	Flex Connector	NAD
14I	Bay 3, HV6	Flex Connector	NAD
14J	Bay 3, HV7	Flex Connector	NAD
14K	Bay 3, HV8	Flex Connector	NAD
14L	Bay 3, HV9	Flex Connector	NAD
15A	Bay 2, HV1 (South)	Stick Pin Adhesive	27% Chrysotile
15B	Bay 2, HV2 (Southwest)	Stick Pin Adhesive	32.55% Chrysotile
15C	Bay 3, HV6	Stick Pin Adhesive	.68% Anthophyllite
15D	Bay 3, HV7 (North)	Stick Pin Adhesive	.67% Anthophyllite
15E	Bay 3, HV8	Stick Pin Adhesive	.65% Anthophyllite
15F	Bay 3, HV9 (North)	Stick Pin Adhesive	.68% Anthophyllite

Appendix A Asbestos Containing Material Bulk Sample Results B300 Roof and HVAC Repair Kittery, ME			
Sample No.	Sample Location	Description of Material	Percent and Type of Asbestos
16A	Ba 2, DH1 (North)	Red Sealant	NAD
16B	Bay 2, DH1 (North)	Red Sealant	NAD
16C	Bay2, DH1 (North)	Red Sealant	NAD
17A	Bay 2, DH2 (North)	Red Sealant	NAD
17B	Bay 2, DH2 (South)	Red Sealant	NAD
17C	Bay 2, DH2 (North)	Red Sealant	NAD
18A	Bay 3, DH3 (North)	Red Sealant	3.13% Chrysotile
18B	Bay 3, DH3 (South)	Red Sealant	2.90% Chrysotile
18C	Bay 3, DH3 (South)	Red Sealant	1.61% Chrysotile
19A	Bay 2, HV1 (North)	Red Sealant	NAD
19B	Bay 2, HV1 (South)	Red Sealant	NAD
19C	Bay 2, HV1 (West)	Red Sealant	NAD
20A	Bay 2, HV2 (North)	Red Sealant	NAD
20B	Bay 2, HV2 (South)	Red Sealant	NAD
20C	Bay 2, HV2 (West)	Red Sealant	NAD
21A	Bay 2, HV3 (North)	Red Sealant	NAD
21B	Bay 2, HV3 (South)	Red Sealant	NAD
21C	Bay 2, HV3 (West)	Red Sealant	NAD
22A	Bay 2, HV4 (North)	Red Sealant	NAD
22B	Bay 2, HV4 (South)	Red Sealant	NAD
22C	Bay 2, HV4 (West)	Red Sealant	NAD
23A	Bay 3, HV5 (North)	Red Sealant	1.29% Chrysotile
23B	Bay 3, HV5 (South)	Red Sealant	1.87% Chrysotile
23C	Bay 3, HV5 (West)	Red Sealant	1.95% Chrysotile
24A	Bay 3, HV7 (North)	Gray Sealant	.60% Chrysotile
24B	Bay 3, HV7 (North)	Gray Sealant	.86% Chrysotile
24C	Bay 3, HV7 (South)	Gray Sealant	1.63% Chrysotile
25A	Bay 3, HV8 (North)	Gray Sealant	1.22% Chrysotile
25B	Bay 3, HV8 (South)	Gray Sealant	.78% Chrysotile
25C	Bay 3, HV8 (West)	Gray Sealant	.70% Chrysotile
Notes: NAD = No Asbestos Detected			

APPENDIX B

Summary of ACM Sampling Results (Example of title for Appendix)

Mike Delaney
Mabbett & Associates, Inc.
105 Central Street
Suite 4100
Stoneham, MA 02180

October 18, 2023

Dear Mike Delaney,

The enclosed analytical results have been obtained using PLM NOB- EPA 600/R-93/116 PLM Method, with gravimetric reduction preparation method for analysis of Non Friable Organically Bound (NOB) materials.

The enclosed results may not be used under any circumstances as product endorsement by the state of Maine, any US government agency or NVLAP.

The Quality Control data related to the samples analyzed is available upon written request from the client.

Aerobiology Laboratory Associates Inc. assumes no responsibility for potential sample contamination occurred during sample collection or erroneous data provided by the client.

All Laboratory records are retained for at least three years unless otherwise directed in writing by the client. The actual samples are retained for a period of 60 days.

All analytical results and records are considered strictly confidential and will not be released under any circumstances to anyone except the actual client.

The analytical results included in this report apply only to the items tested.

This report may not be reproduced, except in its entirety, without the permission of Aerobiology Laboratory Associates Inc. Laboratory Manager.

If you have any questions, please contact the Laboratory Manager or Laboratory Director.

Sincerely,



Aimee Cormier, Laboratory Manager

LAB BATCH ID: N134573

CLIENT PROJECT ID: R2023006.000

CLIENT REF: PNY – B-300

CT ID# PH-0209; MA ID# AA000156; ME ID# LB-055; ME ID# LA-056; NVLAP Lab Code 200090-0; RI ID

Aerobiology Laboratory Associates, Inc

Client #: 1787
 Client Project: R2023006.000
 Client Reference: PNY - B-300
 Client Name: Mabbett & Associates, Inc.
 Method: NY ELAP Method For The Analysis of Non Friable Organically Bound Materials

Batch: N 134573
 Date Sampled: 10/12/2023
 Date Received: 10/13/2023
 Date Analyzed: 10/18/2023
 Date of Report: 10/18/2023

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515540	14A	Tan	.1281	.00	.00	.00	.00	.00	.00	81.42	18.35	.00	.23
Description: Flex Connector													
Location: Bay 2, DH1 (North)													
Comments:													
											Analyzed / Charged :		Yes
											Prepped / Charged :		No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.	
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite					
N1515541	14B	Tan	.1023	.00	.00	.00	.00	.00	.00	80.25	18.87	.00	.88	
Description: Flex Connector														
Location: Bay 2, DH2 (South)												Analyzed / Charged :		Yes
Comments:												Prepped / Charged :		No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515542	14C	Gray	.1688	.00	.00	.00	.00	.00	.00	27.96	9.83	.00	62.21
Description: Flex Connector													
Location: Bay 3, DH3 (West)													
Comments:													
											Analyzed / Charged :		Yes
											Prepped / Charged :		No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515543	14D	Gray	.1208	.00	.00	.00	.00	.00	.00	79.22	16.31	.00	4.47
Description: Flex Connector													
Location: Bay 2, HV1 (West)											Analyzed / Charged :		Yes
Comments:											Prepped / Charged :		No

Aerobiology Laboratory Associates, Inc

Client #: 1787
 Client Project: R2023006.000
 Client Reference: PNY - B-300
 Client Name: Mabbett & Associates, Inc.
 Method: NY ELAP Method For The Analysis of Non Friable Organically Bound Materials

Batch: N 134573
 Date Sampled: 10/12/2023
 Date Received: 10/13/2023
 Date Analyzed: 10/18/2023
 Date of Report: 10/18/2023

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515544	14E	Gray	.1390	.00	.00	.00	.00	.00	.00	79.06	19.64	.00	1.30
Description: Flex Connector													
Location: Bay 2, HV2 (North)												Analyzed / Charged : Yes	
Comments:												Prepped / Charged : No	

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515545	14F	Tan	.1608	.00	.00	.00	.00	.00	.00	79.54	19.71	.00	.75
Description: Flex Connector													
Location: Bay 2, HV3 (South)												Analyzed / Charged : Yes	
Comments:												Prepped / Charged : No	

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515546	14G	Gray	.3623	.00	.00	.00	.00	.00	.00	80.29	19.10	.00	.61
Description: Flex Connector													
Location: Bay 2, HV4 (North)												Analyzed / Charged : Yes	
Comments:												Prepped / Charged : No	

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515547	14H	Multi	.1362	.00	.00	.00	.00	.00	.00	11.82	.59	.00	87.59
Description: Flex Connector													
Location: Bay 3, HV5												Analyzed / Charged : Yes	
Comments:												Prepped / Charged : No	

Aerobiology Laboratory Associates, Inc

Client #: 1787
 Client Project: R2023006.000
 Client Reference: PNY - B-300
 Client Name: Mabbett & Associates, Inc.
 Method: NY ELAP Method For The Analysis of Non Friable Organically Bound Materials

Batch: N 134573
 Date Sampled: 10/12/2023
 Date Received: 10/13/2023
 Date Analyzed: 10/18/2023
 Date of Report: 10/18/2023

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515548	14I	Gray	.2030	.00	.00	.00	.00	.00	.00	36.70	5.57	.00	57.73
Description: Flex Connector										Analyzed / Charged : Yes			
Location: Bay 3, HV6										Prepped / Charged : No			
Comments:													

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515549	14J	Gray	.1086	.00	.00	.00	.00	.00	.00	36.10	38.86	.00	25.04
Description: Flex Connector										Analyzed / Charged : Yes			
Location: Bay 3, HV7										Prepped / Charged : No			
Comments:													

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515550	14K	Gray	.1753	.00	.00	.00	.00	.00	.00	26.30	6.56	.00	67.14
Description: Flex Connector										Analyzed / Charged : Yes			
Location: Bay 3, HV8										Prepped / Charged : No			
Comments:													

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515551	14L	Gray	.1010	.00	.00	.00	.00	.00	.00	37.82	3.56	.00	58.62
Description: Flex Connector										Analyzed / Charged : Yes			
Location: Bay 3, HV9										Prepped / Charged : No			
Comments:													

Aerobiology Laboratory Associates, Inc

Client #: 1787
 Client Project: R2023006.000
 Client Reference: PNY - B-300
 Client Name: Mabbett & Associates, Inc.
 Method: NY ELAP Method For The Analysis of Non Friable Organically Bound Materials

Batch: N 134573
 Date Sampled: 10/12/2023
 Date Received: 10/13/2023
 Date Analyzed: 10/18/2023
 Date of Report: 10/18/2023

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515552	15A	Gray	.0536	27.43	.00	.00	.00	.00	.00	33.77	33.96	27.43	4.84
Description: Stick Pin Adhesive Location: Bay 2, HV1 (South) Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515553	15B	Gray	.0927	32.55	.00	.00	.00	.00	.00	42.83	18.88	32.55	5.74
Description: Stick Pin Adhesive Location: Bay 2, HV2 (Southwest) Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515554	15C	Gray	.2709	.00	.00	.00	.00	.68	.00	59.43	6.61	.68	33.28
Description: Stick Pin Adhesive Location: Bay 3, HV6 Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515555	15D	Gray	.2931	.00	.00	.00	.00	.67	.00	60.49	6.00	.67	32.84
Description: Stick Pin Adhesive Location: Bay 3, HV7 (North) Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

Aerobiology Laboratory Associates, Inc

Client #: 1787
 Client Project: R2023006.000
 Client Reference: PNY - B-300
 Client Name: Mabbett & Associates, Inc.
 Method: NY ELAP Method For The Analysis of Non Friable Organically Bound Materials

Batch: N 134573
 Date Sampled: 10/12/2023
 Date Received: 10/13/2023
 Date Analyzed: 10/18/2023
 Date of Report: 10/18/2023

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515556	15E	Gray	.2536	.00	.00	.00	.00	.65	.00	57.77	9.70	.65	31.88
Description: Stick Pin Adhesive													
Location: Bay 3, HV8													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515557	15F	Gray	.2712	.00	.00	.00	.00	.68	.00	61.10	5.13	.68	33.09
Description: Stick Pin Adhesive													
Location: Bay 3, HV9 (North)													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515558	16A	Pink	.0910	.00	.00	.00	.00	.00	.00	90.55	6.59	.00	2.86
Description: Red Duct Sealant													
Location: Bay 2, DH1 (North)													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515559	16B	Red	.2822	.00	.00	.00	.00	.00	.00	92.70	2.37	.00	4.93
Description: Red Duct Sealant													
Location: Bay 2, DH1 (North)													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

Aerobiology Laboratory Associates, Inc

Client #: 1787
 Client Project: R2023006.000
 Client Reference: PNY - B-300
 Client Name: Mabbett & Associates, Inc.
 Method: NY ELAP Method For The Analysis of Non Friable Organically Bound Materials

Batch: N 134573
 Date Sampled: 10/12/2023
 Date Received: 10/13/2023
 Date Analyzed: 10/18/2023
 Date of Report: 10/18/2023

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515560	16C	Red	.3960	.00	.00	.00	.00	.00	.00	88.81	5.98	.00	5.21
Description: Red Duct Sealant													
Location: Bay 2, DH1 (North)													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515561	17A	Red	.0577	.00	.00	.00	.00	.00	.00	74.70	23.22	.00	2.08
Description: Red Duct Sealant													
Location: Bay 2, DH2													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515562	17B	Red	.0792	.00	.00	.00	.00	.00	.00	86.62	10.48	.00	2.90
Description: Red Duct Sealant													
Location: Bay 2, DH2													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515563	17C	Red	.0490	.00	.00	.00	.00	.00	.00	88.37	9.18	.00	2.45
Description: Red Duct Sealant													
Location: Bay 2, DH2													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

Aerobiology Laboratory Associates, Inc

Client #: 1787
 Client Project: R2023006.000
 Client Reference: PNY - B-300
 Client Name: Mabbett & Associates, Inc.
 Method: NY ELAP Method For The Analysis of Non Friable Organically Bound Materials

Batch: N 134573
 Date Sampled: 10/12/2023
 Date Received: 10/13/2023
 Date Analyzed: 10/18/2023
 Date of Report: 10/18/2023

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515564	18A	Red	.1240	3.13	.00	.00	.00	.00	.00	61.21	17.90	3.13	17.76
Description: Red Duct Sealant													
Location: Bay 3, DH3													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515565	18B	Red	.1860	2.90	.00	.00	.00	.00	.00	46.34	24.62	2.90	26.14
Description: Red Duct Sealant													
Location: Bay 3, DH3													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515566	18C	Red	.1866	1.61	.00	.00	.00	.00	.00	62.65	21.22	1.61	14.52
Description: Red Duct Sealant													
Location: Bay 3, DH3													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515567	19A	Red	.1860	.00	.00	.00	.00	.00	.00	91.72	4.68	.00	3.60
Description: Red Duct Sealant													
Location: Bay 2, HV1													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

Aerobiology Laboratory Associates, Inc

Client #: 1787
 Client Project: R2023006.000
 Client Reference: PNY - B-300
 Client Name: Mabbett & Associates, Inc.
 Method: NY ELAP Method For The Analysis of Non Friable Organically Bound Materials

Batch: N 134573
 Date Sampled: 10/12/2023
 Date Received: 10/13/2023
 Date Analyzed: 10/18/2023
 Date of Report: 10/18/2023

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515568	19B	Red	.0615	.00	.00	.00	.00	.00	.00	95.12	.33	.00	4.55
Description: Red Duct Sealant													
Location: Bay 2, HV1													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515569	19C	Red	.0910	.00	.00	.00	.00	.00	.00	79.67	13.30	.00	7.03
Description: Red Duct Sealant													
Location: Bay 2, HV1													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515570	20A	Red	.0443	.00	.00	.00	.00	.00	.00	95.49	1.81	.00	2.70
Description: Red Duct Sealant													
Location: Bay 2, HV2													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515571	20B	Red	.0763	.00	.00	.00	.00	.00	.00	94.50	1.70	.00	3.80
Description: Red Duct Sealant													
Location: Bay 2, HV2													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

Aerobiology Laboratory Associates, Inc

Client #: 1787
 Client Project: R2023006.000
 Client Reference: PNY - B-300
 Client Name: Mabbett & Associates, Inc.
 Method: NY ELAP Method For The Analysis of Non Friable Organically Bound Materials

Batch: N 134573
 Date Sampled: 10/12/2023
 Date Received: 10/13/2023
 Date Analyzed: 10/18/2023
 Date of Report: 10/18/2023

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515572	20C	Red	.1162	.00	.00	.00	.00	.00	.00	93.89	1.89	.00	4.22
Description: Red Duct Sealant													
Location: Bay 2, HV2													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515573	21A	Red	.1331	.00	.00	.00	.00	.00	.00	93.61	2.03	.00	4.36
Description: Red Duct Sealant													
Location: Bay 2, HV3													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515574	21B	Red	.1203	.00	.00	.00	.00	.00	.00	91.60	4.82	.00	3.58
Description: Red Duct Sealant													
Location: Bay 2, HV3													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515575	21C	Red	.1233	.00	.00	.00	.00	.00	.00	97.24	.08	.00	2.68
Description: Red Duct Sealant													
Location: Bay 2, HV3													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

Aerobiology Laboratory Associates, Inc

Client #: 1787
 Client Project: R2023006.000
 Client Reference: PNY - B-300
 Client Name: Mabbett & Associates, Inc.
 Method: NY ELAP Method For The Analysis of Non Friable Organically Bound Materials

Batch: N 134573
 Date Sampled: 10/12/2023
 Date Received: 10/13/2023
 Date Analyzed: 10/18/2023
 Date of Report: 10/18/2023

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515576	22A	Red	.1566	.00	.00	.00	.00	.00	.00	93.10	1.34	.00	5.56
Description: Red Duct Sealant										Analyzed / Charged : Yes			
Location: Bay 2, HV4										Prepped / Charged : No			
Comments:													

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515577	22B	Red	.2232	.00	.00	.00	.00	.00	.00	94.00	1.43	.00	4.57
Description: Red Duct Sealant										Analyzed / Charged : Yes			
Location: Bay 2, HV4										Prepped / Charged : No			
Comments:													

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515578	22C	Red	.4710	.00	.00	.00	.00	.00	.00	93.91	1.57	.00	4.52
Description: Red Duct Sealant										Analyzed / Charged : Yes			
Location: Bay 2, HV4										Prepped / Charged : No			
Comments:													

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515579	23A	Gray	.1715	1.29	.00	.00	.00	.00	.00	52.01	4.90	1.29	41.80
Description: Red Duct Sealant										Analyzed / Charged : Yes			
Location: Bay 3, HV5										Prepped / Charged : No			
Comments:													

Aerobiology Laboratory Associates, Inc

Client #: 1787
 Client Project: R2023006.000
 Client Reference: PNY - B-300
 Client Name: Mabbett & Associates, Inc.
 Method: NY ELAP Method For The Analysis of Non Friable Organically Bound Materials

Batch: N 134573
 Date Sampled: 10/12/2023
 Date Received: 10/13/2023
 Date Analyzed: 10/18/2023
 Date of Report: 10/18/2023

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515580	23B	Gray	.1686	1.87	.00	.00	.00	.00	.00	53.14	9.49	1.87	35.50
Description: Red Duct Sealant										Analyzed / Charged : Yes			
Location: Bay 3, HV5										Prepped / Charged : No			
Comments:													

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515581	23C	Gray	.4287	1.95	.00	.00	.00	.00	.00	54.56	6.41	1.95	37.08
Description: Red Duct Sealant										Analyzed / Charged : Yes			
Location: Bay 3, HV5										Prepped / Charged : No			
Comments:													

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515582	24A	Gray	.0618	.60	.00	.00	.00	.00	.00	56.96	13.11	.60	29.33
Description: Gray Duct Sealant										Analyzed / Charged : Yes			
Location: Bay 3, HV7										Prepped / Charged : No			
Comments:													

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515583	24B	Gray	.1233	.86	.00	.00	.00	.00	.00	56.85	.08	.86	42.21
Description: Gray Duct Sealant										Analyzed / Charged : Yes			
Location: Bay 3, HV7										Prepped / Charged : No			
Comments:													

Aerobiology Laboratory Associates, Inc

Client #: 1787
 Client Project: R2023006.000
 Client Reference: PNY --B-300
 Client Name: Mabbett & Associates, Inc.
 Method: NY ELAP Method For The Analysis of Non Friable Organically Bound Materials

Batch: N 134573
 Date Sampled: 10/12/2023
 Date Received: 10/13/2023
 Date Analyzed: 10/18/2023
 Date of Report: 10/18/2023

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515584	24C	Gray	.2663	1.63	.00	.00	.00	.00	.00	56.40	2.85	1.63	39.12
Description: Gray Duct Sealant										Analyzed / Charged : Yes			
Location: Bay 3, HV7										Prepped / Charged : No			
Comments:													

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515585	25A	Gray	.0616	1.22	.00	.00	.00	.00	.00	55.84	3.41	1.22	39.53
Description: Gray Duct Sealant										Analyzed / Charged : Yes			
Location: Bay 3, HV8										Prepped / Charged : No			
Comments:													

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515586	25B	Gray	.0441	.78	.00	.00	.00	.00	.00	60.32	.91	.78	37.99
Description: Gray Duct Sealant										Analyzed / Charged : Yes			
Location: Bay 3, HV8										Prepped / Charged : No			
Comments:													

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1515587	25C	Gray	.0804	.70	.00	.00	.00	.00	.00	57.84	7.09	.70	34.37
Description: Gray Duct Sealant										Analyzed / Charged : Yes			
Location: Bay 3, HV8										Prepped / Charged : No			
Comments:													


 Thomas Pickett, Analyst

Aerobiology Laboratory Associates, Inc.

22 Cummings Park, Woburn, MA 01801 T: 781-935-3212 F: 781-932-4857 boston@aerobiology.net
www.aerobiology.net

TAT

(circle one)

3 Hours 6 Hours Same Day Next Day

2 Days 3 Days 5 Days Other

TAT in bus. days - lab approval required for rush analysis

ALAI Batch #

B134573

Client: Mabbett & Assoc. Inc.

Address: 105 Central St. - Suite 4100
Stoneham, MA 02180

Project #: R2023006.000 PO: _____

Project Site: PNY - B-300

Contact: Mike Delaney

Tel. / Fax #: (781) 275-6050

Email: delaney@mabbett.com

PLM

Chain of Custody

Stop on first positive*: ☒ Yes ☐ No

If no selection is made the lab will analyze all samples

Relinquished By: Kevin Donnan Date/Time: 10/13/23

Received By Lab: Paola Leal-Lopez Date/Time: 10/13/23 9:50

Shaded area for lab use only.

Due Date: _____

of Samples Received: 48

Station #: _____

Results: email fax verbal By: _____ Date: _____

Analyst / Date: E 10-18-23 QC by / Date: _____

			Stereo Scope					Optical Properties					RI		Asbestos Percentage (%)						Non Asbestos Percentage (%)						
Sample ID	Date Sampled	Description / Location	SSAPE	Color	Homogeneity	Texture	Friable	Morphology	Extinction	Sign of Elongation	Birefringence	Pleochroism		⊥	Circle Type						Fiberglass	Mineral Wool	Cellulose	Hair	Synthetic	Other	Non Fibrous
															Chrysotile	Amosite	Crocidolite	Tremolite	Anthophyllite	Actinolite							
14A	10/12/23	Flex Connector Bay 2 DH1 (north)	0	T	Y																						100
14B		Bay 2 DH2 (south)	0	T	Y																						100
14C		Bay 3 DH3 (west)	0	G	Y														F	45	Fw	5					50
14D		Bay 2 HV1 (west)	0	G	Y																Fw	2					98
14E		Bay 2 HV2 (north)	0	G	Y														F	2							98
14F	✓	Bay 2 HV3 (south)	0	T	Y														F	2							98

Comments: Birefringence L= less than .010, M= .01-.050, H= greater than .05;

Lab uses the EPA or ELAP point count method as appropriate. SSAPE = Stereo Scope Asb. % Est.

Aerobiology Laboratory Associates, Inc.

22 Cummings Park, Woburn, MA 01801 T: 781-935-3212 F: 781-932-4857 boston@aerobiology.net
www.aerobiology.net

Customer Name: Mabbett & Assoc. Inc.

ALAI Batch #

Project Name/ #: PNY - Bldg #300

3134573

QC by:

Date QC:

Analyzed by:

Date Analyzed:

Sample ID	Date Sampled	Description / Location	SSAPE	Color	Homogeneity	Texture	Friable	Morphology	Extinction	Sign of Elongation	Birefringence	Pleochroism		⊥	Circle Type						Fiberglass	Mineral Wool	Cellulose	Hair	Synthetic	Other	Non Fibrous
															Chrysotile	Amosite	Crocidolite	Tremolite	Anthophyllite	Actinolite							
14G	10/12/23	Flex Connector Bay 2 HV4 (north)	0	F	Y																I		W				96
14H		Bay 3 HV5	0	M	Y																I						25
14I		Bay 3 HV6	0	F	Y																I						25
14J		Bay 3 HV7	0	F	Y																I						45
14K		Bay 3 HV8	0	G	Y																I						60
14L		Bay 3 HV9	0	G	Y																I						35
15A		Stick Pin Adhesive Bay 2 HV1 (south)	50	G	Y			W		+	L	N	1.553	1.550	85												15
15B		Bay 2 HV2 (SW)	50	G	Y			W		+	L	N	1.553	1.550	85												15
15C		Bay 3 HV6	0	F	Y			W	L	+		M	N	1.623	1.605				2		I						68
15D		Bay 3 HV7 (north)	0	F	Y			W	L	+		M	N	1.623	1.605				2		I						68

Comments: Birefringence L= less than .010, M= .01-.050, H= greater than .05: Microscope circle 1: BH-2 - 229027, 235000, 231856, Zeiss - 3352010013

Lab uses the EPA or ELAP point count method as appropriate. SSAPE = Stereo Scope Asb. % Est.

ver 4.10 Updated 01/12/22

Each layer of multilayered materials are analyzed and charged individually (per NESHAP/EPA).

Page 2 Of 6

Aerobiology Laboratory Associates, Inc.

22 Cummings Park, Woburn, MA 01801 T: 781-935-3212 F: 781-932-4857 boston@aerobiology.net
www.aerobiology.net

Customer Name: Mabbett & Assoc Inc

ALAI Batch #

Project Name/ #: PNY - Bldg #300

3134573

QC by:

Date QC:

Analyzed by:

Date Analyzed:

Sample ID	Date Sampled	Description / Location	SSAPE	Color	Homogeneity	Texture	Friable	Morphology	Extinction	Sign of Elongation	Birefringence	Pleochroism		⊥	Circle Type					Fiberglass	Mineral Wool	Cellulose	Hair	Synthetic	Other	Non Fibrous		
															Chrysotile	Amosite	Crocidolite	Tremolite	Anthophyllite								Actinolite	
15 E	10/12/23	Stick Pin Adhesive Bay 3 HV8	0	G	Y			M		+	M	N	1.123	1.605					2		7							68
15 F		Bay 3 HV9 (north)	0	G	Y			M		+	M	N	1.123	1.605					2		7							68
16 A		Red Duct Sealant Bay 2 DH1 (North)	0	R	Y																						100	
16 B			0	R	Y																						100	
16 C			0	R	Y																						100	
17 A		Red Duct Sealant Bay 2 DH2	0	R	Y																						100	
17 B			0	R	Y																						100	
17 C			0	R	Y																						100	
18 A		Red Duct Sealant Bay 3 DH3	0	R	Y			W		+	L	N	1.553	1.550	15												85	
18 B			0	R	Y			W		+	L	N	1.553	1.550	10												90	

Comments: Birefringence L= less than .010, M= .01-.050, H= greater than .05; Microscope circle 1: BH-2 - 229027, 235000, 231856, Zeiss - 3352010013

Lab uses the EPA or ELAP point count method as appropriate. SSAPE = Stereo Scope Asb. % Est.

ver 4.10 Updated 01/12/22

Each layer of multilayered materials are analyzed and charged individually (per NESHAP/EPA).

Page 3 Of 6

TAT

3 Hours 6 Hours Same Day Next Day

2 Days 3 Days 5 Days Other

B134573

PASI Batch #

Sample ID	Date Sampled	Description / Location	SSAPE	Color	Homogeneity	Texture	Friable	Morphology	Extinction	Sign of Elongation	Birefringence	Pleochroism		⊥	Chrysotile	Circle Type				Anthophyllite	Actinolite	Fiberglass	Mineral Wool	Cellulose	Hair	Synthetic	Other	Non Fibrous
																Amosite	Crocidolite	Tremolite										
18C	10/12/23	Red Duct Sealant Bay 3 DH3	0	R	Y	W	W	W	W	W	W	W	W	W	10												90	
19A		Red Duct Sealant Bay 2 - HV 1	0	R	Y	W	W	W	W	W	W	W	W	W													100	
19B		↓ ↓ ↓	0	R	Y	W	W	W	W	W	W	W	W	W													100	
19C		↓ ↓ ↓	0	R	Y	W	W	W	W	W	W	W	W	W													100	
20A		Red Duct Sealant Bay 2 - HV 2	0	R	Y	W	W	W	W	W	W	W	W	W													100	
20B		↓ ↓ ↓	0	R	Y	W	W	W	W	W	W	W	W	W													100	
20C		↓ ↓ ↓	0	R	Y	W	W	W	W	W	W	W	W	W													100	
21A		Red Duct Sealant Bay 2 - HV 3	0	R	Y	W	W	W	W	W	W	W	W	W													100	
21B		↓ ↓ ↓	0	R	Y	W	W	W	W	W	W	W	W	W													100	
21C		↓ ↓ ↓	0	R	Y	W	W	W	W	W	W	W	W	W													100	

Comments: Birefringence L= less than .010, M= .01-.050, H= greater than .05; Microscope circle 1: BH-2 - 229027, 235000, 231856, Zeiss - 3352010013

Lab uses the EPA or ELAP point count method as appropriate. SSAPE = Stereo Scope Asb. % Est.

TAT

3 Hours 6 Hours Same Day Next Day

2 Days 3 Days 5 Days Other

B34573

PASI Batch #

Sample ID	Date Sampled	Description / Location	SSAPE	Color	Homogeneity	Texture	Friable	Morphology	Extinction	Sign of Elongation	Birefringence	Pleochroism		⊥	Asbestos Percentage (%)					Non Asbestos Percentage (%)									
															Chrysotile	Amosite	Crocidolite	Tremolite	Anthophyllite	Actinolite	Fiberglass	Mineral Wool	Cellulose	Hair	Synthetic	Other	Non Fibrous		
22A	10/12/23	Red Duct Sealant Bay 2 - HV4	0	R	Y																							100	
22B			0	R	Y																							100	
22C			0	R	Y																							100	
23A		Red Duct Sealant Bay 3 - HV5	0	G	Y			W	+ L	N	1.553	1.550			3													97	
23B			0	G	Y			W	+ L	N	1.553	1.550			5													95	
23C			0	G	Y			W	+ L	N	1.553	1.550			5													95	
24A		Gray Duct Sealant Bay 3 - HV7	0	G	Y			W	+ L	N	1.553	1.550			2													98	
24B			0	G	Y			W	+ L	N	1.553	1.550			2													98	
24C			0	G	Y			W	+ L	N	1.553	1.550			4													96	
25A		Gray Duct Sealant Bay 3 - HV8	0	G	Y			W	+ L	N	1.553	1.550			3													97	

Comments: Birefringence L= less than .010, M= .01-.050, H= greater than .05; Microscope circle 1: BH-2 - 229027, 235000, 231856, Zeiss - 3352010013

Lab uses the EPA or ELAP point count method as appropriate. SSAPE = Stereo Scope Asb. % Est.

B134573

Page 6 Of 6



Mike Delaney
Mabbett & Associates, Inc.
105 Central Street
Suite 4100
Stoneham, MA 02180

June 30, 2023

Dear Mike Delaney,

The enclosed analytical results have been obtained by using EPA 600/R-93/116 or EPA 600/M4-82-020. Calibrated Visual Estimate (CVE) is used by Aerobiology for the determination of the percentage of asbestos and other components in the sample. Point Counting is recommended when the sample contains less than 10% asbestos by CVE. Aerobiology recommends further analysis by a gravimetric method for non-friable materials that are less than 1% by CVE.

The Quality Control data related to the samples analyzed is available upon client's written request. Aerobiology Laboratory Associates, Inc., assumes no responsibility for potential sample contamination that may have occurred during the sample collection process or erroneous data provided by the client. As such, these results apply to the sample(s) as received. Unless otherwise indicated, all samples were received in acceptable condition.

The enclosed results may not be used under any circumstances as product endorsement by any US government agency including NIST/NVLAP.

All Laboratory records are retained for at least three years unless otherwise directed in writing by the client. The actual samples are retained for a period of two months and written request is necessary in order to be retained for a longer period of time. All analytical results and records are considered strictly confidential and will not be released under any circumstances to anyone except the actual client. The analytical results included in this report apply only to the items tested. This report may not be reproduced except in its entirety, without the permission of Aerobiology Laboratory Associates, Inc., Laboratory Manager.

If you have any questions please contact the Optical Manager or the Laboratory Manager.

Sincerely,

Aimee Cormier, Laboratory Manager

Enclosure: Version 2
LAB BATCH ID: B 133644 CLIENT PROJECT ID: R2023006.000
Client Ref: PNSY - B300
CT ID# PH-0209; MA ID# AA000251; ME ID# LB-055; NVLAP Lab Code 200090-0; RI ID # PLM-00150; VT ID# AL254362.

Aerobiology Laboratory Associates, Inc.

Client Name: Mabbett & Associates, Inc.
 PO #: N/A
 Client Project #: R2023006.000
 Client Reference: PNSY - B300
 Method: EPA/600/R-93/116

Batch: B133644
 Date Sampled: Various
 Date Received: 6/28/2023
 Date Analyzed: 6/28/2023
 Date of Report: 6/30/2023

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
01A	Multi	0	0	0	0	0	0	5	0	10	0	2	0	83
Description: Roof Field Cut Location: Roof - NW Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
01B	Multi	0	0	0	0	0	0	<1	0	5	0	0	0	95
Description: Roof Field Cut Location: Roof - NE Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
01C	Multi	0	0	0	0	0	0	10	0	40	0	0	0	50
Description: Roof Field Cut Location: Roof - North Center Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
01D	Multi	0	0	0	0	0	0	5	0	50	0	0	0	45
Description: Roof Field Cut Location: Roof - West Center Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
01E	Multi	0	0	0	0	0	0	2	0	15	0	0	0	83
Description: Roof Field Cut Location: Roof - SW Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
01F	Multi	0	0	0	0	0	0	2	0	15	0	0	0	83
Description: Roof Field Cut Location: Roof - South Center Comments: Is asbestos present? No. Analyzed: Yes														

Aerobiology Laboratory Associates, Inc.

Client Name: Mabbett & Associates, Inc.
 PO #: N/A
 Client Project #: R2023006.000
 Client Reference: PNSY - B300
 Method: EPA/600/R-93/116

Batch: B133644
Date Sampled: Various
Date Received: 6/28/2023
Date Analyzed: 6/28/2023
Date of Report: 6/30/2023

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
01G	Multi	0	0	0	0	0	0	<1	0	25	0	0	0	75
Description: Roof Field Cut Location: Roof - SE Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
02A	Multi	0	0	0	0	0	0	5	0	0	0	5	0	90
Description: Black Flashing Location: Roof - NW Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
02B	Multi	0	0	0	0	0	0	2	0	0	0	2	0	96
Description: Black Flashing Location: Roof - NE Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
02C	Multi	0	0	0	0	0	0	2	0	5	0	0	0	93
Description: Black Flashing Location: Roof - North Center Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
02D	Black	0	0	0	0	0	0	2	0	2	0	0	0	96
Description: Black Flashing Location: Roof - West Center Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
02E	Black	0	0	0	0	0	0	5	0	0	0	0	0	95
Description: Black Flashing Location: Roof - SW Comments: Is asbestos present? No. Analyzed: Yes														

Aerobiology Laboratory Associates, Inc.

Client Name: Mabbett & Associates, Inc.
 PO #: N/A
 Client Project #: R2023006.000
 Client Reference: PNSY - B300
 Method: EPA/600/R-93/116

Batch: B133644
 Date Sampled: Various
 Date Received: 6/28/2023
 Date Analyzed: 6/28/2023
 Date of Report: 6/30/2023

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
02F	Multi	0	0	0	0	0	0	<1	0	10	0	0	0	90
Description: Black Flashing Location: Roof - South Center Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
02G	Black	0	0	0	0	0	0	0	0	<1	0	0	0	100
Description: Black Flashing Location: Roof - SE Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
03A	Gray	5	0	0	0	0	0	0	0	0	0	0	0	95
Description: Gray Duct Sealant Location: Center Catwalk - HV6 Comments: Is asbestos present? Yes. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
03B	Gray	0	0	0	0	0	0	0	0	0	0	0	0	100
Description: Gray Duct Sealant Location: Center Catwalk - HV8 Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
03C	Gray	5	0	0	0	0	0	0	0	0	0	0	0	95
Description: Gray Duct Sealant Location: Center Catwalk - HV9 Comments: Is asbestos present? Yes. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
04A	Black	0	0	0	0	0	0	30	0	0	0	0	0	70
Description: Black Flex Connector Location: Center Catwalk - HV5 Comments: Is asbestos present? No. Analyzed: Yes														

Aerobiology Laboratory Associates, Inc.

Client Name: Mabbett & Associates, Inc.
 PO #: N/A
 Client Project #: R2023006.000
 Client Reference: PNSY - B300
 Method: EPA/600/R-93/116

Batch: B133644
 Date Sampled: Various
 Date Received: 6/28/2023
 Date Analyzed: 6/28/2023
 Date of Report: 6/30/2023

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
04B	Black	0	0	0	0	0	0	30	0	0	0	0	0	70
Description: Black Flex Connector Location: Center Catwalk - HV7 Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
04C	Black	0	0	0	0	0	0	30	0	0	0	0	0	70
Description: Black Flex Connector Location: Center Catwalk - HV8 Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
04D	Black	0	0	0	0	0	0	30	0	0	0	0	0	70
Description: Black Flex Connector Location: Catwalk - HV3 Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
04E	Black	0	0	0	0	0	0	30	0	0	0	0	0	70
Description: Black Flex Connector Location: Catwalk - HV4 Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
05A	Red	0	0	0	0	0	0	0	0	0	0	0	0	100
Description: Red Duct Sealant Location: Catwalk - Bay Door 2 Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
05B	Red	0	0	0	0	0	0	0	0	0	0	0	0	100
Description: Red Duct Sealant Location: Catwalk - HV3 Comments: Is asbestos present? No. Analyzed: Yes														

Aerobiology Laboratory Associates, Inc.

Client Name: Mabbett & Associates, Inc.
 PO #: N/A
 Client Project #: R2023006.000
 Client Reference: PNSY - B300
 Method: EPA/600/R-93/116

Batch: B133644
 Date Sampled: Various
 Date Received: 6/28/2023
 Date Analyzed: 6/28/2023
 Date of Report: 6/30/2023

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
05C	Red	0	0	0	0	0	0	0	0	0	0	0	0	100
Description: Red Duct Sealant Location: Catwalk - HV5 Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
06A	Tan	30	0	0	0	0	0	0	0	0	0	0	0	70
Description: Stick Pin Adhesive Location: Catwalk - HV3 Comments: Is asbestos present? Yes. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
06B	Tan	30	0	0	0	0	0	0	0	0	0	0	0	70
Description: Stick Pin Adhesive Location: Catwalk - HV4 Comments: Is asbestos present? Yes. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
06C	Tan	30	0	0	0	0	0	0	0	0	0	0	0	70
Description: Stick Pin Adhesive Location: Catwalk - HV5 Comments: Is asbestos present? Yes. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
07A	Brown	0	0	0	0	0	0	0	0	0	0	0	20	80
Description: Brown Duct Sealant Location: 1st Floor Bathroom Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
07B	Brown	0	0	0	0	0	0	0	0	0	0	0	20	80
Description: Brown Duct Sealant Location: 1st Floor Bathroom Comments: Is asbestos present? No. Analyzed: Yes														

Aerobiology Laboratory Associates, Inc.

Client Name: Mabbett & Associates, Inc.
 PO #: N/A
 Client Project #: R2023006.000
 Client Reference: PNSY - B300
 Method: EPA/600/R-93/116

Batch: B133644
 Date Sampled: Various
 Date Received: 6/28/2023
 Date Analyzed: 6/28/2023
 Date of Report: 6/30/2023

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
07C	Brown	0	0	0	0	0	0	0	0	0	0	0	20	80
Description: Brown Duct Sealant Location: 1st Floor Bathroom Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
08A	Gray	0	0	0	0	0	0	0	0	0	0	0	0	100
Description: Gray Duct Sealant Location: 2nd Floor - Main Office Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
08B	Gray	0	0	0	0	0	0	0	0	0	0	0	0	100
Description: Gray Duct Sealant Location: 2nd Floor - Vending Area Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
08C	Gray	0	0	0	0	0	0	0	0	0	0	0	0	100
Description: Gray Duct Sealant Location: 2nd Floor - Break Room Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
09A	Multi	0	0	0	0	0	0	0	40	40	0	0	0	20
Description: 2x4 White Ceiling Tile (Fissured) Location: Mezz Office Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
09B	Multi	0	0	0	0	0	0	0	40	40	0	0	0	20
Description: 2x4 White Ceiling Tile (Fissured) Location: Hall by Stairs Comments: Is asbestos present? No. Analyzed: Yes														

Aerobiology Laboratory Associates, Inc.

Client Name: Mabbett & Associates, Inc.
 PO #: N/A
 Client Project #: R2023006.000
 Client Reference: PNSY - B300
 Method: EPA/600/R-93/116

Batch: B133644
 Date Sampled: Various
 Date Received: 6/28/2023
 Date Analyzed: 6/28/2023
 Date of Report: 6/30/2023

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
09C	Multi	0	0	0	0	0	0	0	40	40	0	0	0	20
Description: 2x4 White Ceiling Tile (Fissured) Location: 2nd Floor - Hallway (East) Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
10A	Multi	0	0	0	0	0	0	<1	0	40	0	0	0	60
Description: Gypsum Wallboard Location: 2nd Floor - Main Office Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
10B	Multi	0	0	0	0	0	0	<1	0	5	0	0	0	95
Description: Gypsum Wallboard Location: 2nd Floor - Vending Area Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
10C	Multi	0	0	0	0	0	0	<1	0	10	0	0	0	90
Description: Gypsum Wallboard Location: 2nd Floor - Hall by Shop Area Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
11A	White	0	0	0	0	0	0	0	0	0	0	0	0	100
Description: Joint Compound Location: 2nd Floor - Main Office Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
11B	White	0	0	0	0	0	0	0	0	0	0	0	0	100
Description: Joint Compound Location: 2nd Floor - Vending Area Comments: Is asbestos present? No. Analyzed: Yes														

Aerobiology Laboratory Associates, Inc.

Client Name: Mabbett & Associates, Inc.
 PO #: N/A
 Client Project #: R2023006.000
 Client Reference: PNSY - B300
 Method: EPA/600/R-93/116

Batch: B133644
 Date Sampled: Various
 Date Received: 6/28/2023
 Date Analyzed: 6/28/2023
 Date of Report: 6/30/2023

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
11C	White	0	0	0	0	0	0	0	0	0	0	0	0	100
Description: Joint Compound Location: 2nd Floor - Hall by Shop Area Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
12A	Tan	0	0	0	0	0	0	0	0	0	0	0	0	100
Description: Sprinkler Pipe Thread Sealant Location: 1st Floor - Column B10 Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
12B	Tan	0	0	0	0	0	0	0	0	0	0	0	0	100
Description: Sprinkler Pipe Thread Sealant Location: 2nd Floor - Hall @ Main Office Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
12C	Tan	0	0	0	0	0	0	0	0	0	0	0	0	100
Description: Sprinkler Pipe Thread Sealant Location: 2nd Floor - Break Room Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
12D	Brown	0	0	0	0	0	0	0	0	0	0	0	0	100
Description: Sprinkler Pipe Thread Sealant Location: 2nd Floor - Hall @ Shop Comments: Is asbestos present? No. Analyzed: Yes														

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
12E	Tan	0	0	0	0	0	0	0	0	0	0	0	0	100
Description: Sprinkler Pipe Thread Sealant Location: Catwalk - West Side Comments: Is asbestos present? No. Analyzed: Yes														

Aerobiology Laboratory Associates, Inc.

Client Name: Mabbett & Associates, Inc.
 PO #: N/A
 Client Project #: R2023006.000
 Client Reference: PNSY - B300
 Method: EPA/600/R-93/116

Batch: B133644
 Date Sampled: Various
 Date Received: 6/28/2023
 Date Analyzed: 6/28/2023
 Date of Report: 6/30/2023

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
13A	Multi	0	0	0	0	0	0	0	40	40	0	0	0	20
Description: 2x4 White Ceiling Tile (Fiss 2) Location: 2nd Floor - Main Office Comments:														
Is asbestos present? No.													Analyzed: Yes	

Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
13B	Multi	0	0	0	0	0	0	0	40	40	0	0	0	20
Description: 2x4 White Ceiling Tile (Fiss 2) Location: 2nd Floor - Main Office Comments:														
Is asbestos present? No.													Analyzed: Yes	


Sample ID	Color	Asbestos %						Non-Asbestos %						
		CHR	AMO	CRO	ACT	TRE	ANT	FBG	MNW	CEL	HAR	SYN	OTH	NON
13C	Multi	0	0	0	0	0	0	0	40	40	0	0	0	20
Description: 2x4 White Ceiling Tile (Fiss 2) Location: 2nd Floor - Main Office Comments:														
Is asbestos present? No.													Analyzed: Yes	

Asbestos Codes: CHR = Chrysotile AMO = Amosite CRO = Crocidolite ACT = Actinolite TRE = Tremolite ANT = Anthophyllite
 Non-Asbestos Codes: FBG = Fiberglass MNW = Mineral Wool CEL = Cellulose HAR = Hair SYN = Synthetic OTH = Other NON = Non-Fibrous Minerals

Note: To create a unique lab sample ID, use the Batch # and the Sample ID (example: [Batch #] - [Sample ID]).

* All results are in percentage.

Analyst: Dan Pine



TAT (circle one)	3 Hours 6 Hours Same Day Next Day	PASI Batch # <u>B133644</u>
	<u>2 Days</u> 3 Days 5 Days Other _____	
TAT in bus. days - lab approval required for rush analysis		

Client: Mabbett & Assoc, Inc
Address: 105 Central St. Suite 4100
Stonham, MA 02180
Project #: R2023006,000 PO: _____
Project Site: PNSY - B300
Contact: Mike Delaney
Tel. / Fax #: (781) 275-6050
Email: delaney@mabbett.com

PLM

Chain of Custody

Special Instructions:

Relinquished By: Jacob Walsh gear valve Date/Time: 6/28/23 3:22
Received By Lab: Paula Leavitt-Locke Date/Time: 6/28/23 3:22

Shaded area for lab use only.

Due Date:

of Samples Received: 51 Analyzed: 25 station 4.

Results: email fax verbal By: _____ Date: _____

Analyst / Date: John 6/28/23 QC by / Date: JS / 06/29/23

Sample ID	Date Sampled	Description / Location	Stereo Scope					Optical Properties							RI		Asbestos Percentage (%)					Non Asbestos Percentage (%)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
			SSAPE	Color	Homogeneity	Texture	Friable	Morphology	Extinction	Sign of Elongation	Birefringence	Pleochroism		⊥	Chrysotile	Circle Type				Actinolite	Fiberglass	Mineral Wool	Cellulose	Hair	Synthetic	Other	Non Fibrous																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
																Amosite	Crocidolite	Tremolite	Anthophyllite																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
01A	6/27/23	Roof Field Cut Roof - NW	OM	Y	M																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									

Comments: Birefringence L= less than .010, M= .01-.050, H= greater than .05; Microscope circle 1: BH-2 - 229027, 235000, 231856, Zeiss - 3352010013

Lab uses the EPA or ELAP point count method as appropriate. SSAPE = Stereo Scope Asb. % Est.



6/28/22
TAT

3 Hours 6 Hours Same Day Next Day

2 Days 3 Days 5 Days Other

B133644

PASI Batch #

			Stereo Scope		Optical Properties		2 Days		3 Days		5 Days		Other		Asbestos Percentage (%)										Non Asbestos Percentage (%)						
Sample ID	Date Sampled	Description / Location	SSAPE	Color	Homogeneity	Texture	Friable	Morphology	Extinction	Sign of Elongation	Birefringence	Pleochroism		⊥	Chrysotile	Circle Type					Anthophyllite	Actinolite	Fiberglass	Mineral Wool	Cellulose	Hair	Synthetic	Other	Non Fibrous		
																Amosite	Crocidolite	Tremolite	Other												
01G	6/27/23	Roof Field Cut																													
		Roof - SE	G	M	M																										
02A		Black Flashing																													
		Roof - N NE	O	M	M																										
02B																															
		- NE	O	M	M																										
02C																															
		- North Center	G	M	M																										
02D																															
		- West Center	O	M	M																										
02E																															
		- SW	O	M	M																										
02F																															
		- South Center	O	M	M																										
02G																															
		- SE	O	M	M																										
03A		Gray Duct Seulant																													
		center catwalk - HV6	O	M	M																										
03B																															
		- HV8	O	M	M																										

Comments: Birefringence L= less than .010, M= .01-.050, H= greater than .05; Microscope circle 1: BH-2 - 229027, 235000, 231856, Zeiss - 3352010013

Lab uses the EPA or ELAP point count method as appropriate. SSAPE = Stereo Scope Asb. % Est.

78 6/28/23

TAT

3 Hours 6 Hours Same Day Next Day

2 Days 3 Days 5 Days Other

B133644

PASI Batch #

Sample ID	Date Sampled	Description / Location	Stereo Scope					Optical Properties					Asbestos Percentage (%)					Non Asbestos Percentage (%)								
			SSAPE	Color	Homogeneity	Texture	Frable	Morphology	Extinction	Sign of Elongation	Birefringence	Pleochroism	II	I	Chrysotile	Amosite	Crocidolite	Tremolite	Anthophyllite	Actinolite	Fiberglass	Mineral Wool	Cellulose	Hair	Synthetic	Other
03C	6/27/23	Griny Duct Sealant Center catwalk - HV9	06	YR										5												95
04A		Black Flex Connector Center catwalk - HV5	03	KN																I						70
04B		- HV7	03	KN																I						70
04C		- HV8	03	KN																I						70
04D		Black Flex Connector catwalk - HV3	03	KN																I						70
04E		- HV4	03	KN																I						70
05A		Reel Duct Sealant catwalk - Bay Door 2	0R	YR																						100
05B		- HV3	0R	YR																						100
05C		- HV5	0R	YR																						100
06A		Stick Pin Adhesive catwalk - HV3	0T	YR										30												70

Comments: Birefringence L= less than .010, M=.01-.050, H= greater than .05; Microscope circle 1: BH-2 - 229027, 235000, 231856, Zeiss - 3352010013

Lab uses the EPA or ELAP point count method as appropriate. SSAPE = Stereo Scope Asb. % Est.

78 6/28/23
TAT

3 Hours 6 Hours Same Day Next Day

2 Days 3 Days 5 Days Other

B133644

PASI Batch #

Sample ID	Date Sampled	Description / Location	Stereo Scope					Optical Properties					RI		Asbestos Percentage (%)						Non Asbestos Percentage (%)						
			SSAPE	Color	Homogeneity	Texture	Friable	Morphology	Extinction	Sign of Elongation	Birefringence	Pleochroism		⊥	Chrysotile	Amosite	Crocidolite	Tremolite	Anthophyllite	Actinolite	Fiberglass	Mineral Wool	Cellulose	Hair	Synthetic	Other	Non Fibrous
06B	4/27/23	stick pin Adhesive catwalk - HV4													WLL+LW	WLL+LW	WLL+LW	WLL+LW	WLL+LW								70
06C	↓	↓ - HV5													WLL+LW	WLL+LW	WLL+LW	WLL+LW	WLL+LW								70
07A	6/28/23	Brown Duct Sealant 1st floor - Bathroom																								20	80
07B																									20	80	
07C																									20	80	
08A		Gray Duct Sealant 2nd floor - Main office																								100	
08B		↓ - vending area																								100	
08C		↓ - break room																								100	
09A		2x1 white ceiling tile - merrill office (pressured)																								20	
09B	↓	↓ - hall by stairs																								20	

Comments: Birefringence L= less than .010, M= .01-.050, H= greater than .05; Microscope circle 1: BH-2 - 229027, 235000, 231856, Zeiss - 3352010013

Lab uses the EPA or ELAP point count method as appropriate. SSAPE = Stereo Scope Asb. % Est.



DO 6/28/23
TAT

3 Hours 6 Hours Same Day Next Day

2 Days 3 Days 5 Days Other

B133644

PASI Batch #

Sample ID	Date Sampled	Description / Location	Stereo Scope			Optical Properties					RI		Asbestos Percentage (%)						Non Asbestos Percentage (%)						
			SSAPE	Color	Homogeneity	Texture	Fracture	Morphology	Extinction	Sign of Elongation	Birefringence	Pleochroism	Chrysotile	Amosite	Crocidolite	Tremolite	Anthophyllite	Actinolite	Fiberglass	Mineral Wool	Cellulose	Hair	Synthetic	Other	Non Fibrous
09C	6/28/23	2x4 white ceiling tile (fissured) 2nd floor - hallway (East)	OM																	40	40				20
10A		Gypsum wallboard 2nd floor - main office	OM																41	40					60
10B		- vending area	OM																41	5					95
10C		- hall by shop area	OM																41	10					90
11A		Joint Compound 2nd floor - main office	OM																						100
11B		- vending area	OM																						100
11C		- hall by shop area	OM																						100
12A		Sprinkler Pipe Thread Sealant 1st floor - Column B10	OT																						100
12B		2nd floor - hall @ main office	OT																						100
12C		- breakroom	OT																						100

Comments: Birefringence L= less than .010, M= .01-.050, H= greater than .05; Microscope circle 1: BH-2 - 229027, 235000, 231856, Zeiss - 3352010013

Lab uses the EPA or ELAP point count method as appropriate. SSAPE = Stereo Scope Asb. % Est.



TAT

3 Hours 6 Hours Same Day Next Day

2 Days 3 Days 5 Days Other

PASI Batch #

Sample ID	Date Sampled	Description / Location	Stereo Scope					Optical Properties					RI		Asbestos Percentage (%)						Non Asbestos Percentage (%)						
			SSAPE	Color	Homogeneity	Texture	Friable	Morphology	Extinction	Sign of Elongation	Birefringence	Pleochroism		⊥	Chrysotile	Amosite	Crocidolite	Tremolite	Anthophyllite	Actinolite	Fiberglass	Mineral Wool	Cellulose	Hair	Synthetic	Other	Non Fibrous
12D	6/28/23	Sprinkler Pipe Thread Sealant 2nd floor hulk & shop west end																									100
12E		↓ Cantwalk ↓ west side																									100
13A		2x4 white ceiling tile (Box 2) 2nd floor - main office																			IW						20
13B		↓																			IW						20
13C		↓																			IW						20

Comments: Birefringence L= less than .010, M= .01-.050, H= greater than .05; Microscope circle 1: BH-2 - 229027, 235000, 231856, Zeiss - 3352010013

Lab uses the EPA or ELAP point count method as appropriate. SSAPE = Stereo Scope Asb. % Est.

Mike Delaney
Mabbett & Associates, Inc.
105 Central Street
Stoneham, MA 02180

July 14, 2023

Dear Mike Delaney,

The enclosed analytical results have been obtained using PLM NOB- EPA 600/R-93/116 PLM Method, with gravimetric reduction preparation method for analysis of Non Friable Organically Bound (NOB) materials.

The enclosed results may not be used under any circumstances as product endorsement by the state of Maine, any US government agency or NVLAP.

The Quality Control data related to the samples analyzed is available upon written request from the client.

Aerobiology Laboratory Associates Inc. assumes no responsibility for potential sample contamination occurred during sample collection or erroneous data provided by the client.

All Laboratory records are retained for at least three years unless otherwise directed in writing by the client. The actual samples are retained for a period of 60 days.

All analytical results and records are considered strictly confidential and will not be released under any circumstances to anyone except the actual client.

The analytical results included in this report apply only to the items tested.

This report may not be reproduced, except in its entirety, without the permission of Aerobiology Laboratory Associates Inc. Laboratory Manager.

If you have any questions, please contact the Laboratory Manager or Laboratory Director.

Sincerely,



Aimee Cormier, Laboratory Manager

LAB BATCH ID: N133695

CLIENT PROJECT ID: R2023006.000

CLIENT REF: PNSY – B300

CT ID# PH-0209; MA ID# AA000156; ME ID# LB-055; ME ID# LA-056; NVLAP Lab Code 200090-0; RI ID

Aerobiology Laboratory Associates, Inc

Client #: 1787
 Client Project: R2023006.000
 Client Reference: PNSY - B300
 Client Name: Mabbett & Associates, Inc.
 Method: NY ELAP Method For The Analysis of Non Friable Organically Bound Materials

Batch: N 133695
 Date Sampled: Various
 Date Received: 7/7/2023
 Date Analyzed: 7/12/2023
 Date of Report: 7/14/2023

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507226	01A	N/A	.6552	.00	.00	.00	.00	.00	.00	85.71	8.67	.00	5.62
Description: Roof Field Cut Location: Roof - NW Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No
LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507227	01B	N/A	.9678	.00	.00	.00	.00	.00	.00	95.12	2.01	.00	2.87
Description: Roof Field Cut Location: Roof - NE Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No
LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507228	01C	N/A	.8991	.00	.00	.00	.00	.00	.00	87.54	9.84	.00	2.62
Description: Roof Field Cut Location: Roof - North Center Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No
LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507229	01D	N/A	.5329	.00	.00	.00	.00	.00	.00	80.48	4.99	.00	14.53
Description: Roof Field Cut Location: Roof - West Center Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

Aerobiology Laboratory Associates, Inc

Client #: 1787
 Client Project: R2023006.000
 Client Reference: PNSY - B300
 Client Name: Mabbett & Associates, Inc.
 Method: NY ELAP Method For The Analysis of Non Friable Organically Bound Materials

Batch: N 133695
 Date Sampled: Various
 Date Received: 7/7/2023
 Date Analyzed: 7/12/2023
 Date of Report: 7/14/2023

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						%	%	Total %	%
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507230	01E	N/A	.9874	.00	.00	.00	.00	.00	.00	74.91	14.28	.00	10.81

Description: Roof Field Cut

Location: Roof - SW

Comments:

Analyzed / Charged : Yes

Prepped / Charged : No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						%	%	Total %	%
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507231	01F	N/A	.6449	.00	.00	.00	.00	.00	.00	72.03	21.17	.00	6.80

Description: Roof Field Cut

Location: Roof - South Center

Comments:

Analyzed / Charged : Yes

Prepped / Charged : No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						%	%	Total %	%
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507232	01G	N/A	1.7418	.00	.00	.00	.00	.00	.00	23.29	.61	.00	76.10

Description: Roof Field Cut

Location: Roof - SE

Comments:

Analyzed / Charged : Yes

Prepped / Charged : No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						%	%	Total %	%
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507233	02A	N/A	.4718	.00	.00	.00	.00	.00	.00	54.73	7.16	.00	38.11

Description: Black Flashing

Location: Roof - NW

Comments:

Analyzed / Charged : Yes

Prepped / Charged : No

Aerobiology Laboratory Associates, Inc

Client #: 1787
 Client Project: R2023006.000
 Client Reference: PNSY - B300
 Client Name: Mabbett & Associates, Inc.
 Method: NY ELAP Method For The Analysis of Non Friable Organically Bound Materials

Batch: N 133695
 Date Sampled: Various
 Date Received: 7/7/2023
 Date Analyzed: 7/12/2023
 Date of Report: 7/14/2023

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507234	02B	N/A	.3642	.00	.00	.00	.00	.00	.00	60.49	10.93	.00	28.58

Description: Black Flashing

Location: Roof - NE

Comments:

Analyzed / Charged : Yes

Prepped / Charged : No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507235	02C	N/A	.8425	.00	.00	.00	.00	.00	.00	35.89	56.42	.00	7.69

Description: Black Flashing

Location: Roof - North Center

Comments:

Analyzed / Charged : Yes

Prepped / Charged : No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507236	02D	N/A	.1068	.00	.00	.00	.00	.00	.00	33.24	38.30	.00	28.46

Description: Black Flashing

Location: Roof - West Center

Comments:

Analyzed / Charged : Yes

Prepped / Charged : No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507237	02E	N/A	.1380	.00	.00	.00	.00	.00	.00	64.06	4.71	.00	31.23

Description: Black Flashing

Location: Roof - SW

Comments:

Analyzed / Charged : Yes

Prepped / Charged : No

Aerobiology Laboratory Associates, Inc

Client #: 1787
 Client Project: R2023006.000
 Client Reference: PNSY - B300
 Client Name: Mabbett & Associates, Inc.
 Method: NY ELAP Method For The Analysis of Non Friable Organically Bound Materials

Batch: N 133695
 Date Sampled: Various
 Date Received: 7/7/2023
 Date Analyzed: 7/12/2023
 Date of Report: 7/14/2023

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507238	02F	N/A	.6699	.00	.00	.00	.00	.00	.00	53.17	32.68	.00	14.15
Description: Black Flashing										Analyzed / Charged : Yes			
Location: Roof - South Center										Prepped / Charged : No			
Comments:													

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507239	02G	N/A	.3197	.00	.00	.00	.00	.00	.00	93.02	4.79	.00	2.19
Description: Black Flashing										Analyzed / Charged : Yes			
Location: Roof - SE										Prepped / Charged : No			
Comments:													

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507240	04A	N/A	.3496	.00	.00	.00	.00	.00	.00	36.13	7.47	.00	56.40
Description: Black Flex Connector										Analyzed / Charged : Yes			
Location: Center Catwalk - HV5										Prepped / Charged : No			
Comments:													

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507241	04B	N/A	.2090	.00	.00	.00	.00	.00	.00	36.75	5.50	.00	57.75
Description: Black Flex Connector										Analyzed / Charged : Yes			
Location: Center Catwalk - HV7										Prepped / Charged : No			
Comments:													

Aerobiology Laboratory Associates, Inc

Client #: 1787
 Client Project: R2023006.000
 Client Reference: PNSY - B300
 Client Name: Mabbett & Associates, Inc.
 Method: NY ELAP Method For The Analysis of Non Friable Organically Bound Materials

Batch: N 133695
 Date Sampled: Various
 Date Received: 7/7/2023
 Date Analyzed: 7/12/2023
 Date of Report: 7/14/2023

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507242	04C	N/A	.0974	.00	.00	.00	.00	.00	.00	44.05	3.80	.00	52.15
Description: Black Flex Connector										Analyzed / Charged : Yes			
Location: Center Catwalk - HV8										Prepped / Charged : No			
Comments:													

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507243	04D	N/A	.0500	.00	.00	.00	.00	.00	.00	46.00	3.80	.00	50.20
Description: Black Flex Connector										Analyzed / Charged : Yes			
Location: Catwalk - HV3										Prepped / Charged : No			
Comments:													

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507244	04E	N/A	.4152	.00	.00	.00	.00	.00	.00	45.04	1.18	.00	53.78
Description: Black Flex Connector										Analyzed / Charged : Yes			
Location: Catwalk - HV4										Prepped / Charged : No			
Comments:													

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507245	05A	N/A	.0247	.00	.00	.00	.00	.00	.00	97.17	.40	.00	2.43
Description: Red Duct Sealant										Analyzed / Charged : Yes			
Location: Catwalk - Bay Door 2										Prepped / Charged : No			
Comments:													

Aerobiology Laboratory Associates, Inc

Client #: 1787
 Client Project: R2023006.000
 Client Reference: PNSY - B300
 Client Name: Mabbett & Associates, Inc.
 Method: NY ELAP Method For The Analysis of Non Friable Organically Bound Materials

Batch: N 133695
 Date Sampled: Various
 Date Received: 7/7/2023
 Date Analyzed: 7/12/2023
 Date of Report: 7/14/2023

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507246	05B	N/A	.1116	.00	.00	.00	.00	.00	.00	92.47	3.23	.00	4.30
Description: Red Duct Sealant										Analyzed / Charged : Yes			
Location: Catwalk - HV3										Prepped / Charged : No			
Comments:													

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507247	05C	N/A	.1172	.00	.00	.00	.00	.00	.00	95.05	1.45	.00	3.50
Description: Red Duct Sealant										Analyzed / Charged : Yes			
Location: Catwalk - HV5										Prepped / Charged : No			
Comments:													

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507248	07A	N/A	.1016	.00	.00	.00	.00	.00	.00	59.65	14.76	.00	25.59
Description: Brown Duct Sealant										Analyzed / Charged : Yes			
Location: 1st Floor Bathroom										Prepped / Charged : No			
Comments:													

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507249	07B	N/A	.0451	.00	.00	.00	.00	.00	.00	60.31	18.18	.00	21.51
Description: Brown Duct Sealant										Analyzed / Charged : Yes			
Location: 1st Floor Bathroom										Prepped / Charged : No			
Comments:													

Aerobiology Laboratory Associates, Inc

Client #: 1787
 Client Project: R2023006.000
 Client Reference: PNSY - B300
 Client Name: Mabbett & Associates, Inc.
 Method: NY ELAP Method For The Analysis of Non Friable Organically Bound Materials

Batch: N 133695
 Date Sampled: Various
 Date Received: 7/7/2023
 Date Analyzed: 7/12/2023
 Date of Report: 7/14/2023

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507250	07C	N/A	.0466	.00	.00	.00	.00	.00	.00	60.30	13.30	.00	26.40
Description: Brown Duct Sealant													
Location: 1st Floor Bathroom													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507251	08A	N/A	.1703	.00	.00	.00	.00	.00	.00	41.05	54.49	.00	4.46
Description: Gray Duct Sealant													
Location: 2nd Floor - Main Office													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507252	08B	N/A	.2536	.00	.00	.00	.00	.00	.00	55.13	6.66	.00	38.21
Description: Gray Duct Sealant													
Location: 2nd Floor - Vending Area													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507253	08C	N/A	.2340	.00	.00	.00	.00	.00	.00	21.41	41.79	.00	36.80
Description: Gray Duct Sealant													
Location: 2nd Floor - Break Room													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No

Aerobiology Laboratory Associates, Inc

Client #: 1787
 Client Project: R2023006.000
 Client Reference: PNSY - B300
 Client Name: Mabbett & Associates, Inc.
 Method: NY ELAP Method For The Analysis of Non Friable Organically Bound Materials

Batch: N 133695
 Date Sampled: Various
 Date Received: 7/7/2023
 Date Analyzed: 7/12/2023
 Date of Report: 7/14/2023

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507254	12A	N/A	.0676	.00	.00	.00	.00	.00	.00	40.24	16.72	.00	43.04

Description: Sprinkler Pipe Thread Sealant

Location: 1st Floor - Column B10

Comments:

Analyzed / Charged : Yes

Prepped / Charged : No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507255	12B	N/A	.0351	.00	.00	.00	.00	.00	.00	53.28	6.27	.00	40.45

Description: Sprinkler Pipe Thread Sealant

Location: 2nd Floor - Hall @ Main Office

Comments:

Analyzed / Charged : Yes

Prepped / Charged : No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507256	12C	N/A	.0258	.00	.00	.00	.00	.00	.00	55.04	13.18	.00	31.78

Description: Sprinkler Pipe Thread Sealant

Location: 2nd Floor - Break Room

Comments:

Analyzed / Charged : Yes

Prepped / Charged : No

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507257	12D	N/A	.2010	.00	.00	.00	.00	.00	.00	49.20	46.57	.00	4.23

Description: Sprinkler Pipe Thread Sealant

Location: 2nd Floor - Hall @ Shop

Comments:

Analyzed / Charged : Yes

Prepped / Charged : No

Aerobiology Laboratory Associates, Inc

Client #: 1787
Client Project: R2023006.000
Client Reference: PNSY - B300
Client Name: Mabbett & Associates, Inc.
Method: NY ELAP Method For The Analysis of Non Friable Organically Bound Materials

Batch: N 133695
Date Sampled: Various
Date Received: 7/7/2023
Date Analyzed: 7/12/2023
Date of Report: 7/14/2023

LAB ID	Field ID	Color	Initial Sample Weight	% Asbestos Types						% ORG	% Carbonate	Total % Asbestos	% Non Fib. / Non Asb.
				Chrysotile	Amosite	Actinolite	Crocidolite	Anthophyllite	Tremolite				
N1507258	12E	N/A	.0304	.00	.00	.00	.00	.00	.00	50.66	9.21	.00	40.13
Description: Sprinkler Pipe Thread Sealant													
Location: Catwalk - West Side													
Comments:													
												Analyzed / Charged :	Yes
												Prepped / Charged :	No


Thomas Pickett, Analyst

TAT (circle one) 3 Hours 6 Hours Same Day Next Day
2 Days 3 Days 5 Days Other _____
TAT in bus. days - lab approval required for rush analysis

PASI Batch #
B133644

Client: Mabbett & Assoc. Inc.
Address: 105 Central St. - Suite 4100
Stoughton MA 02180
Project #: R2023006,000 PO: _____
Project Site: PNSY - B300
Contact: Mike Delaney
Tel. / Fax #: (781) 275-6050
Email: delaney@mabbett.com

PLM

Chain of Custody

Special Instructions:

Relinquished By: Jacob Walsh Date/Time: 6/28/23 3:22

Received By Lab: Paula Leavitt-Lowe Date/Time: 6/28/23 3:22

Shaded area for lab use only.

Due Date:

of Samples Received: 51

Analyzed: 25 station 4.

Results: email fax verbal By: _____

Date: _____

Analyst / Date: Paula Leavitt-Lowe 6/28/23

QC by / Date: PS / 06/29/23

Sample ID	Date Sampled	Description / Location	Stereo Scope					Optical Properties					RI		Asbestos Percentage (%)					Non Asbestos Percentage (%)							
			SSAPE	Color	Homogeneity	Texture	Frable	Morphology	Extinction	Sign of Elongation	Birefringence	Pleochroism		⊥	Chrysotile	Amosite	Crocidolite	Tremolite	Anthophyllite	Actinolite	Fiberglass	Mineral Wool	Cellulose	Hair	Synthetic	Other	Non Fibrous
01A	6/27/23	Roof Field Cut																									
		Roof - NW																									
01B		- NE																									
01C		- North Center																									
01D		- West Center																									
01E		- SW																									
01F		- South Center																									

Comments: Birefringence L= less than .010, M=.01-.050, H= greater than .05; Microscope circle 1: BH-2 - 229027, 235000, 231856, Zeiss - 335210013

Lab uses the EPA or ELAP point count method as appropriate. SSAPE = Stereo Scope Asb. % Est.

ver 4.7 Updated 09/28/2021

Each layer of multilayered materials are analyzed and charged individually (per NESHA/EPA).

Page 1 Of 6

8/6/23
TAT

3 Hours 6 Hours Same Day Next Day

N 133695
B133644

PASI Batch #

			Stereo Scope				Optical Properties		2 Days		3 Days		5 Days		Other		Asbestos Percentage (%)										Non Asbestos Percentage (%)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
Sample ID	Date Sampled	Description / Location	SSAPE	Color	Homogeneity	Texture	Friable	Morphology	Extinction	Sign of Elongation	Birefringence	Pleochroism		⊥	Circle Type						Fiberglass	Mineral Wool	Cellulose	Hair	Synthetic	Other	Non Fibrous																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
															Chrysotile	Amosite	Crocidolite	Tremolite	Anthophyllite	Actinolite																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
01G	6/27/23	Roof Field Cut Roof - SE	G	M	M	M																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									

Comments: Birefringence L= less than .010, M=.01-.050, H= greater than .05; Microscope circle 1: BH-2 - 229027, 235000, 231856, Zeiss - 3352010013

Lab uses the EPA or ELAP point count method as appropriate. SSAPE = Stereo Scope Asb. % Est.

TAT

3 Hours 6 Hours Same Day Next Day

N133695 N133644

PASI Batch #

Sample ID	Date Sampled	Description / Location	Stereo Scope					Optical Properties					Asbestos Percentage (%)					Non Asbestos Percentage (%)									
			SSAPE	Color	Homogeneity	Texture	Friable	Morphology	Extinction	Sign of Elongation	Birefringence	Pleochroism		⊥	Chrysotile	Circle Type				Fiberglass	Mineral Wool	Cellulose	Hair	Synthetic	Other	Non Fibrous	
																Amosite	Crocidolite	Tremolite	Anthophyllite								Actinolite
03C	6/27/23	Gray Duct Sealant Center catwalk - HV9	06	YRN				W/1142N/104/101					5														95
04A		Black Flex Connector Center catwalk - HV5	03	KN															I								70
04B		- HV7	03	KN															I								70
04C		- HV8	03	KN															I								70
04D		Black Flex Connector Catwalk - HV3	03	KN															I								70
04E		- HV4	03	KN															I								70
05A		Red Duct Sealant catwalk - Bay Door 2	0R	YRN																							100
05B		- HV3	0R	YRN																							100
05C		- HV5	0R	YRN																							100
06A		Stick Pin Adhesive catwalk - HV3	0T	YRN				W/1142N/104/101					30														70

Comments: Birefringence L= less than .010, M=.01-.050, H= greater than .05; Microscope circle 1: BH-2 - 229027, 235000, 231856, Zeiss - 3352010013

Lab uses the EPA or ELAP point count method as appropriate. SSAPE = Stereo Scope Asb. % Est.

TAT

3 Hours 6 Hours Same Day Next Day

2 Days 3 Days 5 Days Other

PASI Batch #

			Stereo Scope				Optical Properties				Asbestos Percentage (%)				Non Asbestos Percentage (%)												
Sample ID	Date Sampled	Description / Location	SSAPE	Color	Homogeneity	Texture	Friable	Morphology	Extinction	Sign of Elongation	Birefringence	Pleochroism	RI		Chrysotile	Circle Type					Fiberglass	Mineral Wool	Cellulose	Hair	Synthetic	Other	Non Fibrous
														⊥		Amosite	Crocidolite	Tremolite	Anthophyllite	Actinolite							
06B	4/27/23	stick pin Adhesive catwalk - HV4	0	T	Y	R	N								30											70	
06C	↓	↓ - HV5	0	T	Y	R	N								30											70	
07A	6/28/23	Brown Duct Sealant 1st floor - Bathroom	0	B	R	Y	R	N																		20	
07B			0	B	R	Y	R	N																		20	
07C			0	B	R	Y	R	N																		20	
08A		Gray Duct Sealant 2nd floor - Main office	0	G	Y	P	S	N																		100	
08B		- vending area	0	G	Y	P	S	N																		100	
08C		- break room	0	G	Y	P	S	N																		100	
09A		2x1 white ceiling tile - mezz office (pressed)	0	W	C	N	F	Y													IW	40	40			20	
09B	↓	↓ - hall by stairs	0	W	C	N	F	Y													IW	40	40			20	

Comments: Birefringence L= less than .010, M=.01-.050, H= greater than .05; Microscope circle 1: BH-2 - 229027, 235000, 231858, Zeiss - 3352010013

Lab uses the EPA or ELAP point count method as appropriate. SSAPE = Stereo Scope Asb. % Est.

DP 6/28/23
TAT

3 Hours 6 Hours Same Day Next Day

N133695 NT19877 DT
B133644

PASI Batch #

Sample ID	Date Sampled	Description / Location	Stereo Scope					Optical Properties					Asbestos Percentage (%)		Non Asbestos Percentage (%)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
			SSABP	Color	Homogeneity	Texture	Friable	Morphology	Extinction	Sign of Elongation	Birefringence	Pleochroism	H	I	Circle Type					Fiberglass	Mineral Wool	Cellulose	Hair	Synthetic	Other	Non Fibrous																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
															Chrysotile	Amosite	Crocidolite	Tremolite	Anthophyllite								Actinolite																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
09C	6/28/23	2x4 white ceiling tile (fissured) 2nd floor - hallway (East)	0	M	C	N	F	Y																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							

Comments: Birefringence L= less than .010, M=.01-.050, H= greater than .05; Microscope circle 1: BH-2 - 229027, 235000, 231856, Zeiss - 3352010013

Lab uses the EPA or ELAP point count method as appropriate. SSAPE = Stereo Scope Asb. % Est.



TAT

3 Hours 6 Hours Same Day Next Day

2 Days 3 Days 5 Days Other

PASI Batch #

Sample ID	Date Sampled	Description / Location	Stereo Scope		Optical Properties										Asbestos Percentage (%)					Non Asbestos Percentage (%)							
			SSAPE	Color	Homogeneity	Texture	Fracture	Morphology	Extinction	Sign of Elongation	Birefringence	Pleochroism		⊥	Chrysotile	Amosite	Crocidolite	Tremolite	Anthophyllite	Actinolite	Fiberglass	Mineral Wool	Cellulose	Hair	Synthetic	Other	Non Fibrous
12D	6/28/23	Sprinkler Pipe Thread Sealant 2nd floor 1 hull shop west end																									100
12E		Cutwalk west side																									100
13A		2x4 white ceiling tile (Rm 2) 2nd floor - main office																			IW						20
13B																					IW						20
13C																					IW						20

Comments: Birefringence L= less than .010, M= .01-.050, H= greater than .05; Microscope circle 1: BH-2 - 229027, 235000, 231850, Zeiss - 3352010013

Lab uses the EPA or ELAP point count method as appropriate. SSAPE = Stereo Scope Asb. % Est.

APPENDIX C

Paint Chip Laboratory Report and Chain of Custody Documentation



Analysis for Metals Concentration in Bulk Solids

by Inductively-Coupled Plasma (ICP)
EPA SW-846 3050B



Customer: Mabbett & Associates, Inc.
105 Central Street
Suite 4100

Attn: Mike Delaney

Lab Order ID: 10034807

Analysis: IPB

Date Received: 10/16/2023

Date Reported: 10/18/2023

Project: PNY - Bldg 300/R2023006.000

Sample ID	Description	Mass (g)	Element	Reporting Limit (ppm)	Concentration (ppm)	Concentration (% by Weight)
Lab Sample ID	Lab Notes					
Pb-06	Tan metal duct - 1st fl. col. A18	0.046	Cr	2.2	16000	1.6
10034807_0001						
Pb-08	Tan metal duct - 1st fl. col. B7	0.0599	Cr	1.7	50000	5.0
10034807_0002						
Pb-10	Tan metal duct - 1st fl. col. B15	0.0758	Cr	1.3	67	0.0067
10034807_0003						
Pb-12	Tan metal duct - 1st fl. col. D19	0.0746	Cr	1.3	30.	0.0030
10034807_0004						
Pb-14	Tan metal duct - 1st fl. col. D10	0.1032	Cr	0.97	2200	0.22
10034807_0005						
Pb-15	White metal duct - 1st fl. nom 3143	0.1345	Cd	0.37	16	0.0016
10034807_0006		0.1345	Cr	0.74	13000	1.3
Pb-18	Tan metal duct - 1st fl. col. E9	0.0482	Cd	1.0	3.1	0.00031
10034807_0008		0.0482	Cr	2.1	3900	0.39
Pb-23	Tan metal duct - 2nd floor col. 2. 16	0.0571	Cr	1.8	140	0.014
10034807_0010						

Disclaimer: This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. Scientific Analytical Institute participates in the AIHA ELPAT program. ELPAT Laboratory ID: 173190. SAI is AIHA ELLAP accredited for Pb only for bulk samples. Unless otherwise noted blank sample correction was not performed on analytical results. Reporting limits stated above. Analytical uncertainty available upon request. SAI is AIHA ELLAP accredited for Pb only for bulk metals.

Matthew Caffey (10)

Analyst

Nathaniel J. Durham

Approved Signatory



Analysis for Metals Concentration in Bulk Solids

by Inductively-Coupled Plasma (ICP)
EPA SW-846 3050B



Customer: Mabbett & Associates, Inc.
105 Central Street
Suite 4100

Attn: Mike Delaney

Lab Order ID: 10034807

Analysis: IPB

Date Received: 10/16/2023

Date Reported: 10/18/2023

Project: PNY - Bldg 300/R2023006.000


Sample ID <i>Lab Sample ID</i>	Description <i>Lab Notes</i>	Mass (g)	Element	Reporting Limit (ppm)	Concentration (ppm)	Concentration (% by Weight)
Pb-27 10034807_0011	Tan metal duct - bay 2 catwalk (West) HV9	0.1206	Cr	0.83	4500	0.45
Pb-29 10034807_0012	Tan metal duct - catwalk (West)	0.1	Cr	1.0	22000	2.2

Disclaimer: This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. Scientific Analytical Institute participates in the AIHA ELPAT program. ELPAT Laboratory ID: 173190. SAI is AIHA ELLAP accredited for Pb only for bulk samples. Unless otherwise noted blank sample correction was not performed on analytical results. Reporting limits stated above. Analytical uncertainty available upon request. SAI is AIHA ELLAP accredited for Pb only for bulk metals.

Matthew Caffey (10)

Analyst

Approved Signatory

Page 1 of 1



Analysis for Lead Concentration in Paint Chips

by Flame Atomic Absorption Spectroscopy
EPA SW-846 3050B/6010C/7000B



Customer: Mabbett & Associates, Inc.
105 Central Street
Suite 4100

Attn: Mike Delaney

Lab Order ID: 10026594

Analysis: PBP

Date Received: 06/28/2023

Date Reported: 06/30/2023

Project: PNSY - B300 #R2023006.000

Sample ID	Description	Mass (g)	Concentration (ppm)	Concentration (% by weight)
Lab Sample ID	Lab Notes			
Pb-01	Tan concrete wall 1st floor - columns A2-A3	0.0318	130	0.013%
10026594_0001				
Pb-02	Tan metal column 1st floor - column A5	0.0613	260	0.026%
10026594_0002				
Pb-03	Gray concrete floor 1st floor - column A5	0.1270	80.	0.0080%
10026594_0003				
Pb-04	Tan metal column 1st floor - column A18	0.0873	1700	0.17%
10026594_0004				
Pb-05	Gray concrete wall 1st floor - column A17	0.0771	68	0.0068%
10026594_0005				
Pb-06	Tan metal duct 1st floor - column A18	0.0223	790	0.079%
10026594_0006				
Pb-07	Tan metal column 1st floor - column B7	0.0575	150	0.015%
10026594_0007				
Pb-08	Tan metal duct 1st floor - column B8	0.0828	400	0.040%
10026594_0008				

Disclaimer: Unless otherwise noted blank sample correction was not performed on analytical results. Scientific Analytical Institute participates in the AIHA ELPAT program. ELPAT Laboratory ID: 173190. This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. Analytical uncertainty available upon request. The quality control samples run with the samples in this report have passed all EPA required specifications unless otherwise noted. RL: (Report Limit for an undiluted 50ml sample is 4µg Total Pb).

Matthew Caffey (29)

Analyst

Nathaniel J. Durham

Approved Signatory



Analysis for Lead Concentration in Paint Chips

by Flame Atomic Absorption Spectroscopy
EPA SW-846 3050B/6010C/7000B



Customer: Mabbett & Associates, Inc.
105 Central Street
Suite 4100

Attn: Mike Delaney

Lab Order ID: 10026594

Analysis: PBP

Date Received: 06/28/2023

Date Reported: 06/30/2023

Project: PNSY - B300 #R2023006.000

Sample ID	Description	Mass (g)	Concentration (ppm)	Concentration (% by weight)
Lab Sample ID	Lab Notes			
Pb-09	Tan metal column 1st floor - column B15	0.0527	240	0.024%
10026594_0009				
Pb-10	Tan metal duct 1st floor - column B15	0.0655	320	0.032%
10026594_0010				
Pb-11	Tan concrete block wall 1st floor - column C3	0.0396	72	0.0072%
10026594_0011				
Pb-12	Tan metal duct 1st floor - column D19	0.0697	150	0.015%
10026594_0012				
Pb-13	Tan metal column 1st floor - column D10	0.0622	320	0.032%
10026594_0013				
Pb-14	Tan metal duct 1st floor - column D10	0.0582	160	0.016%
10026594_0014				
Pb-15	White metal duct 1st floor - columns E16-E17	0.0630	1100	0.11%
10026594_0015				
Pb-16	Red concrete floor 1st floor - column E16-E17	0.1533	1000	0.10%
10026594_0016				

Disclaimer: Unless otherwise noted blank sample correction was not performed on analytical results. Scientific Analytical Institute participates in the AIHA ELPAT program. ELPAT Laboratory ID: 173190. This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. Analytical uncertainty available upon request. The quality control samples run with the samples in this report have passed all EPA required specifications unless otherwise noted. RL: (Report Limit for an undiluted 50ml sample is 4µg Total Pb).

Matthew Caffey (29)

Analyst

Nathaniel J. Durham

Approved Signatory



Analysis for Lead Concentration in Paint Chips

by Flame Atomic Absorption Spectroscopy
EPA SW-846 3050B/6010C/7000B



Customer: Mabbett & Associates, Inc.
105 Central Street
Suite 4100

Attn: Mike Delaney

Lab Order ID: 10026594

Analysis: PBP

Date Received: 06/28/2023

Date Reported: 06/30/2023

Project: PNSY - B300 #R2023006.000

Sample ID	Description	Mass (g)	Concentration (ppm)	Concentration (% by weight)
Lab Sample ID	Lab Notes			
Pb-17	Tan metal truss 1st floor - column E9	0.0639	920	0.092%
10026594_0017				
Pb-18	Tan metal duct 1st floor - column E9	0.0252	530	0.053%
10026594_0018				
Pb-19	Gray concrete floor 1st floor - column E9	0.0997	58	0.0058%
10026594_0019				
Pb-20	Tan concrete wall 1st floor - column E3	0.1007	98	0.0098%
10026594_0020				
Pb-21	Tan metal duct 2nd floor - column D5	0.0635	800	0.080%
10026594_0021				
Pb-22	Gray concrete floor 2nd floor - column D5	0.0255	<63	<0.0063%
10026594_0022				
Pb-23	Tan metal duct 2nd floor column 2.16	0.0956	1100	0.11%
10026594_0023				
Pb-24	White metal wall 2nd floor column 2.16	0.1168	480	0.048%
10026594_0024				

Disclaimer: Unless otherwise noted blank sample correction was not performed on analytical results. Scientific Analytical Institute participates in the AIHA ELPAT program. ELPAT Laboratory ID: 173190. This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. Analytical uncertainty available upon request. The quality control samples run with the samples in this report have passed all EPA required specifications unless otherwise noted. RL: (Report Limit for an undiluted 50ml sample is 4µg Total Pb).

Matthew Caffey (29)

Analyst

Nathaniel J. Durham

Approved Signatory



Analysis for Lead Concentration in Paint Chips

by Flame Atomic Absorption Spectroscopy
EPA SW-846 3050B/6010C/7000B



Customer: Mabbett & Associates, Inc.
105 Central Street
Suite 4100

Attn: Mike Delaney

Lab Order ID: 10026594

Analysis: PBP

Date Received: 06/28/2023

Date Reported: 06/30/2023

Project: PNSY - B300 #R2023006.000

Sample ID	Description	Mass (g)	Concentration (ppm)	Concentration (% by weight)
Lab Sample ID	Lab Notes			
Pb-25	Green gypsum wall 2nd floor - break room	0.0535	<75	<0.0075%
10026594_0025				
Pb-26	Blue gypsum wall 2nd floor hall by men's room	0.0631	<63	<0.0063%
10026594_0026				
Pb-27	Tan metal duct center catwalk - HV9	0.1318	73	0.0073%
10026594_0027				
Pb-28	Tan metal truss center catwalk - HV5	0.0201	430	0.043%
10026594_0028				
Pb-29	Tan metal desk catwalk - west side	0.0730	1700	0.17%
10026594_0029				

Disclaimer: Unless otherwise noted blank sample correction was not performed on analytical results. Scientific Analytical Institute participates in the AIHA ELPAT program. ELPAT Laboratory ID: 173190. This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. Analytical uncertainty available upon request. The quality control samples run with the samples in this report have passed all EPA required specifications unless otherwise noted. RL: (Report Limit for an undiluted 50ml sample is 4µg Total Pb).

Matthew Caffey (29)

Analyst

Approved Signatory



Scientific Analytical Institute
4604 Dundas Dr. Greensboro, NC 27407
Phone: 336.292.3888 Fax: 336.292.3313
www.sailab.com lab@sailab.com

Lab Use Only
Lab Order ID: 10026594
Client Code: _____

Contact Information

Company Name: Mabbett & Assoc. Inc.
Address: 105 Central St - Suite 4100
Stoneham, MA 02180
Contact: Mike Delaney
Phone ☐: (781) 275-6050
Fax ☐:
Email ☒: delaney@mabbett.com
PO Number:
Project Name/Number: PNSY - B300
#R2023006.000

Lead Test Types

Paint Chips by Flame AA ☒ (PBP) Soil by Flame AA ☐ (PBS) Other ☐
Wipe by Flame AA ☐ (PBW) Air by Flame AA ☐ (PBA)

Billing/Invoice Information

Company:

Address:

Contact:

Phone ☐:

Fax ☐:

Email ☐:

Turn Around Times

3 Hours	☐	72 Hours	☐
6 Hours	☐	96 Hours	☐
12 Hours	☐	120 Hours	☐
24 Hours	☐	144+ Hours	☐
48 Hours	☒		

Sample ID #	Description/Location	Volume/Area	Comments
Pb-01	Tan Concrete Wall 1st floor - Columns A2-A3		
Pb-02	Tan Metal Column 1st floor - column A5		
Pb-03	Gray Concrete Floor 1st floor - Column A5		
Pb-04	Tan Metal Column 1st floor - column A18		
Pb-05	Gray Concrete Wall 1st floor - column A17		
Pb-06	Tan Metal Duct 1st floor - column A18		
Pb-07	Tan Metal Column 1st floor - Column B7		
Pb-08	Tan Metal Duct 1st floor - column B8		
Pb-09	Tan Metal Column 1st floor - column B15		Accepted ☒
Pb-10	Tan Metal Duct 1st floor - column B15		Rejected ☐

Total Number of Samples 29

Relinquished by	Date/Time	Received by	Date/Time
Kevin Dorman	6/27/23 5PM	CJ	6/28 10:30AM



Scientific Analytical Institute
 4604 Dundas Dr. Greensboro, NC 27407
 Phone: 336.292.3888 Fax: 336.292.3313
 www.sailab.com lab@sailab.com

Lab use only
 Lab Order ID: 10026594
 Client Code: _____

Sample ID #	Description/Location	Volume/Area	Comments
Pb-11	Tan Concrete Block Wall		
	1st floor - column C3		
Pb-12	Tan Metal Duct		
	1st floor - column D19		
Pb-13	Tan Metal Column		
	1st floor - column D10		
Pb-14	Tan Metal Duct		
	1st floor - column D10		
Pb-15	White Metal Duct		
	1st floor - columns E16-E17		
Pb-16	Red Concrete Floor		
	1st floor - column E16-E17		
Pb-17	Tan Metal Truss		
	1st floor - column E9		
Pb-18	Tan Metal Duct		
	1st floor - column E9		
Pb-19	Gray Concrete Floor		
	1st floor - column E9		
Pb-20	Tan Concrete Wall		
	1st floor - column E3		
Pb-21	Tan Metal Duct		
	2nd floor - column D5		
Pb-22	Gray Concrete Floor		
	2nd floor - column D5		
Pb-23	Tan Metal Duct		
	2nd floor column 215		
Pb-24	White Metal Wall		
	2nd floor column 215		
Pb-25	Green Gypsum Wall		
	2nd floor - break room		
Pb-26	Blue Gypsum Wall		
	2nd floor Hall by men's room		
Pb-27	Tan Metal Duct		
	center catwalk - HV 9		
Pb-28	Tan Metal Truss		
	center catwalk - HV 5		
Pb-29	Tan Metal Deck		
	catwalk - west side		



Analysis for Metals Concentration in Bulk Solids

by Inductively-Coupled Plasma (ICP)
EPA SW-846 3050B



Customer: Mabbett & Associates, Inc.
105 Central Street
Suite 4100

Attn: Mike Delaney

Lab Order ID: 10026594

Analysis: IPB

Date Received: 07/21/2023

Date Reported: 07/25/2023

Project: PNSY - B300 #R2023006.000

Sample ID	Description	Mass (g)	Element	Reporting Limit (ppm)	Concentration (ppm)	Concentration (% by Weight)
Lab Sample ID	Lab Notes					
Pb-01	Tan concrete wall 1st floor - columns A2-A3	0.0193	Cd	2.6	<2.6	<0.00026
10026594_0001		0.0193	Cr	5.2	41	0.0041
Pb-02	Tan metal column 1st floor - column A5	0.0495	Cd	1.0	3.8	0.00038
10026594_0002						
Pb-03	Gray concrete floor 1st floor - column A5	0.0114	Cd	4.4	<4.4	<0.00044
10026594_0003						
Pb-04	Tan metal column 1st floor - column A18	0.0663	Cd	0.75	26	0.0026
10026594_0004						
Pb-05	Gray concrete wall 1st floor - column A17	0.0378	Cd	1.3	<1.3	<0.00013
10026594_0005						
Pb-06	Tan metal duct 1st floor - column A18	0.0118	Cd	4.2	5.4	0.00054
10026594_0006						
Pb-07	Tan metal column 1st floor - column B7	0.0415	Cd	1.2	4.3	0.00043
10026594_0007						
Pb-08	Tan metal duct 1st floor - column B8	0.0594	Cd	0.84	11	0.0011
10026594_0008						

Disclaimer: This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. Scientific Analytical Institute participates in the AIHA ELPAT program. ELPAT Laboratory ID: 173190. SAI is AIHA ELLAP accredited for Pb only for bulk samples. Unless otherwise noted blank sample correction was not performed on analytical results. Reporting limits stated above. Analytical uncertainty available upon request. SAI is AIHA ELLAP accredited for Pb only for bulk metals.

Matthew Caffey (24)

Analyst

Nathaniel J. Durham

Approved Signatory



Analysis for Metals Concentration in Bulk Solids

by Inductively-Coupled Plasma (ICP)
EPA SW-846 3050B



Customer: Mabbett & Associates, Inc.
105 Central Street
Suite 4100

Attn: Mike Delaney

Lab Order ID: 10026594

Analysis: IPB

Date Received: 07/21/2023

Date Reported: 07/25/2023

Project: PNSY - B300 #R2023006.000

Sample ID	Description	Mass (g)	Element	Reporting Limit (ppm)	Concentration (ppm)	Concentration (% by Weight)
Lab Sample ID	Lab Notes					
Pb-09	Tan metal column 1st floor - column B15	0.0526	Cd	0.95	6.0	0.00060
10026594_0009						
Pb-10	Tan metal duct 1st floor - column B15	0.0376	Cd	1.3	<1.3	<0.00013
10026594_0010						
Pb-11	Tan concrete block wall 1st floor - column C3	0.0169	Cd	3.0	3.2	0.00032
10026594_0011						
Pb-12	Tan metal duct 1st floor - column D19	0.0342	Cd	1.5	3.0	0.00030
10026594_0012						
Pb-13	Tan metal column 1st floor - column D10	0.0285	Cd	1.8	5.8	0.00058
10026594_0013						
Pb-14	Tan metal duct 1st floor - column D10	0.0243	Cd	2.1	15	0.0015
10026594_0014						
Pb-16	Red concrete floor 1st floor - column E16-E17	0.1233	Cd	0.41	53	0.0053
10026594_0016						
Pb-19	Gray concrete floor 1st floor - column E9	0.075	Cd	0.67	2.9	0.00029
10026594_0019						

Disclaimer: This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. Scientific Analytical Institute participates in the AIHA ELPAT program. ELPAT Laboratory ID: 173190. SAI is AIHA ELLAP accredited for Pb only for bulk samples. Unless otherwise noted blank sample correction was not performed on analytical results. Reporting limits stated above. Analytical uncertainty available upon request. SAI is AIHA ELLAP accredited for Pb only for bulk metals.

Matthew Caffey (24)

Analyst

Nathaniel J. Durham

Approved Signatory



Analysis for Metals Concentration in Bulk Solids

by Inductively-Coupled Plasma (ICP)
EPA SW-846 3050B



Customer: Mabbett & Associates, Inc.
105 Central Street
Suite 4100

Attn: Mike Delaney

Lab Order ID: 10026594

Analysis: IPB

Date Received: 07/21/2023

Date Reported: 07/25/2023

Project: PNSY - B300 #R2023006.000

Sample ID	Description	Mass (g)	Element	Reporting Limit (ppm)	Concentration (ppm)	Concentration (% by Weight)
Lab Sample ID	Lab Notes					
Pb-20	Tan concrete wall 1st floor - column E3	0.1114	Cd	0.45	<0.45	<0.000045
10026594_0020						
Pb-22	Gray concrete floor 2nd floor - column D5	0.0117	Cd	4.3	6.9	0.00069
10026594_0022						
Pb-23	Tan metal duct 2nd floor column 2.16	0.0192	Cd	2.6	8.7	0.00087
10026594_0023						
Pb-24	White metal wall 2nd floor column 2.16	0.0247	Cd	2.0	<2.0	<0.00020
10026594_0024						
Pb-25	Green gypsum wall 2nd floor - break room	0.079	Cd	0.63	<0.63	<0.000063
10026594_0025						
Pb-26	Blue gypsum wall 2nd floor hall by men's room	0.1031	Cd	0.48	1.3	0.00013
10026594_0026						
Pb-27	Tan metal duct center catwalk - HV9	0.1106	Cd	0.45	2.2	0.00022
10026594_0027						
Pb-29	Tan metal desk catwalk - west side	0.0954	Cd	0.52	2.2	0.00022
10026594_0029						

Disclaimer: This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. Scientific Analytical Institute participates in the AIHA ELPAT program. ELPAT Laboratory ID: 173190. SAI is AIHA ELLAP accredited for Pb only for bulk samples. Unless otherwise noted blank sample correction was not performed on analytical results. Reporting limits stated above. Analytical uncertainty available upon request. SAI is AIHA ELLAP accredited for Pb only for bulk metals.

Matthew Caffey (24)

Analyst

Nathaniel J. Durham

Approved Signatory



Scientific Analytical Institute
4604 Dundas Dr. Greensboro, NC 27407
Phone: 336.292.3888 Fax: 336.292.3313
www.sailab.com lab@sailab.com

Lab Use Only
Lab Order ID: 10026594
Client Code: _____

Contact Information

Company Name: Mabbett & Assoc. Inc.
Address: 105 Central St - Suite 4100
Stoneham, MA 02180
Contact: Mike Delaney
Phone ☐: (781) 275-6050
Fax ☐:
Email ☒: delaney@mabbett.com
PO Number:
Project Name/Number: PNSY - B300
#R2023006.000

Lead Test Types

Paint Chips by Flame AA ☒ (PBP) Soil by Flame AA ☐ (PBS) Other ☐
Wipe by Flame AA ☐ (PBW) Air by Flame AA ☐ (PBA)

Billing/Invoice Information

Company:

Address:

Contact:

Phone ☐:

Fax ☐:

Email ☐:

Turn Around Times

3 Hours	☐	72 Hours	☐
6 Hours	☐	96 Hours	☐
12 Hours	☐	120 Hours	☐
24 Hours	☐	144+ Hours	☐
48 Hours	☒		

Sample ID #	Description/Location	Volume/Area	Comments
Pb-01	Tan Concrete Wall 1st floor - Columns A2-A3		
Pb-02	Tan Metal Column 1st floor - column A5		
Pb-03	Gray Concrete Floor 1st floor - Column A5		
Pb-04	Tan Metal Column 1st floor - column A18		
Pb-05	Gray Concrete Wall 1st floor - column A17		
Pb-06	Tan Metal Duct 1st floor - column A18		
Pb-07	Tan Metal Column 1st floor - Column B7		
Pb-08	Tan Metal Duct 1st floor - column B8		
Pb-09	Tan Metal Column 1st floor - column B15		Accepted ☒
Pb-10	Tan Metal Duct 1st floor - column B15		Rejected ☐

Total Number of Samples 29

Relinquished by	Date/Time	Received by	Date/Time
Kevin Dorman	6/27/23 5PM	CJ	6/28 10:30AM



Scientific Analytical Institute
 4604 Dundas Dr. Greensboro, NC 27407
 Phone: 336.292.3888 Fax: 336.292.3313
 www.sailab.com lab@sailab.com

Lab use only
 Lab Order ID: 10026594
 Client Code: _____

Sample ID #	Description/Location	Volume/Area	Comments
Pb-11	Tan Concrete Block Wall		
	1st floor - column C3		
Pb-12	Tan Metal Duct		
	1st floor - column D19		
Pb-13	Tan Metal Column		
	1st floor - column D10		
Pb-14	Tan Metal Duct		
	1st floor - column D10		
Pb-15	White Metal Duct		
	1st floor - columns E16-E17		
Pb-16	Red Concrete Floor		
	1st floor - column E16-E17		
Pb-17	Tan Metal Truss		
	1st floor - column E9		
Pb-18	Tan Metal Duct		
	1st floor - column E9		
Pb-19	Gray Concrete Floor		
	1st floor - column E9		
Pb-20	Tan Concrete Wall		
	1st floor - column E3		
Pb-21	Tan Metal Duct		
	2nd floor - column D5		
Pb-22	Gray Concrete Floor		
	2nd floor - column D5		
Pb-23	Tan Metal Duct		
	2nd floor column 215		
Pb-24	White Metal Wall		
	2nd floor column 215		
Pb-25	Green Gypsum Wall		
	2nd floor - break room		
Pb-26	Blue Gypsum Wall		
	2nd floor Hall by men's room		
Pb-27	Tan Metal Duct		
	center catwalk - HV 9		
Pb-28	Tan Metal Truss		
	center catwalk - HV 5		
Pb-29	Tan Metal Deck		
	catwalk - west side		

APPENDIX D

Dust Sampling (RCRA 8 Metals) Laboratory Report and Chain of Custody Documentation



Analysis for Metals Concentration in Wipe Samples

by Inductively-Coupled Plasma (ICP)
NIOSH 7303/EPA SW-846 3050B



Customer: Mabbett & Associates, Inc.
105 Central Street
Suite 4100

Attn: Mike Delaney

Lab Order ID: 10026592

Analysis: IPW

Date Received: 06/28/2023

Date Reported: 07/03/2023

Date Amended: 07/05/2023

Project: PNSY - Building 300

Sample ID	Description	Area (ft ²)	Element	Reporting Limit (µg)	Concentration (µg)	Concentration (µg/ft ²)
Lab Sample ID	Lab Notes					
DW-01	Dust wipe - 1st floor - column A2	0.108	Ag	0.15	68	630
			As	0.25	<0.25	<2.3
			Ba	0.050	30.	280
			Cd	0.050	12	110
			Cr	0.10	28	260
			Pb	0.25	100	930
10026592_0001			Se	0.50	1.6	15
DW-02	Dust wipe - 1st floor - column A18	0.108	Ag	0.15	41	380
			As	0.25	<0.25	<2.3
			Ba	0.050	62	570
			Cd	0.050	6.5	60.
			Cr	0.10	170	1600
			Pb	0.25	170	1500
10026592_0002			Se	0.50	4.6	43
DW-03	Dust wipe - 1st floor - column B8	0.108	Ag	0.15	140	1300
			As	25	<25	<230
			Ba	5.0	490	4600
			Cd	5.0	74	690
			Cr	10.	180	1700
			Pb	25	120	1100
10026592_0003			Se	50.	<50.	<460

Disclaimer: This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. Scientific Analytical Institute participates in the AIHA ELPAT program. ELPAT Laboratory ID: 173190. SAI is AIHA ELLAP accredited for Pb only for dust wipe samples. Unless otherwise noted blank sample correction was not performed on analytical results. Reporting limits stated above. Analytical uncertainty available upon request. Unless indicated, areas and volumes were provided by the customer. *SAI is AIHA ELLAP accredited for Pb only for dust wipe metals.

Matthew Caffey (15)

Analyst

Nathaniel J. Durham

Approved Signatory



Analysis for Metals Concentration in Wipe Samples

by Inductively-Coupled Plasma (ICP)
NIOSH 7303/EPA SW-846 3050B



Customer: Mabbett & Associates, Inc.
105 Central Street
Suite 4100

Attn: Mike Delaney

Lab Order ID: 10026592

Analysis: IPW

Date Received: 06/28/2023

Date Reported: 07/03/2023

Date Amended: 07/05/2023

Project: PNSY - Building 300

Sample ID	Description	Area (ft ²)	Element	Reporting Limit (µg)	Concentration (µg)	Concentration (µg/ft ²)
Lab Sample ID	Lab Notes					
DW-04	Dust wipe - 1st floor - column B15	0.108	Ag	0.15	140	1300
			As	0.25	<0.25	<2.3
			Ba	0.050	46	420
			Cd	0.050	42	390
			Cr	0.10	69	640
			Pb	0.25	200	1800
10026592_0004			Se	0.50	2.8	26
DW-05	Dust wipe - 1st floor - column C3	0.108	Ag	0.15	3.5	33
			As	0.25	<0.25	<2.3
			Ba	0.050	35	320
			Cd	0.050	21	200
			Cr	0.10	15	130
			Pb	0.25	17	160
10026592_0005			Se	0.50	1.9	17
DW-06	Dust wipe - 1st floor - column D19	0.108	Ag	0.15	3.2	30.
			As	0.25	<0.25	<2.3
			Ba	0.050	39	360
			Cd	0.050	8.4	77
			Cr	0.10	29	270
			Pb	0.25	34	320
10026592_0006			Se	0.50	2.2	20.

Disclaimer: This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. Scientific Analytical Institute participates in the AIHA ELPAT program. ELPAT Laboratory ID: 173190. SAI is AIHA ELLAP accredited for Pb only for dust wipe samples. Unless otherwise noted blank sample correction was not performed on analytical results. Reporting limits stated above. Analytical uncertainty available upon request. Unless indicated, areas and volumes were provided by the customer. *SAI is AIHA ELLAP accredited for Pb only for dust wipe metals.

Matthew Caffey (15)

Analyst

Nathaniel J. Durham

Approved Signatory



Analysis for Metals Concentration in Wipe Samples

by Inductively-Coupled Plasma (ICP)
NIOSH 7303/EPA SW-846 3050B



Customer: Mabbett & Associates, Inc.
105 Central Street
Suite 4100

Attn: Mike Delaney

Lab Order ID: 10026592

Analysis: IPW

Date Received: 06/28/2023

Date Reported: 07/03/2023

Date Amended: 07/05/2023

Project: PNSY - Building 300

Sample ID	Description	Area (ft ²)	Element	Reporting Limit (µg)	Concentration (µg)	Concentration (µg/ft ²)
Lab Sample ID	Lab Notes					
DW-07	Dust wipe - 1st floor - column D10	0.108	Ag	0.15	22	210
			As	0.25	<0.25	<2.3
			Ba	0.050	190	1800
			Cd	0.050	44	400
			Cr	0.10	37	340
			Pb	0.25	46	420
10026592_0007			Se	0.50	4.1	38
DW-08	Dust wipe - 1st floor - column E16/E17	0.108	Ag	0.15	11	98
			As	25	<25	<230
			Ba	5.0	170	1600
			Cd	5.0	25	230
			Cr	0.10	120	1100
			Pb	25	33	300
10026592_0008			Se	50.	<50.	<460
DW-09	Dust wipe - 1st floor - column E9	0.108	Ag	0.15	53	490
			As	2.5	<2.5	<23
			Ba	0.050	210	1900
			Cd	0.050	350	3300
			Cr	0.10	170	1500
			Pb	2.5	270	2500
10026592_0009			Se	5.0	<5.0	<46

Disclaimer: This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. Scientific Analytical Institute participates in the AIHA ELPAT program. ELPAT Laboratory ID: 173190. SAI is AIHA ELLAP accredited for Pb only for dust wipe samples. Unless otherwise noted blank sample correction was not performed on analytical results. Reporting limits stated above. Analytical uncertainty available upon request. Unless indicated, areas and volumes were provided by the customer. *SAI is AIHA ELLAP accredited for Pb only for dust wipe metals.

Matthew Caffey (15)

Analyst

Nathaniel J. Durham

Approved Signatory



Analysis for Metals Concentration in Wipe Samples

by Inductively-Coupled Plasma (ICP)
NIOSH 7303/EPA SW-846 3050B



Customer: Mabbett & Associates, Inc.
105 Central Street
Suite 4100

Attn: Mike Delaney

Lab Order ID: 10026592

Analysis: IPW

Date Received: 06/28/2023

Date Reported: 07/03/2023

Date Amended: 07/05/2023

Project: PNSY - Building 300

Sample ID	Description	Area (ft ²)	Element	Reporting Limit (µg)	Concentration (µg)	Concentration (µg/ft ²)
Lab Sample ID	Lab Notes					
DW-10	Dust wipe - 1st floor - column E3	0.108	Ag	0.15	40.	370
			As	2.5	<2.5	<23
			Ba	0.50	330	3000
			Cd	0.50	200	1800
			Cr	1.0	170	1600
			Pb	2.5	260	2400
10026592_0010			Se	5.0	12	110
DW-11	Dust wipe - 2nd floor - column D5	0.108	Ag	0.15	1.3	12
			As	0.25	<0.25	<2.3
			Ba	0.050	45	420
			Cd	0.050	20.	190
			Cr	0.10	15	140
			Pb	0.25	9.2	86
10026592_0011			Se	0.50	2.1	19
DW-12	Dust wipe - 2nd floor - column 2.16 back room	0.108	Ag	0.15	46	430
			As	2.5	<2.5	<23
			Ba	0.50	380	3500
			Cd	0.50	35	320
			Cr	1.0	700	6500
			Pb	2.5	89	830
10026592_0012			Se	5.0	32	300

Disclaimer: This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. Scientific Analytical Institute participates in the AIHA ELPAT program. ELPAT Laboratory ID: 173190. SAI is AIHA ELLAP accredited for Pb only for dust wipe samples. Unless otherwise noted blank sample correction was not performed on analytical results. Reporting limits stated above. Analytical uncertainty available upon request. Unless indicated, areas and volumes were provided by the customer. *SAI is AIHA ELLAP accredited for Pb only for dust wipe metals.

Matthew Caffey (15)

Analyst

Nathaniel J. Durham

Approved Signatory



Analysis for Metals Concentration in Wipe Samples

by Inductively-Coupled Plasma (ICP)
NIOSH 7303/EPA SW-846 3050B



Customer: Mabbett & Associates, Inc.
105 Central Street
Suite 4100

Attn: Mike Delaney

Lab Order ID: 10026592

Analysis: IPW

Date Received: 06/28/2023

Date Reported: 07/03/2023

Date Amended: 07/05/2023

Project: PNSY - Building 300

Sample ID	Description	Area (ft ²)	Element	Reporting Limit (µg)	Concentration (µg)	Concentration (µg/ft ²)
Lab Sample ID	Lab Notes					
DW-13	Dust wipe - 2nd floor - mens room	0.108	Ag	0.15	4.5	42
			As	0.25	<0.25	<2.3
			Ba	0.050	83	770
			Cd	0.050	15	140
			Cr	0.10	19	170
			Pb	0.25	16	150
10026592_0013			Se	0.50	3.6	33
DW-14	Dust wipe - middle catwalk - HV6	0.108	Ag	0.15	9.7	90.
			As	0.25	<0.25	<2.3
			Ba	0.050	77	710
			Cd	0.050	41	380
			Cr	0.10	30.	280
			Pb	0.25	41	380
10026592_0014			Se	0.50	2.2	20.
DW-15	Dust wipe - middle catwalk - HV5	0.108	Ag	0.15	40.	370
			As	2.5	<2.5	<23
			Ba	0.50	280	2600
			Cd	0.50	56	520
			Cr	1.0	430	4000
			Pb	2.5	350	3300
10026592_0015			Se	5.0	7.8	72

Disclaimer: This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. Scientific Analytical Institute participates in the AIHA ELPAT program. ELPAT Laboratory ID: 173190. SAI is AIHA ELLAP accredited for Pb only for dust wipe samples. Unless otherwise noted blank sample correction was not performed on analytical results. Reporting limits stated above. Analytical uncertainty available upon request. Unless indicated, areas and volumes were provided by the customer. *SAI is AIHA ELLAP accredited for Pb only for dust wipe metals.

Matthew Caffey (15)

Analyst

Nathaniel J. Durham

Approved Signatory



Scientific Analytical Institute
4604 Dundas Dr. Greensboro, NC 27407
Phone: 336.292.3888 Fax: 336.292.3313
www.sallab.com lab@sallab.com

10026592 R
Lab Use Only
Lab Order ID: 10008 CS
Client Code: _____

Contact Information	
Company Name:	Mabbett & Associates, Inc.,
Address:	105 Central Street - Suite 4100 Stonham, MA 02180
Contact:	Mike Delaney
Phone ☒ :	(781) 275-6050
Fax ☐ :	
Email ☒ :	delaney@mabbett.com
PO Number:	
Project Name/Number:	PN5Y - Building #300 #R2023006, 060

Lead Test Types		
Paint Chips by Flame AA ☐ (PBP)	Soil by Flame AA ☐ (PBS)	Other ☒ Dust Wipe
Wipe by Flame AA ☐ (PBW)	Air by Flame AA ☐ (PBA)	RECRA-8

Billing/Invoice Information	
Company:	
Address:	SAME
Contact:	
Phone ☐ :	
Fax ☐ :	
Email ☐ :	

Turn Around Times			
3 Hours	☐	72 Hours	☐
6 Hours	☐	96 Hours	☐
12 Hours	☐	120 Hours	☐
24 Hours	☐	144+ Hours	☐
48 Hours	☒		

Sample ID #	Description/Location	Volume/Area	Comments
DW-01	Dust Wipe - 1st floor, column A2	100sq cm	inside duct
DW-02	- 1st floor, column A18		inside duct
DW-03	- 1st floor, column B8		inside duct
DW-04	- 1st floor, column B15		inside duct
DW-05	- 1st floor, column C3		outside duct
DW-06	- 1st floor, column D19		inside duct
DW-07	- 1st floor, column D10		outside duct
DW-08	- 1st floor, column EK/E17		inside duct
DW-09	- 1st floor, column E9		inside duct
DW-10	- 1st floor, column E3		inside duct
DW-11	- 2nd floor, column D5		inside duct
DW-12	- 2nd floor, column D16 back		inside duct
DW-13	- 2nd floor, men's room		outside duct
DW-14	- Middle Corridor - HV6		inside air handler
DW-15	✓ - Middle Corridor - HV5	✓	outside duct
			Accepted ☒
			Rejected ☐

Total Number of Samples 15

Relinquished by	Date/Time	Received by	Date/Time
<u>[Signature]</u> Kain Conner	6/27/23 5PM	<u>[Signature]</u>	7/5 12pm



Analysis for Mercury Concentration in Wipe Samples

by Cold Vapor Atomic Absorption
OSHA ID -145

Customer: Mabbett & Associates, Inc.
105 Central Street
Suite 4100

Attn: Mike Delaney

Lab Order ID: 10026592

Analysis: HGW

Date Received: 06/28/2023

Date Reported: 06/30/2023

Date Amended: 07/05/2023

Project: PNSY - Building 300

Sample ID	Description	Area (ft ²)	Concentration (µg)	Concentration (µg/ft ²)
Lab Sample ID	Lab Notes			
DW-01	Dust wipe - 1st floor - column A2	0.108	<0.075	<0.69
10026592_0001				
DW-02	Dust wipe - 1st floor - column A18	0.108	<0.075	<0.69
10026592_0002				
DW-03	Dust wipe - 1st floor - column B8	0.108	<0.075	<0.69
10026592_0003				
DW-04	Dust wipe - 1st floor - column B15	0.108	<0.075	<0.69
10026592_0004				
DW-05	Dust wipe - 1st floor - column C3	0.108	<0.075	<0.69
10026592_0005				
DW-06	Dust wipe - 1st floor - column D19	0.108	<0.075	<0.69
10026592_0006				
DW-07	Dust wipe - 1st floor - column D10	0.108	<0.075	<0.69
10026592_0007				
DW-08	Dust wipe - 1st floor - column E16/E17	0.108	0.15	1.4
10026592_0008				

Disclaimer: This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. Unless otherwise noted blank sample correction was not performed on analytical results. The reporting limit for an undiluted wipe sample is 0.025µg total Mercury. Analytical uncertainty available upon request. Unless indicated, areas and volumes were provided by the customer.

Athena Summa (15)

Analyst

Approved Signatory



Analysis for Mercury Concentration in Wipe Samples

by Cold Vapor Atomic Absorption
OSHA ID -145

Customer: Mabbett & Associates, Inc.
105 Central Street
Suite 4100

Attn: Mike Delaney

Lab Order ID: 10026592

Analysis: HGW

Date Received: 06/28/2023

Date Reported: 06/30/2023

Date Amended: 07/05/2023

Project: PNSY - Building 300

Sample ID	Description	Area (ft ²)	Concentration (µg)	Concentration (µg/ft ²)
Lab Sample ID	Lab Notes			
DW-09	Dust wipe - 1st floor - column E9	0.108	0.30	2.8
10026592_0009				
DW-10	Dust wipe - 1st floor - column E3	0.108	0.88	8.1
10026592_0010				
DW-11	Dust wipe - 2nd floor - column D5	0.108	0.89	8.2
10026592_0011				
DW-12	Dust wipe - 2nd floor - column 2.16 back room	0.108	0.080	0.74
10026592_0012				
DW-13	Dust wipe - 2nd floor - mens room	0.108	0.25	2.3
10026592_0013				
DW-14	Dust wipe - middle catwalk - HV6	0.108	0.095	0.88
10026592_0014				
DW-15	Dust wipe - middle catwalk - HV5	0.108	0.46	4.2
10026592_0015				

Disclaimer: This report relates only to the samples tested and may not be reproduced, except in full, without the written approval of SAI. Unless otherwise noted blank sample correction was not performed on analytical results. The reporting limit for an undiluted wipe sample is 0.025µg total Mercury. Analytical uncertainty available upon request. Unless indicated, areas and volumes were provided by the customer.

Athena Summa (15)

Analyst

Approved Signatory



Scientific Analytical Institute
 4604 Dundas Dr. Greensboro, NC 27407
 Phone: 336.292.3888 Fax: 336.292.3313
 www.sallab.com lab@sallab.com

Lab Use Only
 Lab Order ID: 10026592 CS
 Client Code: _____

Contact Information	
Company Name:	Mabbett & Associates, Inc.,
Address:	105 Central Street - Suite 4100 Stonham, MA 02180
Contact:	Mike Delaney
Phone ☑:	(781) 275-6050
Fax ☐:	
Email ☑:	delaney@mabbett.com
PO Number:	
Project Name/Number:	PN5Y - Building #300 #R2023006, 060

Billing/Invoice Information	
Company:	
Address:	SAME
Contact:	
Phone ☐:	
Fax ☐:	
Email ☐:	

Lead Test Types		
Paint Chips by Flame AA (PBP) ☐	Soil by Flame AA (PBS) ☐	Other ☑ Dust Wipe
Wipe by Flame AA (PBW) ☐	Air by Flame AA (PBA) ☐	RECRA-8

Turn Around Times			
3 Hours	☐	72 Hours	☐
6 Hours	☐	96 Hours	☐
12 Hours	☐	120 Hours	☐
24 Hours	☐	144+ Hours	☐
48 Hours	☑		

Sample ID #	Description/Location	Volume/Area	Comments
DW-01	Dust Wipe - 1st floor, column A2	100sq cm	inside duct
DW-02	- 1st floor, column A18		inside duct
DW-03	- 1st floor, column B8		inside duct
DW-04	- 1st floor, column B15		inside duct
DW-05	- 1st floor, column C3		outside duct
DW-06	- 1st floor, column D19		inside duct
DW-07	- 1st floor, column D10		outside duct
DW-08	- 1st floor, column EK/E17		inside duct
DW-09	- 1st floor, column E9		inside duct
DW-10	- 1st floor, column E3		inside duct
DW-11	- 2nd floor, column D5		inside duct
DW-12	- 2nd floor, column D16 back		inside duct
DW-13	- 2nd floor, men's room		outside duct
DW-14	- Middle Corridor - HV6		inside air handler
DW-15	✓ - Middle Corridor - HV5	✓	outside duct
			Accepted ☑
			Rejected ☐

Total Number of Samples 15

Relinquished by	Date/Time	Received by	Date/Time
<u>[Signature]</u> Kain Conner	6/27/23 5PM	<u>[Signature]</u>	7/5 12pm

APPENDIX E

PCB Laboratory Report and Chain of Custody Documentation



ANALYTICAL REPORT

Lab Number:	L2360824
Client:	Mabbett & Associates 105 Central Street Suite 4100 Stoneham, MA 02180
ATTN:	Michael Delaney
Phone:	(781) 275-6050
Project Name:	PORTSMOUTH NAVAL YARD
Project Number:	R2023006.000
Report Date:	10/24/23

The original project report/data package is held by Alpha Analytical. This report/data package is paginated and should be reproduced only in its entirety. Alpha Analytical holds no responsibility for results and/or data that are not consistent with the original.

Certifications & Approvals: MA (M-MA086), NH NELAP (2064), CT (PH-0826), IL (200077), IN (C-MA-03), KY (KY98045), ME (MA00086), MD (348), NJ (MA935), NY (11148), NC (25700/666), OH (CL108), OR (MA-1316), PA (68-03671), RI (LAO00065), TX (T104704476), VT (VT-0935), VA (460195), USDA (Permit #525-23-122-91930).

Eight Walkup Drive, Westborough, MA 01581-1019
508-898-9220 (Fax) 508-898-9193 800-624-9220 - www.alphalab.com



Project Name: PORTSMOUTH NAVAL YARD

Project Number: R2023006.000

Lab Number: L2360824

Report Date: 10/24/23

Alpha Sample ID	Client ID	Matrix	Sample Location	Collection Date/Time	Receive Date
L2360824-01	PCB-01-RED DUT SEALANT BAY 3 CATWALK DH3	SOLID	B-300 KITTERY, ME	10/11/23 11:00	10/13/23
L2360824-02	PCB-02-TAN METAL DUCT PAINT BAY 3 CATWALK BY DH3	SOLID	B-300 KITTERY, ME	10/11/23 11:00	10/13/23
L2360824-03	PCB-03-TAN METAL DUCT PAINT BAY 2 CATWALK(WEST)	SOLID	B-300 KITTERY, ME	10/11/23 11:00	10/13/23
L2360824-04	PCB-04-TAN DUCT PAINT BAY 1 @ COLUMN 1A1	SOLID	B-300 KITTERY, ME	10/11/23 11:00	10/13/23
L2360824-05	PCB-05-TAN DUCT PAINT BAY 2 COLUMN C18	SOLID	B-300 KITTERY, ME	10/11/23 11:00	10/13/23
L2360824-06	PCB-06-TAN DUCT PAINT BAY 3 COLUMN, D8	SOLID	B-300 KITTERY, ME	10/11/23 11:00	10/13/23
L2360824-07	PCB-07-WHITE DUCT PAINT BAY 4 ROOM 3143	SOLID	B-300 KITTERY, ME	10/11/23 11:00	10/13/23
L2360824-08	PCB-08-TAN DUCT PAINT BAY 5 WELDERS ROOM	SOLID	B-300 KITTERY, ME	10/11/23 11:00	10/13/23

Project Name: PORTSMOUTH NAVAL YARD
Project Number: R2023006.000

Lab Number: L2360824
Report Date: 10/24/23

Case Narrative

The samples were received in accordance with the Chain of Custody and no significant deviations were encountered during the preparation or analysis unless otherwise noted. Sample Receipt, Container Information, and the Chain of Custody are located at the back of the report.

Results contained within this report relate only to the samples submitted under this Alpha Lab Number and meet NELAP requirements for all NELAP accredited parameters unless otherwise noted in the following narrative. The data presented in this report is organized by parameter (i.e. VOC, SVOC, etc.). Sample specific Quality Control data (i.e. Surrogate Spike Recovery) is reported at the end of the target analyte list for each individual sample, followed by the Laboratory Batch Quality Control at the end of each parameter. Tentatively Identified Compounds (TICs), if requested, are reported for compounds identified to be present and are not part of the method/program Target Compound List, even if only a subset of the TCL are being reported. If a sample was re-analyzed or re-extracted due to a required quality control corrective action and if both sets of data are reported, the Laboratory ID of the re-analysis or re-extraction is designated with an "R" or "RE", respectively.

When multiple Batch Quality Control elements are reported (e.g. more than one LCS), the associated samples for each element are noted in the grey shaded header line of each data table. Any Laboratory Batch, Sample Specific % recovery or RPD value that is outside the listed Acceptance Criteria is bolded in the report. In reference to questions H (CAM) or 4 (RCP) when "NO" is checked, the performance criteria for CAM and RCP methods allow for some quality control failures to occur and still be within method compliance. In these instances, the specific failure is not narrated but noted in the associated QC Outlier Summary Report, located directly after the Case Narrative. QC information is also incorporated in the Data Usability Assessment table (Format 11) of our Data Merger tool, where it can be reviewed in conjunction with the sample result, associated regulatory criteria and any associated data usability implications.

Soil/sediments, solids and tissues are reported on a dry weight basis unless otherwise noted. Definitions of all data qualifiers and acronyms used in this report are provided in the Glossary located at the back of the report.

HOLD POLICY - For samples submitted on hold, Alpha's policy is to hold samples (with the exception of Air canisters) free of charge for 21 calendar days from the date the project is completed. After 21 calendar days, we will dispose of all samples submitted including those put on hold unless you have contacted your Alpha Project Manager and made arrangements for Alpha to continue to hold the samples. Air canisters will be disposed after 3 business days from the date the project is completed.

Please contact Project Management at 800-624-9220 with any questions.

Project Name: PORTSMOUTH NAVAL YARD
Project Number: R2023006.000

Lab Number: L2360824
Report Date: 10/24/23

Case Narrative (continued)

PCBs

L2360824-02 through -08: The sample has elevated detection limits due to the limited sample volume utilized during extraction, as required by the sample matrix.

I, the undersigned, attest under the pains and penalties of perjury that, to the best of my knowledge and belief and based upon my personal inquiry of those responsible for providing the information contained in this analytical report, such information is accurate and complete. This certificate of analysis is not complete unless this page accompanies any and all pages of this report.

Authorized Signature:



Cristin Walker

Title: Technical Director/Representative

Date: 10/24/23

ORGANICS

PCBS

Project Name: PORTSMOUTH NAVAL YARD
Project Number: R2023006.000

Lab Number: L2360824
Report Date: 10/24/23

SAMPLE RESULTS

Lab ID: L2360824-01
Client ID: PCB-01-RED DUT SEALANT BAY 3 CATWALK DH3
Sample Location: B-300 KITTEERY, ME

Date Collected: 10/11/23 11:00
Date Received: 10/13/23
Field Prep: Not Specified

Sample Depth:

Matrix: Solid
Analytical Method: 1,8082A
Analytical Date: 10/19/23 16:04
Analyst: RMP
Percent Solids: Results reported on an 'AS RECEIVED' basis.

Extraction Method: EPA 3540C
Extraction Date: 10/18/23 11:00
Cleanup Method: EPA 3630
Cleanup Date: 10/19/23
Cleanup Method: EPA 3665A
Cleanup Date: 10/19/23
Cleanup Method: EPA 3660B
Cleanup Date: 10/19/23

Parameter	Result	Qualifier	Units	RL	MDL	Dilution Factor	Column
Polychlorinated Biphenyls by GC - Westborough Lab							
Aroclor 1016	ND		ug/kg	621	--	1	A
Aroclor 1221	ND		ug/kg	621	--	1	A
Aroclor 1232	ND		ug/kg	621	--	1	A
Aroclor 1242	ND		ug/kg	310	--	1	A
Aroclor 1248	ND		ug/kg	621	--	1	A
Aroclor 1254	ND		ug/kg	621	--	1	A
Aroclor 1260	ND		ug/kg	621	--	1	A
Aroclor 1262	ND		ug/kg	621	--	1	A
Aroclor 1268	ND		ug/kg	310	--	1	A
PCBs, Total	ND		ug/kg	310	--	1	A

Surrogate	% Recovery	Qualifier	Acceptance Criteria	Column
2,4,5,6-Tetrachloro-m-xylene	71		30-150	A
Decachlorobiphenyl	68		30-150	A
2,4,5,6-Tetrachloro-m-xylene	69		30-150	B
Decachlorobiphenyl	60		30-150	B

Project Name: PORTSMOUTH NAVAL YARD**Lab Number:** L2360824**Project Number:** R2023006.000**Report Date:** 10/24/23**SAMPLE RESULTS****Lab ID:** L2360824-02**Date Collected:** 10/11/23 11:00**Client ID:** PCB-02-TAN METAL DUCT PAINT BAY 3 CATWALK BY**Date Received:** 10/13/23**Sample Location:** DH3
B-300 KITTERY, ME**Field Prep:** Not Specified**Sample Depth:****Matrix:** Solid**Extraction Method:** EPA 3540C**Analytical Method:** 1,8082A**Extraction Date:** 10/18/23 11:15**Analytical Date:** 10/19/23 19:02**Cleanup Method:** EPA 3665A**Analyst:** RMP**Cleanup Date:** 10/19/23**Percent Solids:** Results reported on an 'AS RECEIVED' basis.**Cleanup Method:** EPA 3660B**Cleanup Date:** 10/19/23

Parameter	Result	Qualifier	Units	RL	MDL	Dilution Factor	Column
Polychlorinated Biphenyls by GC - Westborough Lab							
Aroclor 1016	ND		ug/kg	192	--	1	A
Aroclor 1221	ND		ug/kg	192	--	1	A
Aroclor 1232	ND		ug/kg	192	--	1	A
Aroclor 1242	ND		ug/kg	192	--	1	A
Aroclor 1248	ND		ug/kg	192	--	1	A
Aroclor 1254	481		ug/kg	192	--	1	A
Aroclor 1260	ND		ug/kg	192	--	1	A
Aroclor 1262	ND		ug/kg	192	--	1	A
Aroclor 1268	ND		ug/kg	192	--	1	A
PCBs, Total	481		ug/kg	192	--	1	A

Surrogate	% Recovery	Qualifier	Acceptance Criteria	Column
2,4,5,6-Tetrachloro-m-xylene	64		30-150	A
Decachlorobiphenyl	55		30-150	A
2,4,5,6-Tetrachloro-m-xylene	70		30-150	B
Decachlorobiphenyl	57		30-150	B

Project Name: PORTSMOUTH NAVAL YARD**Lab Number:** L2360824**Project Number:** R2023006.000**Report Date:** 10/24/23**SAMPLE RESULTS**

Lab ID: L2360824-03
 Client ID: PCB-03-TAN METAL DUCT PAINT BAY 2
 Sample Location: CATWALK(WEST)
 B-300 KITTERY, ME

Date Collected: 10/11/23 11:00
 Date Received: 10/13/23
 Field Prep: Not Specified

Sample Depth:

Matrix: Solid
 Analytical Method: 1,8082A
 Analytical Date: 10/19/23 19:10
 Analyst: RMP
 Percent Solids: Results reported on an 'AS RECEIVED' basis.

Extraction Method: EPA 3540C
 Extraction Date: 10/18/23 11:15
 Cleanup Method: EPA 3665A
 Cleanup Date: 10/19/23
 Cleanup Method: EPA 3660B
 Cleanup Date: 10/19/23

Parameter	Result	Qualifier	Units	RL	MDL	Dilution Factor	Column
Polychlorinated Biphenyls by GC - Westborough Lab							
Aroclor 1016	ND		ug/kg	174	--	1	A
Aroclor 1221	ND		ug/kg	174	--	1	A
Aroclor 1232	ND		ug/kg	174	--	1	A
Aroclor 1242	445		ug/kg	174	--	1	B
Aroclor 1248	ND		ug/kg	174	--	1	A
Aroclor 1254	485		ug/kg	174	--	1	A
Aroclor 1260	ND		ug/kg	174	--	1	A
Aroclor 1262	ND		ug/kg	174	--	1	A
Aroclor 1268	ND		ug/kg	174	--	1	A
PCBs, Total	930		ug/kg	174	--	1	B

Surrogate	% Recovery	Qualifier	Acceptance Criteria	Column
2,4,5,6-Tetrachloro-m-xylene	70		30-150	A
Decachlorobiphenyl	56		30-150	A
2,4,5,6-Tetrachloro-m-xylene	73		30-150	B
Decachlorobiphenyl	58		30-150	B

Project Name: PORTSMOUTH NAVAL YARD
Project Number: R2023006.000

Lab Number: L2360824
Report Date: 10/24/23

SAMPLE RESULTS

Lab ID: L2360824-04
Client ID: PCB-04-TAN DUCT PAINT BAY 1 @ COLUMN 1A1
Sample Location: B-300 KITTERY, ME

Date Collected: 10/11/23 11:00
Date Received: 10/13/23
Field Prep: Not Specified

Sample Depth:

Matrix: Solid
Analytical Method: 1,8082A
Analytical Date: 10/19/23 19:18
Analyst: RMP
Percent Solids: Results reported on an 'AS RECEIVED' basis.

Extraction Method: EPA 3540C
Extraction Date: 10/18/23 11:15
Cleanup Method: EPA 3665A
Cleanup Date: 10/19/23
Cleanup Method: EPA 3660B
Cleanup Date: 10/19/23

Parameter	Result	Qualifier	Units	RL	MDL	Dilution Factor	Column
Polychlorinated Biphenyls by GC - Westborough Lab							
Aroclor 1016	ND		ug/kg	239	--	1	A
Aroclor 1221	ND		ug/kg	239	--	1	A
Aroclor 1232	ND		ug/kg	239	--	1	A
Aroclor 1242	ND		ug/kg	239	--	1	A
Aroclor 1248	ND		ug/kg	239	--	1	A
Aroclor 1254	588		ug/kg	239	--	1	A
Aroclor 1260	550		ug/kg	239	--	1	A
Aroclor 1262	ND		ug/kg	239	--	1	A
Aroclor 1268	ND		ug/kg	239	--	1	A
PCBs, Total	1140		ug/kg	239	--	1	A

Surrogate	% Recovery	Qualifier	Acceptance Criteria	Column
2,4,5,6-Tetrachloro-m-xylene	65		30-150	A
Decachlorobiphenyl	56		30-150	A
2,4,5,6-Tetrachloro-m-xylene	69		30-150	B
Decachlorobiphenyl	53		30-150	B

Project Name: PORTSMOUTH NAVAL YARD
Project Number: R2023006.000

Lab Number: L2360824
Report Date: 10/24/23

SAMPLE RESULTS

Lab ID: L2360824-05
Client ID: PCB-05-TAN DUCT PAINT BAY 2 COLUMN C18
Sample Location: B-300 KITTEERY, ME

Date Collected: 10/11/23 11:00
Date Received: 10/13/23
Field Prep: Not Specified

Sample Depth:

Matrix: Solid
Analytical Method: 1,8082A
Analytical Date: 10/19/23 19:26
Analyst: RMP
Percent Solids: Results reported on an 'AS RECEIVED' basis.

Extraction Method: EPA 3540C
Extraction Date: 10/18/23 11:15
Cleanup Method: EPA 3665A
Cleanup Date: 10/19/23
Cleanup Method: EPA 3660B
Cleanup Date: 10/19/23

Parameter	Result	Qualifier	Units	RL	MDL	Dilution Factor	Column
Polychlorinated Biphenyls by GC - Westborough Lab							
Aroclor 1016	ND		ug/kg	230	--	1	A
Aroclor 1221	ND		ug/kg	230	--	1	A
Aroclor 1232	ND		ug/kg	230	--	1	A
Aroclor 1242	ND		ug/kg	230	--	1	A
Aroclor 1248	ND		ug/kg	230	--	1	B
Aroclor 1254	308		ug/kg	230	--	1	A
Aroclor 1260	436		ug/kg	230	--	1	A
Aroclor 1262	ND		ug/kg	230	--	1	A
Aroclor 1268	ND		ug/kg	230	--	1	A
PCBs, Total	744		ug/kg	230	--	1	B

Surrogate	% Recovery	Qualifier	Acceptance Criteria	Column
2,4,5,6-Tetrachloro-m-xylene	65		30-150	A
Decachlorobiphenyl	55		30-150	A
2,4,5,6-Tetrachloro-m-xylene	69		30-150	B
Decachlorobiphenyl	89		30-150	B

Project Name: PORTSMOUTH NAVAL YARD**Lab Number:** L2360824**Project Number:** R2023006.000**Report Date:** 10/24/23**SAMPLE RESULTS**

Lab ID: L2360824-06
 Client ID: PCB-06-TAN DUCT PAINT BAY 3 COLUMN, D8
 Sample Location: B-300 KITTERY, ME

Date Collected: 10/11/23 11:00
 Date Received: 10/13/23
 Field Prep: Not Specified

Sample Depth:

Matrix: Solid
 Analytical Method: 1,8082A
 Analytical Date: 10/19/23 19:33
 Analyst: RMP
 Percent Solids: Results reported on an 'AS RECEIVED' basis.

Extraction Method: EPA 3540C
 Extraction Date: 10/18/23 11:15
 Cleanup Method: EPA 3665A
 Cleanup Date: 10/19/23
 Cleanup Method: EPA 3660B
 Cleanup Date: 10/19/23

Parameter	Result	Qualifier	Units	RL	MDL	Dilution Factor	Column
Polychlorinated Biphenyls by GC - Westborough Lab							
Aroclor 1016	ND		ug/kg	223	--	1	A
Aroclor 1221	ND		ug/kg	223	--	1	A
Aroclor 1232	ND		ug/kg	223	--	1	A
Aroclor 1242	ND		ug/kg	223	--	1	A
Aroclor 1248	385		ug/kg	223	--	1	A
Aroclor 1254	603		ug/kg	223	--	1	B
Aroclor 1260	ND		ug/kg	223	--	1	A
Aroclor 1262	ND		ug/kg	223	--	1	A
Aroclor 1268	ND		ug/kg	223	--	1	A
PCBs, Total	988		ug/kg	223	--	1	B

Surrogate	% Recovery	Qualifier	Acceptance Criteria	Column
2,4,5,6-Tetrachloro-m-xylene	75		30-150	A
Decachlorobiphenyl	61		30-150	A
2,4,5,6-Tetrachloro-m-xylene	76		30-150	B
Decachlorobiphenyl	56		30-150	B

Project Name: PORTSMOUTH NAVAL YARD**Lab Number:** L2360824**Project Number:** R2023006.000**Report Date:** 10/24/23**SAMPLE RESULTS****Lab ID:** L2360824-07**Date Collected:** 10/11/23 11:00**Client ID:** PCB-07-WHITE DUCT PAINT BAY 4 ROOM 3143**Date Received:** 10/13/23**Sample Location:** B-300 KITTERY, ME**Field Prep:** Not Specified**Sample Depth:****Matrix:** Solid**Extraction Method:** EPA 3540C**Analytical Method:** 1,8082A**Extraction Date:** 10/18/23 11:15**Analytical Date:** 10/19/23 19:41**Cleanup Method:** EPA 3665A**Analyst:** RMP**Cleanup Date:** 10/19/23**Percent Solids:** Results reported on an 'AS RECEIVED' basis.**Cleanup Method:** EPA 3660B**Cleanup Date:** 10/19/23

Parameter	Result	Qualifier	Units	RL	MDL	Dilution Factor	Column
Polychlorinated Biphenyls by GC - Westborough Lab							
Aroclor 1016	ND		ug/kg	3850	--	1	A
Aroclor 1221	ND		ug/kg	3850	--	1	A
Aroclor 1232	ND		ug/kg	3850	--	1	A
Aroclor 1242	ND		ug/kg	3850	--	1	A
Aroclor 1248	ND		ug/kg	3850	--	1	A
Aroclor 1254	ND		ug/kg	3850	--	1	A
Aroclor 1260	ND		ug/kg	3850	--	1	A
Aroclor 1262	ND		ug/kg	3850	--	1	A
Aroclor 1268	ND		ug/kg	3850	--	1	A
PCBs, Total	ND		ug/kg	3850	--	1	A

Surrogate	% Recovery	Qualifier	Acceptance Criteria	Column
2,4,5,6-Tetrachloro-m-xylene	65		30-150	A
Decachlorobiphenyl	61		30-150	A
2,4,5,6-Tetrachloro-m-xylene	68		30-150	B
Decachlorobiphenyl	58		30-150	B

Project Name: PORTSMOUTH NAVAL YARD**Lab Number:** L2360824**Project Number:** R2023006.000**Report Date:** 10/24/23**SAMPLE RESULTS****Lab ID:** L2360824-08**Date Collected:** 10/11/23 11:00**Client ID:** PCB-08-TAN DUCT PAINT BAY 5 WELDERS ROOM**Date Received:** 10/13/23**Sample Location:** B-300 KITTEERY, ME**Field Prep:** Not Specified**Sample Depth:****Matrix:** Solid**Extraction Method:** EPA 3540C**Analytical Method:** 1,8082A**Extraction Date:** 10/18/23 11:15**Analytical Date:** 10/19/23 19:49**Cleanup Method:** EPA 3665A**Analyst:** RMP**Cleanup Date:** 10/19/23**Percent Solids:** Results reported on an 'AS RECEIVED' basis.**Cleanup Method:** EPA 3660B**Cleanup Date:** 10/19/23

Parameter	Result	Qualifier	Units	RL	MDL	Dilution Factor	Column
Polychlorinated Biphenyls by GC - Westborough Lab							
Aroclor 1016	ND		ug/kg	403	--	1	A
Aroclor 1221	ND		ug/kg	403	--	1	A
Aroclor 1232	ND		ug/kg	403	--	1	A
Aroclor 1242	ND		ug/kg	403	--	1	A
Aroclor 1248	1020		ug/kg	403	--	1	B
Aroclor 1254	1870		ug/kg	403	--	1	B
Aroclor 1260	ND		ug/kg	403	--	1	A
Aroclor 1262	ND		ug/kg	403	--	1	A
Aroclor 1268	ND		ug/kg	403	--	1	A
PCBs, Total	2890		ug/kg	403	--	1	B

Surrogate	% Recovery	Qualifier	Acceptance Criteria	Column
2,4,5,6-Tetrachloro-m-xylene	68		30-150	A
Decachlorobiphenyl	73		30-150	A
2,4,5,6-Tetrachloro-m-xylene	73		30-150	B
Decachlorobiphenyl	51		30-150	B

Project Name: PORTSMOUTH NAVAL YARD
Project Number: R2023006.000

Lab Number: L2360824
Report Date: 10/24/23

Method Blank Analysis Batch Quality Control

Analytical Method: 1,8082A
 Analytical Date: 10/19/23 15:04
 Analyst: RMP

Extraction Method: EPA 3540C
 Extraction Date: 10/17/23 13:00
 Cleanup Method: EPA 3630
 Cleanup Date: 10/19/23
 Cleanup Method: EPA 3665A
 Cleanup Date: 10/19/23
 Cleanup Method: EPA 3660B
 Cleanup Date: 10/19/23

Parameter	Result	Qualifier	Units	RL	MDL	Column
Polychlorinated Biphenyls by GC - Westborough Lab for sample(s): 01 Batch: WG1840783-1						
Aroclor 1016	ND		ug/kg	562	--	A
Aroclor 1221	ND		ug/kg	562	--	A
Aroclor 1232	ND		ug/kg	562	--	A
Aroclor 1242	ND		ug/kg	281	--	A
Aroclor 1248	ND		ug/kg	562	--	A
Aroclor 1254	ND		ug/kg	562	--	A
Aroclor 1260	ND		ug/kg	562	--	A
Aroclor 1262	ND		ug/kg	562	--	A
Aroclor 1268	ND		ug/kg	281	--	A
PCBs, Total	ND		ug/kg	281	--	A

Surrogate	%Recovery	Qualifier	Acceptance Criteria	Column
2,4,5,6-Tetrachloro-m-xylene	81		30-150	A
Decachlorobiphenyl	75		30-150	A
2,4,5,6-Tetrachloro-m-xylene	80		30-150	B
Decachlorobiphenyl	68		30-150	B

Project Name: PORTSMOUTH NAVAL YARD
Project Number: R2023006.000

Lab Number: L2360824
Report Date: 10/24/23

Method Blank Analysis
Batch Quality Control

Analytical Method: 1,8082A
 Analytical Date: 10/19/23 18:38
 Analyst: RMP

Extraction Method: EPA 3540C
 Extraction Date: 10/18/23 11:15
 Cleanup Method: EPA 3665A
 Cleanup Date: 10/19/23
 Cleanup Method: EPA 3660B
 Cleanup Date: 10/19/23

Parameter	Result	Qualifier	Units	RL	MDL	Column
Polychlorinated Biphenyls by GC - Westborough Lab for sample(s): 02-08 Batch: WG1841215-1						
Aroclor 1016	ND		ug/kg	84.0	--	A
Aroclor 1221	ND		ug/kg	84.0	--	A
Aroclor 1232	ND		ug/kg	84.0	--	A
Aroclor 1242	ND		ug/kg	84.0	--	A
Aroclor 1248	ND		ug/kg	84.0	--	A
Aroclor 1254	ND		ug/kg	84.0	--	A
Aroclor 1260	ND		ug/kg	84.0	--	A
Aroclor 1262	ND		ug/kg	84.0	--	A
Aroclor 1268	ND		ug/kg	84.0	--	A
PCBs, Total	ND		ug/kg	84.0	--	A

Surrogate	%Recovery	Qualifier	Acceptance Criteria	Column
2,4,5,6-Tetrachloro-m-xylene	76		30-150	A
Decachlorobiphenyl	66		30-150	A
2,4,5,6-Tetrachloro-m-xylene	76		30-150	B
Decachlorobiphenyl	64		30-150	B

Lab Control Sample Analysis

Batch Quality Control

Project Name: PORTSMOUTH NAVAL YARD

Lab Number: L2360824

Project Number: R2023006.000

Report Date: 10/24/23

Parameter	LCS %Recovery	Qual	LCSD %Recovery	Qual	%Recovery Limits	RPD	Qual	RPD Limits	Column
Polychlorinated Biphenyls by GC - Westborough Lab Associated sample(s): 01 Batch: WG1840783-2 WG1840783-3									
Aroclor 1016	83		77		40-140	8		50	A
Aroclor 1260	75		70		40-140	7		50	A

Surrogate	LCS %Recovery	Qual	LCSD %Recovery	Qual	Acceptance Criteria	Column
2,4,5,6-Tetrachloro-m-xylene	84		78		30-150	A
Decachlorobiphenyl	81		74		30-150	A
2,4,5,6-Tetrachloro-m-xylene	82		77		30-150	B
Decachlorobiphenyl	71		65		30-150	B

Lab Control Sample Analysis

Batch Quality Control

Project Name: PORTSMOUTH NAVAL YARD

Project Number: R2023006.000

Lab Number: L2360824

Report Date: 10/24/23

Parameter	LCS %Recovery	Qual	LCSD %Recovery	Qual	%Recovery Limits	RPD	Qual	RPD Limits	Column
Polychlorinated Biphenyls by GC - Westborough Lab Associated sample(s): 02-08 Batch: WG1841215-2 WG1841215-3									
Aroclor 1016	72		72		40-140	0		50	A
Aroclor 1260	60		62		40-140	3		50	A

Surrogate	LCS %Recovery	Qual	LCSD %Recovery	Qual	Acceptance Criteria	Column
2,4,5,6-Tetrachloro-m-xylene	73		72		30-150	A
Decachlorobiphenyl	60		62		30-150	A
2,4,5,6-Tetrachloro-m-xylene	73		71		30-150	B
Decachlorobiphenyl	59		60		30-150	B

Project Name: PORTSMOUTH NAVAL YARD
Project Number: R2023006.000

Serial_No:10242315:49
Lab Number: L2360824
Report Date: 10/24/23

Sample Receipt and Container Information

Were project specific reporting limits specified?

YES

Cooler Information

Cooler	Custody Seal
A	Absent

Container Information

Container ID	Container Type	Cooler	Initial pH	Final pH	Temp deg C	Pres	Seal	Frozen Date/Time	Analysis(*)
L2360824-01A	Glass 60mL/2oz unpreserved	A	NA		3.8	Y	Absent		PCB-8082-CAULK(365)
L2360824-02A	Glass 60mL/2oz unpreserved	A	NA		3.8	Y	Absent		PCB-8082-PAINT(365)
L2360824-03A	Glass 60mL/2oz unpreserved	A	NA		3.8	Y	Absent		PCB-8082-PAINT(365)
L2360824-04A	Glass 60mL/2oz unpreserved	A	NA		3.8	Y	Absent		PCB-8082-PAINT(365)
L2360824-05A	Glass 60mL/2oz unpreserved	A	NA		3.8	Y	Absent		PCB-8082-PAINT(365)
L2360824-06A	Glass 60mL/2oz unpreserved	A	NA		3.8	Y	Absent		PCB-8082-PAINT(365)
L2360824-07A	Glass 60mL/2oz unpreserved	A	NA		3.8	Y	Absent		PCB-8082-PAINT(365)
L2360824-08A	Glass 60mL/2oz unpreserved	A	NA		3.8	Y	Absent		PCB-8082-PAINT(365)

Project Name: PORTSMOUTH NAVAL YARD
Project Number: R2023006.000

Lab Number: L2360824
Report Date: 10/24/23

GLOSSARY

Acronyms

DL	- Detection Limit: This value represents the level to which target analyte concentrations are reported as estimated values, when those target analyte concentrations are quantified below the limit of quantitation (LOQ). The DL includes any adjustments from dilutions, concentrations or moisture content, where applicable. (DoD report formats only.)
EDL	- Estimated Detection Limit: This value represents the level to which target analyte concentrations are reported as estimated values, when those target analyte concentrations are quantified below the reporting limit (RL). The EDL includes any adjustments from dilutions, concentrations or moisture content, where applicable. The use of EDLs is specific to the analysis of PAHs using Solid-Phase Microextraction (SPME).
EMPC	- Estimated Maximum Possible Concentration: The concentration that results from the signal present at the retention time of an analyte when the ions meet all of the identification criteria except the ion abundance ratio criteria. An EMPC is a worst-case estimate of the concentration.
EPA	- Environmental Protection Agency.
LCS	- Laboratory Control Sample: A sample matrix, free from the analytes of interest, spiked with verified known amounts of analytes or a material containing known and verified amounts of analytes.
LCSD	- Laboratory Control Sample Duplicate: Refer to LCS.
LFB	- Laboratory Fortified Blank: A sample matrix, free from the analytes of interest, spiked with verified known amounts of analytes or a material containing known and verified amounts of analytes.
LOD	- Limit of Detection: This value represents the level to which a target analyte can reliably be detected for a specific analyte in a specific matrix by a specific method. The LOD includes any adjustments from dilutions, concentrations or moisture content, where applicable. (DoD report formats only.)
LOQ	- Limit of Quantitation: The value at which an instrument can accurately measure an analyte at a specific concentration. The LOQ includes any adjustments from dilutions, concentrations or moisture content, where applicable. (DoD report formats only.) Limit of Quantitation: The value at which an instrument can accurately measure an analyte at a specific concentration. The LOQ includes any adjustments from dilutions, concentrations or moisture content, where applicable. (DoD report formats only.)
MDL	- Method Detection Limit: This value represents the level to which target analyte concentrations are reported as estimated values, when those target analyte concentrations are quantified below the reporting limit (RL). The MDL includes any adjustments from dilutions, concentrations or moisture content, where applicable.
MS	- Matrix Spike Sample: A sample prepared by adding a known mass of target analyte to a specified amount of matrix sample for which an independent estimate of target analyte concentration is available. For Method 332.0, the spike recovery is calculated using the native concentration, including estimated values.
MSD	- Matrix Spike Sample Duplicate: Refer to MS.
NA	- Not Applicable.
NC	- Not Calculated: Term is utilized when one or more of the results utilized in the calculation are non-detect at the parameter's reporting unit.
NDPA/DPA	- N-Nitrosodiphenylamine/Diphenylamine.
NI	- Not Ignitable.
NP	- Non-Plastic: Term is utilized for the analysis of Atterberg Limits in soil.
NR	- No Results: Term is utilized when 'No Target Compounds Requested' is reported for the analysis of Volatile or Semivolatile Organic TIC only requests.
RL	- Reporting Limit: The value at which an instrument can accurately measure an analyte at a specific concentration. The RL includes any adjustments from dilutions, concentrations or moisture content, where applicable.
RPD	- Relative Percent Difference: The results from matrix and/or matrix spike duplicates are primarily designed to assess the precision of analytical results in a given matrix and are expressed as relative percent difference (RPD). Values which are less than five times the reporting limit for any individual parameter are evaluated by utilizing the absolute difference between the values; although the RPD value will be provided in the report.
SRM	- Standard Reference Material: A reference sample of a known or certified value that is of the same or similar matrix as the associated field samples.
STLP	- Semi-dynamic Tank Leaching Procedure per EPA Method 1315.
TEF	- Toxic Equivalency Factors: The values assigned to each dioxin and furan to evaluate their toxicity relative to 2,3,7,8-TCDD.
TEQ	- Toxic Equivalent: The measure of a sample's toxicity derived by multiplying each dioxin and furan by its corresponding TEF and then summing the resulting values.
TIC	- Tentatively Identified Compound: A compound that has been identified to be present and is not part of the target compound list (TCL) for the method and/or program. All TICs are qualitatively identified and reported as estimated concentrations.

Report Format: Data Usability Report



Project Name: PORTSMOUTH NAVAL YARD
Project Number: R2023006.000

Lab Number: L2360824
Report Date: 10/24/23

Footnotes

- 1 - The reference for this analyte should be considered modified since this analyte is absent from the target analyte list of the original method.

Terms

Analytical Method: Both the document from which the method originates and the analytical reference method. (Example: EPA 8260B is shown as 1,8260B.) The codes for the reference method documents are provided in the References section of the Addendum.

Chlordane: The target compound Chlordane (CAS No. 57-74-9) is reported for GC ECD analyses. Per EPA, this compound "refers to a mixture of chlordane isomers, other chlorinated hydrocarbons and numerous other components." (Reference: USEPA Toxicological Review of Chlordane, In Support of Summary Information on the Integrated Risk Information System (IRIS), December 1997.)

Difference: With respect to Total Oxidizable Precursor (TOP) Assay analysis, the difference is defined as the Post-Treatment value minus the Pre-Treatment value.

Final pH: As it pertains to Sample Receipt & Container Information section of the report, Final pH reflects pH of container determined after adjustment at the laboratory, if applicable. If no adjustment required, value reflects Initial pH.

Frozen Date/Time: With respect to Volatile Organics in soil, Frozen Date/Time reflects the date/time at which associated Reagent Water-preserved vials were initially frozen. Note: If frozen date/time is beyond 48 hours from sample collection, value will be reflected in 'bold'.

Gasoline Range Organics (GRO): Gasoline Range Organics (GRO) results include all chromatographic peaks eluting from Methyl tert butyl ether through Naphthalene, with the exception of GRO analysis in support of State of Ohio programs, which includes all chromatographic peaks eluting from Hexane through Dodecane.

Initial pH: As it pertains to Sample Receipt & Container Information section of the report, Initial pH reflects pH of container determined upon receipt, if applicable.

PAH Total: With respect to Alkylated PAH analyses, the 'PAHs, Total' result is defined as the summation of results for all or a subset of the following compounds: Naphthalene, C1-C4 Naphthalenes, 2-Methylnaphthalene, 1-Methylnaphthalene, Biphenyl, Acenaphthylene, Acenaphthene, Fluorene, C1-C3 Fluorenes, Phenanthrene, C1-C4 Phenanthrenes/Anthracenes, Anthracene, Fluoranthene, Pyrene, C1-C4 Fluoranthenes/Pyrenes, Benz(a)anthracene, Chrysene, C1-C4 Chrysenes, Benzo(b)fluoranthene, Benzo(j)+(k)fluoranthene, Benzo(e)pyrene, Benzo(a)pyrene, Perylene, Indeno(1,2,3-cd)pyrene, Dibenz(ah)+(ac)anthracene, Benzo(g,h,i)perylene. If a 'Total' result is requested, the results of its individual components will also be reported.

PFAS Total: With respect to PFAS analyses, the 'PFAS, Total (5)' result is defined as the summation of results for: PFHpA, PFHxS, PFOA, PFNA and PFOS. In addition, the 'PFAS, Total (6)' result is defined as the summation of results for: PFHpA, PFHxS, PFOA, PFNA, PFDA and PFOS. For MassDEP DW compliance analysis only, the 'PFAS, Total (6)' result is defined as the summation of results at or above the RL. Note: If a 'Total' result is requested, the results of its individual components will also be reported.

Total: With respect to Organic analyses, a 'Total' result is defined as the summation of results for individual isomers or Aroclors. If a 'Total' result is requested, the results of its individual components will also be reported. This is applicable to 'Total' results for methods 8260, 8081 and 8082.

Data Qualifiers

- A** - Spectra identified as "Aldol Condensates" are byproducts of the extraction/concentration procedures when acetone is introduced in the process.
- B** - The analyte was detected above the reporting limit in the associated method blank. Flag only applies to associated field samples that have detectable concentrations of the analyte at less than ten times (10x) the concentration found in the blank. For MCP-related projects, flag only applies to associated field samples that have detectable concentrations of the analyte at less than ten times (10x) the concentration found in the blank. For DOD-related projects, flag only applies to associated field samples that have detectable concentrations of the analyte at less than ten times (10x) the concentration found in the blank AND the analyte was detected above one-half the reporting limit (or above the reporting limit for common lab contaminants) in the associated method blank. For NJ-Air-related projects, flag only applies to associated field samples that have detectable concentrations of the analyte above the reporting limit. For NJ-related projects (excluding Air), flag only applies to associated field samples that have detectable concentrations of the analyte, which was detected above the reporting limit in the associated method blank or above five times the reporting limit for common lab contaminants (Phthalates, Acetone, Methylene Chloride, 2-Butanone).
- C** - Co-elution: The target analyte co-elutes with a known lab standard (i.e. surrogate, internal standards, etc.) for co-extracted analyses.
- D** - Concentration of analyte was quantified from diluted analysis. Flag only applies to field samples that have detectable concentrations of the analyte.
- E** - Concentration of analyte exceeds the range of the calibration curve and/or linear range of the instrument.
- F** - The ratio of quantifier ion response to qualifier ion response falls outside of the laboratory criteria. Results are considered to be an estimated maximum concentration.
- G** - The concentration may be biased high due to matrix interferences (i.e. co-elution) with non-target compound(s). The result should be considered estimated.
- H** - The analysis of pH was performed beyond the regulatory-required holding time of 15 minutes from the time of sample collection.
- I** - The lower value for the two columns has been reported due to obvious interference.
- J** - Estimated value. This represents an estimated concentration for Tentatively Identified Compounds (TICs).
- M** - Reporting Limit (RL) exceeds the MCP CAM Reporting Limit for this analyte.

Report Format: Data Usability Report



Project Name: PORTSMOUTH NAVAL YARD
Project Number: R2023006.000

Lab Number: L2360824
Report Date: 10/24/23

Data Qualifiers

- ND** - Not detected at the reporting limit (RL) for the sample.
- NJ** - Presumptive evidence of compound. This represents an estimated concentration for Tentatively Identified Compounds (TICs), where the identification is based on a mass spectral library search.
- P** - The RPD between the results for the two columns exceeds the method-specified criteria.
- Q** - The quality control sample exceeds the associated acceptance criteria. For DOD-related projects, LCS and/or Continuing Calibration Standard exceedences are also qualified on all associated sample results. Note: This flag is not applicable for matrix spike recoveries when the sample concentration is greater than 4x the spike added or for batch duplicate RPD when the sample concentrations are less than 5x the RL. (Metals only.)
- R** - Analytical results are from sample re-analysis.
- RE** - Analytical results are from sample re-extraction.
- S** - Analytical results are from modified screening analysis.
- V** - The surrogate associated with this target analyte has a recovery outside the QC acceptance limits. (Applicable to MassDEP DW Compliance samples only.)
- Z** - The batch matrix spike and/or duplicate associated with this target analyte has a recovery/RPD outside the QC acceptance limits. (Applicable to MassDEP DW Compliance samples only.)

Project Name: PORTSMOUTH NAVAL YARD
Project Number: R2023006.000

Lab Number: L2360824
Report Date: 10/24/23

REFERENCES

- 1 Test Methods for Evaluating Solid Waste: Physical/Chemical Methods. EPA SW-846. Third Edition. Updates I - VI, 2018.

LIMITATION OF LIABILITIES

Alpha Analytical performs services with reasonable care and diligence normal to the analytical testing laboratory industry. In the event of an error, the sole and exclusive responsibility of Alpha Analytical shall be to re-perform the work at it's own expense. In no event shall Alpha Analytical be held liable for any incidental, consequential or special damages, including but not limited to, damages in any way connected with the use of, interpretation of, information or analysis provided by Alpha Analytical.

We strongly urge our clients to comply with EPA protocol regarding sample volume, preservation, cooling, containers, sampling procedures, holding time and splitting of samples in the field.



Alpha Analytical, Inc.Facility: **Company-wide**Department: **Quality Assurance**Title: **Certificate/Approval Program Summary**ID No.: **17873**

Revision 20

Published Date: 6/16/2023 4:52:28 PM

Page 1 of 1

Certification Information**The following analytes are not included in our Primary NELAP Scope of Accreditation:****Westborough Facility****EPA 624.1:** m/p-xylene, o-xylene, Naphthalene**EPA 625.1:** alpha-Terpineol**EPA 8260D:** NPW: 1,2,4,5-Tetramethylbenzene; 4-Ethyltoluene, Azobenzene; SCM: Iodomethane (methyl iodide), 1,2,4,5-Tetramethylbenzene; 4-Ethyltoluene.**EPA 8270E:** NPW: Dimethylnaphthalene, 1,4-Diphenylhydrazine, alpha-Terpineol; SCM: Dimethylnaphthalene, 1,4-Diphenylhydrazine.**SM4500:** NPW: Amenable Cyanide; SCM: Total Phosphorus, TKN, NO₂, NO₃.**Mansfield Facility****SM 2540D:** TSS.**EPA TO-15:** Halothane, 2,4,4-Trimethyl-2-pentene, 2,4,4-Trimethyl-1-pentene, Thiophene, 2-Methylthiophene,

3-Methylthiophene, 2-Ethylthiophene, 1,2,3-Trimethylbenzene, Indan, Indene, 1,2,4,5-Tetramethylbenzene, Benzothiophene, 1-Methylnaphthalene.

Biological Tissue Matrix: EPA 3050B**The following analytes are included in our Massachusetts DEP Scope of Accreditation****Westborough Facility:****Drinking Water****EPA 300.0:** Chloride, Nitrate-N, Fluoride, Sulfate; **EPA 353.2:** Nitrate-N, Nitrite-N; **SM4500NO3-F:** Nitrate-N, Nitrite-N; **SM4500F-C, SM4500CN-CE,****EPA 180.1, SM2130B, SM4500CI-D, SM2320B, SM2540C, SM4500H-B, SM4500NO2-B****EPA 524.2:** THMs and VOCs; **EPA 504.1:** EDB, DBCP.**Microbiology:** **SM9215B; SM9223-P/A, SM9223B-Colilert-QT, SM9222D.****Non-Potable Water****SM4500H,B, EPA 120.1, SM2510B, SM2540C, SM2320B, SM4500CL-E, SM4500F-BC, SM4500NH3-BH:** Ammonia-N and Kjeldahl-N, **EPA 350.1:**Ammonia-N, **LACHAT 10-107-06-1-B:** Ammonia-N, **EPA 351.1, SM4500NO3-F, EPA 353.2:** Nitrate-N, **SM4500P-E, SM4500P-B, E, SM4500SO4-E,****SM5220D, EPA 410.4, SM5210B, SM5310C, SM4500CL-D, EPA 1664, EPA 420.1, SM4500-CN-CE, SM2540D, EPA 300:** Chloride, Sulfate, Nitrate.**EPA 624.1:** Volatile Halocarbons & Aromatics,**EPA 608.3:** Chlordane, Toxaphene, Aldrin, alpha-BHC, beta-BHC, gamma-BHC, delta-BHC, Dieldrin, DDD, DDE, DDT, Endosulfan I, Endosulfan II, Endosulfan sulfate, Endrin, Endrin Aldehyde, Heptachlor, Heptachlor Epoxide, PCBs**EPA 625.1:** SVOC (Acid/Base/Neutral Extractables).**Microbiology:** **SM9223B-Colilert-QT; Enterolert-QT, SM9221E, EPA 1600, EPA 1603, SM9222D.****Mansfield Facility:****Drinking Water****EPA 200.7:** Al, Ba, Cd, Cr, Cu, Fe, Mn, Ni, Na, Ag, Ca, Zn. **EPA 200.8:** Al, Sb, As, Ba, Be, Cd, Cr, Cu, Pb, Mn, Ni, Se, Ag, TL, Zn. **EPA 245.1** Hg.**EPA 522, EPA 537.1.****Non-Potable Water****EPA 200.7:** Al, Sb, As, Be, Cd, Ca, Cr, Co, Cu, Fe, Pb, Mg, Mn, Mo, Ni, K, Se, Ag, Na, Sr, TL, Ti, V, Zn.**EPA 200.8:** Al, Sb, As, Be, Cd, Cr, Cu, Fe, Pb, Mn, Ni, K, Se, Ag, Na, TL, Zn.**EPA 245.1** Hg.**SM2340B**

For a complete listing of analytes and methods, please contact your Alpha Project Manager.



CHAIN OF CUSTODY

PAGE 1 OF 1

8 Walkup Drive
Westboro, MA 01581
Tel: 508-898-9220

320 Forbes Blvd
Mansfield, MA 02048
Tel: 508-822-9300

Date Rec'd in Lab: 10/13/23

ALPHA Job #: L2360824

Client Information

Client: Mabbett & Assoc. Inc.

Address: 105 Central St. Suite 4100

Stoneham, MA 02180

Phone: (781) 275-6050

Email: delaney@mabbett.com

Project Information

Project Name: Portsmouth Naval Yard

Project Location: B-300 Kittery, ME

Project #: R2023006.000

Project Manager: Mike Delaney

ALPHA Quote #:

Turn-Around Time

☒ Standard ☐ RUSH (only confirmed if pre-approved)

Date Due:

Report Information - Data Deliverables

☒ ADEx ☐ EMAIL

Billing Information

☒ Same as Client info PO #:

Regulatory Requirements & Project Information Requirements

☐ Yes ☐ No MA MCP Analytical Methods ☐ Yes ☐ No CT RCP Analytical Methods
☐ Yes ☐ No Matrix Spike Required on this SDG? (Required for MCP Inorganics)
☐ Yes ☐ No GW1 Standards (Info Required for Metals & EPH with Targets)
☐ Yes ☐ No NPDES RGP
☐ Other State /Fed Program Criteria

Additional Project Information:

* Samples collected from Building 300 in (PNY)
Kittery, ME

ALPHA Lab ID (Lab Use Only)	Sample ID	Collection		Sample Matrix	Sampler Initials	ANALYSIS															SAMPLE INFO	TOTAL # BOTTLES
		Date	Time			VOC: ☐ 8260 ☐ 624 ☐ 524.2	SVOC: ☐ ABN ☐ PAH	METALS: ☐ MCP 13 ☐ MCP 14 ☐ RCP 15	METALS: ☐ RCRA5 ☐ RCRA8	EPH: ☐ Ranges & Targets ☐ Ranges Only	VPH: ☐ Ranges & Targets ☐ Ranges Only	PEB: ☒ PCB ☐ PEST	TPH: ☐ Quant Only ☐ Fingerprint							Filtration ☐ Field ☐ Lab to do		
60824-01	PCB-01 - Rad Duct Sealant	10/11/23	11AM	BULK	KMD							X										1
-02	PCB-02 - Tan metal Duct Paint											X										1
-03	PCB-03 - Bay 3 catwalk by DH3											X										1
-04	PCB-04 - Tan Duct Paint											X										1
-05	PCB-05 - Bay 2 catwalk (west)											X										1
-06	PCB-06 - Tan Duct Paint											X										1
-07	PCB-07 - Bay 2 column C18											X										1
-08	PCB-08 - Tan Duct Paint											X										1
	PCB-09 - White Duct Paint											X										1
	PCB-10 - Bay 4 Room 3143											X										1
	PCB-11 - Tan Duct Paint											X										1
	PCB-12 - Bay 5 welders room											X										1

Container Type

P= Plastic
 A= Amber glass
 V= Vial
 G= Glass
 B= Bacteria cup
 C= Cube
 O= Other
 E= Encore
 D= BOD Bottle

Preservative

A= None
 B= HCl
 C= HNO₃
 D= H₂SO₄
 E= NaOH
 F= MeOH
 G= NaHSO₄
 H= Na₂S₂O₃
 I= Ascorbic Acid
 J= NH₄Cl
 K= Zn Acetate
 O= Other

Container Type

Preservative

G

N

G

N

Relinquished By:

Date/Time

Received By:

Date/Time

Kevin Donnan

10/13/23

10/13/23 1935

Kevin Donnan

10/13/23

10/13/23 1245

All samples submitted are subject to Alpha's Terms and Conditions. See reverse side.

FORM NO: 01-01 (rev. 12-Mar-2012)

APPENDIX F

Photo Log

Image 1
Red Duct Seam Sealant

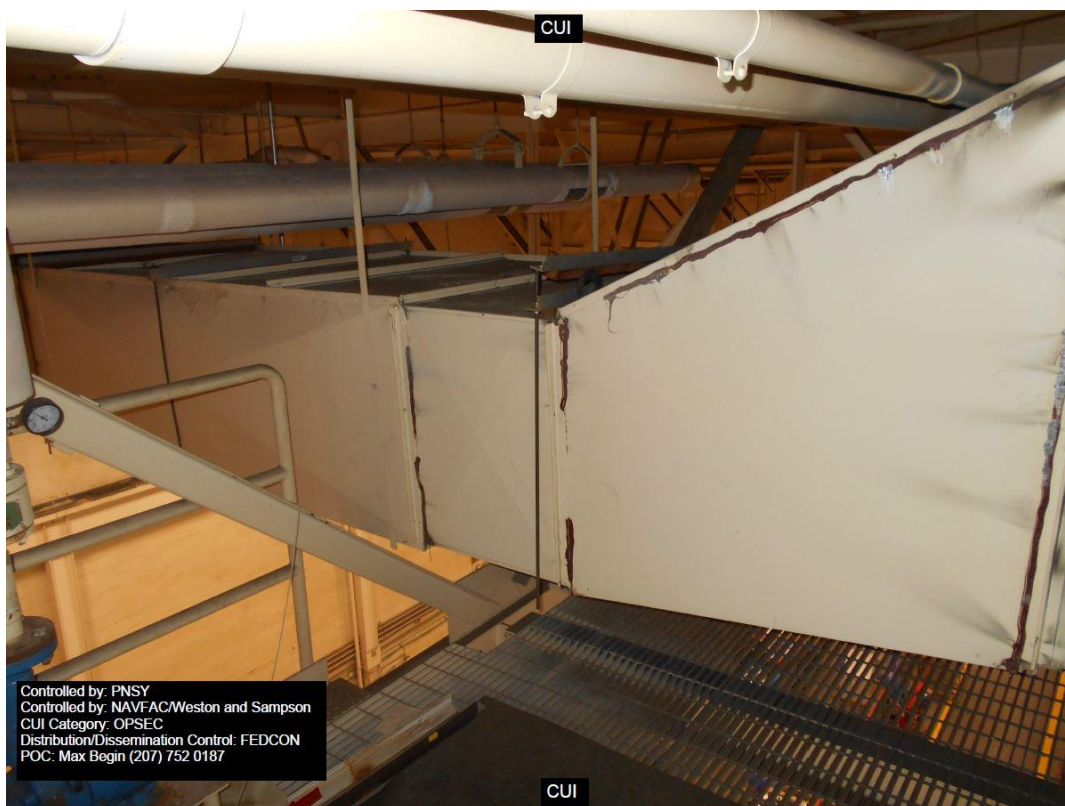


Image 2
Stick Pin Adhesive

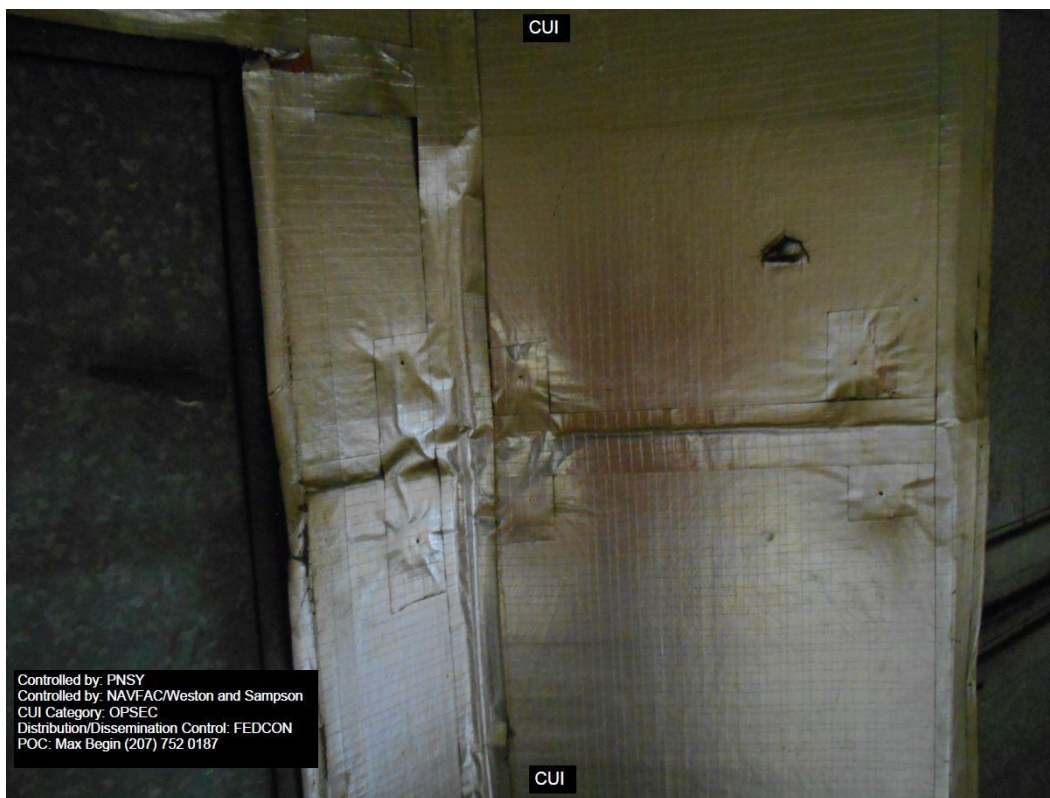


Image 3
Typical Dust Outside Grille

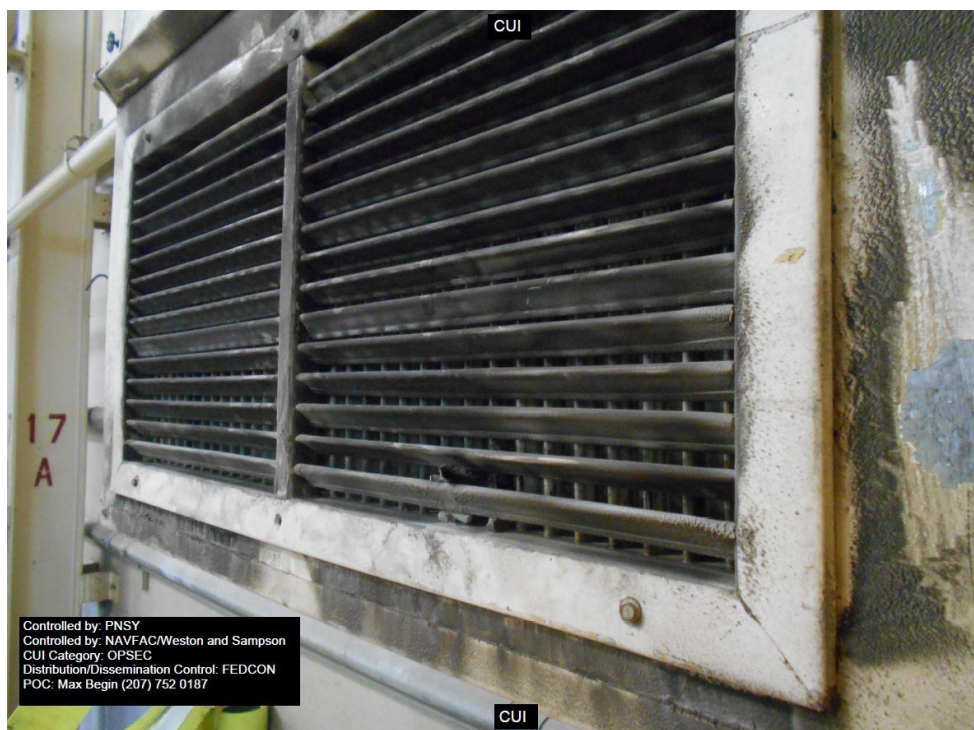


Image 4
Typical Dust Inside Air Handler



Image 5
DW-13 Sample Location

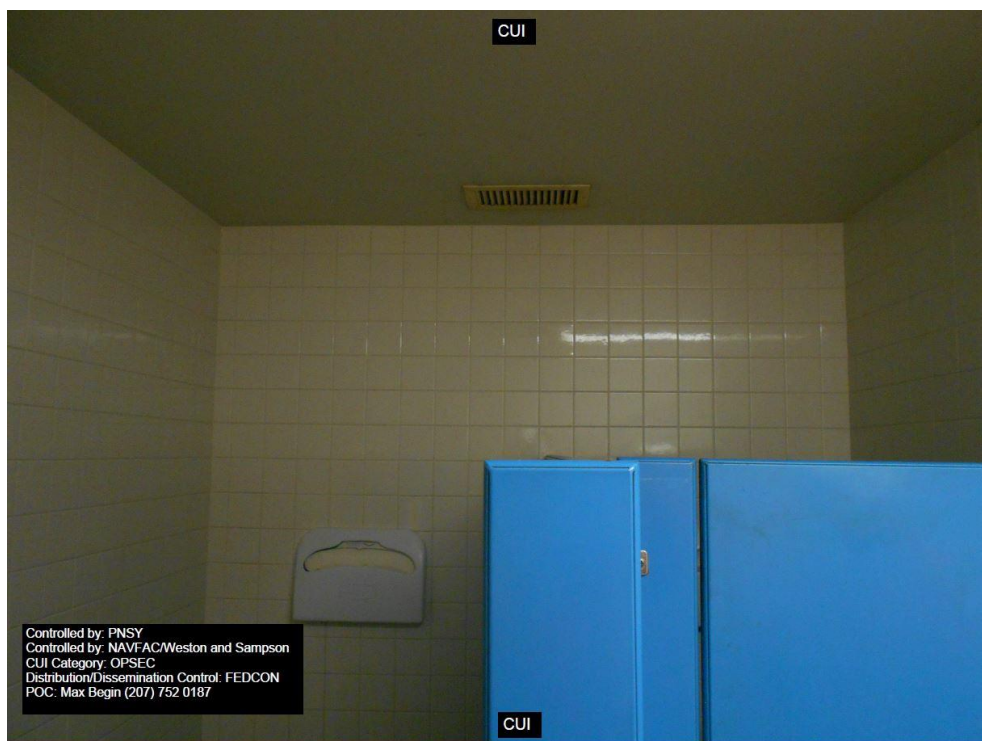


Image 6
Sample Collection Method

