

LIST OF SHEETS

GENERAL SHEET INDEX			
SHEET NO.		NAVFAC DWG. NO.	SHEET TITLE
NO.	SHEET		
1	G-001	12936570	TITLE SHEET
2	G-002	12936571	INDEX OF DRAWINGS - SHEET 1 OF 2
3	G-003	12936572	INDEX OF DRAWINGS - SHEET 2 OF 2
4	G-004	12936573	GENERAL ABBREVIATIONS
5	G-101	12936574	OVERVIEW EXISTING SITE CONTROLS
6	G-102	12936575	GENERAL SITE PLAN
7	G-103	12936576	GENERAL ARRANGEMENT PLAN
8	G-104	12936577	GENERAL ARRANGEMENT SECTION
9	G-105	12936578	CONTRACTOR ACCESS ROUTE PLAN
10	G-106	12936579	MOORING ARRANGEMENT PLAN
11	G-107	12936580	BATHYMETRIC SURVEY PLAN

HAZARDOUS MATERIALS SHEET INDEX			
SHEET NO.		NAVFAC DWG. NO.	SHEET TITLE
NO.	SHEET		
12	H-101	12936581	HAZARDOUS MATERIALS NOTES & PLAN

SURVEY SHEET INDEX			
SHEET NO.		NAVFAC DWG. NO.	SHEET TITLE
NO.	SHEET		
13	V-001	12936582	CODDINGTON COVE EXISTING CONDITIONS OVERVIEW
14	V-101	12936583	EXISTING CONDITIONS - PIER 2 LANDSIDE
15	V-102	12936584	EXISTING CONDITIONS - PIER 1 LANDSIDE
16	V-103	12936585	EXISTING CONDITIONS - RETENTION POND
17	V-104	12936586	EXISTING CONDITIONS - NOAA BUILDING
18	V-105	12936587	EXISTING CONDITIONS - PIER 1 SHEET 1 OF 5
19	V-106	12936588	EXISTING CONDITIONS - PIER 1 SHEET 2 OF 5
20	V-107	12936589	EXISTING CONDITIONS - PIER 1 SHEET 3 OF 5
21	V-108	12936590	EXISTING CONDITIONS - PIER 1 SHEET 4 OF 5
22	V-109	12936591	EXISTING CONDITIONS - PIER 1 SHEET 5 OF 5

GEOTECHNICAL SHEET INDEX			
SHEET NO.		NAVFAC DWG. NO.	SHEET TITLE
NO.	SHEET		
23	B-101	12936592	ESTIMATED TOP OF WEATHERED ROCK CONTOUR PLAN
24	B-601	12936593	SOIL BORING LOGS - SHEET 1 OF 6
25	B-602	12936594	SOIL BORING LOGS - SHEET 2 OF 6
26	B-603	12936595	SOIL BORING LOGS - SHEET 3 OF 6
27	B-604	12936596	SOIL BORING LOGS - SHEET 4 OF 6
28	B-605	12936597	SOIL BORING LOGS - SHEET 5 OF 6
29	B-606	12936598	SOIL BORING LOGS - SHEET 6 OF 6

DREDGE SHEET INDEX			
SHEET NO.		NAVFAC DWG. NO.	SHEET TITLE
NO.	SHEET		
30	CN101	12936599	OVERALL DREDGING PLAN (BASE BID)
31	CN301	12936600	DREDGING SECTIONS - SHEET 1 OF 3 (BASE BID)
32	CN302	12936601	DREDGING SECTIONS - SHEET 2 OF 3 (BASE BID)
33	CN303	12936602	DREDGING SECTIONS - SHEET 3 OF 3 (BASE BID)

CIVIL SHEET INDEX			
SHEET NO.		NAVFAC DWG. NO.	SHEET TITLE
NO.	SHEET		
34	C-001	12936603	CIVIL LEGEND, ABBREVIATIONS & GENERAL NOTES (BASE BID)
35	C-002	12936604	GENERAL NOTES (BASE BID)
36	CD101	12936605	SITE DEMOLITION PLAN (BASE BID)
37	CD102	12936606	UTILITY DEMOLITION PLAN - PIER 1 LAND SIDE (BASE BID)
38	C-101	12936607	SITE PLAN (BASE BID)
39	C-102	12936608	UTILITY PLAN - PIER 1 LAND SIDE (BASE BID)
40	C-103	12936613	COMPOSITE UTILITY LAYOUT PLAN - PIER 1 LANDSIDE (BASE BID)
41	C-201	12936610	UTILITY PROFILES - SHEET 1 OF 2
42	C-202	12936611	UTILITY PROFILES - SHEET 2 OF 2 (BASE BID)
43	C-501	12936612	EROSION CONTROL NOTES & DETAILS (BASE BID)
44	C-502	12936613	SITE DETAILS - SHEET 1 OF 6 (BASE BID)
45	C-503	12936614	SITE DETAILS - SHEET 2 OF 6
46	C-504	12936615	SITE DETAILS - SHEET 3 OF 6
47	C-505	12936616	SITE DETAILS - SHEET 4 OF 6
48	C-506	12936617	SITE DETAILS - SHEET 5 OF 6
49	C-507	12936618	SITE DETAILS - SHEET 6 OF 6

STRUCTURAL SHEET INDEX			
SHEET NO.		NAVFAC DWG. NO.	SHEET TITLE
NO.	SHEET		
50	S-001	12936619	STRUCTURAL ABBREVIATION (BASE BID)
51	S-002	12936620	STRUCTURAL GENERAL NOTES - SHEET 1 OF 2 (BASE BID)
52	S-003	12936621	STRUCTURAL GENERAL NOTES - SHEET 2 OF 2 (BASE BID)
53	S-004	12936622	STRUCTURAL DESIGN LOADS AND STANDARD DETAILS - SHEET 1 OF 2
54	S-005	12936623	STRUCTURAL DESIGN LOADS AND STANDARD DETAILS - SHEET 2 OF 2
55	SD001	12936624	STRUCTURAL DEMOLITION NOTES (BASE BID)
56	SD101	12936625	OVERALL STRUCTURAL DEMOLITION PLAN (BASE BID)
57	SD102	12936626	PIER 1 DEMOLITION PLAN
58	SD103	12936627	S45N BULKHEAD DEMOLITION PLAN
59	SD104	12936628	S45S BULKHEAD DEMOLITION PLAN (BASE BID)
60	SD201	12936629	S45N BULKHEAD DEMOLITION ELEVATION
61	SD202	12936630	TEMPORARY SHEETING BULKHEAD ELEVATION
62	SD301	12936631	TYPICAL SECTION FOR PIER 1 DEMOLITION (BASE BID)
63	SD302	12936632	TYPICAL SECTION FOR BULKHEAD DEMOLITION
64	SD303	12936633	SECTION OF DEMOLITION AT S45N BULKHEAD (BASE BID)
65	SD501	12936634	MISCELLANEOUS DEMOLITION DETAILS
66	SD601	12936635	PIER 1 AND S45N BULKHEAD DEMOLITION PHOTOGRAPHS (BASE BID)
67	SD602	12936636	S45N BULKHEAD DEMOLITION PHOTOGRAPHS (BASE BID)
68	S-101	12936637	OVERALL BULKHEAD PLAN (BASE BID)
69	S-102	12936638	GENERAL DECK PLAN
70	S-103	12936639	PILE PLAN - SHEET 1 OF 7
71	S-104	12936640	PILE PLAN - SHEET 2 OF 7
72	S-105	12936641	PILE PLAN - SHEET 3 OF 7
73	S-106	12936642	PILE PLAN - SHEET 4 OF 7
74	S-107	12936643	PILE PLAN - SHEET 5 OF 7
75	S-108	12936644	PILE PLAN - SHEET 6 OF 7
76	S-109	12936645	PILE PLAN - SHEET 7 OF 7
77	S-110	12936646	FRAMING PLAN - SHEET 1 OF 7
78	S-111	12936647	FRAMING PLAN - SHEET 2 OF 7
79	S-112	12936648	FRAMING PLAN - SHEET 3 OF 7
80	S-113	12936649	FRAMING PLAN - SHEET 4 OF 7
81	S-114	12936650	FRAMING PLAN - SHEET 5 OF 7
82	S-115	12936651	FRAMING PLAN - SHEET 6 OF 7
83	S-116	12936652	FRAMING PLAN - SHEET 7 OF 7
84	S-117	12936653	CONCRETE PLANKS PLAN - SHEET 1 OF 7
85	S-118	12936654	CONCRETE PLANKS PLAN - SHEET 2 OF 7
86	S-119	12936655	CONCRETE PLANKS PLAN - SHEET 3 OF 7
87	S-120	12936656	CONCRETE PLANKS PLAN - SHEET 4 OF 7
88	S-121	12936657	CONCRETE PLANKS PLAN - SHEET 5 OF 7
89	S-122	12936658	CONCRETE PLANKS PLAN - SHEET 6 OF 7
90	S-123	12936659	CONCRETE PLANKS PLAN - SHEET 7 OF 7
91	S-124	12936660	DECK PLAN - SHEET 1 OF 7
92	S-125	12936661	DECK PLAN - SHEET 2 OF 7
93	S-126	12936662	DECK PLAN - SHEET 3 OF 7
94	S-127	12936663	DECK PLAN - SHEET 4 OF 7
95	S-128	12936664	DECK PLAN - SHEET 5 OF 7
96	S-129	12936665	DECK PLAN - SHEET 6 OF 7
97	S-130	12936666	DECK PLAN - SHEET 7 OF 7
98	S-131	12936667	FENDER PILE PLAN - SHEET 1 OF 6
99	S-132	12936668	FENDER PILE PLAN - SHEET 2 OF 6

SHEET NO.		NAVFAC DWG. NO.	SHEET TITLE
NO.	SHEET		
100	S-133	12936669	FENDER PILE PLAN - SHEET 3 OF 6
101	S-134	12936670	FENDER PILE PLAN - SHEET 4 OF 6
102	S-135	12936671	FENDER PILE PLAN - SHEET 5 OF 6
103	S-136	12936672	FENDER PILE PLAN - SHEET 6 OF 6
104	S-137	12936673	DECK DRAINAGE PLAN - SHEET 1 OF 2
105	S-138	12936674	DECK DRAINAGE PLAN - SHEET 2 OF 2
106	S-201	12936675	PIER SOUTHERN ELEVATION - SHEET 1 OF 3
107	S-202	12936676	PIER SOUTHERN ELEVATION - SHEET 2 OF 3
108	S-203	12936677	PIER SOUTHERN ELEVATION - SHEET 3 OF 3
109	S-204	12936678	PIER NORTHERN ELEVATION - SHEET 1 OF 3
110	S-205	12936679	PIER NORTHERN ELEVATION - SHEET 2 OF 3
111	S-206	12936680	PIER NORTHERN ELEVATION - SHEET 3 OF 3
112	S-207	12936681	REPAIRED S45N BULKHEAD ELEVATION & PIER 1 SECTION
113	S-208	12936682	S45S BULKHEAD ELEVATION (BASE BID)
114	S-301	12936683	PIER LONGITUDINAL SECTIONS - SHEET 1 OF 2
115	S-302	12936684	PIER LONGITUDINAL SECTIONS - SHEET 2 OF 2
116	S-303	12936685	PIER ABUTMENT & APPROACH SLAB LONGITUDINAL SECTION
117	S-304	12936686	LONGITUDINAL SECTIONS AT UTILITY TRENCH
118	S-305	12936687	LONGITUDINAL SECTION CROSS UTILITY TRENCH AT ABUTMENT
119	S-306	12936688	PIER ABUTMENT & UTILITY TRENCH TRANSVERSE SECTION
120	S-307	12936689	PIER TRANSVERSE SECTIONS - SHEET 1 OF 5
121	S-308	12936690	PIER TRANSVERSE SECTIONS - SHEET 2 OF 5
122	S-309	12936691	PIER TRANSVERSE SECTIONS - SHEET 3 OF 5
123	S-310	12936692	PIER TRANSVERSE SECTIONS - SHEET 4 OF 5
124	S-311	12936693	PIER TRANSVERSE SECTIONS - SHEET 5 OF 5
125	S-401	12936694	ABUTMENT & LANDSIDE FRAMING PART PLAN
126	S-402	12936699	OUTBOARD SUBSTATION PART PLAN
127	S-403	12936700	INBOARD SUBSTATION PART PLAN
128	S-404	12936697	S45S BULKHEAD PART PLAN & SECTION (BASE BID)
129	S-501	12936698	TURBIDITY CURTAIN NOTES & DETAILS (BASE BID)
130	S-502	12936699	PILE DETAILS - CONCRETE-FILLED STEEL PIPE PILES
131	S-503	12936704	PILE DETAILS - STEEL PILES
132	S-504	12936701	CONCRETE PILE CAP DETAILS - SHEET 1 OF 3
133	S-505	12936706	CONCRETE PILE CAP DETAILS - SHEET 2 OF 3
134	S-506	12936703	CONCRETE PILE CAP DETAILS - SHEET 3 OF 3
135	S-507	12936708	REINFORCED BOLLARD FOUNDATION DETAILS
136	S-508	12936705	REINFORCEMENT DETAILS FOR CONCRETE BLOCKOUT AT BENT 43 - SHEET 1 OF 2
137	S-509	12936706	REINFORCEMENT DETAILS FOR CONCRETE BLOCKOUT AT BENT 43 - SHEET 2 OF 2
138	S-510	12936707	CONCRETE DUCTBANK REINFORCEMENT DETAILS
139	S-511	12936708	REINFORCEMENT DETAILS
140	S-512	12936709	CONCRETE BEAM DETAILS
141	S-513	12936710	TYPICAL PIER DUCTBANK DETAILS
142	S-514	12936711	LANDSIDE PIPE PILES CONNECTION DETAILS
143	S-515	12936712	PRECAST CONCRETE PLANK DETAILS
144	S-516	12936713	CONDUITS AND FITTINGS AT EXPANSION JOINT
145	S-517	12936714	PRECAST MANHOLE DETAILS
146	S-518	12936715	UTILITY TRENCH COVER DETAILS
147	S-519	12936716	FENDER SYSTEM DETAILS - SHEET 1 OF 2
148	S-520	12936717	FENDER SYSTEM DETAILS - SHEET 2 OF 2
149	S-521	12936718	PIPE SUPPORT DETAILS
150	S-522	12936719	MISCELLANEOUS SECTIONS & DETAILS - SHEET 1 OF 2
151	S-523	12936720	MISCELLANEOUS SECTIONS & DETAILS - SHEET 2 OF 2
152	S-524	12936721	S45N BULKHEAD MODIFICATION DETAILS - SHEET 1 OF 2
153	S-525	12936722	S45N BULKHEAD MODIFICATION DETAILS - SHEET 2 OF 2
154	S-526	12936723	S45S BULKHEAD DETAILS - SHEET 1 OF 3 (BASE BID)
155	S-527	12936724	S45S BULKHEAD DETAILS - SHEET 2 OF 3 (BASE BID)
156	S-528	12936725	S45S BULKHEAD DETAILS - SHEET 3 OF 3 (BASE BID)
157	S-529	12936730	AIR COMPRESSOR FOUNDATION & STEEL FRAME PART PLAN
158	S-530	12936727	AIR COMPRESSOR DETAILS
159	S-531	12936728	AIR COMPRESSOR FOUNDATION DETAILS
160	S-532	12936729	AIR COMPRESSOR STAIRS ACCESS DETAILS - SHEET 1 OF 2
161	S-533	12936730	AIR COMPRESSOR STAIRS ACCESS DETAILS - SHEET 2 OF 2
162	S-534	12936731	15KV SWITCHGEAR STRUCTURE DETAILS
163	S-601	12936732	STEEL PILE SCHEDULE
164	S-602	12936733	FENDER PILE SCHEDULE - SHEET 1 OF 2
165	S-603	12936734	FENDER PILE SCHEDULE - SHEET 2 OF 2

[illegible]

D

C

B

- # A

3



3



3



3



3



4



4

D

1. PROVIDE A TOTAL AVAILABLE FIRE LANE WIDTH OF 20'.
2. RETAIN AND MARK A 15' WIDE UNOBSTRUCTED FIRE LANE.
3. PROVIDE A MARKED 2'-6" "DUAL USE" BUFFER ON BOTH SIDES OF THE 15' WIDE UNOBSTRUCTED FIRE LANE.
4. THE CENTER 15' MUST REMAIN UNOBSTRUCTED. ENCRoACHMENT INTO THE "DUAL USE" BUFFER BY CRANES IS ACCEPTABLE.
5. AT LEAST 13'-6" NOMINAL VERTICAL CLEARANCE MUST BE PROVIDED AND MAINTAINED OVER THE FULL WIDTH OF THE FIRE LANE.
6. THE ANGLE OF APPROACH MUST NOT EXCEED 8 DEGREES AT ANY POINT. MINIMUM INSIDE TURN RADIUS MUST BE 25' AND MINIMUM OUTSIDE TURN RADIUS MUST BE 50'.
7. IF TEMPORARY ADJUSTMENTS ARE REQUIRED TO MOVE THE FIRE LANE TO ALLOW FOR ATYPICAL CRANE USE, MAINTENANCE/DELIVERY TRUCK ACCESS, ETC. THEN A SOP MUST BE PREPARED FOR EACH INSTANCE.
8. FIRE LANE MARKINGS MUST BE OF MATERIAL COMPATIBLE WITH THE CONCRETE SURFACE, DOT APPROVED FOR HIGHWAYS OR APPROVED EQUIVALENT.
9. FIRE LANE MARKINGS MUST BE OF SLIP RESISTANT MATERIAL.



1. FOR MECHANICAL ABBREVIATIONS, LEGEND & GENERAL NOTES, SEE DRAWING M-001.
2. COMPRESSED AIR AND FRESH WATER PIPING IN UTILITY TRENCHES TO MAINTAIN 3" MINIMUM CLEARANCE OF PILE CAP OPENING.

1. PROVIDE 2" COMPRESSED AIR PIPE WITHIN UTILITY TRENCH.
2. PROVIDE 2" COMPRESSED AIR BRANCH PIPE IN TRENCH WITH SHUTOFF VALVE. CONTINUE TO HEATED MECHANICAL UTILITY ENCLOSURE.
3. PROVIDE 10" FRESH WATER MAIN IN UTILITY TRENCH. PROVIDE PIPE INSULATION AND JACKET. REFER TO ELECTRICAL DRAWINGS FOR HEAT TRACE REQUIREMENTS.
4. PROVIDE 3" FRESH WATER BRANCH PIPE IN TRENCH WITH SHUTOFF VALVE. CONTINUE TO HEATED MECHANICAL UTILITY ENCLOSURE. PROVIDE INSULATION, AND JACKETING. REFER TO ELECTRICAL DRAWINGS FOR HEAT TRACE REQUIREMENTS.
5. PROVIDE 4" SANITARY FORCED MAIN BETWEEN PIER STRUCTURE AND FENDER. PROVIDE INSULATION AND JACKETING. REFER TO ELECTRICAL DRAWINGS FOR HEAT TRACE REQUIREMENTS.
6. PROVIDE 4" SANITARY CLEAN OUT ALONGSIDE PIER.
7. PROVIDE PIPE ANCHOR (TYPICAL). REFER TO DETAIL ON M-504.
8. PROVIDE PIPE GUIDE (TYPICAL). REFER TO DETAIL ON M-504.
9. PROVIDE AXIAL MOVEMENT THERMAL EXPANSION JOINT. PROVIDE PIPE GUIDE ON EACH SIDE OF JOINT (TYPICAL).
10. PROVIDE 3" FRESH WATER RISER UP TO MECHANICAL UTILITY ENCLOSURE. PROVIDE WATER METERING AND ACCESSORIES. PROVIDE SHORE CONNECTION WITH REDUCED PRESSURE ZONE BACKFLOW PREVENTER. REFER TO PIER UTILITY WATER SERVICE ENTRY ON C1/M-505.
11. PROVIDE 4" SANITARY PIPE TO MECHANICAL UTILITY ENCLOSURE. PROVIDE DUAL SANITARY INLINE PUMPS.
12. PROVIDE 2" COMPRESSED AIR RISER UP TO MECHANICAL UTILITY ENCLOSURE. PROVIDE FOUR 3/4" QUICK CONNECT OUTLETS AT UTILITY STATION.
13. PROVIDE STRUCTURAL MOVEMENT PIPE JOINT AT PIER EXPANSION JOINT. PROVIDE ANCHOR ON EACH SIDE OF THE JOINT.
14. REFER TO NORTHERN ENCLOSURE DETAILS OF THE SANITARY SEWER, WATER, AND COMPRESSED AIR ON M-501.
15. REFER TO SOUTHERN ENCLOSURE DETAILS OF THE SANITARY SEWER, WATER, AND COMPRESSED AIR ON M-502.
16. PROVIDE MANUFACTURER CONTROL ENCLOSURE WITH VFDs SUPPORTING THE DUPLEX SANITARY PUMP SYSTEM. PROVIDE STAINLESS STEEL UNISTRUT MOUNTING SUPPORT FOR ENCLOSURE MOUNTING.
17. PROVIDE 10" RUBBER SEATED BUTTERFLY VALVE WITHIN TRENCH FOR ISOLATION OF FRESH WATER PIPING MAIN. PROVIDE 3/4" DRAIN WITH BALL VALVE, CAP AND CHAIN ON BOTH SIDES OF THE ISOLATION VALVE FOR DRAINING OF THE PIPE MAIN.
18. PROVIDE 2" BALL VALVE WITHIN TRENCH FOR ISOLATION OF COMPRESSED AIR PIPING MAIN. PROVIDE 3/4" BLOW DOWN WITH BALL VALVE, CAP AND CHAIN ON BOTH SIDES OF THE ISOLATION VALVE.
19. MANHOLE LOCATION FOR VALVE ACCESS. REFER TO STRUCTURAL DRAWINGS FOR FURTHER DETAILS.
20. PROVIDE 4" SSFM SPOOL PIECE FOR ACCESS TO REMOVABLE TRENCH COVERS.
21. REFER TO DETAIL A4 ON M-001 FOR DIMENSIONAL CONTROL INFORMATION REGARDING THE FIRE LANE STRIPPING PLAN.

1/8" = 1' - 0"

A horizontal graphic scale bar with alternating black and white segments. It is marked with '0', '5'', '10'', '15'', and '30'' at regular intervals.


[illegible]

PROVED		APR 01 2026	
			
R COMMANDER NAVFAC		3/5/2026	
ACTIVITY			
Approved by Frank Cole USCG MSI DISFACTORY TO DATE 06 FEB 2026			
SAS	DRW	IB	CHK TJE
D/MD		MRI/CWJ	
ANCH MANAGER		NEK	
CHIEF ENG/ANCH		JWJ	
SEC PROTECTION		WDM	

[illegible]

SCALE: AS NOTED	
PROJECT NO.:	1826479
CONSTR. CONTR. NO.	
AVFAC DRAWING NO.	
12936737	
SHEET 168	OF 247
M-102	

3/2/2026 5:05:01 PM
M-103
Autodesk Docs/22410155_USCG_OCR_Homeport_Initiative_OPC_Pier_1/PIER USCG-173929-M.mxd

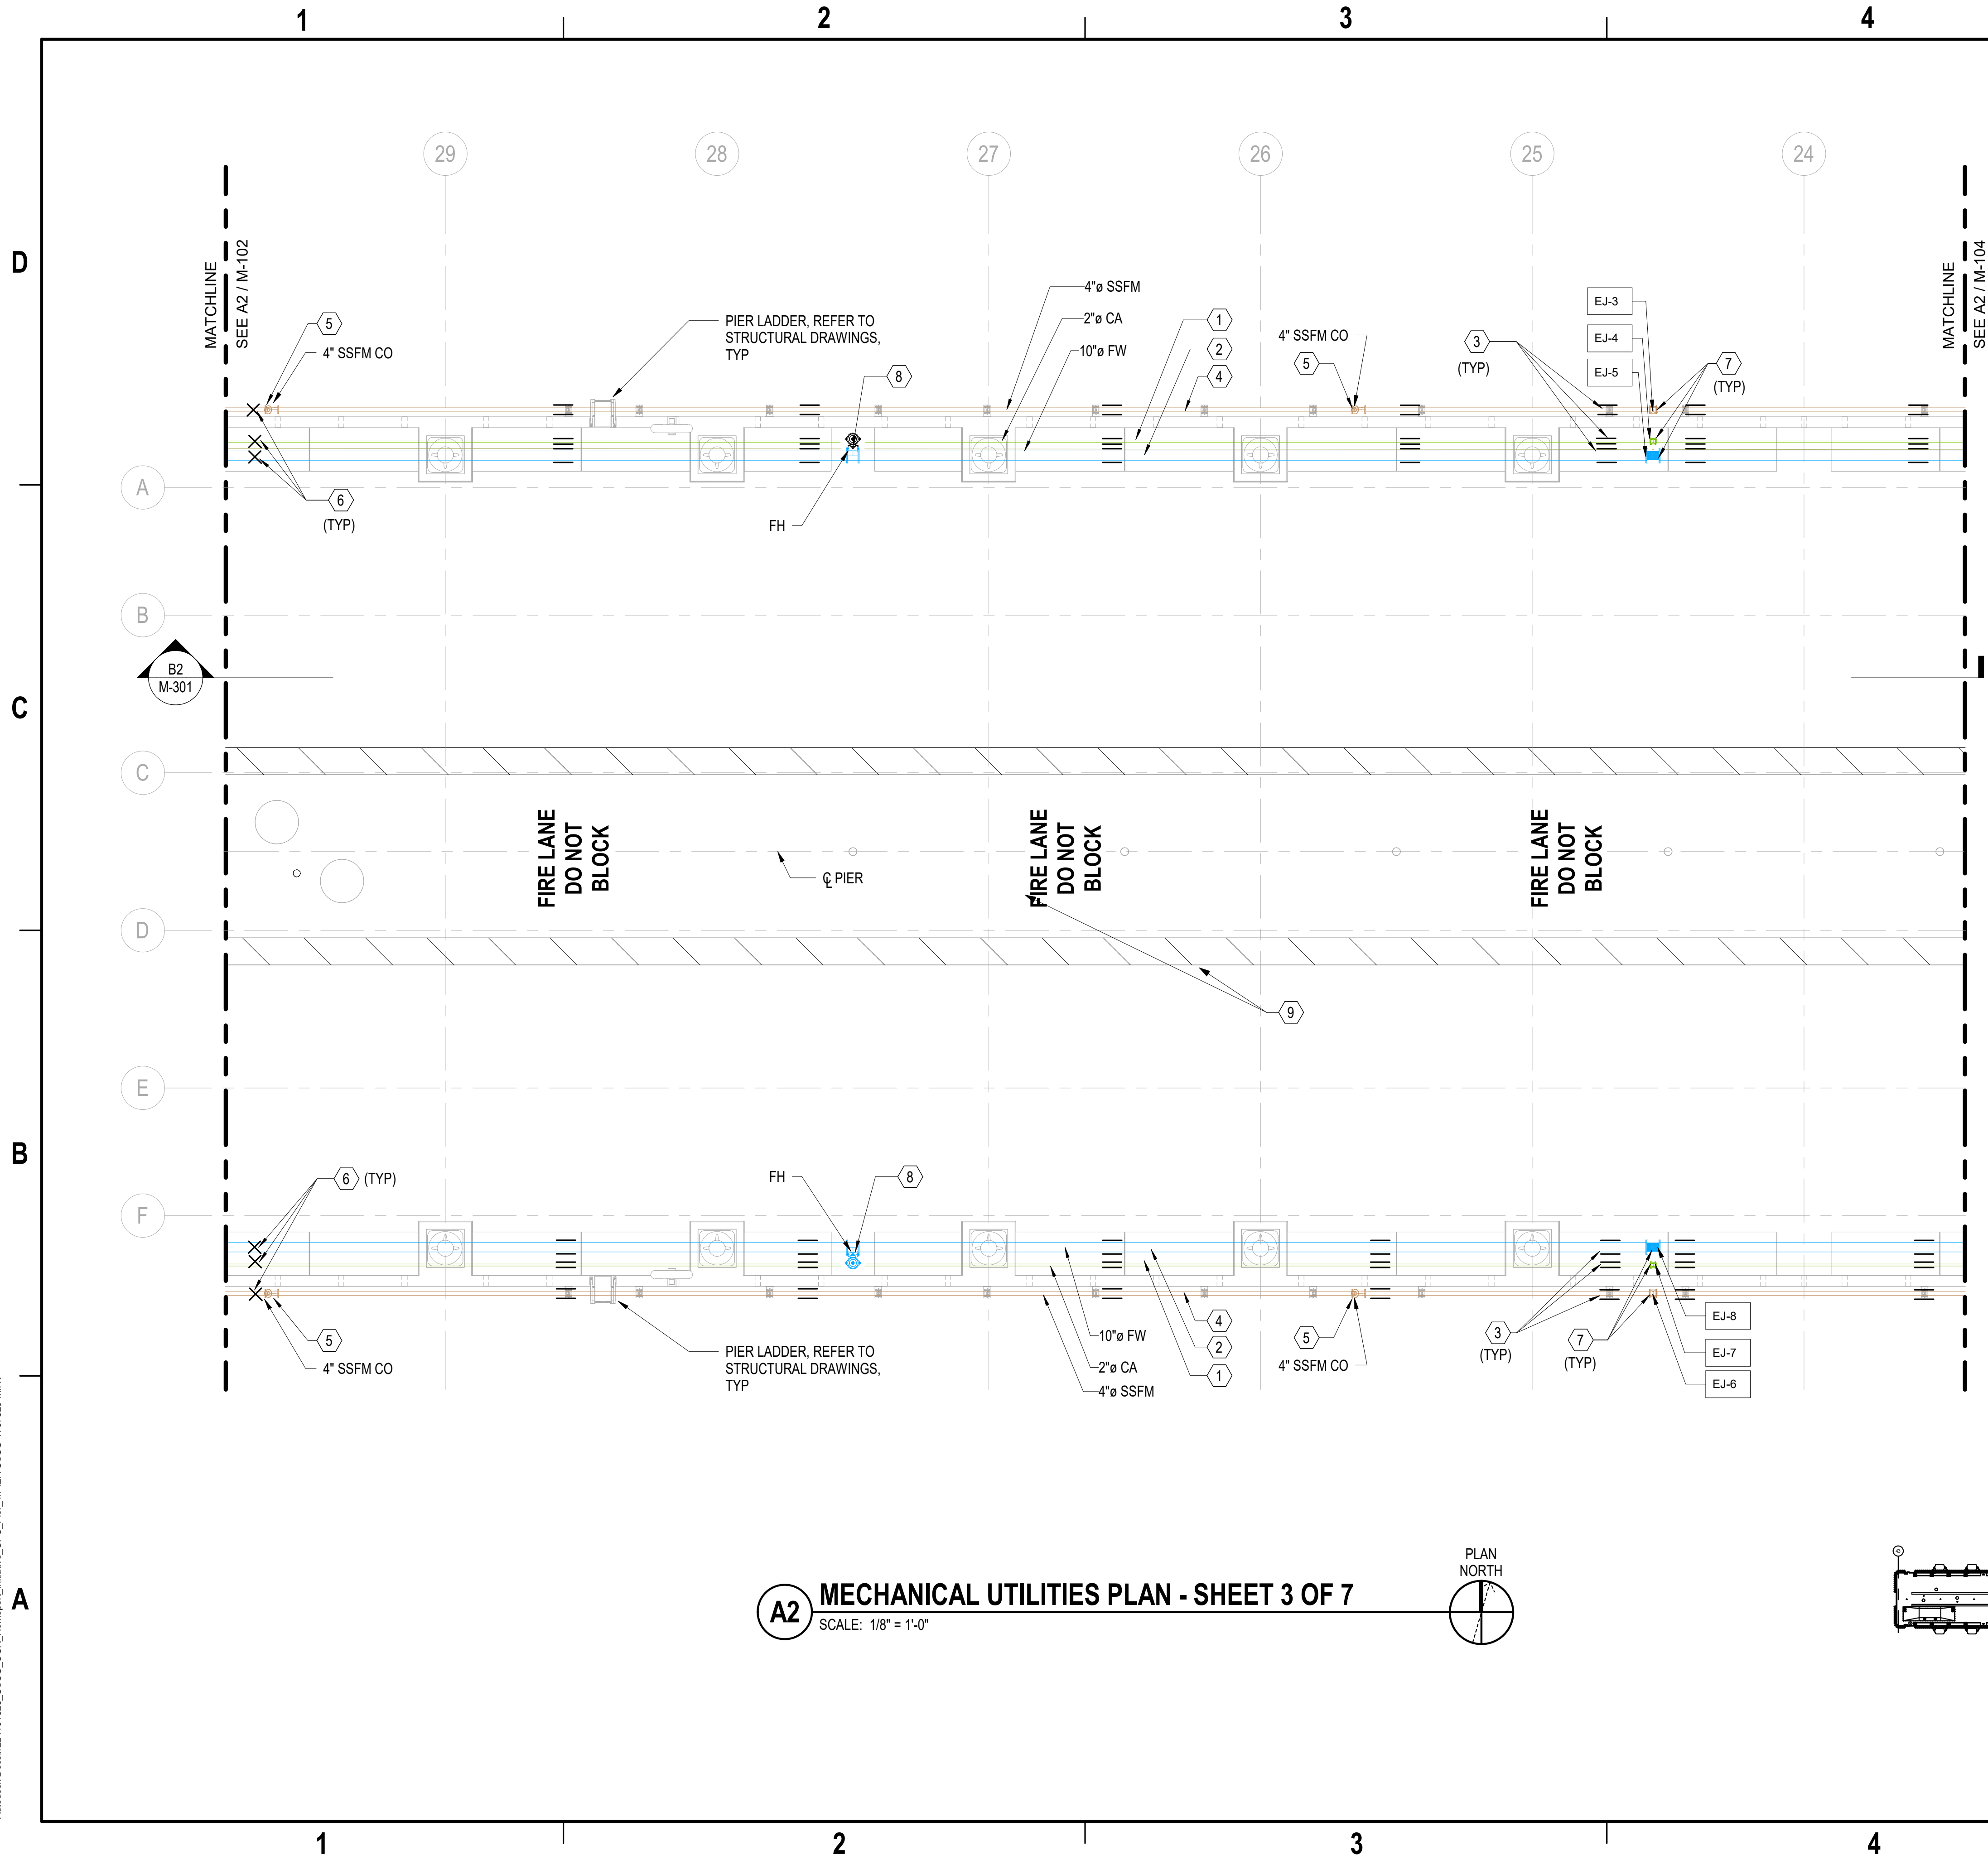

A2 MECHANICAL UTILITIES PLAN - SHEET 3 OF 7
SCALE: 1/8" = 1'-0"

GENERAL SHEET NOTES:


- FOR MECHANICAL ABBREVIATIONS, LEGEND & GENERAL NOTES, SEE DRAWING M-001.
- COMPRESSED AIR AND FRESH WATER PIPING IN UTILITY TRENCHES TO MAINTAIN 3" MINIMUM CLEARANCE OF PILE CAP OPENING.

FIRE LANE GENERAL NOTES:

- PROVIDE A TOTAL AVAILABLE FIRE LANE WIDTH OF 20'.
- RETAIN AND MARK A 15' WIDE UNOBSTRUCTED FIRE LANE.
- PROVIDE A MARKED 2'-6" "DUAL USE" BUFFER ON BOTH SIDES OF THE 15' WIDE UNOBSTRUCTED FIRE LANE.
- THE CENTER 15' MUST REMAIN UNOBSTRUCTED. ENCROACHMENT INTO THE "DUAL USE" BUFFER BY CRANES IS ACCEPTABLE.
- AT LEAST 13'-6" NOMINAL VERTICAL CLEARANCE MUST BE PROVIDED AND MAINTAINED OVER THE FULL WIDTH OF THE FIRE LANE.
- THE ANGLE OF APPROACH MUST NOT EXCEED 8 DEGREES AT ANY POINT. MINIMUM INSIDE TURN RADIUS MUST BE 25' AND MINIMUM OUTSIDE TURN RADIUS MUST BE 50'.
- IF TEMPORARY ADJUSTMENTS ARE REQUIRED TO MOVE THE FIRE LANE TO ALLOW FOR ATYPICAL CRANE USE, MAINTENANCE/DELIVERY TRUCK ACCESS, ETC. THEN A SOP MUST BE PREPARED FOR EACH INSTANCE.
- FIRE LANE MARKINGS MUST BE OF MATERIAL COMPATIBLE WITH THE CONCRETE SURFACE, DOT APPROVED FOR HIGHWAYS OR APPROVED EQUIVALENT.
- FIRE LANE MARKINGS MUST BE OF SLIP RESISTANT MATERIAL.

SHEET KEYNOTES:

- PROVIDE 2" COMPRESSED AIR MAIN WITHIN UTILITY TRENCH.
- PROVIDE 10" FRESH WATER MAIN IN UTILITY TRENCH. PROVIDE PIPE INSULATION AND JACKET. REFER TO ELECTRICAL DRAWINGS FOR HEAT TRACE REQUIREMENTS.
- PROVIDE PIPE GUIDE ON EACH SIDE OF THE EXPANSION JOINT (TYPICAL). REFER TO DETAIL ON M-504.
- PROVIDE 4" SANITARY FORCED MAIN BETWEEN PIER STRUCTURE AND FENDER. PROVIDE INSULATION AND JACKETING. REFER TO ELECTRICAL DRAWINGS FOR HEAT TRACE REQUIREMENTS.
- PROVIDE 4" SANITARY CLEAN OUT ALONGSIDE PIER.
- PROVIDE PIPE ANCHOR (TYPICAL). REFER TO DETAIL ON M-504.
- PROVIDE AXIAL MOVEMENT THERMAL EXPANSION JOINT (TYPICAL). PROVIDE GUIDE ON EACH SIDE OF JOINT.
- PROVIDE DRY-BARREL FIRE HYDRANT WITH 6" INLET, AND ONE 4-1/2" HOSE OUTLET AND TWO 2-1/2" HOSE OUTLET CONNECTIONS.
- REFER TO DETAIL A4 ON M-001 FOR DIMENSIONAL CONTROL INFORMATION REGARDING THE FIRE LANE STRIPPING PLAN.

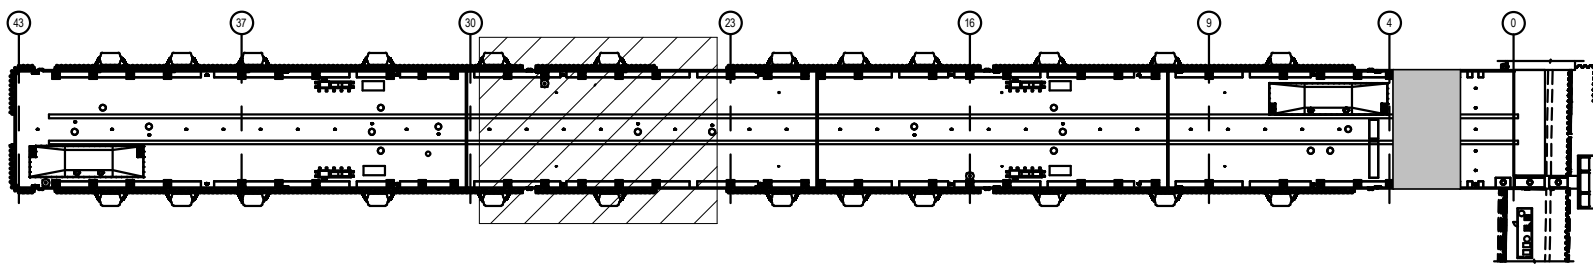

KEY PLAN

1/8" = 1' - 0" 0 5' 10' 15' 30'

DATE	APPR
DESCRIPTION	SYM



APPROVED: 
FOR COMMANDER NAVFAC
ACTIVITY: 2/15/2026


Approved by Frank Cole USCG MASI				
SATISFACTORY TO DATE: 06 FEB 2026				
DES	SAS	DRW	IB	CHK
BRANCH MANAGER: MRUCWJ				
CHIEF ENGINEER: JMU				
FIRE PROTECTION: HPN				

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND ~ MID-ATLANTIC
CI CORE - HAMPTON ROADS
NAVAL STATION NEWPORT
NEWPORT, RI
USCG OCR HOMEPOR INITIATIVE OPC PIER
MECHANICAL PLAN - SHEET 3 OF 7

SCALE: AS NOTED	
EPROJECT NO.: 1826479	
CONSTR. CONTR. NO.	
NAVFAC DRAWING NO. 12936738	
SHEET 169	OF 247
M-103	

DRAWING REVISION: 25 AUGUST 2020

3/2/2026 5:05:02 PM Mr-104 Autodesk Docs/224101525_USCG_OCR_Homeport_Initiative_OPC_Pier_1/PIER USCG-1737623-M.mxd

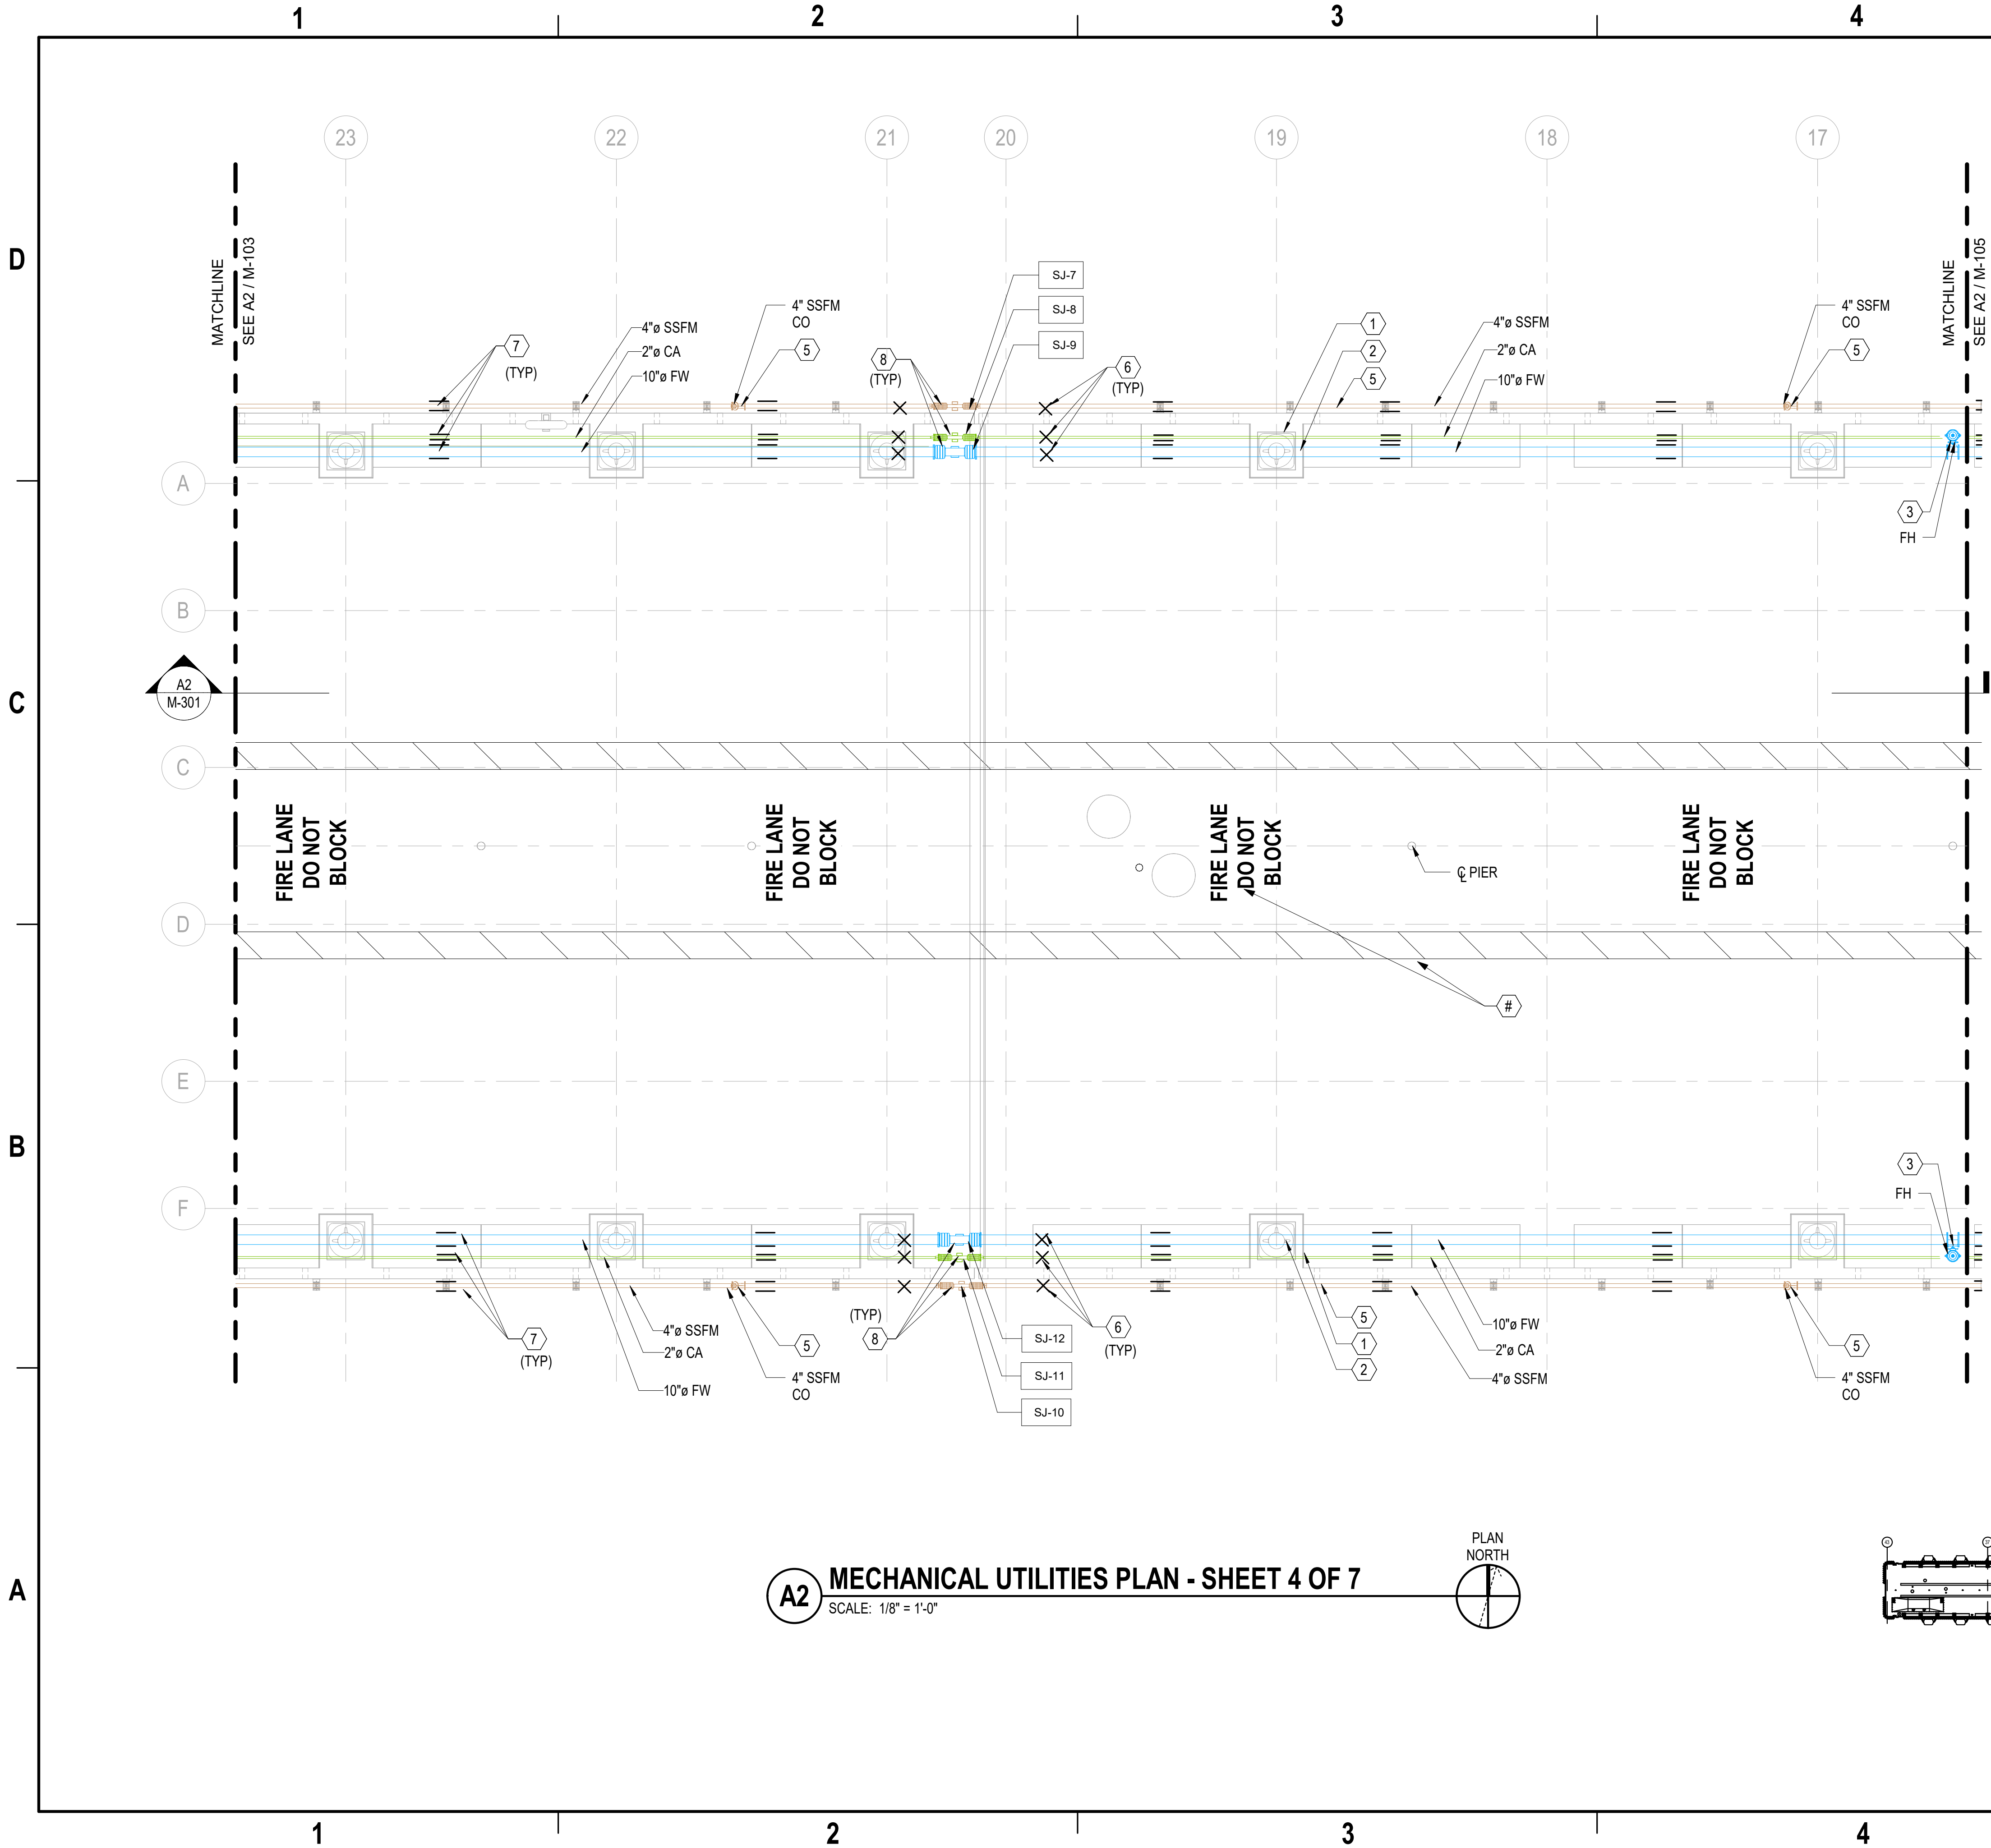

GENERAL SHEET NOTES:


- 1. FOR MECHANICAL ABBREVIATIONS, LEGEND & GENERAL NOTES, SEE DRAWING M-001.
- 2. COMPRESSED AIR AND FRESH WATER PIPING IN UTILITY TRENCHES TO MAINTAIN 3" MINIMUM CLEARANCE OF PILE CAP OPENING.

FIRE LANE GENERAL NOTES:


- 1. PROVIDE A TOTAL AVAILABLE FIRE LANE WIDTH OF 20'.
- 2. RETAIN AND MARK A 15' WIDE UNOBSTRUCTED FIRE LANE.
- 3. PROVIDE A MARKED 2'-6" "DUAL USE" BUFFER ON BOTH SIDES OF THE 15' WIDE UNOBSTRUCTED FIRE LANE.
- 4. THE CENTER 15' MUST REMAIN UNOBSTRUCTED. ENCROACHMENT INTO THE "DUAL USE" BUFFER BY CRANES IS ACCEPTABLE.
- 5. AT LEAST 13'-6" NOMINAL VERTICAL CLEARANCE MUST BE PROVIDED AND MAINTAINED OVER THE FULL WIDTH OF THE FIRE LANE.
- 6. THE ANGLE OF APPROACH MUST NOT EXCEED 8 DEGREES AT ANY POINT. MINIMUM INSIDE TURN RADIUS MUST BE 25' AND MINIMUM OUTSIDE TURN RADIUS MUST BE 50'.
- 7. IF TEMPORARY ADJUSTMENTS ARE REQUIRED TO MOVE THE FIRE LANE TO ALLOW FOR ATYPICAL CRANE USE, MAINTENANCE/DELIVERY TRUCK ACCESS, ETC. THEN A SOP MUST BE PREPARED FOR EACH INSTANCE.
- 8. FIRE LANE MARKINGS MUST BE OF MATERIAL COMPATIBLE WITH THE CONCRETE SURFACE, DOT APPROVED FOR HIGHWAYS OR APPROVED EQUIVALENT.
- 9. FIRE LANE MARKINGS MUST BE OF SLIP RESISTANT MATERIAL.

SHEET KEYNOTES:

- 1. PROVIDE 2" COMPRESSED AIR MAIN WITHIN UTILITY TRENCH.
- 2. PROVIDE 10" FRESH WATER MAIN IN UTILITY TRENCH. PROVIDE PIPE INSULATION AND JACKET. REFER TO ELECTRICAL DRAWINGS FOR HEAT TRACE REQUIREMENTS.
- 3. PROVIDE DRY-BARREL FIRE HYDRANT WITH 6" INLET, AND ONE 4-1/2" HOSE OUTLET AND TWO 2-1/2" HOSE OUTLET CONNECTIONS.
- 4. PROVIDE 4" SANITARY FORCED MAIN BETWEEN PIER STRUCTURE AND FENDER. PROVIDE INSULATION AND JACKETING. REFER TO ELECTRICAL DRAWINGS FOR HEAT TRACE REQUIREMENTS.
- 5. PROVIDE 4" SANITARY CLEAN OUT ALONGSIDE PIER.
- 6. PROVIDE PIPE ANCHOR (TYPICAL). REFER TO DETAIL ON M-504.
- 7. PROVIDE PIPE GUIDE (TYPICAL). REFER TO DETAIL ON M-504.
- 8. PROVIDE STRUCTURAL MOVEMENT PIPE JOINT AT PIER EXPANSION JOINT. PROVIDE ANCHOR ON EACH SIDE OF THE JOINT.
- 9. REFER TO DETAIL A4 ON M-001 FOR DIMENSIONAL CONTROL INFORMATION REGARDING THE FIRE LANE STRIPPING PLAN.

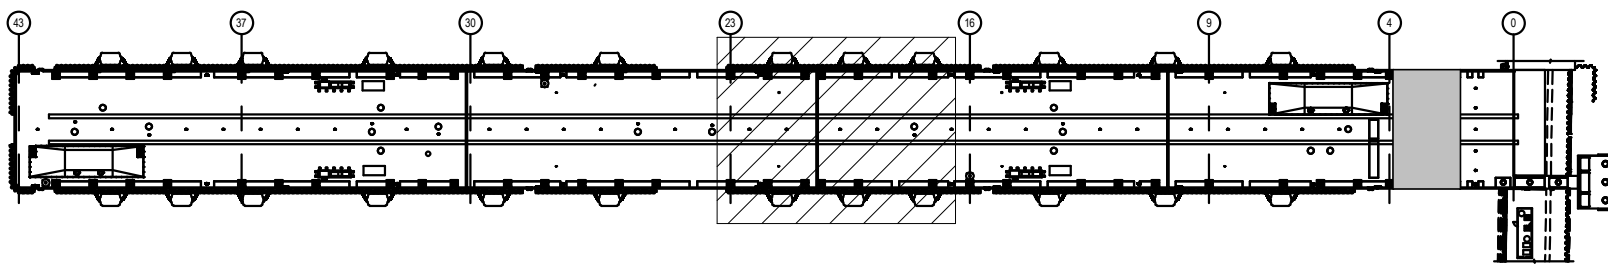

KEY PLAN



A2 MECHANICAL UTILITIES PLAN - SHEET 4 OF 7
SCALE: 1/8" = 1'-0"



DATE	APPR
DESCRIPTION	SYM



APPROVED:	AE INFO
FOR COMMANDER NAVFAC	2/15/2026
ACTIVITY	
Approved by Frank Cole USCG MASI	
SATISFACTORY TO DATE	06 FEB 2026
DES	SAS
BRW	IB
CHK	TJE
PMOM	MRUCWU
BRANCH MANAGER	NEK
CHIEF ENGINEER	JMU
FIRE PROTECTION	HPN

DEPARTMENT OF THE NAVY	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND	NAVAL STATION NEWPORT
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND ~ MID-ATLANTIC	NAVAL STATION - HAMPTON ROADS	NEWPORT, RI
USCG OCR HOMEPORT INITIATIVE OPC PIER		
MECHANICAL PLAN - SHEET 4 OF 7		

SCALE: AS NOTED
EPROJECT NO.: 1826479
CONSTR. CONTR. NO.
NAVFAC DRAWING NO. 12936739
SHEET 170 OF 247
M-104

DRAWING REVISION: 25 AUGUST 2020

GENERAL SHEET NOTES:


- FOR MECHANICAL ABBREVIATIONS, LEGEND & GENERAL NOTES, SEE DRAWING M-001.
- COMPRESSED AIR AND FRESH WATER PIPING IN UTILITY TRENCHES TO MAINTAIN 3" MINIMUM CLEARANCE OF PILE CAP OPENING.

FIRE LANE GENERAL NOTES:


- PROVIDE A TOTAL AVAILABLE FIRE LANE WIDTH OF 20'.
- RETAIN AND MARK A 15' WIDE UNOBSTRUCTED FIRE LANE.
- PROVIDE A MARKED 2'-6" "DUAL USE" BUFFER ON BOTH SIDES OF THE 15' WIDE UNOBSTRUCTED FIRE LANE.
- THE CENTER 15' MUST REMAIN UNOBSTRUCTED. ENCROACHMENT INTO THE "DUAL USE" BUFFER BY CRANES IS ACCEPTABLE.
- AT LEAST 13'-6" NOMINAL VERTICAL CLEARANCE MUST BE PROVIDED AND MAINTAINED OVER THE FULL WIDTH OF THE FIRE LANE.
- THE ANGLE OF APPROACH MUST NOT EXCEED 8 DEGREES AT ANY POINT. MINIMUM INSIDE TURN RADIUS MUST BE 25' AND MINIMUM OUTSIDE TURN RADIUS MUST BE 50'.
- IF TEMPORARY ADJUSTMENTS ARE REQUIRED TO MOVE THE FIRE LANE TO ALLOW FOR ATYPICAL CRANE USE, MAINTENANCE/DELIVERY TRUCK ACCESS, ETC. THEN A SOP MUST BE PREPARED FOR EACH INSTANCE.
- FIRE LANE MARKINGS MUST BE OF MATERIAL COMPATIBLE WITH THE CONCRETE SURFACE. DOT APPROVED FOR HIGHWAYS OR APPROVED EQUIVALENT.
- FIRE LANE MARKINGS MUST BE OF SLIP RESISTANT MATERIAL.

SHEET KEYNOTES:


- PROVIDE 2" COMPRESSED AIR MAIN WITHIN UTILITY TRENCH.
- PROVIDE 10" FRESH WATER MAIN IN UTILITY TRENCH. PROVIDE PIPE INSULATION AND JACKET. REFER TO ELECTRICAL DRAWINGS FOR HEAT TRACE REQUIREMENTS.
- PROVIDE 4" SANITARY FORCED MAIN BETWEEN PIER STRUCTURE AND FENDER. PROVIDE INSULATION AND JACKETING. REFER TO ELECTRICAL DRAWINGS FOR HEAT TRACE REQUIREMENTS.
- PROVIDE 4" SANITARY CLEAN OUT ALONGSIDE PIER
- PROVIDE PIPE ANCHOR (TYPICAL). REFER TO DETAIL ON M-504.
- PROVIDE PIPE GUIDE (TYPICAL). REFER TO DETAIL ON M-504.
- PROVIDE AXIAL MOVEMENT THERMAL EXPANSION JOINT (TYPICAL). PROVIDE GUIDE ON EACH SIDE OF JOINT.
- PROVIDE STRUCTURAL MOVEMENT PIPE JOINT AT PIER EXPANSION JOINT. PROVIDE ANCHOR ON EACH SIDE OF THE JOINT.
- PROVIDE 4" SSFM POOL PIECE FOR ACCESS TO REMOVABLE TRENCH COVERS.
- PROVIDE 2" COMPRESSED AIR BRANCH PIPE IN TRENCH WITH SHUTOFF VALVE. CONTINUE TO HEATED MECHANICAL UTILITY ENCLOSURE.
- PROVIDE 3" FRESH WATER BRANCH PIPE IN TRENCH WITH SHUTOFF VALVE. CONTINUE TO HEATED MECHANICAL UTILITY ENCLOSURE. PROVIDE INSULATION AND JACKETING. REFER TO ELECTRICAL DRAWINGS FOR HEAT TRACE REQUIREMENTS.
- PROVIDE 3" FRESH WATER RISER UP TO MECHANICAL UTILITY ENCLOSURE. PROVIDE WATER METERING AND ACCESSORIES. SHIP CONNECTIONS WITH REDUCED PRESSURE ZONE BACKFLOW PREVENTER. REFER TO PIER UTILITY WATER SERVICE ENTRY ON C1/M-505.
- PROVIDE 4" SANITARY PIPE TO MECHANICAL UTILITY ENCLOSURE. PROVIDE DUAL SANITARY INLINE PUMPS.
- PROVIDE 2" COMPRESSED AIR RISER UP TO MECHANICAL UTILITY ENCLOSURE. PROVIDE FOUR 3/4" QUICK CONNECT OUTLETS AT UTILITY STATION.
- REFER TO NORTHERN ENCLOSURE DETAILS OF THE SANITARY SEWER, WATER, AND COMPRESSED AIR ON M-501.
- REFER TO SOUTHERN ENCLOSURE DETAILS OF THE SANITARY SEWER, WATER, AND COMPRESSED AIR ON M-502.
- PROVIDE MANUFACTURER CONTROL ENCLOSURE WITH VFDs SUPPORTING THE DUPLEX SANITARY PUMP SYSTEM. PROVIDE STAINLESS STEEL UNISTRUT MOUNTING SUPPORT FOR ENCLOSURE MOUNTING.
- PROVIDE 10" RUBBER SEATED BUTTERFLY VALVE WITHIN TRENCH FOR ISOLATION OF FRESH WATER PIPING MAIN. PROVIDE 3/4" DRAIN WITH BALL VALVE, CAP AND CHAIN ON BOTH SIDES OF THE ISOLATION VALVE FOR DRAINING OF THE PIPE MAIN.
- PROVIDE 2" BALL VALVE WITHIN TRENCH FOR ISOLATION OF COMPRESSED AIR PIPING MAIN. PROVIDE 3/4" BLOW DOWN WITH BALL VALVE, CAP AND CHAIN ON BOTH SIDES OF THE ISOLATION VALVE.
- MANHOLE LOCATION FOR VALVE ACCESS. REFER TO STRUCTURAL DRAWINGS FOR FURTHER DETAILS.
- REFER TO DETAIL A4 ON M-001 FOR DIMENSIONAL CONTROL INFORMATION REGARDING THE FIRE LANE STRIPPING PLAN.

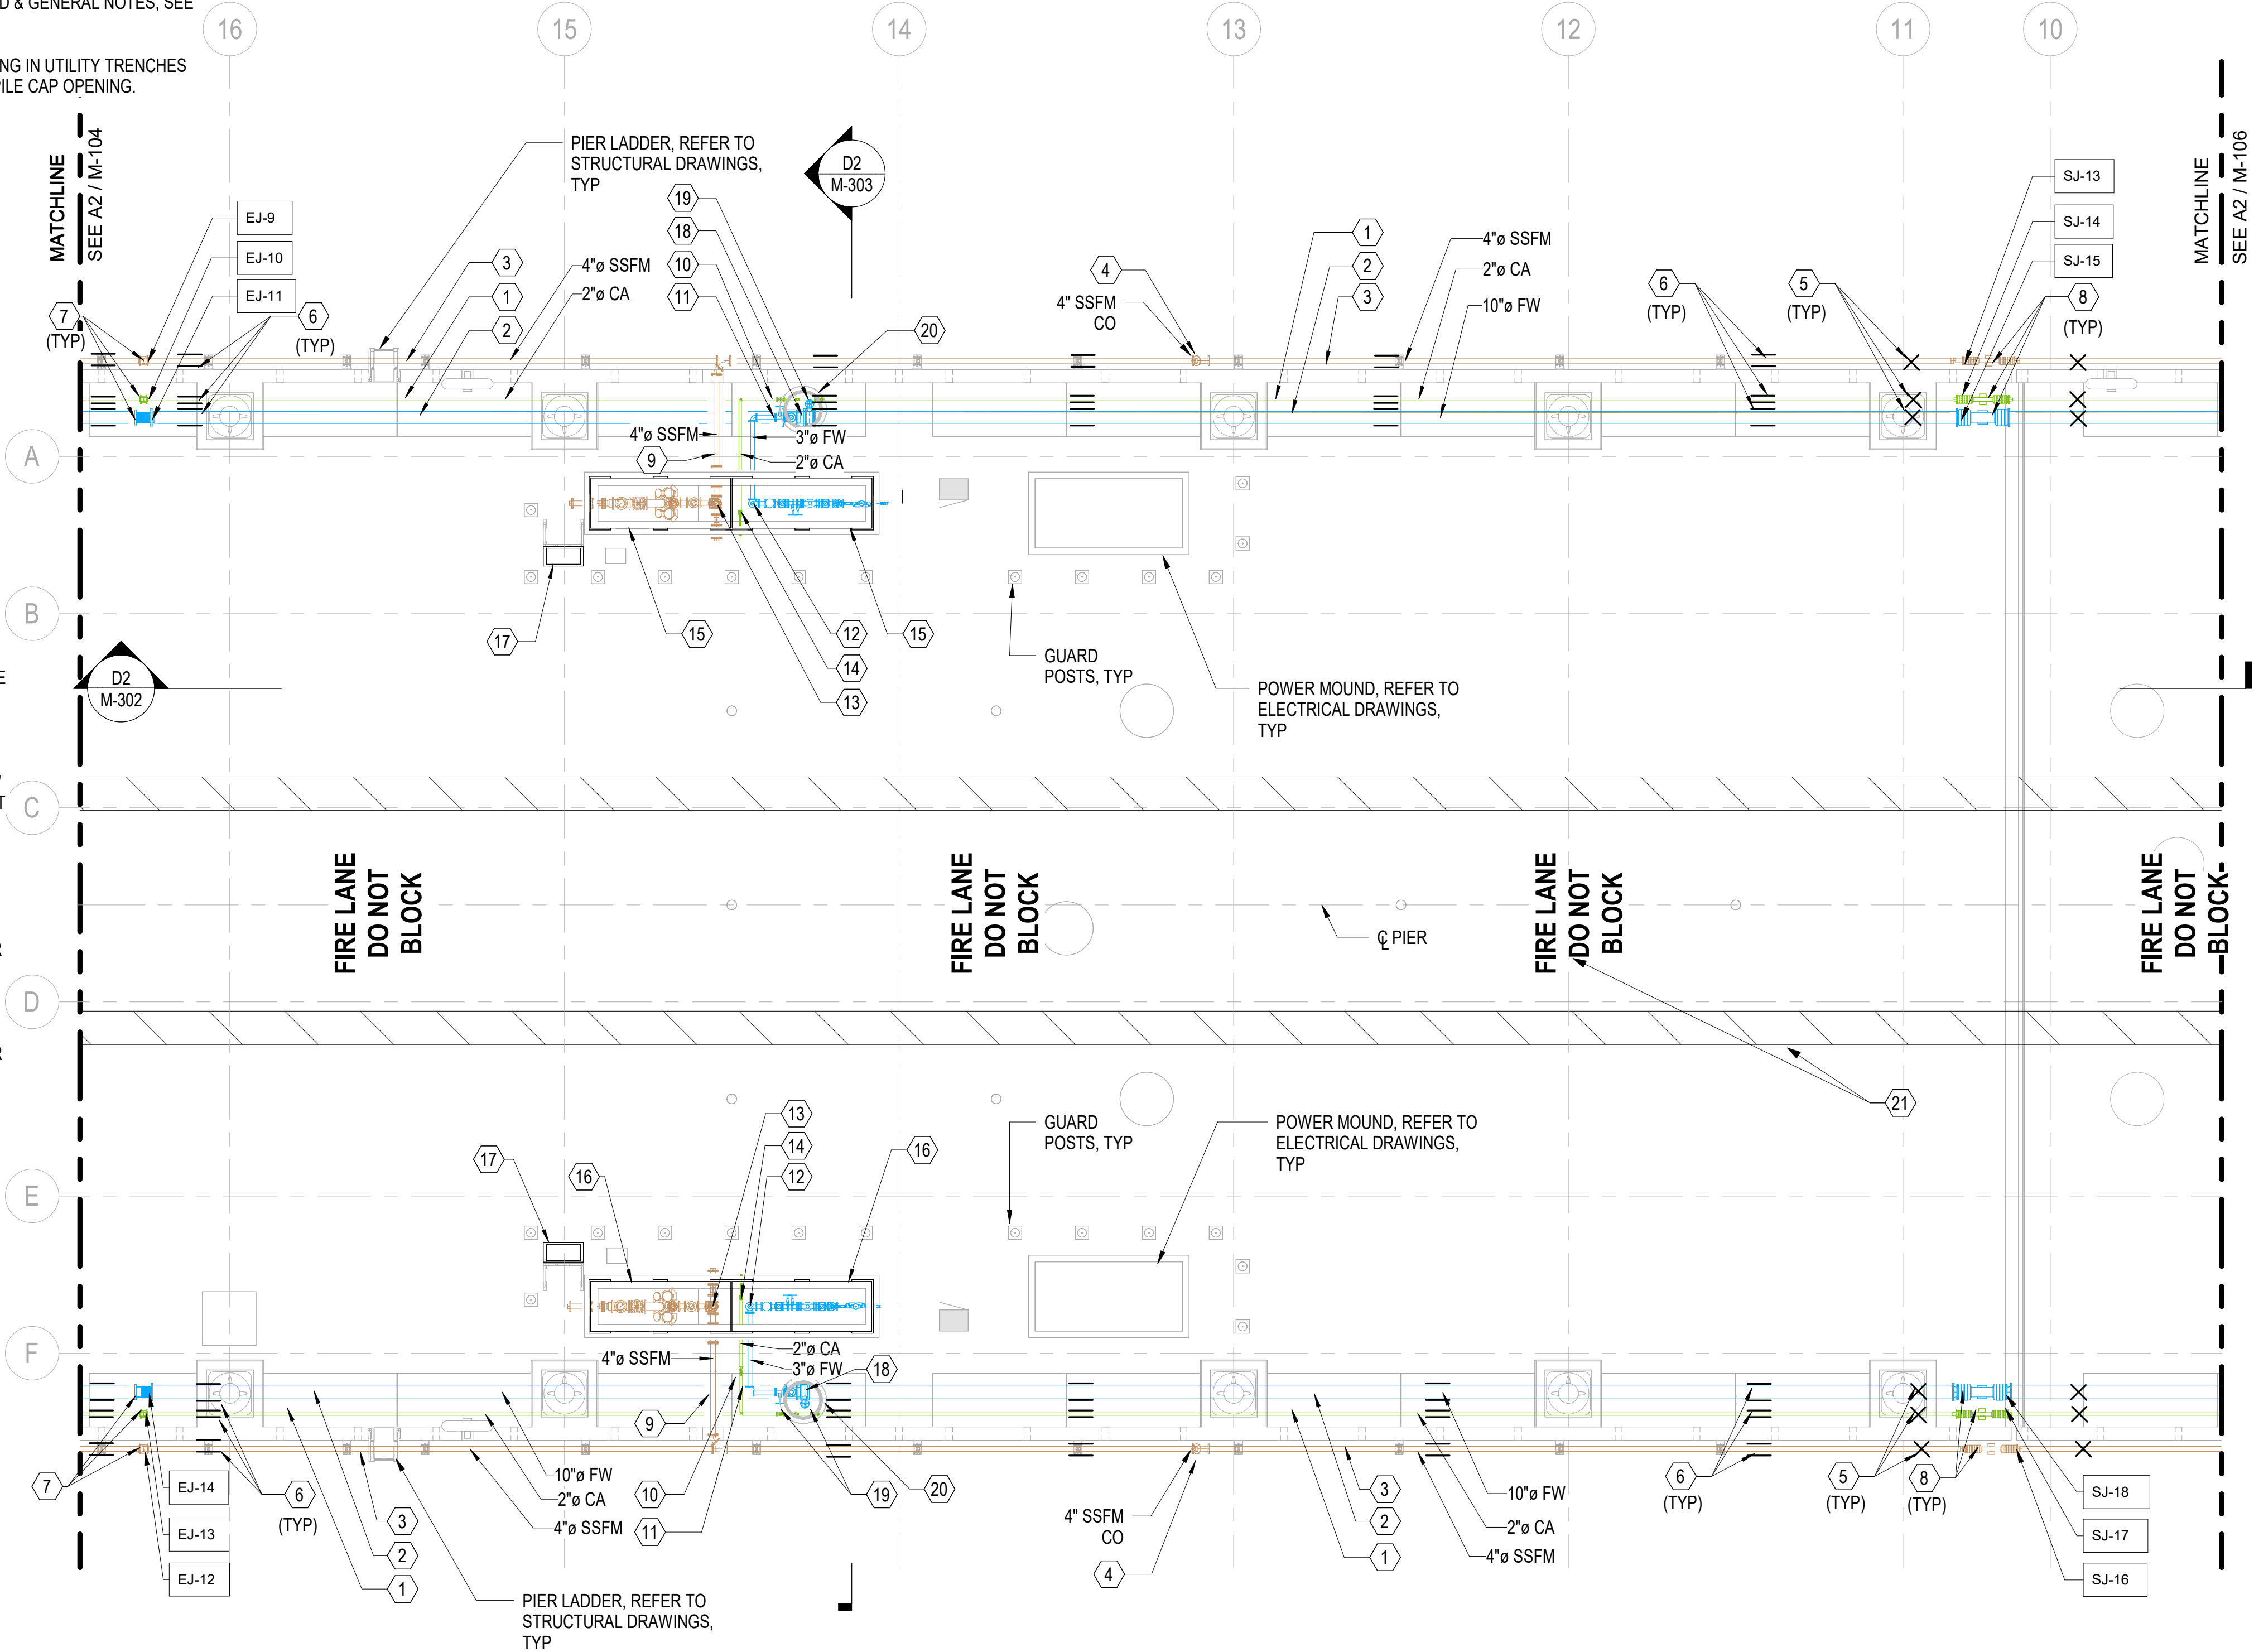

A2 MECHANICAL UTILITIES PLAN - SHEET 5 OF 7
SCALE: 1/8" = 1'-0"

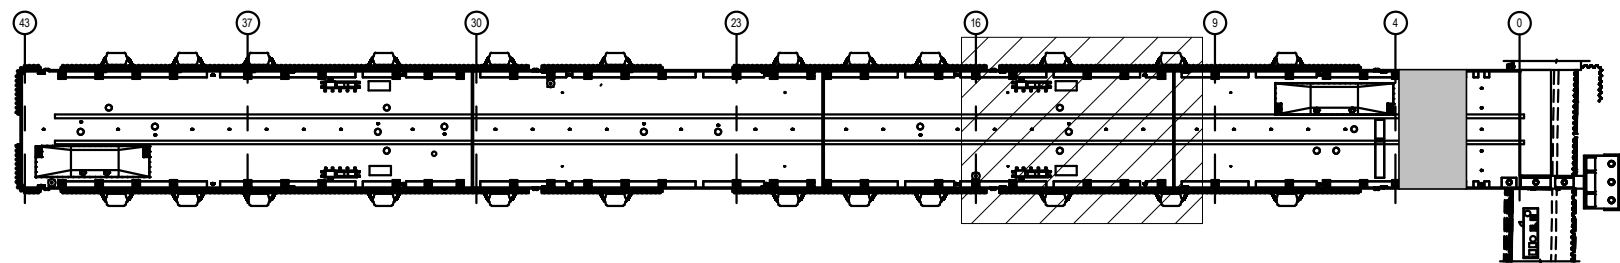

KEY PLAN



DATE	APPR
DESCRIPTION	SYM



APPROVED: 3/15/2026
FOR COMMANDER NAVFAC
ACTIVITY


Approved by Frank Cole USCG MASI
SATISFACTORY TO DATE 06 FEB 2026
DES SAs BRW IB CHK TJE
PMOM MRUCWJ
BRANCH MANAGER NEK
CHIEF ENGINEER JMU
FIRE PROTECTION HPN

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND ~ MID-ATLANTIC
CI CORE - HAMPTON ROADS
NAVAL STATION NEWPORT
USCG OCR HOMEPOR INITIATIVE OPC PIER
NEWPORT, RI
MECHANICAL PLAN - SHEET 5 OF 7

SCALE: AS NOTED
EPROJCT NO.: 1826479
CONSTR. CONTR. NO.
NAVFAC DRAWING NO. 12936740
SHEET 171 OF 247
M-105
DRAWING REVISION: 25 AUGUST 2020




3/2/2026 5:05:24 PM M-303
Autodesk Docs/22410152_USCG_OCR_Homeport_Initiative_OPC_Pier_1/PIPER USCG-1737623-M.rvt

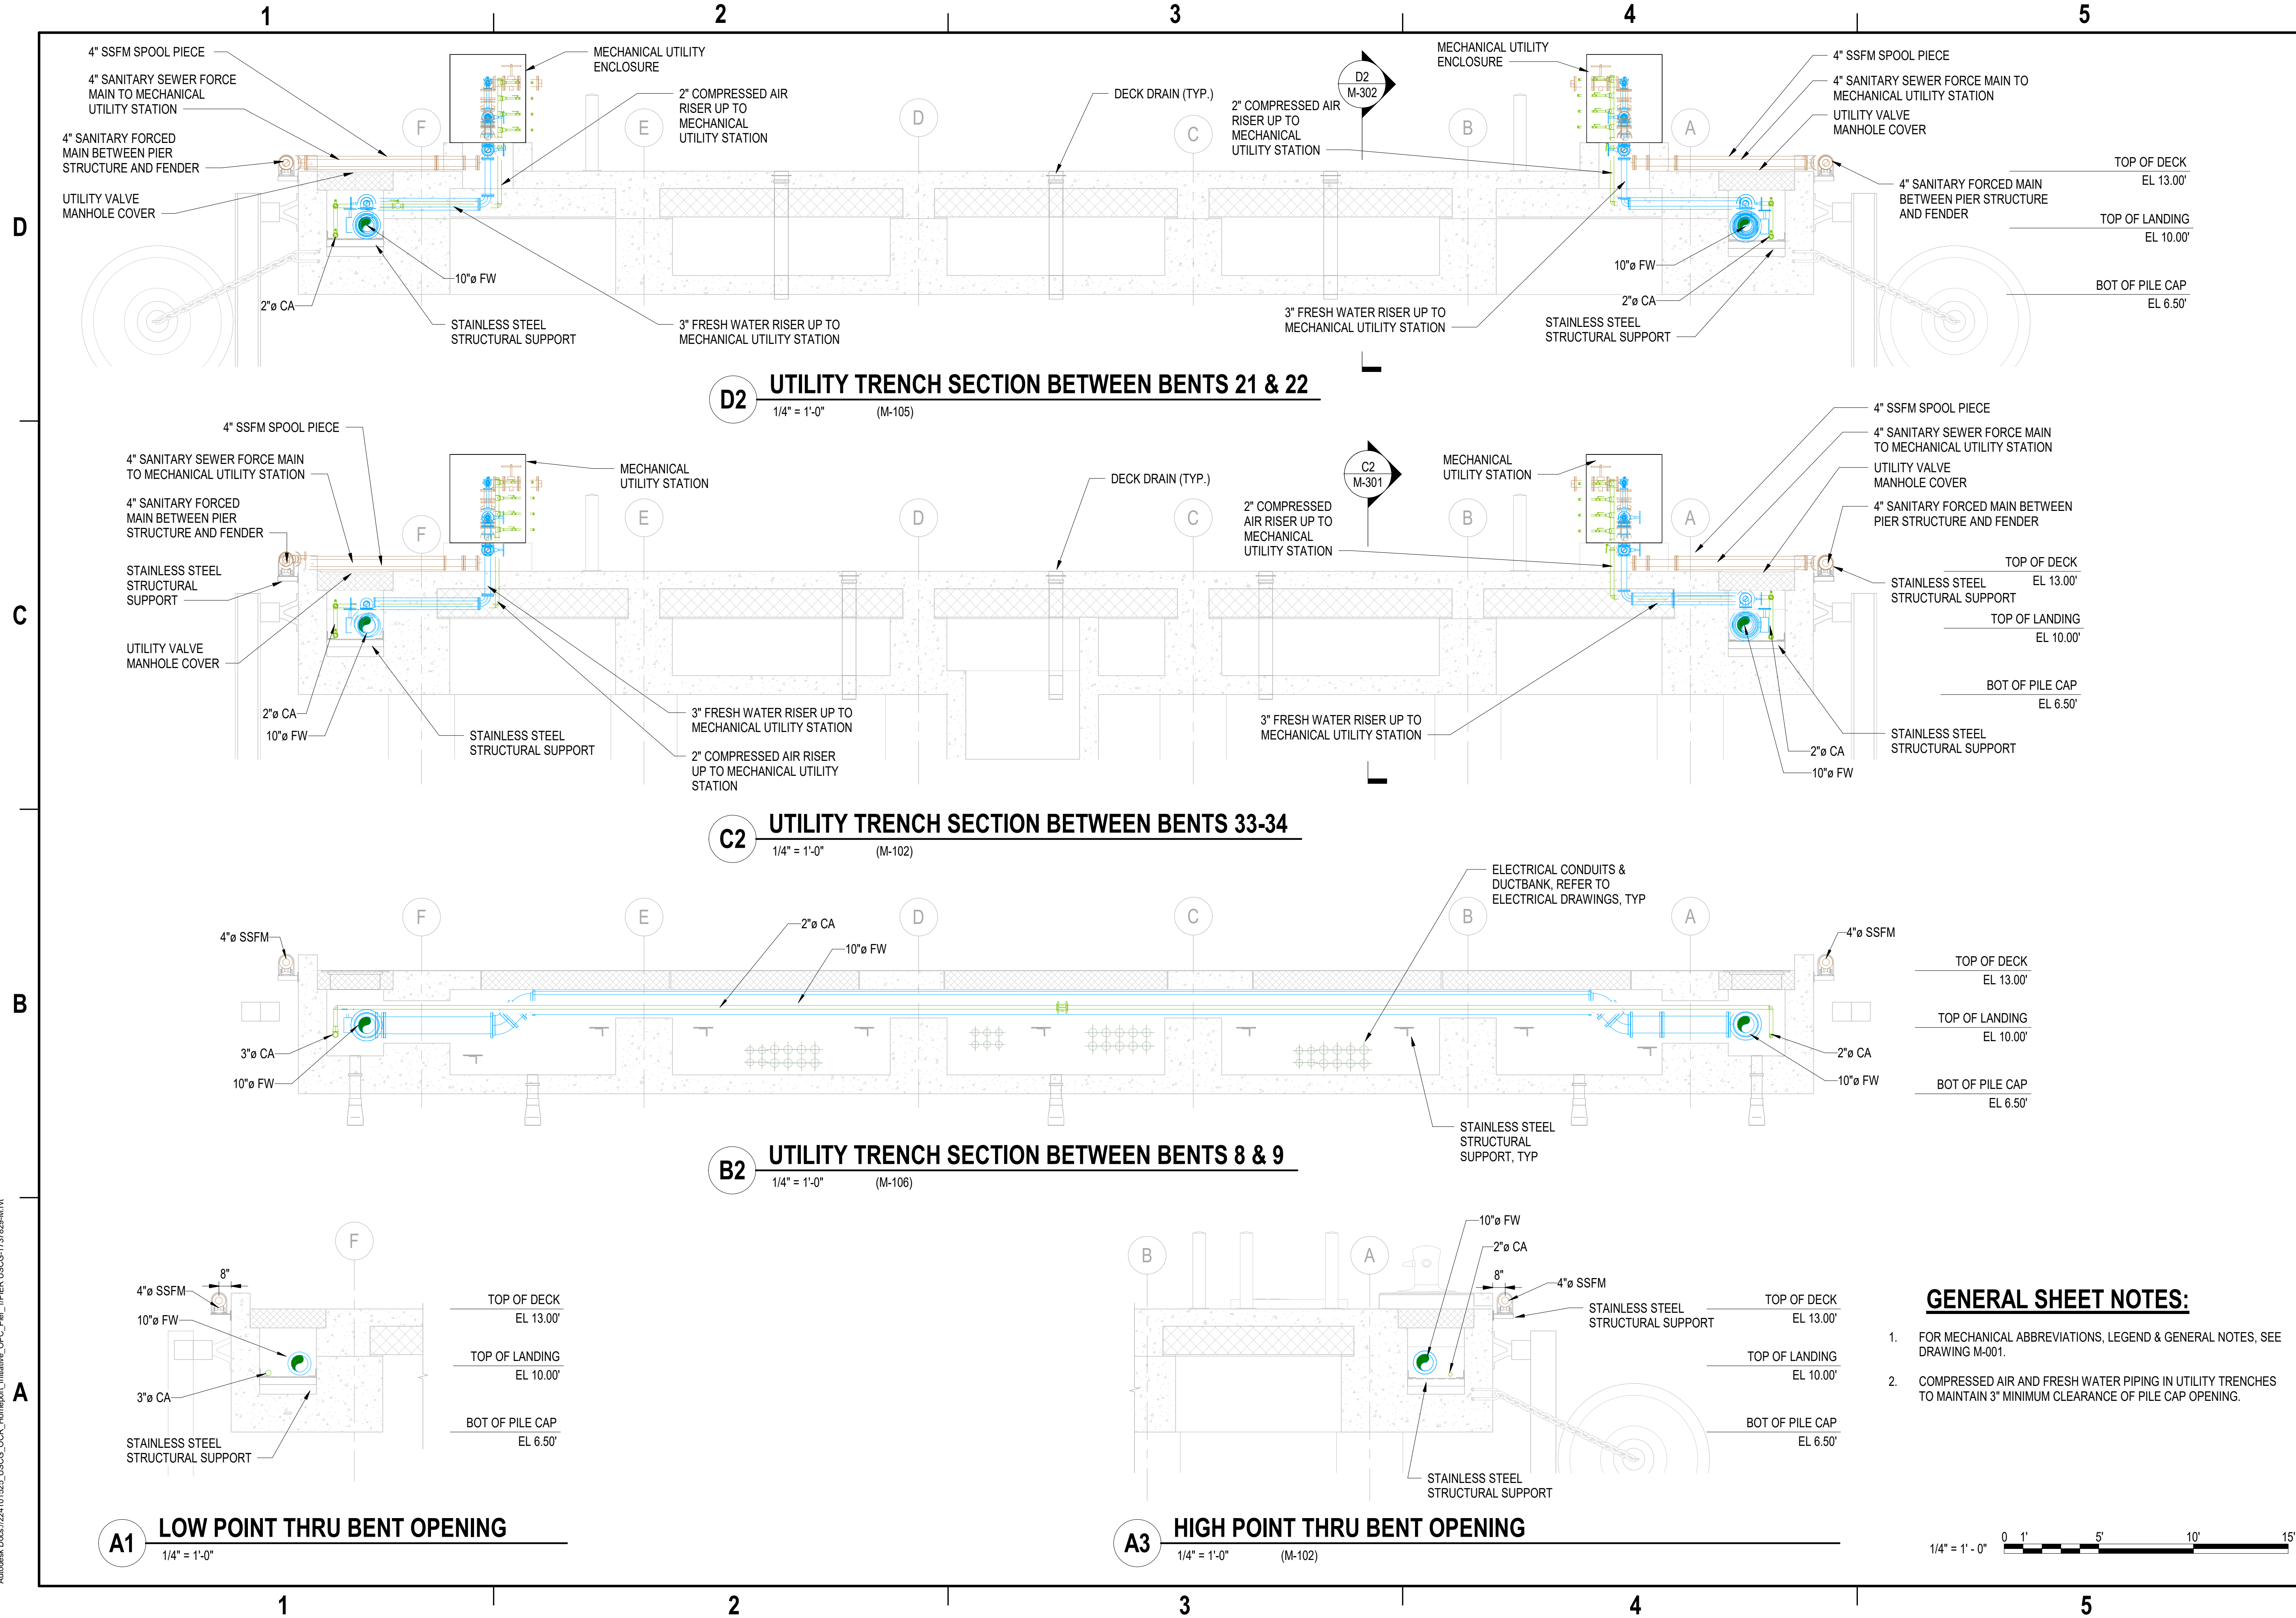

GENERAL SHEET NOTES:

- FOR MECHANICAL ABBREVIATIONS, LEGEND & GENERAL NOTES, SEE DRAWING M-001.
- COMPRESSED AIR AND FRESH WATER PIPING IN UTILITY TRENCHES TO MAINTAIN 3" MINIMUM CLEARANCE OF PILE CAP OPENING.



SYN	DESCRIPTION	DATE	APPR




APPROVED:	AVE INFO
FOR COMMANDER NAVFAC	3/5/2026
ACTIVITY	
Approved by Frank Cole USCG MASI	
SATISFACTORY TO DATE	06 FEB 2026
DES	SAS
BRW	IB
CHK	TJE
PMIDM	MRICWJ
BRANCH MANAGER	NEK
CHIEF ENGINEER	JWJ
FIRE PROTECTION	HPN

DEPARTMENT OF THE NAVY	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND	NEWPORT, RI
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND ~ MID-ATLANTIC	NAVAL STATION - NORFOLK, VA	
CI CORE - HAMPTON ROADS	NAVAL STATION NEWPORT	
USCG OCR HOMEPORT INITIATIVE OPC PIER	MECHANICAL TRANSVERSE SECTIONS	


SCALE: AS NOTED
PROJECT NO.: 1826479
CONSTR. CONTR. NO.
NAVFAC DRAWING NO. 12936745
SHEET 176 OF 247
M-303

DRAWING REVISION: 25 AUGUST 2020

3/2/2026 5:05:34 PM
Autodesk Docs/222101525_USCG_OCR_Homeport_Initiative_OPC_Pier_1/PIPER USCG-1737628-M.rvt

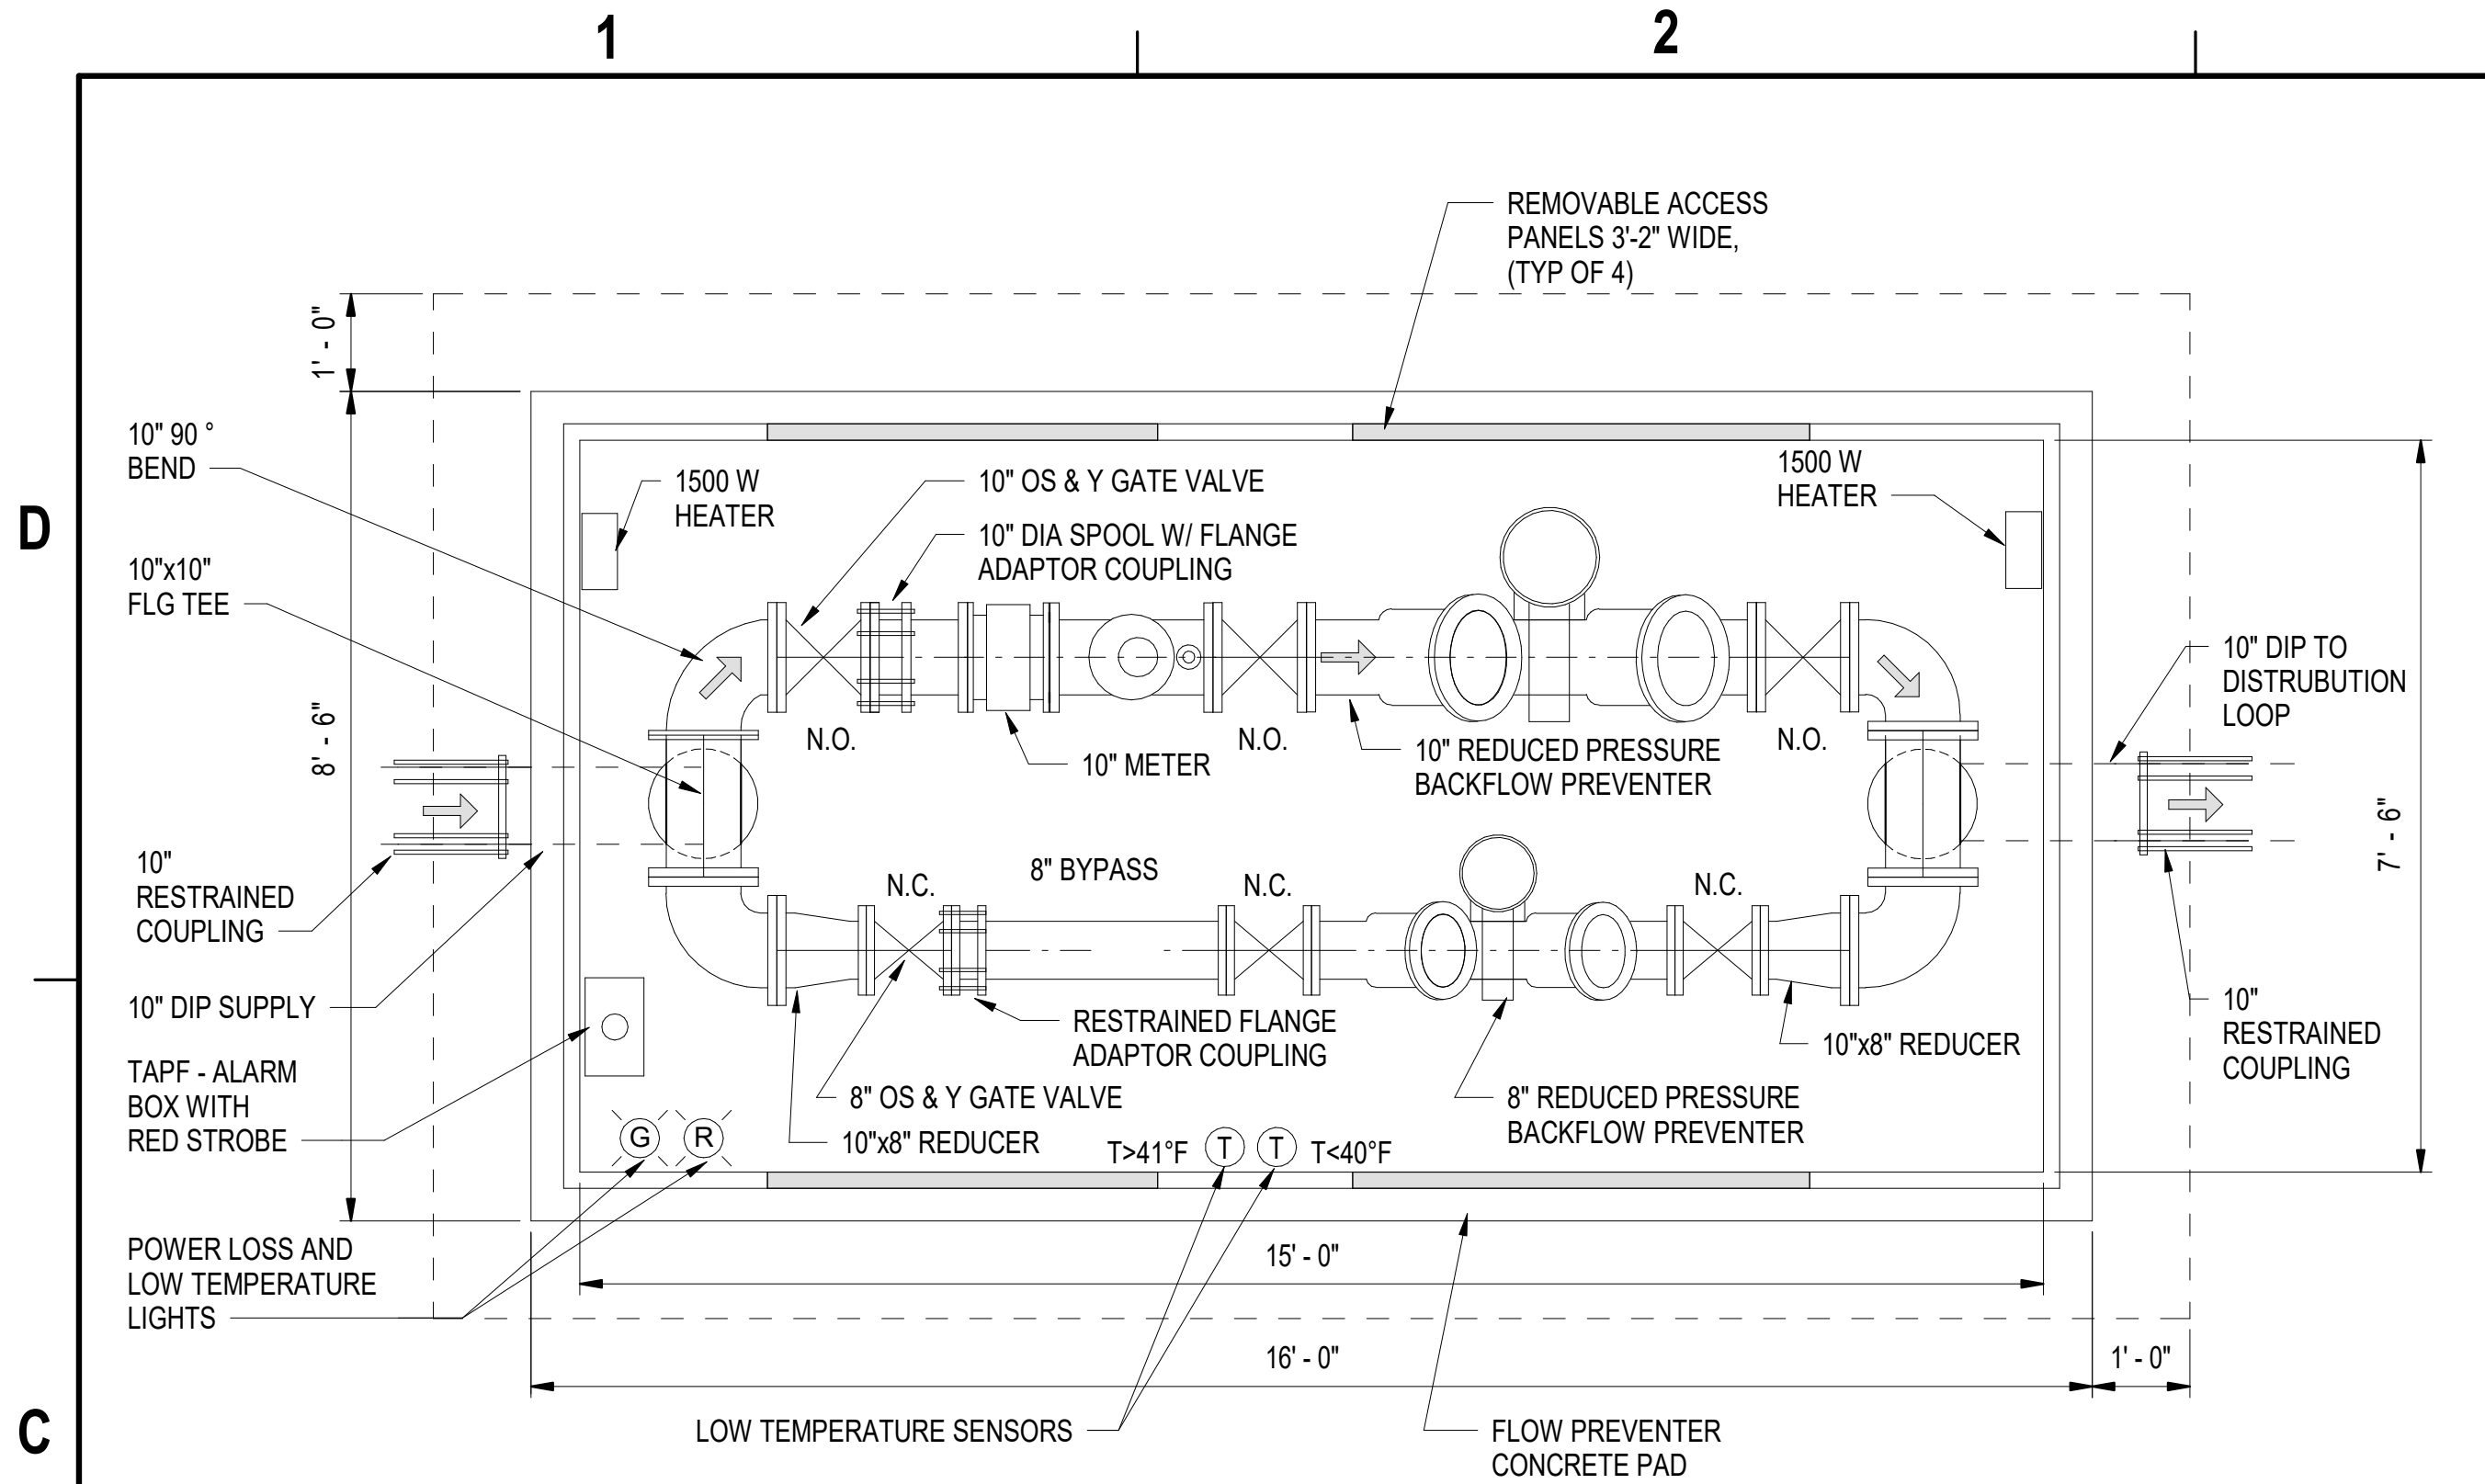


C1 10" BACKFLOW PREVENTER - PLAN
NOT TO SCALE

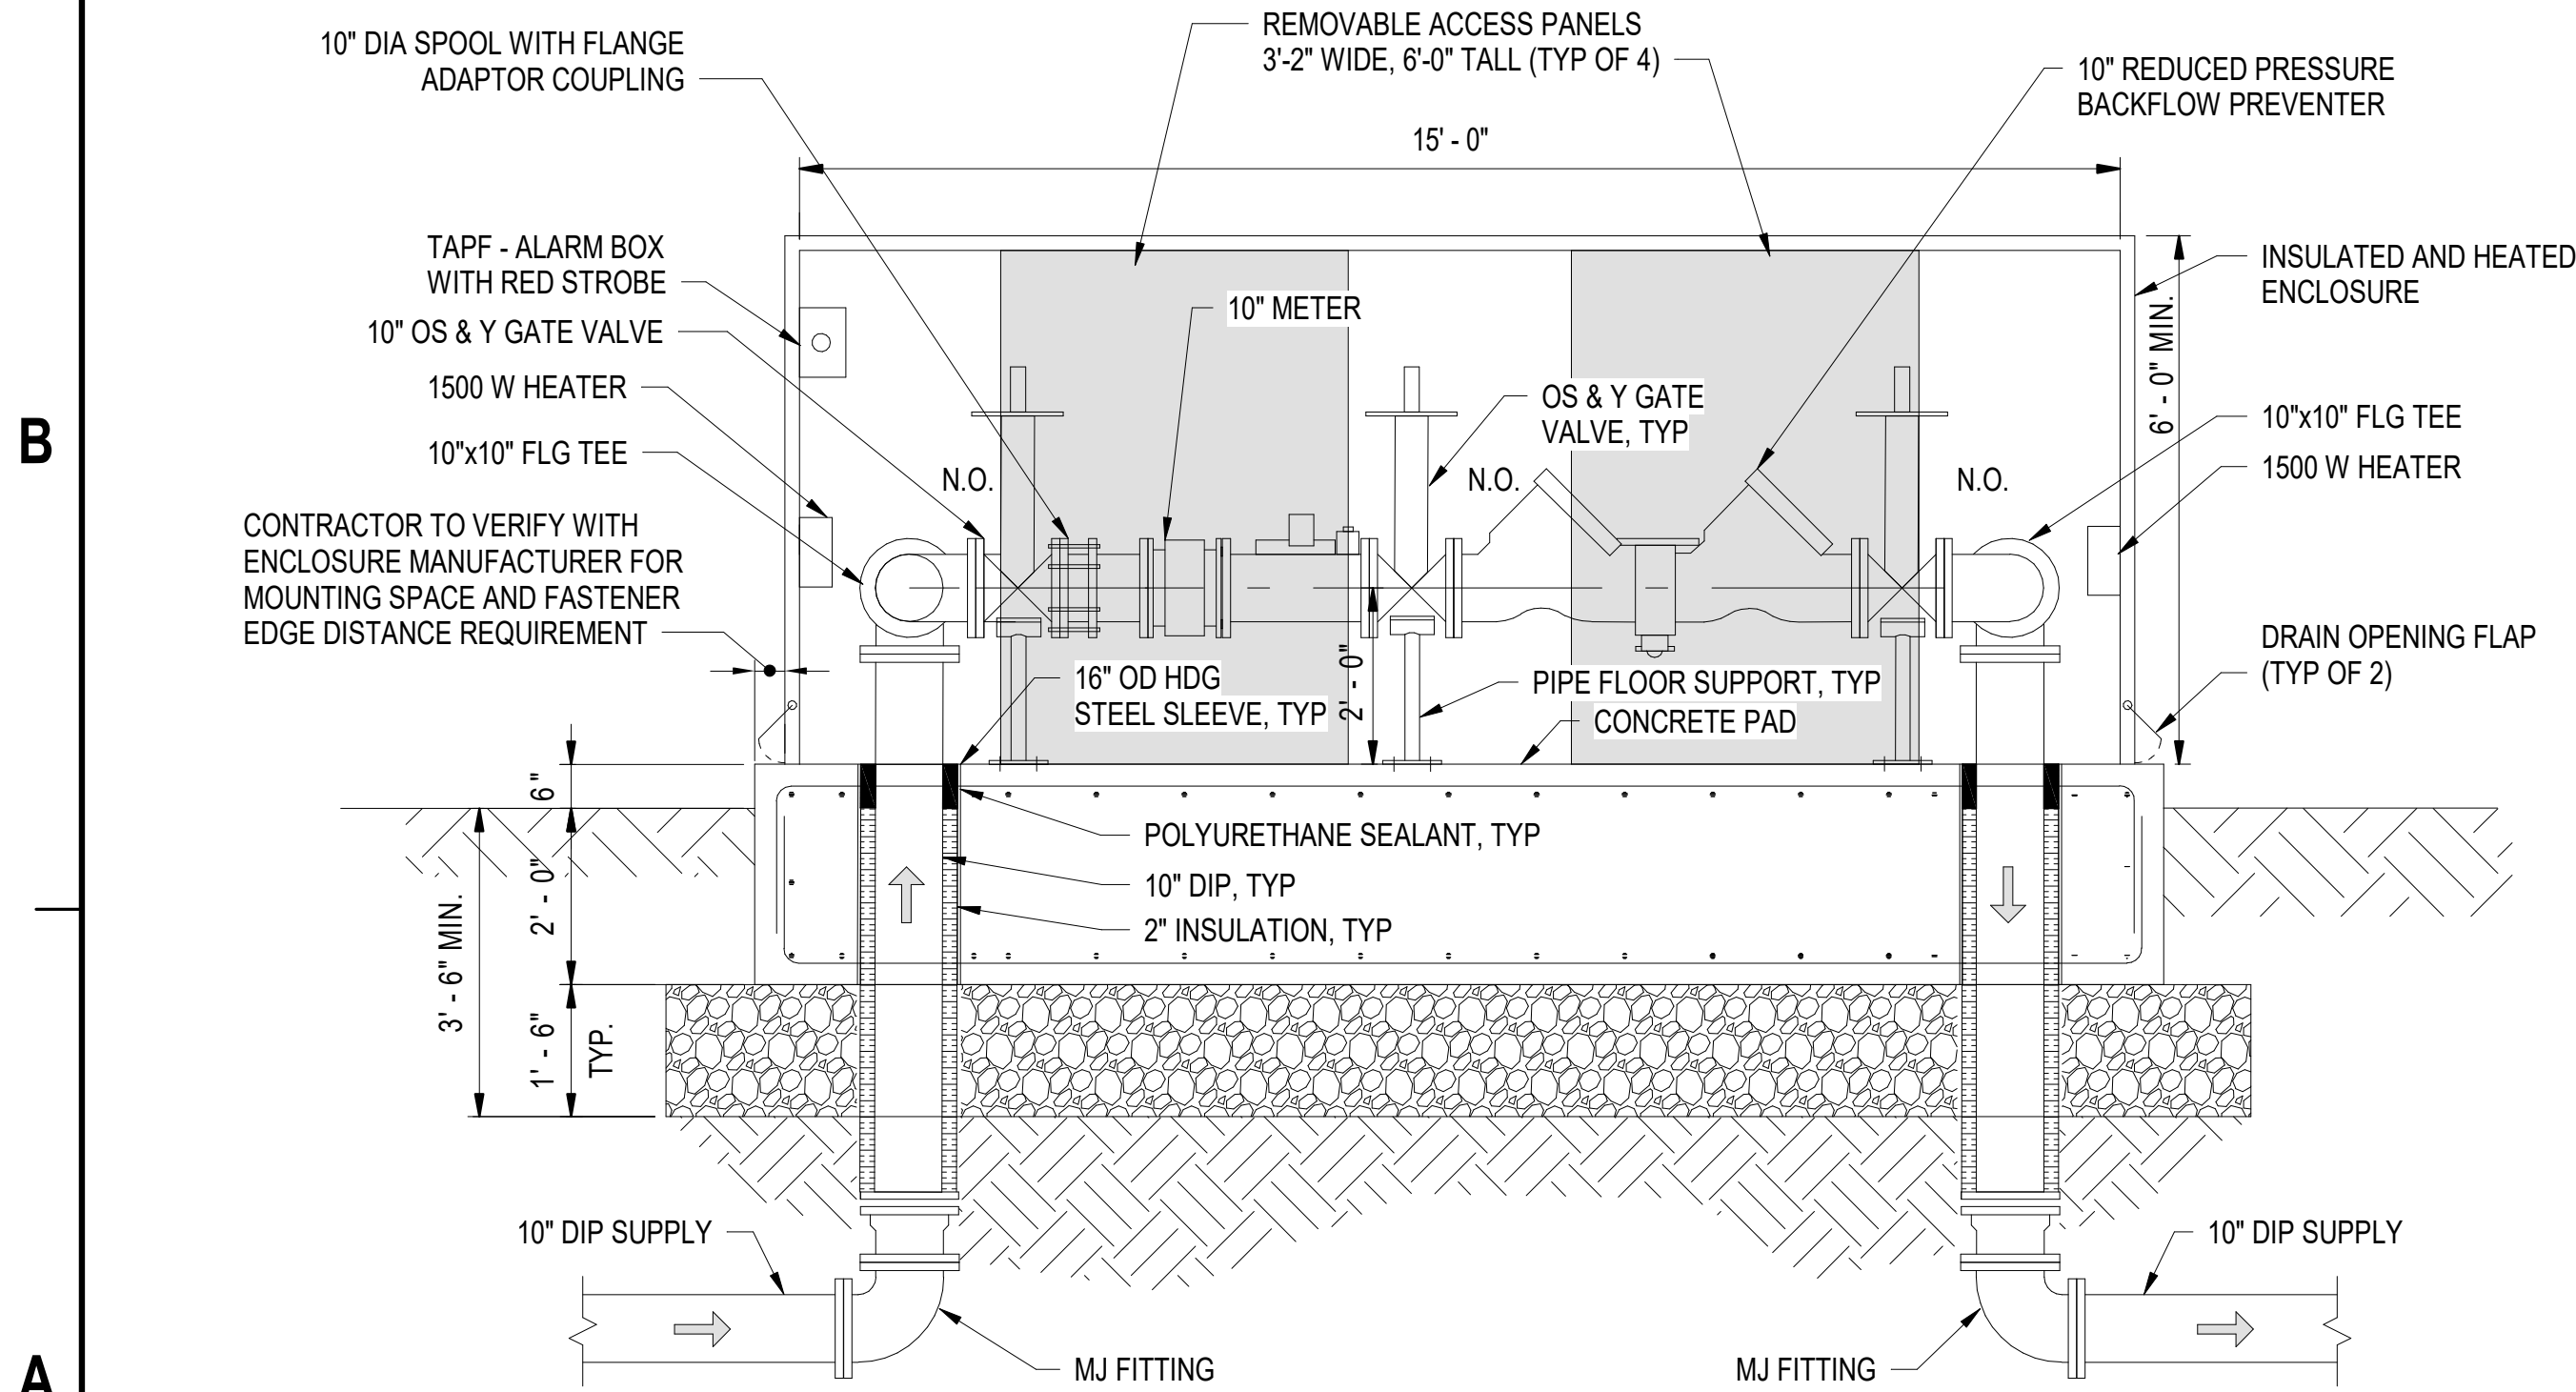


A1 10" BACKFLOW PREVENTER - SECTION
NOT TO SCALE


NOTE:
1. SEE B3/ M-402 FOR REINFORCEMENT DETAILS

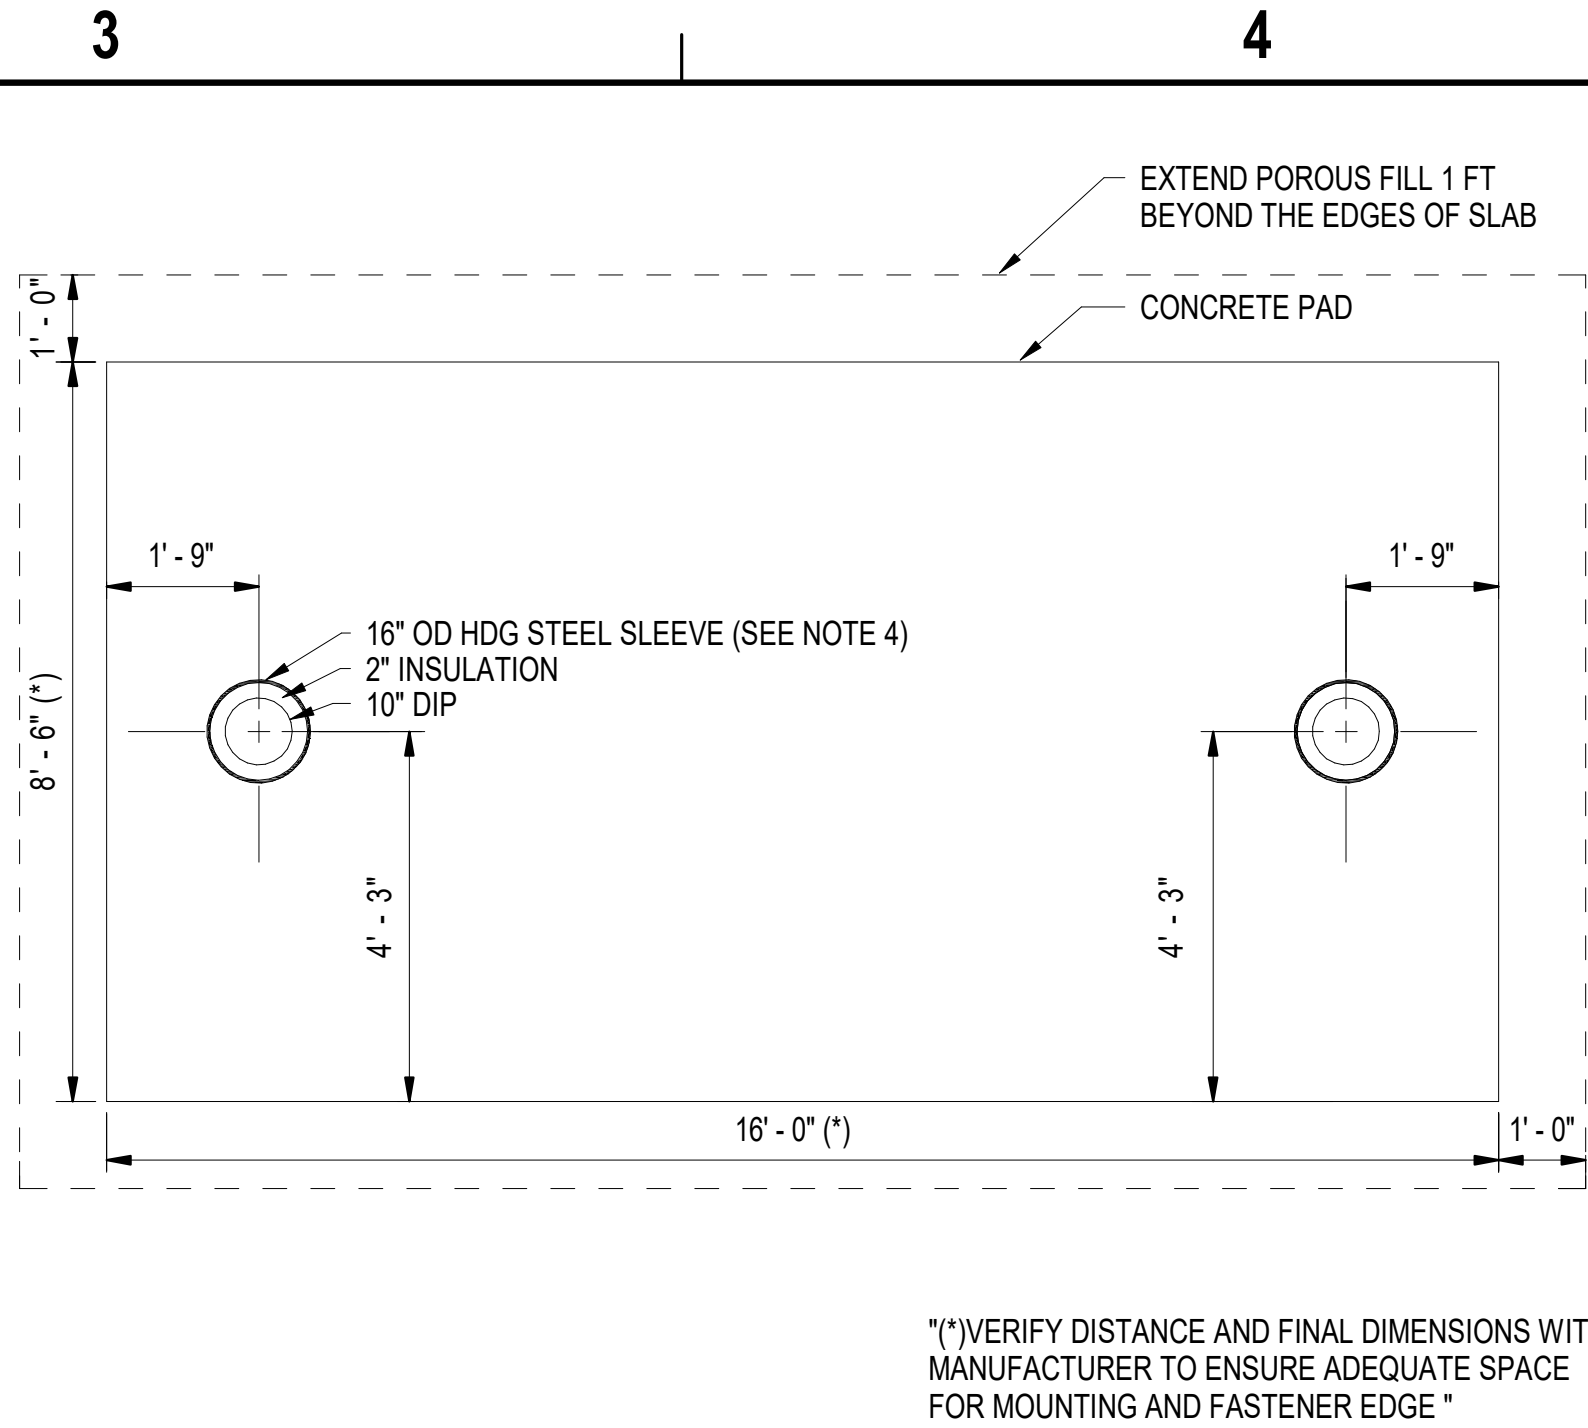

C3 10" BACKFLOW PREVENTER PAD PART PLAN
NOT TO SCALE

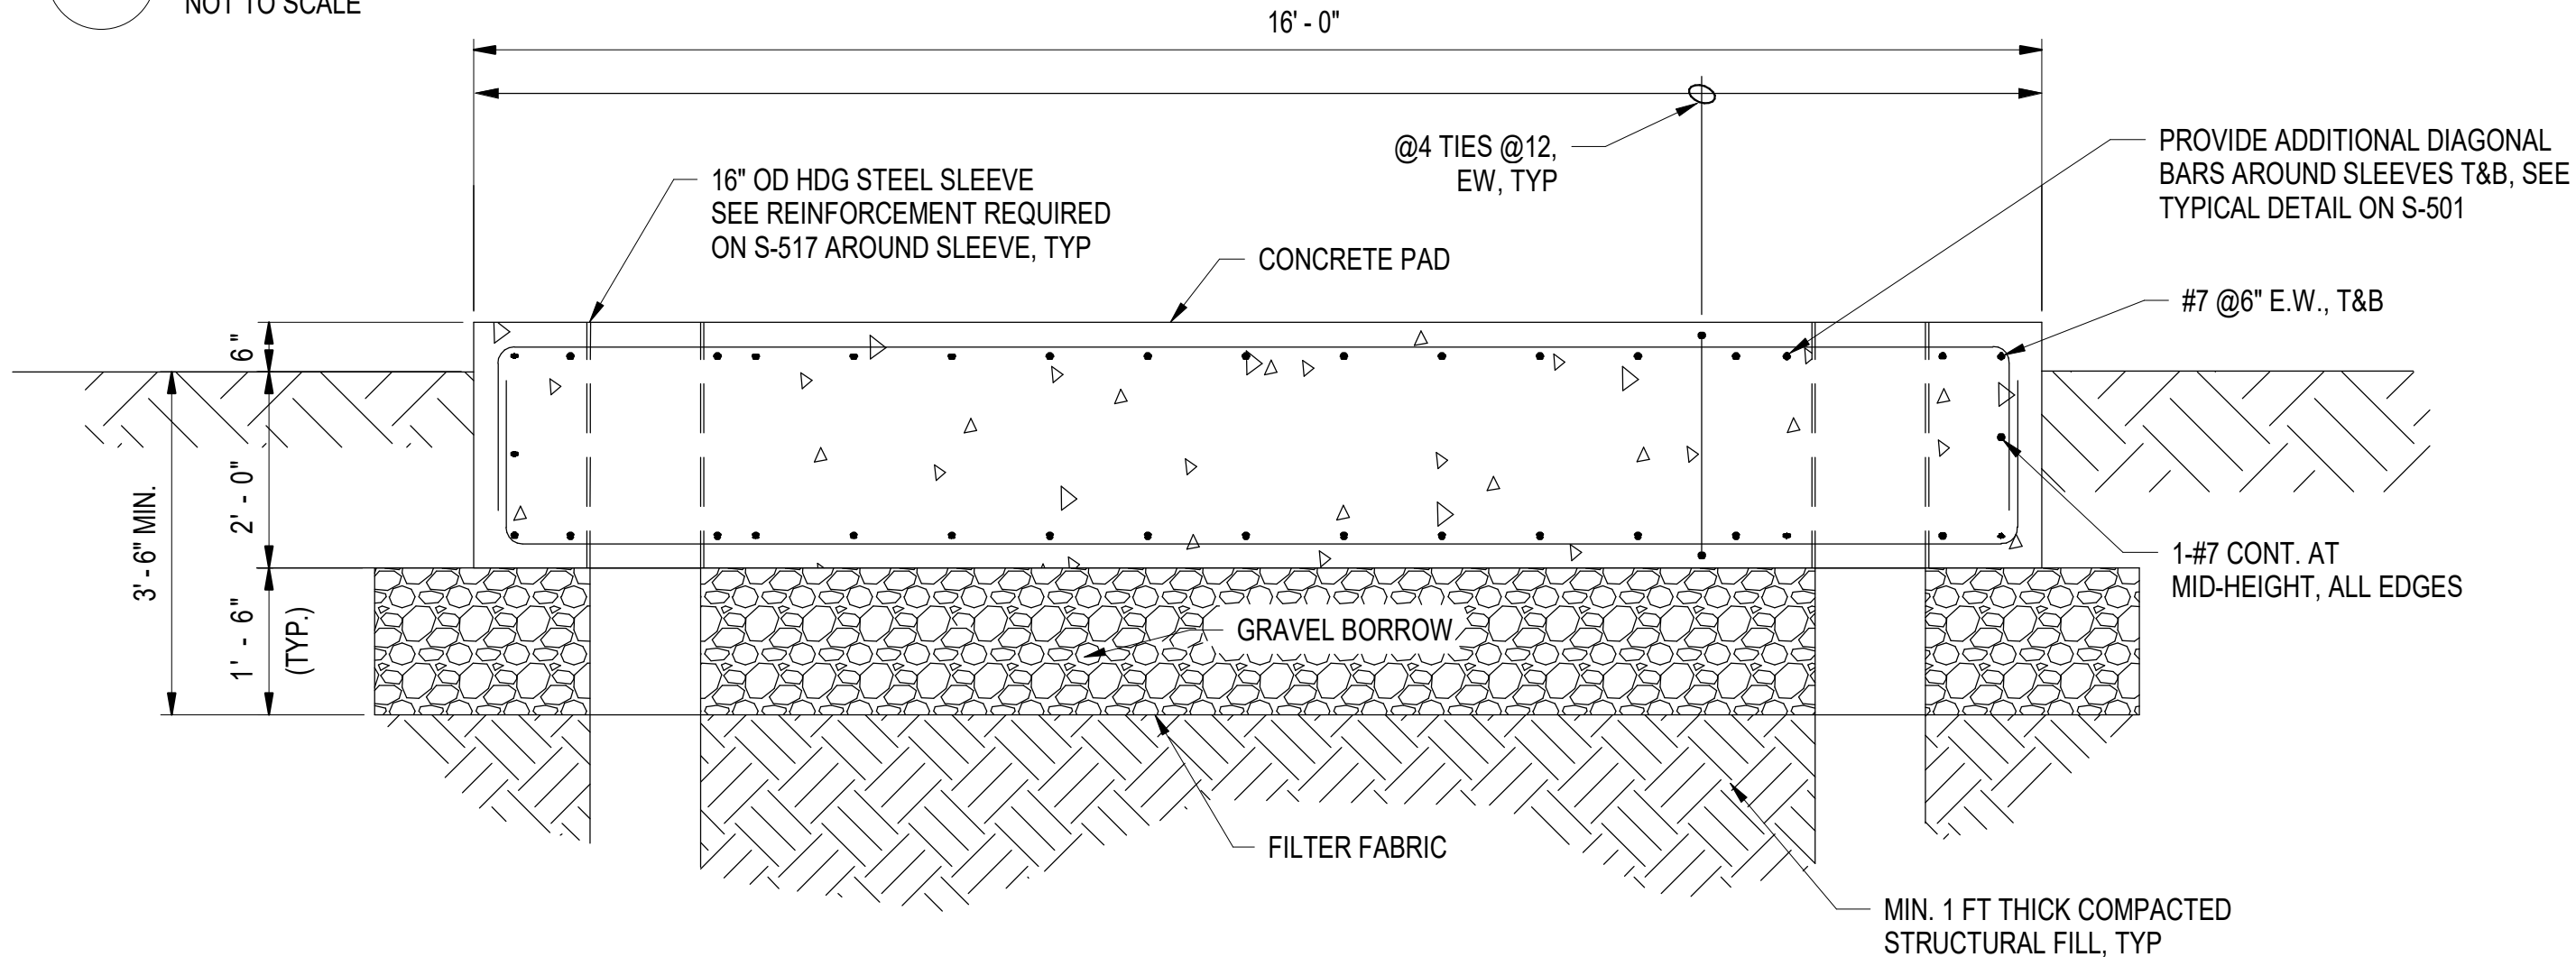

B3 10" BACKFLOW PREVENTOR - SECTION 1
NOT TO SCALE

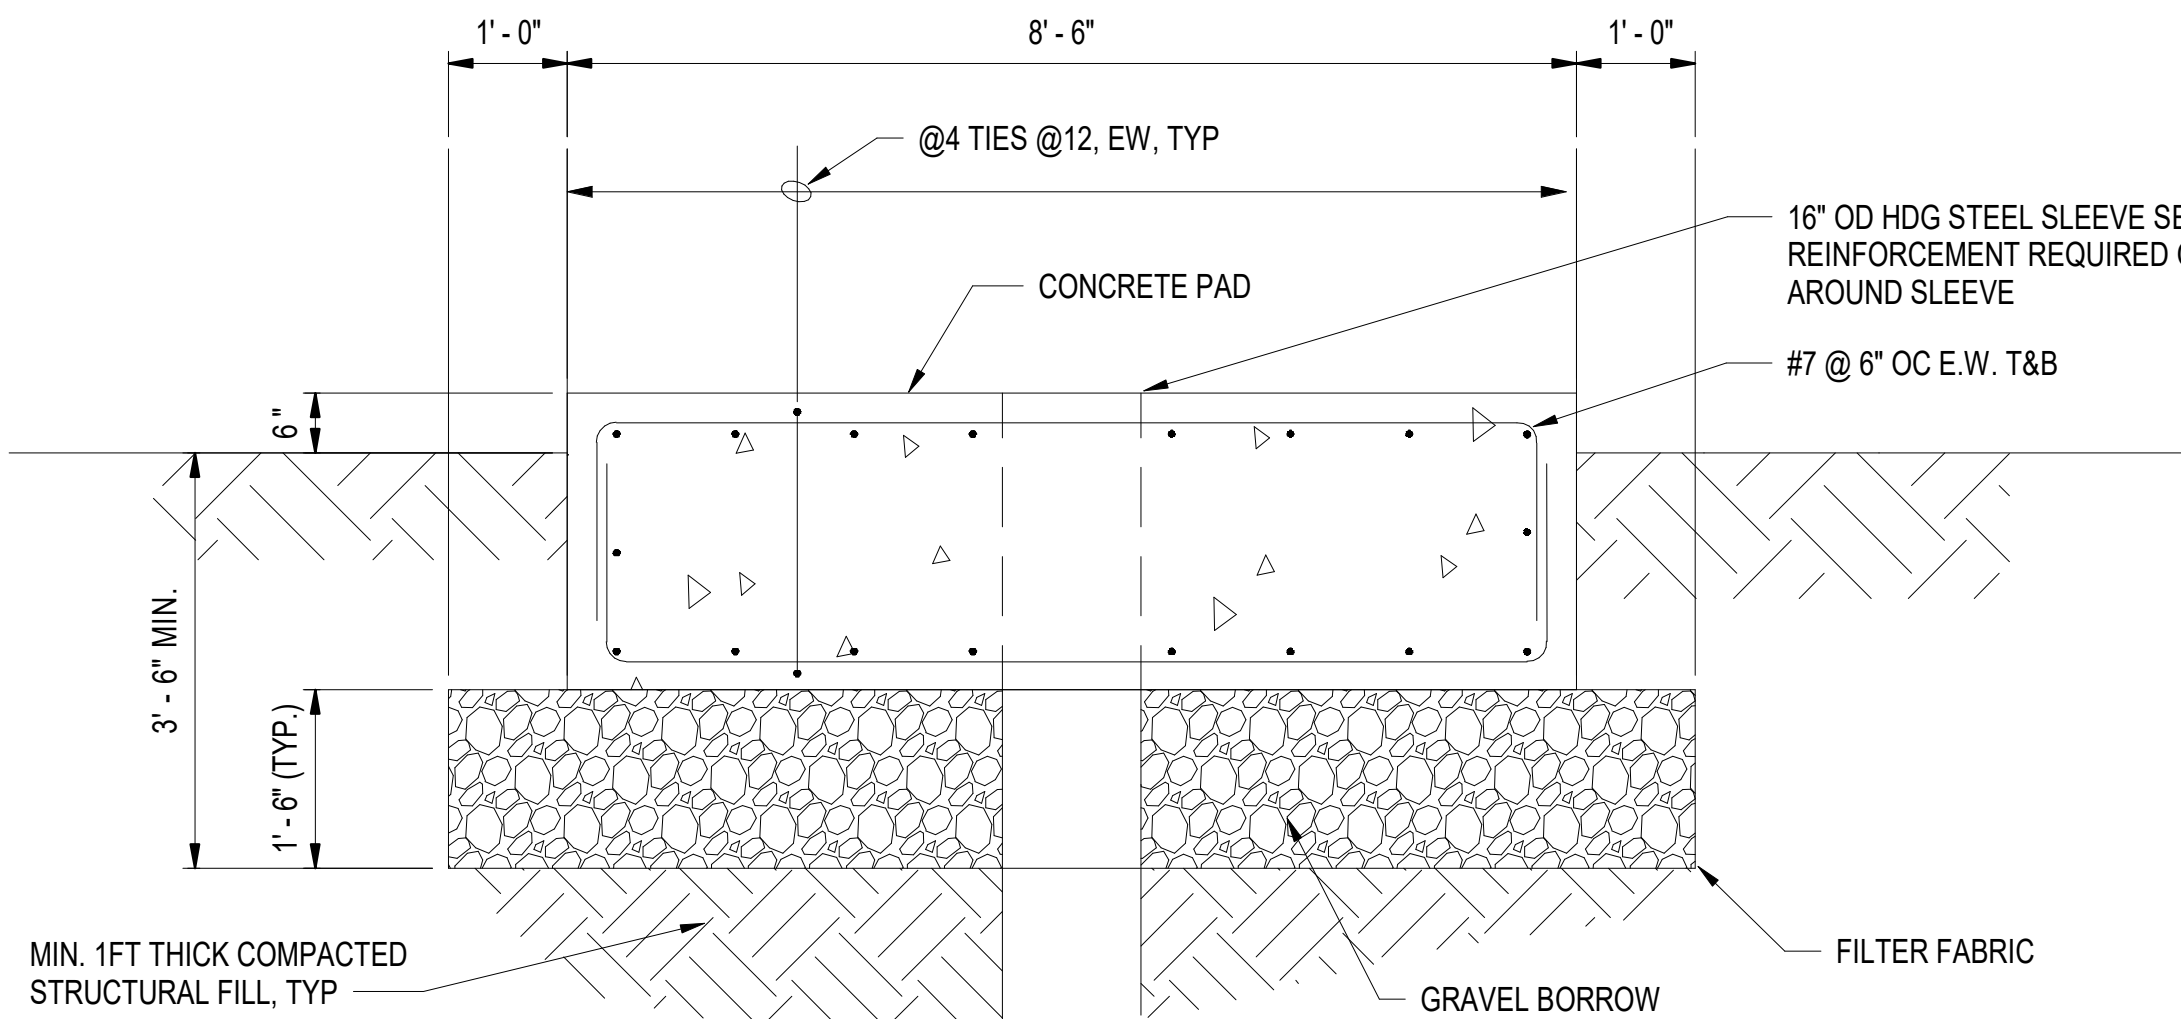


A3 10" BACKFLOW PREVENTOR - SECTION 2
NOT TO SCALE

GENERAL SHEET NOTES:

1. PROVIDE REMOVABLE ACCESS PANELS FOR ALL VALVES INSIDE THE ENCLOSURE.
2. PROVIDE SUPPORT PIPING FROM CONCRETE STRUCTURE. DO NOT SUPPORT FROM ENCLOSURE. PROVIDE ADJUSTABLE PIPE SADDLE SUPPORTS WITH U-BOLT.
3. PROVIDE HEAT TRACE AND INSULATION ON WATER PIPING FOR FREEZE PROTECTION OR AS INDICATED FOR ANTISWEAT.
4. PROVIDE INSULATION FOR ALL VALVES AND RPZ WITH PRE-FABRICATED REMOVABLE AND REUSABLE VALVE JACKETS.
5. PROVIDE HEATED ENCLOSURE WITH POWER LOSS AND LOW TEMPERATURE ALARM. THE ALARM WILL CONSIST OF THE CABINET, BATTERY, BATTERY CHARGER, RELAYS, RED STROBE LIGHT, TEMPERATURE SENSOR, SIX FOOT POWER CORD AND PLUG. THE ALARM WILL ACTIVATE THE STROBE LIGHT IF ENCLOSURE LOSES POWER OR IF THE TEMPERATURE FALLS BELOW 40DEG F (ADJ). STROBE LIGHT MUST BE FACTORY MOUNTED OUTSIDE AND ALARM BOX FIELD MOUNTED WITHIN THE ENCLOSURE. PROVIDE ALARM SIGNAL FROM EACH UTILITY STATION FREEZE PROTECTION SYSTEM BACK TO MAT BUILDING 1406. REFER TO ELECTRICAL DRAWINGS FOR CONDUIT AND WIRING REQUIREMENT.
6. PROVIDE LABELS FOR EACH SERVICE CONNECTION ON OUTSIDE OF ENCLOSURE. ABOVE PIPES. USE STANDARD SYSTEM ABBREVIATIONS. ALL VALVES MUST HAVE TAGS WITH CHAIN.
7. PROVIDE HEATED ENCLOSURES REINFORCED AND INSULATED TYPE 316L STAINLESS STEEL CONSTRUCTION; WITH ANCHORING DEVICES FOR ATTACHING HOUSING TO CONCRETE BASE, ACCESS DOORS WITH LOCKING DEVICES, SIZED TO ALLOW ACCESS AND SERVICE OF THE PROTECTED SYSTEMS, DRAIN OPENINGS, AND AN ELECTRIC HEATER WITH SELF-LIMITING TEMPERATURE CONTROL. ENCLOSURES MUST BE FABRICATED TO THE DIMENSIONS INDICATED ON THE DRAWINGS. REFER TO SPECIFICATIONS FOR FURTHER DETAILS.

DATE	APPR
DESCRIPTION	SYM




APPROVED: 
FOR COMMANDER NAVFAC
ACTIVITY: 3/5/2026

Approved by Frank Cole USCG MASI
SATISFACTORY TO DATE: 06 FEB 2026
DES: SAS BRW IB CHK: TJE
PMID: MRICWJ
BRANCH MANAGER: NEK
CHIEF ENGINEER: JMU
FIRE PROTECTION: HPN

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND ~ MID-ATLANTIC
CL CORE - HAMPTON ROADS
NAVAL STATION NEWPORT
USCG OCR HOMEPORT INITIATIVE OPC PIER
NEWPORT, RI
REDUCED PRESSURE BACKFLOW PREVENTER DETAILS

SCALE: AS NOTED
PROJECT NO.: 1826479
CONSTR. CONTR. NO.:
NAVFAC DRAWING NO.: 12936747
SHEET 178 OF 247
M-402
DRAWING REVISION: 25 AUGUST 2020

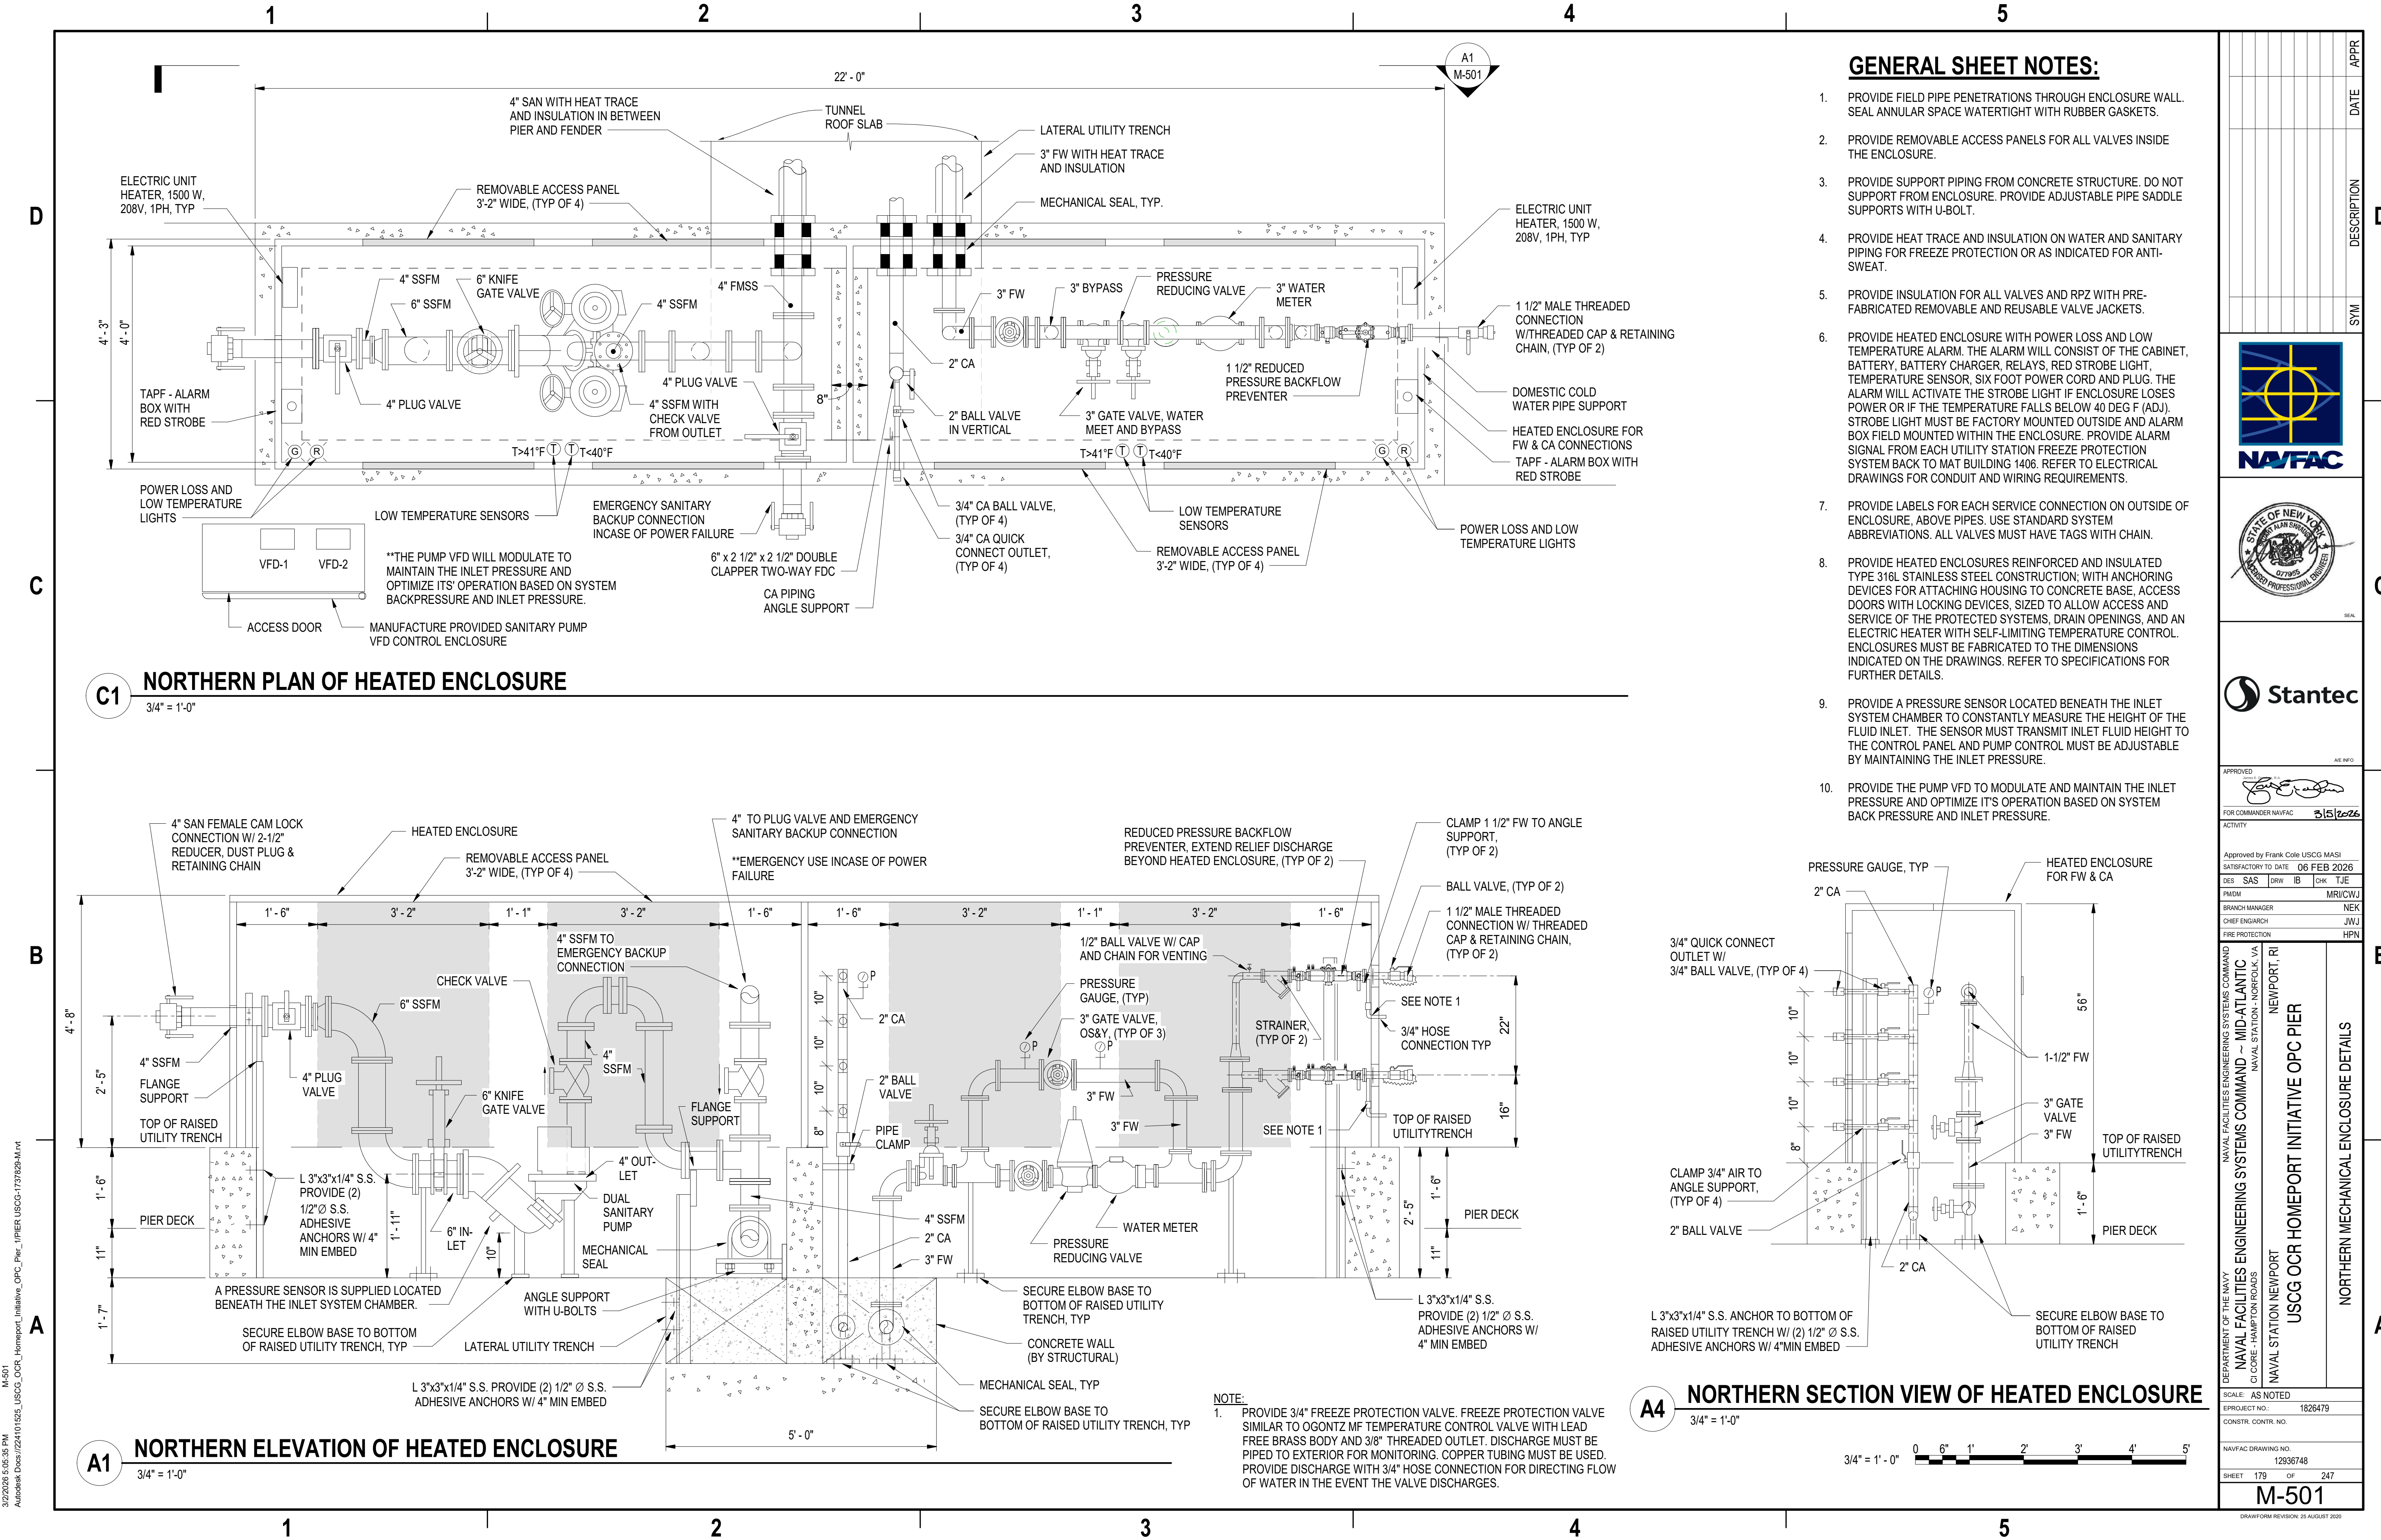

GENERAL SHEET NOTES:

1. PROVIDE FIELD PIPE PENETRATIONS THROUGH ENCLOSURE WALL. SEAL ANNULAR SPACE WATERTIGHT WITH RUBBER GASKETS.
2. PROVIDE REMOVABLE ACCESS PANELS FOR ALL VALVES INSIDE THE ENCLOSURE.
3. PROVIDE SUPPORT PIPING FROM CONCRETE STRUCTURE. DO NOT SUPPORT FROM ENCLOSURE. PROVIDE ADJUSTABLE PIPE SADDLE SUPPORTS WITH U-BOLT.
4. PROVIDE HEAT TRACE AND INSULATION ON WATER AND SANITARY PIPING FOR FREEZE PROTECTION OR AS INDICATED FOR ANTI-SWEAT.
5. PROVIDE INSULATION FOR ALL VALVES AND RPZ WITH PREFABRICATED REMOVABLE AND REUSABLE VALVE JACKETS.
6. PROVIDE HEATED ENCLOSURE WITH POWER LOSS AND LOW TEMPERATURE ALARM. THE ALARM WILL CONSIST OF THE CABINET, BATTERY, BATTERY CHARGER, RELAYS, RED STROBE LIGHT, TEMPERATURE SENSOR, SIX FOOT POWER CORD AND PLUG. THE ALARM WILL ACTIVATE THE STROBE LIGHT IF ENCLOSURE LOSES POWER OR IF THE TEMPERATURE FALLS BELOW 40 DEG F (ADJ). STROBE LIGHT MUST BE FACTORY MOUNTED OUTSIDE AND ALARM BOX FIELD MOUNTED WITHIN THE ENCLOSURE. PROVIDE ALARM SIGNAL FROM EACH UTILITY STATION FREEZE PROTECTION SYSTEM BACK TO MAT BUILDING 1406. REFER TO ELECTRICAL DRAWINGS FOR CONDUIT AND WIRING REQUIREMENTS.
7. PROVIDE LABELS FOR EACH SERVICE CONNECTION ON OUTSIDE OF ENCLOSURE, ABOVE PIPES. USE STANDARD SYSTEM ABBREVIATIONS. ALL VALVES MUST HAVE TAGS WITH CHAIN.
8. PROVIDE HEATED ENCLOSURES REINFORCED AND INSULATED TYPE 316L STAINLESS STEEL CONSTRUCTION; WITH ANCHORING DEVICES FOR ATTACHING HOUSING TO CONCRETE BASE, ACCESS DOORS WITH LOCKING DEVICES, SIZED TO ALLOW ACCESS AND SERVICE OF THE PROTECTED SYSTEMS. DRAIN OPENINGS, AND AN ELECTRIC HEATER WITH SELF-LIMITING TEMPERATURE CONTROL. ENCLOSURES MUST BE FABRICATED TO THE DIMENSIONS INDICATED ON THE DRAWINGS. REFER TO SPECIFICATIONS FOR FURTHER DETAILS.
9. PROVIDE A PRESSURE SENSOR LOCATED BENEATH THE INLET SYSTEM CHAMBER TO CONSTANTLY MEASURE THE HEIGHT OF THE FLUID INLET. THE SENSOR MUST TRANSMIT INLET FLUID HEIGHT TO THE CONTROL PANEL AND PUMP CONTROL MUST BE ADJUSTABLE BY MAINTAINING THE INLET PRESSURE.
10. PROVIDE THE PUMP VFD TO MODULATE AND MAINTAIN THE INLET PRESSURE AND OPTIMIZE ITS OPERATION BASED ON SYSTEM BACK PRESSURE AND INLET PRESSURE.

NORTHERN PLAN OF HEATED ENCLOSURE

3/4" = 1'-0"


NORTHERN SECTION VIEW OF HEATED ENCLOSURE

3/4" = 1'-0"

APPROVED	DATE	APPR
FOR COMMANDER NAVFAC	2/15/2026	
ACTIVITY		
Approved by Frank Cole USCG MASI		
SATISFACTORY TO DATE 06 FEB 2026		
DES	SAS	DRW
IB	CHK	TJE
PMIDM	MRICWU	
BRANCH MANAGER	NEK	
CHIEF ENGINEER	JMU	
FIRE PROTECTION	HPN	
DEPARTMENT OF THE NAVY		
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND		
NAVAL STATION NEWPORT		
USCG OCR HOMEPOR INITIATIVE OPC PIER		
NAVAL STATION - NORFOLK VA		
NORTHERN MECHANICAL ENCLOSURE DETAILS		
SCALE: AS NOTED		
PROJECT NO.: 1826479		
CONSTR. CONTR. NO.		
NAVFAC DRAWING NO. 12936748		
SHEET 179 OF 247		
M-501		
DRAWING REVISION: 25 AUGUST 2020		

3/2/2026 5:05:35 PM
Autodesk Docs/224101525_USCG_OCR_Homeport_Initiative_OPC_Pier_1/PIER USCG-1737629-M.rvt

M-502

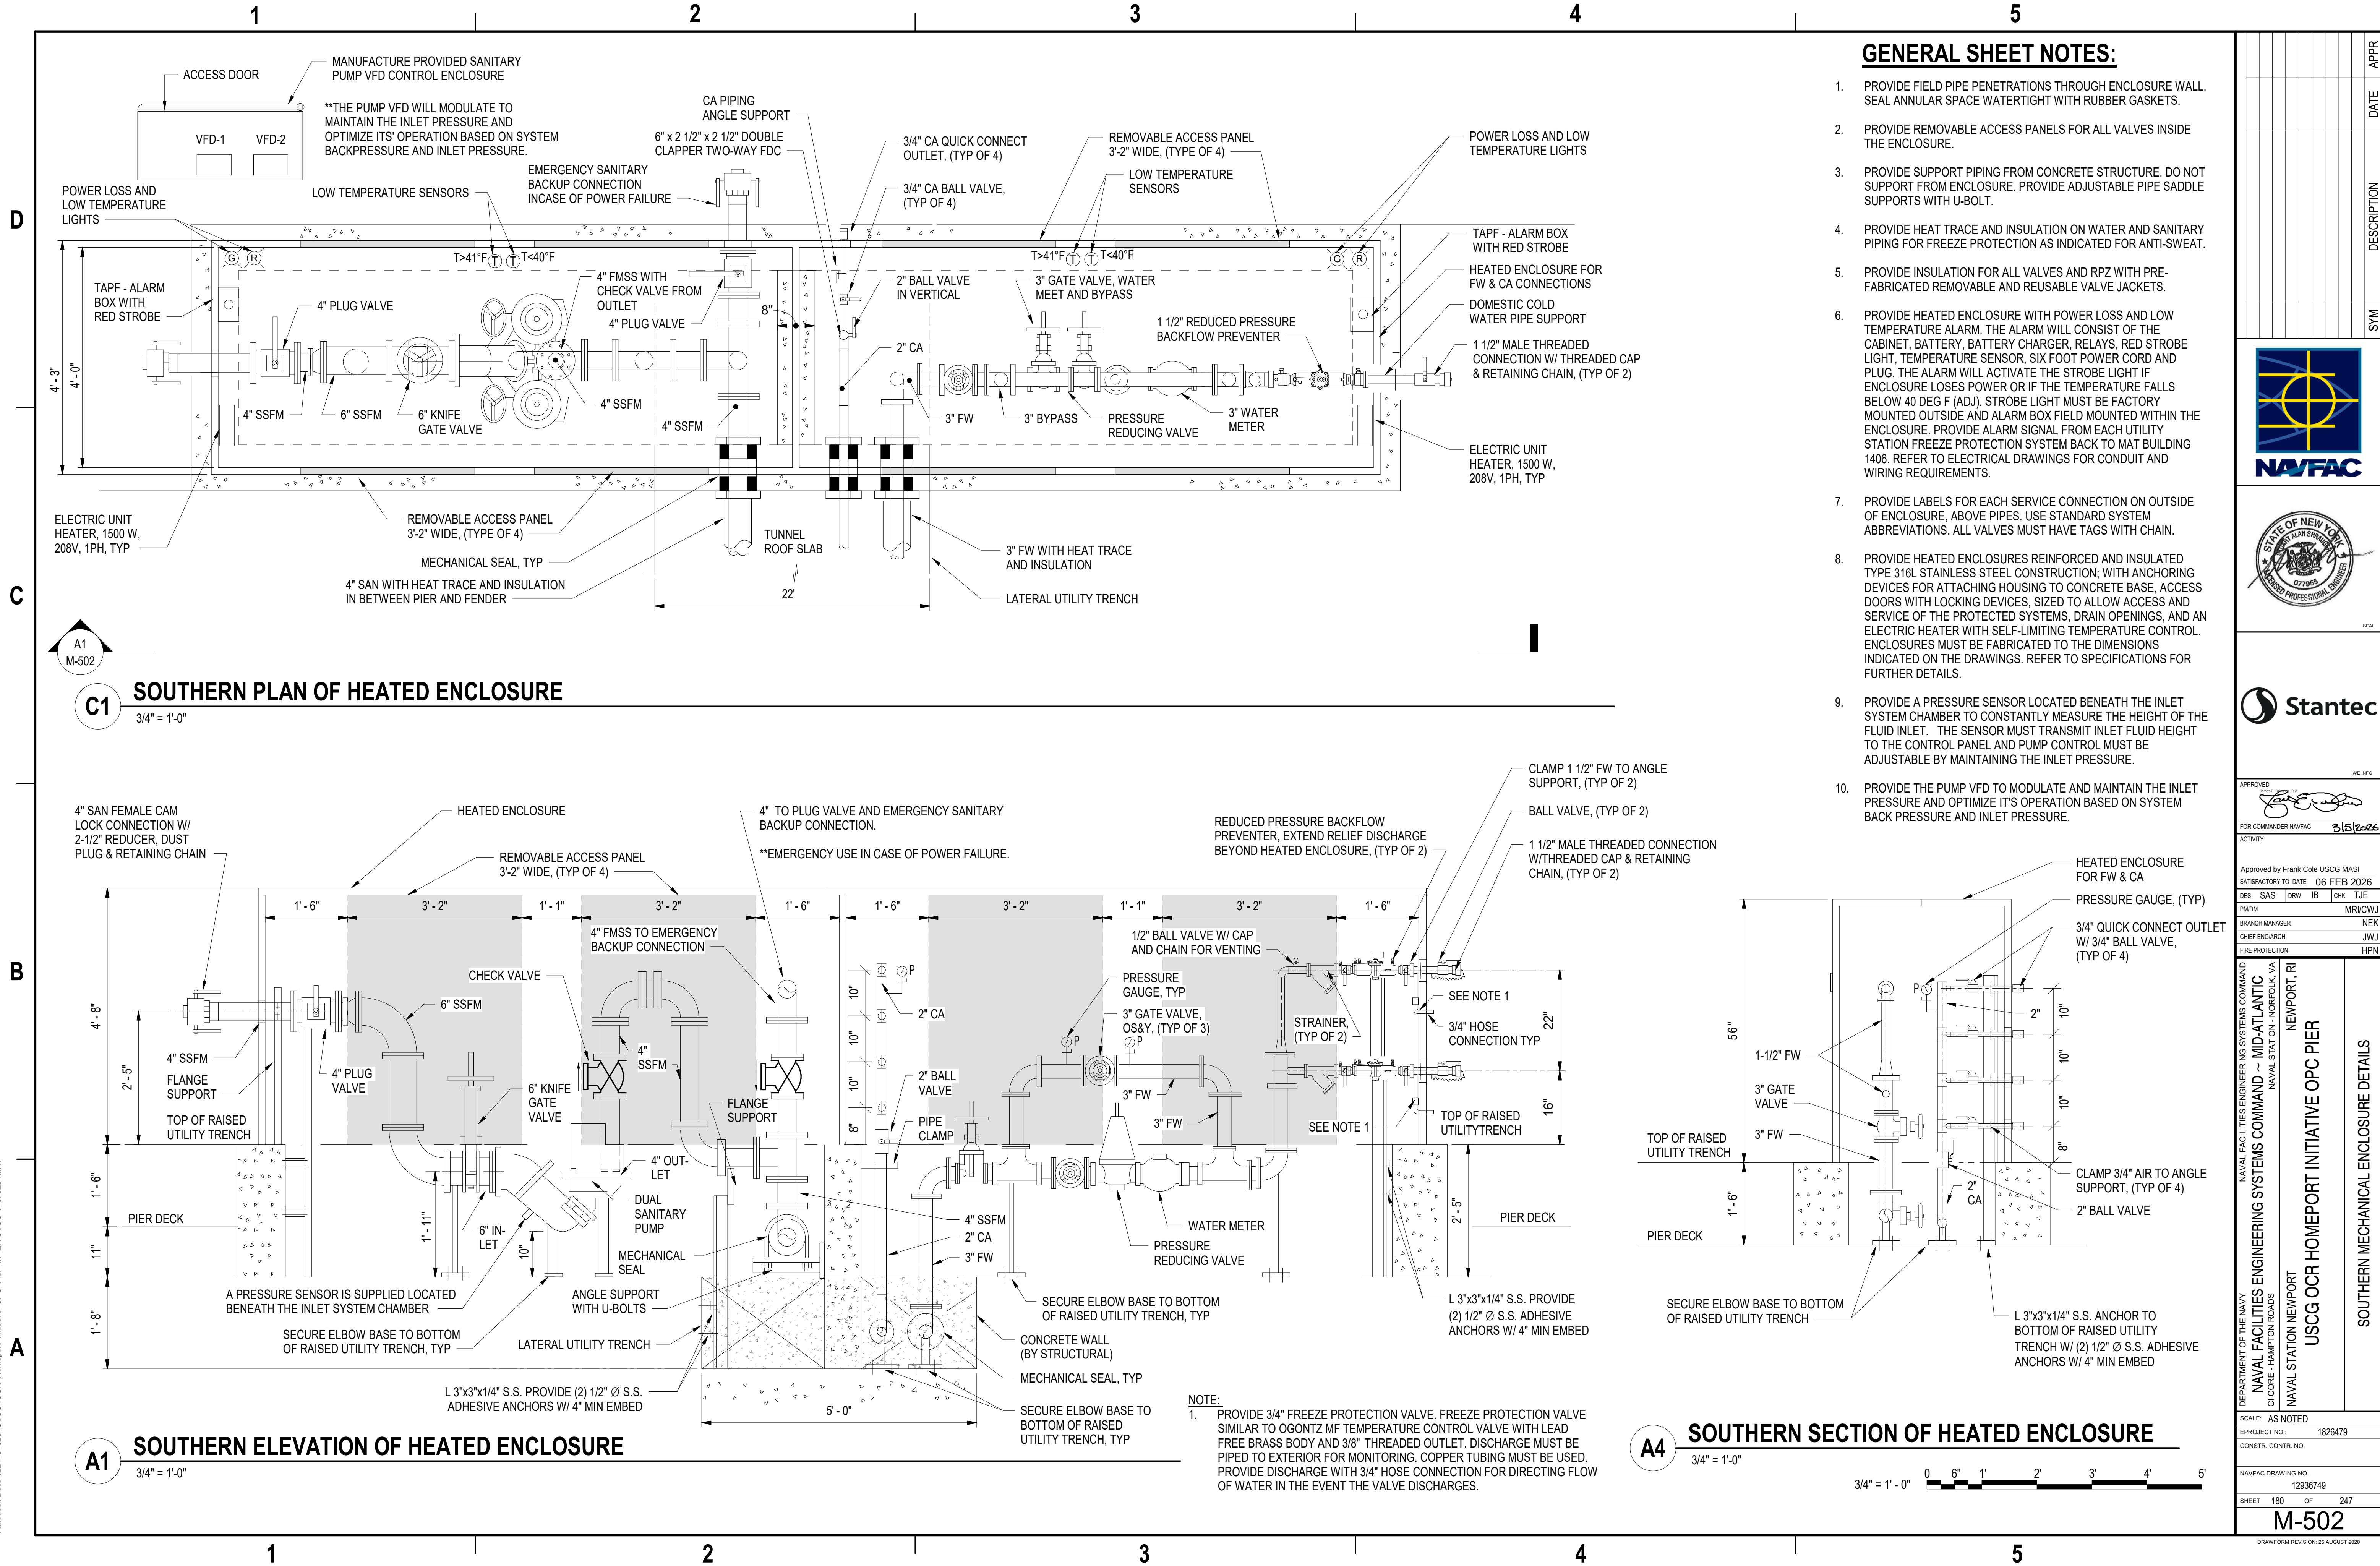

DATE	DESCRIPTION	SYN	APPR



APPROVED:	FOR COMMANDER NAVFAC	DATE	ACTIVITY
		2/15/2026	
Approved by Frank Cole USCG MASI			
SATISFACTORY TO DATE 06 FEB 2026			
DES	SAS	DRW	IB
PMOM			MRICWJ
BRANCH MANAGER			NEK
CHIEF ENGINEER			JMU
FIRE PROTECTION			HPN

DEPARTMENT OF THE NAVY	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND	NAVAL STATION - NEWPORT
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC	NAVAL STATION - HAMPTON ROADS	NAVAL STATION - NEWPORT
USCG OCR HOMEPORT INITIATIVE OPC PIER		
SOUTHERN MECHANICAL ENCLOSURE DETAILS		

SCALE: AS NOTED	PROJECT NO.: 1826479
CONSTR. CONTR. NO.	
NAVFAC DRAWING NO. 12936749	
SHEET 180 OF 247	
M-502	
DRAWING REVISION: 25 AUGUST 2020	

3/2/2026 5:05:38 PM
Autodesk Docs/224101625_USCG_OCR_Homeport_Initiative_OPC_Pier_1/PIER USCG-173623-M.rvt

A

B

C

D


1

2

3

4

5

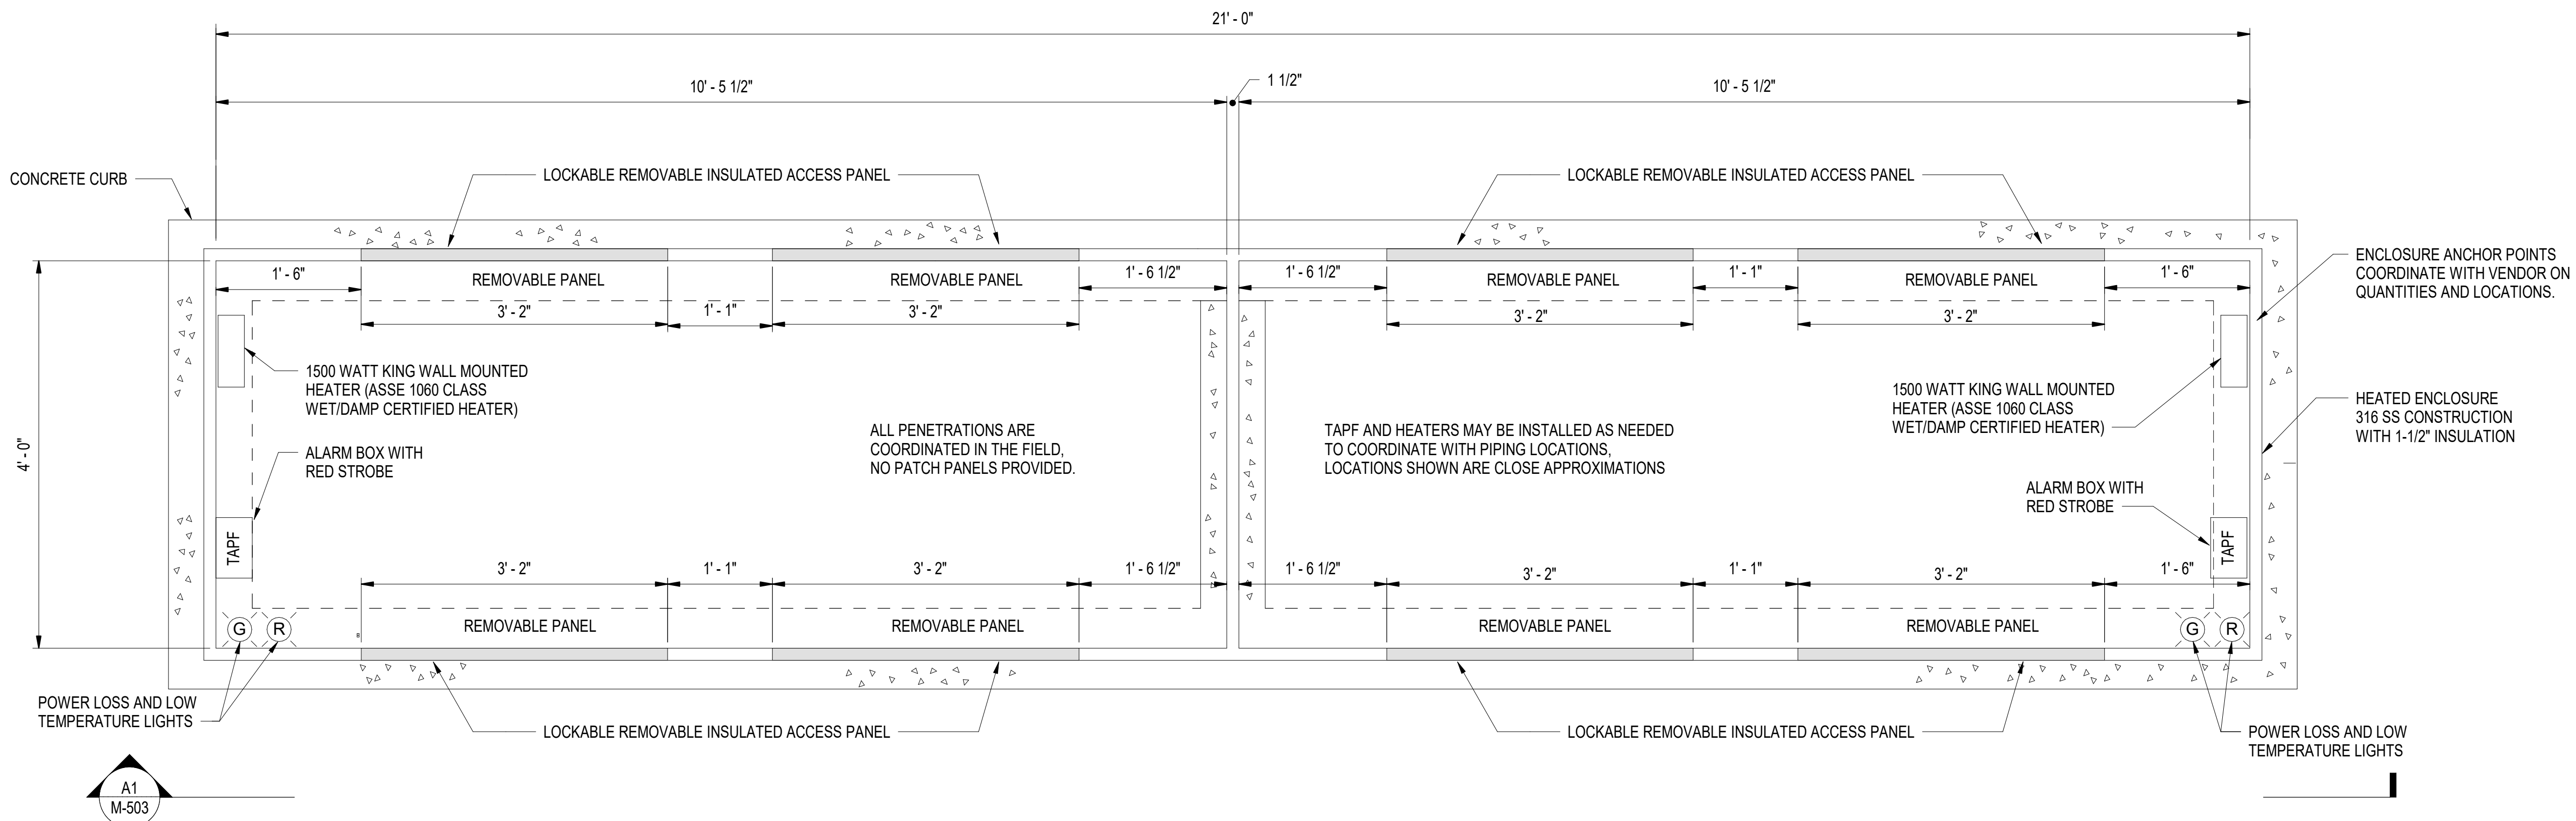


C1

PLAN PIER HEATED ENCLOSURE - SANITARY AND FRESH WATER

1" = 1'-0"

18Ga ALUMINUM ~ ROOF PANELS ARE REMOVABLE FOR MAINTENANCE ~ 3" INSULATION ROOF (R18)

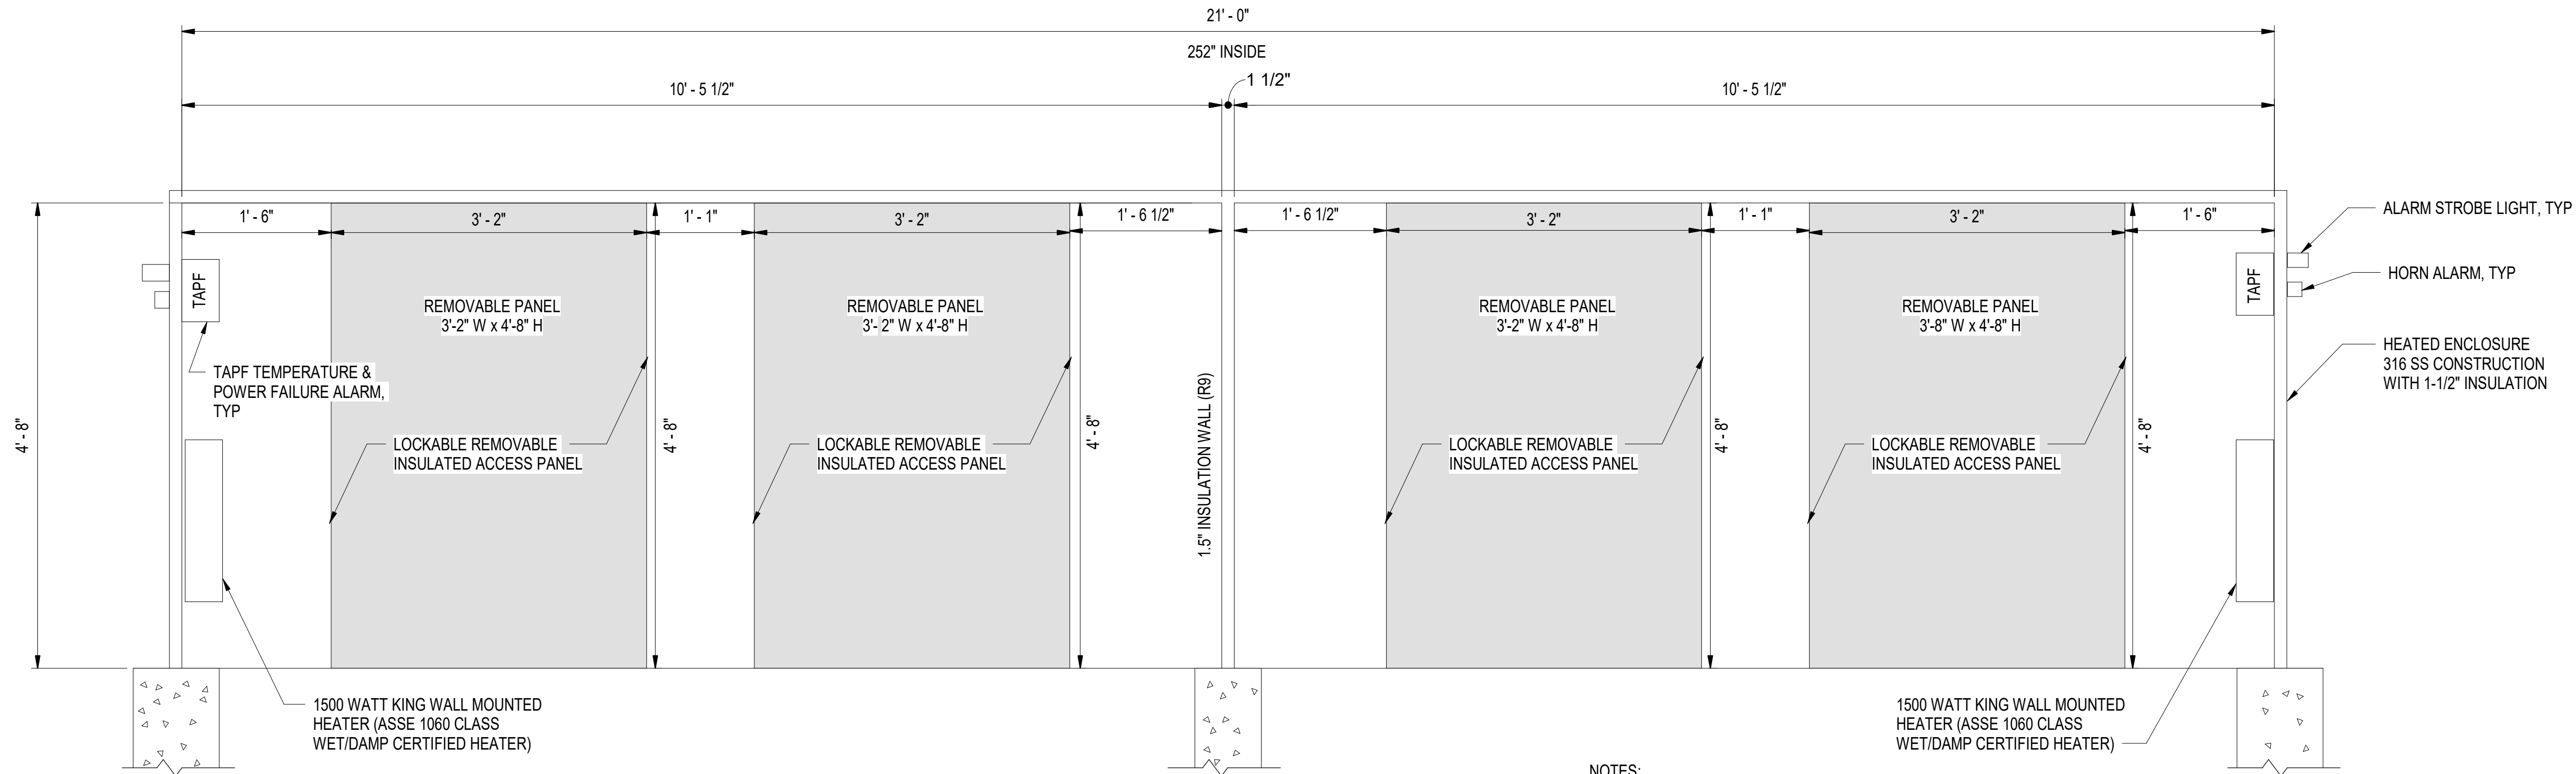

A1

ELEVATION PIER HEATED ENCLOSURE - SANITARY AND FRESH WATER

1" = 1'-0"

NOTES:

- ASSE 1060 CLASS I WET/DAMP CERTIFIED WALL MOUNTED HEATER SPEC.
- TAPF AND HEATERS MAY BE INSTALLED AS NEEDED TO COORDINATE WITH PIPING LOCATIONS, LOCATIONS SHOWN ARE CLOSE APPROXIMATIONS

DATE	APPR
DESCRIPTION	SYM



SEAL



APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

SATISFACTORY TO DATE 06 FEB 2026

DES SAs BRW IB CHK TJE

PMOM MR/CWJ

BRANCH MANAGER NEK

CHIEF ENGINEER JMU

FIRE PROTECTION HPN

NAVFACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND ~ MID-ATLANTIC

CI CORE - HAMPTON ROADS

NAVAL STATION NEWPORT

USCG OCR HOMEPORT INITIATIVE OPC PIER

NEWPORT, RI

PIER HEATED ENCLOSURE - SANITARY AND FRESH WATER

SCALE: AS NOTED

PROJECT NO.: 1826479

CONSTR. CONTR. NO.

NAVFAC DRAWING NO. 12936750

SHEET 181 OF 247

M-503

DRAWING REVISION: 25 AUGUST 2020



SCALE: AS NOTED		
EPROJECT NO.:		1826479
CONSTR. CONTR. NO.		
NAVFAC DRAWING NO.		
		12936751
SHEET	182	OF 247
M-504		



- C

B



3



3



(A2)

4



5



A4

NOT TO SCALE

[illegible]

APPROVED
James E. O'Connell, R.A.

FOR COMMANDER NAVFAC
ACTIVITY

Approved by Frank Cole USCG MASI					
SATISFACTORY TO DATE 06 FEB 2026					
DES	SAS	DRW	IB	CHK	TJE
PM/DM				MR/CWJ	
BRANCH MANAGER				NEK	
CHIEF ENGINEER				JWJ	
PIPE PROTECTION				LBN	

DEPARTMENT OF THE NAVY

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND ~ MID-ATLANTIC

CI CORE - HAMPTON ROADS

NAVAL STATION NEWPORT

USCG OCR HOMEPOR INITIATIVE OPC PIER

PIPE SUPPORT DETAILS - SHEET 2 OF 2

NAVAL STATION NEWPORT


NEWPORT, RI

SCALE: AS NOTED		
EPROJECT NO.:		1826479
CONSTR. CONTR. NO.		
NAVFAC DRAWING NO.		
		12936752
SHEET	183	OF 247

M-505

DRAW/FORM REVISION: 25 AUGUST 2022

3/2/2026 5:05:45 PM M-703
Autodesk Docs/22410152_USCG_OCR_Homeport_Initiative_OPC_Pier_1/PIPER USCG-1737629-M.mxd

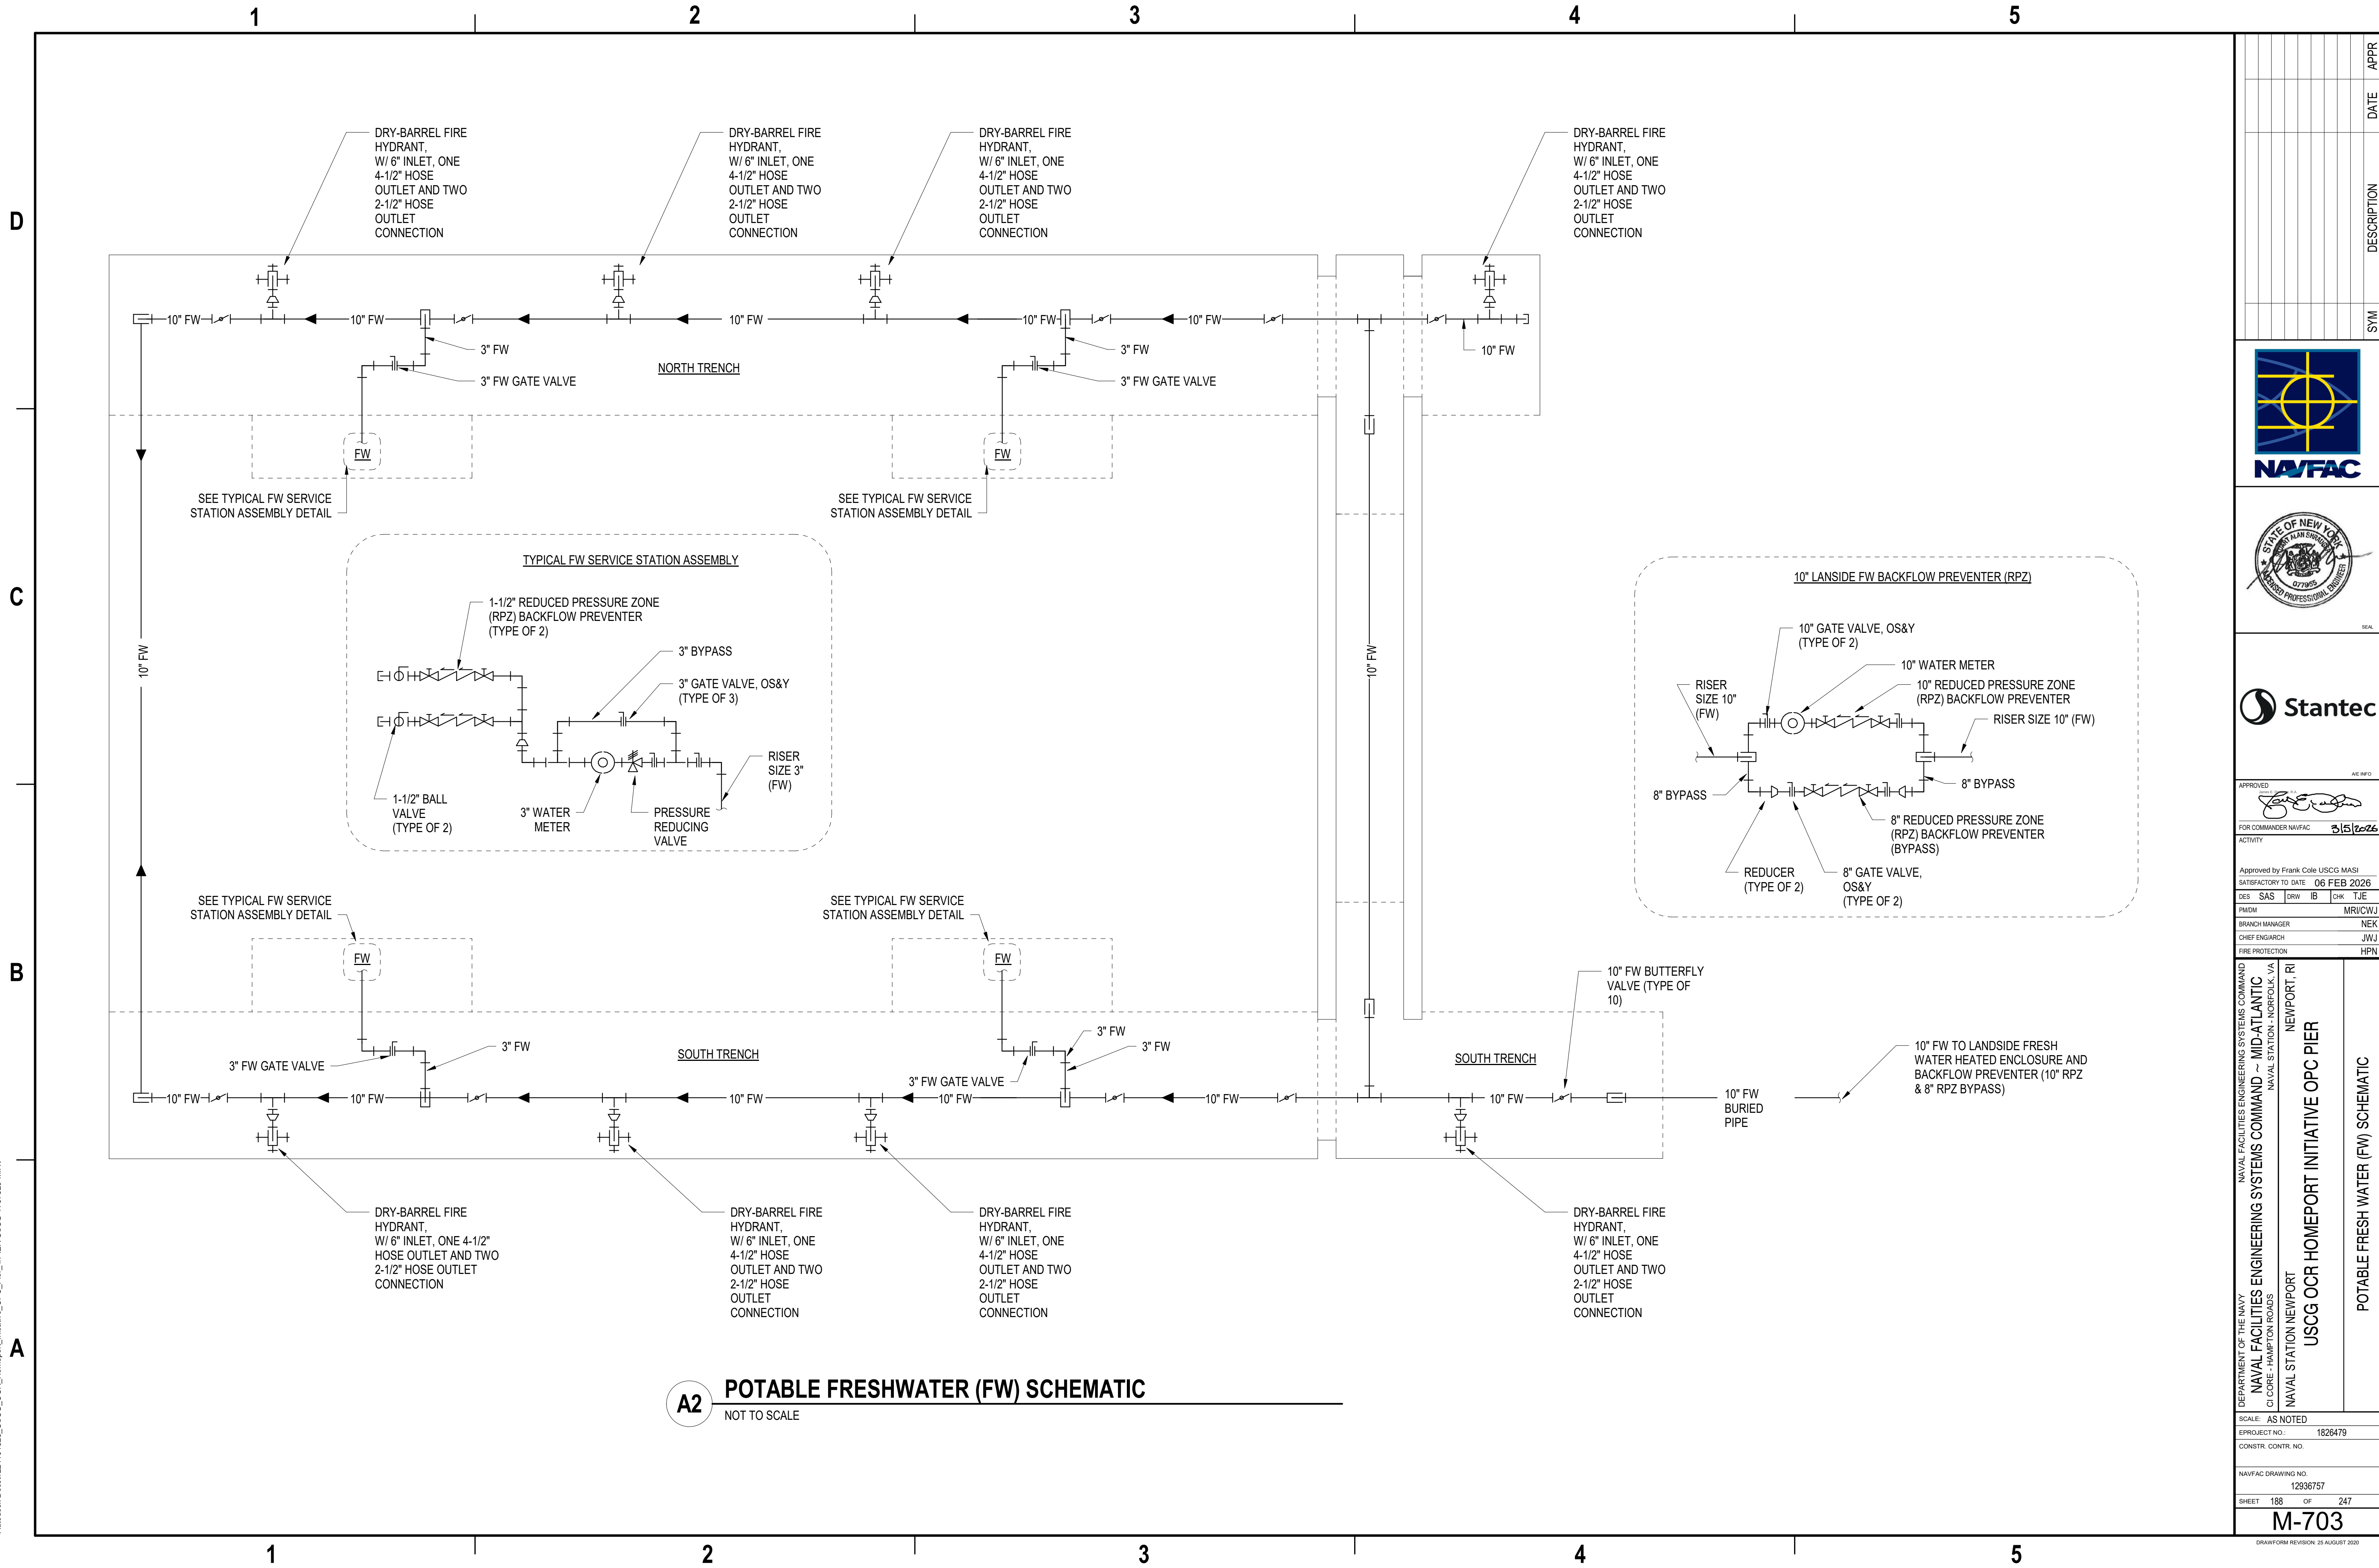

SYN	DESCRIPTION	DATE	APPR




APPROVED: 
FOR COMMANDER NAVFAC
ACTIVITY

Approved by Frank Cole USCG MASI
SATISFACTORY TO DATE 06 FEB 2026
DES SAS DRW IB CHK TJE
PMOM MRICWUJ
BRANCH MANAGER NEK
CHIEF ENGINEER JNU
FIRE PROTECTION HPN

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND ~ MID-ATLANTIC
CI CORE - HAMPTON ROADS
NAVAL STATION NEWPORT
NEWPORT, RI
USCG OCR HOMEPOR INITIATIVE OPC PIER
POTABLE FRESH WATER (FW) SCHEMATIC

SCALE: AS NOTED
PROJECT NO.: 1826479
CONSTR. CONTR. NO.
NAVFAC DRAWING NO. 12936757
SHEET 188 OF 247
M-703
DRAWING REVISION: 25 AUGUST 2020

3/2/2026 5:05:55 PM M-901 Autodesk Docs/22410152_USCG_OCR_Homeport_Initiative_OPC_Pier_1/Pier_USCG-1737623-M.rvt

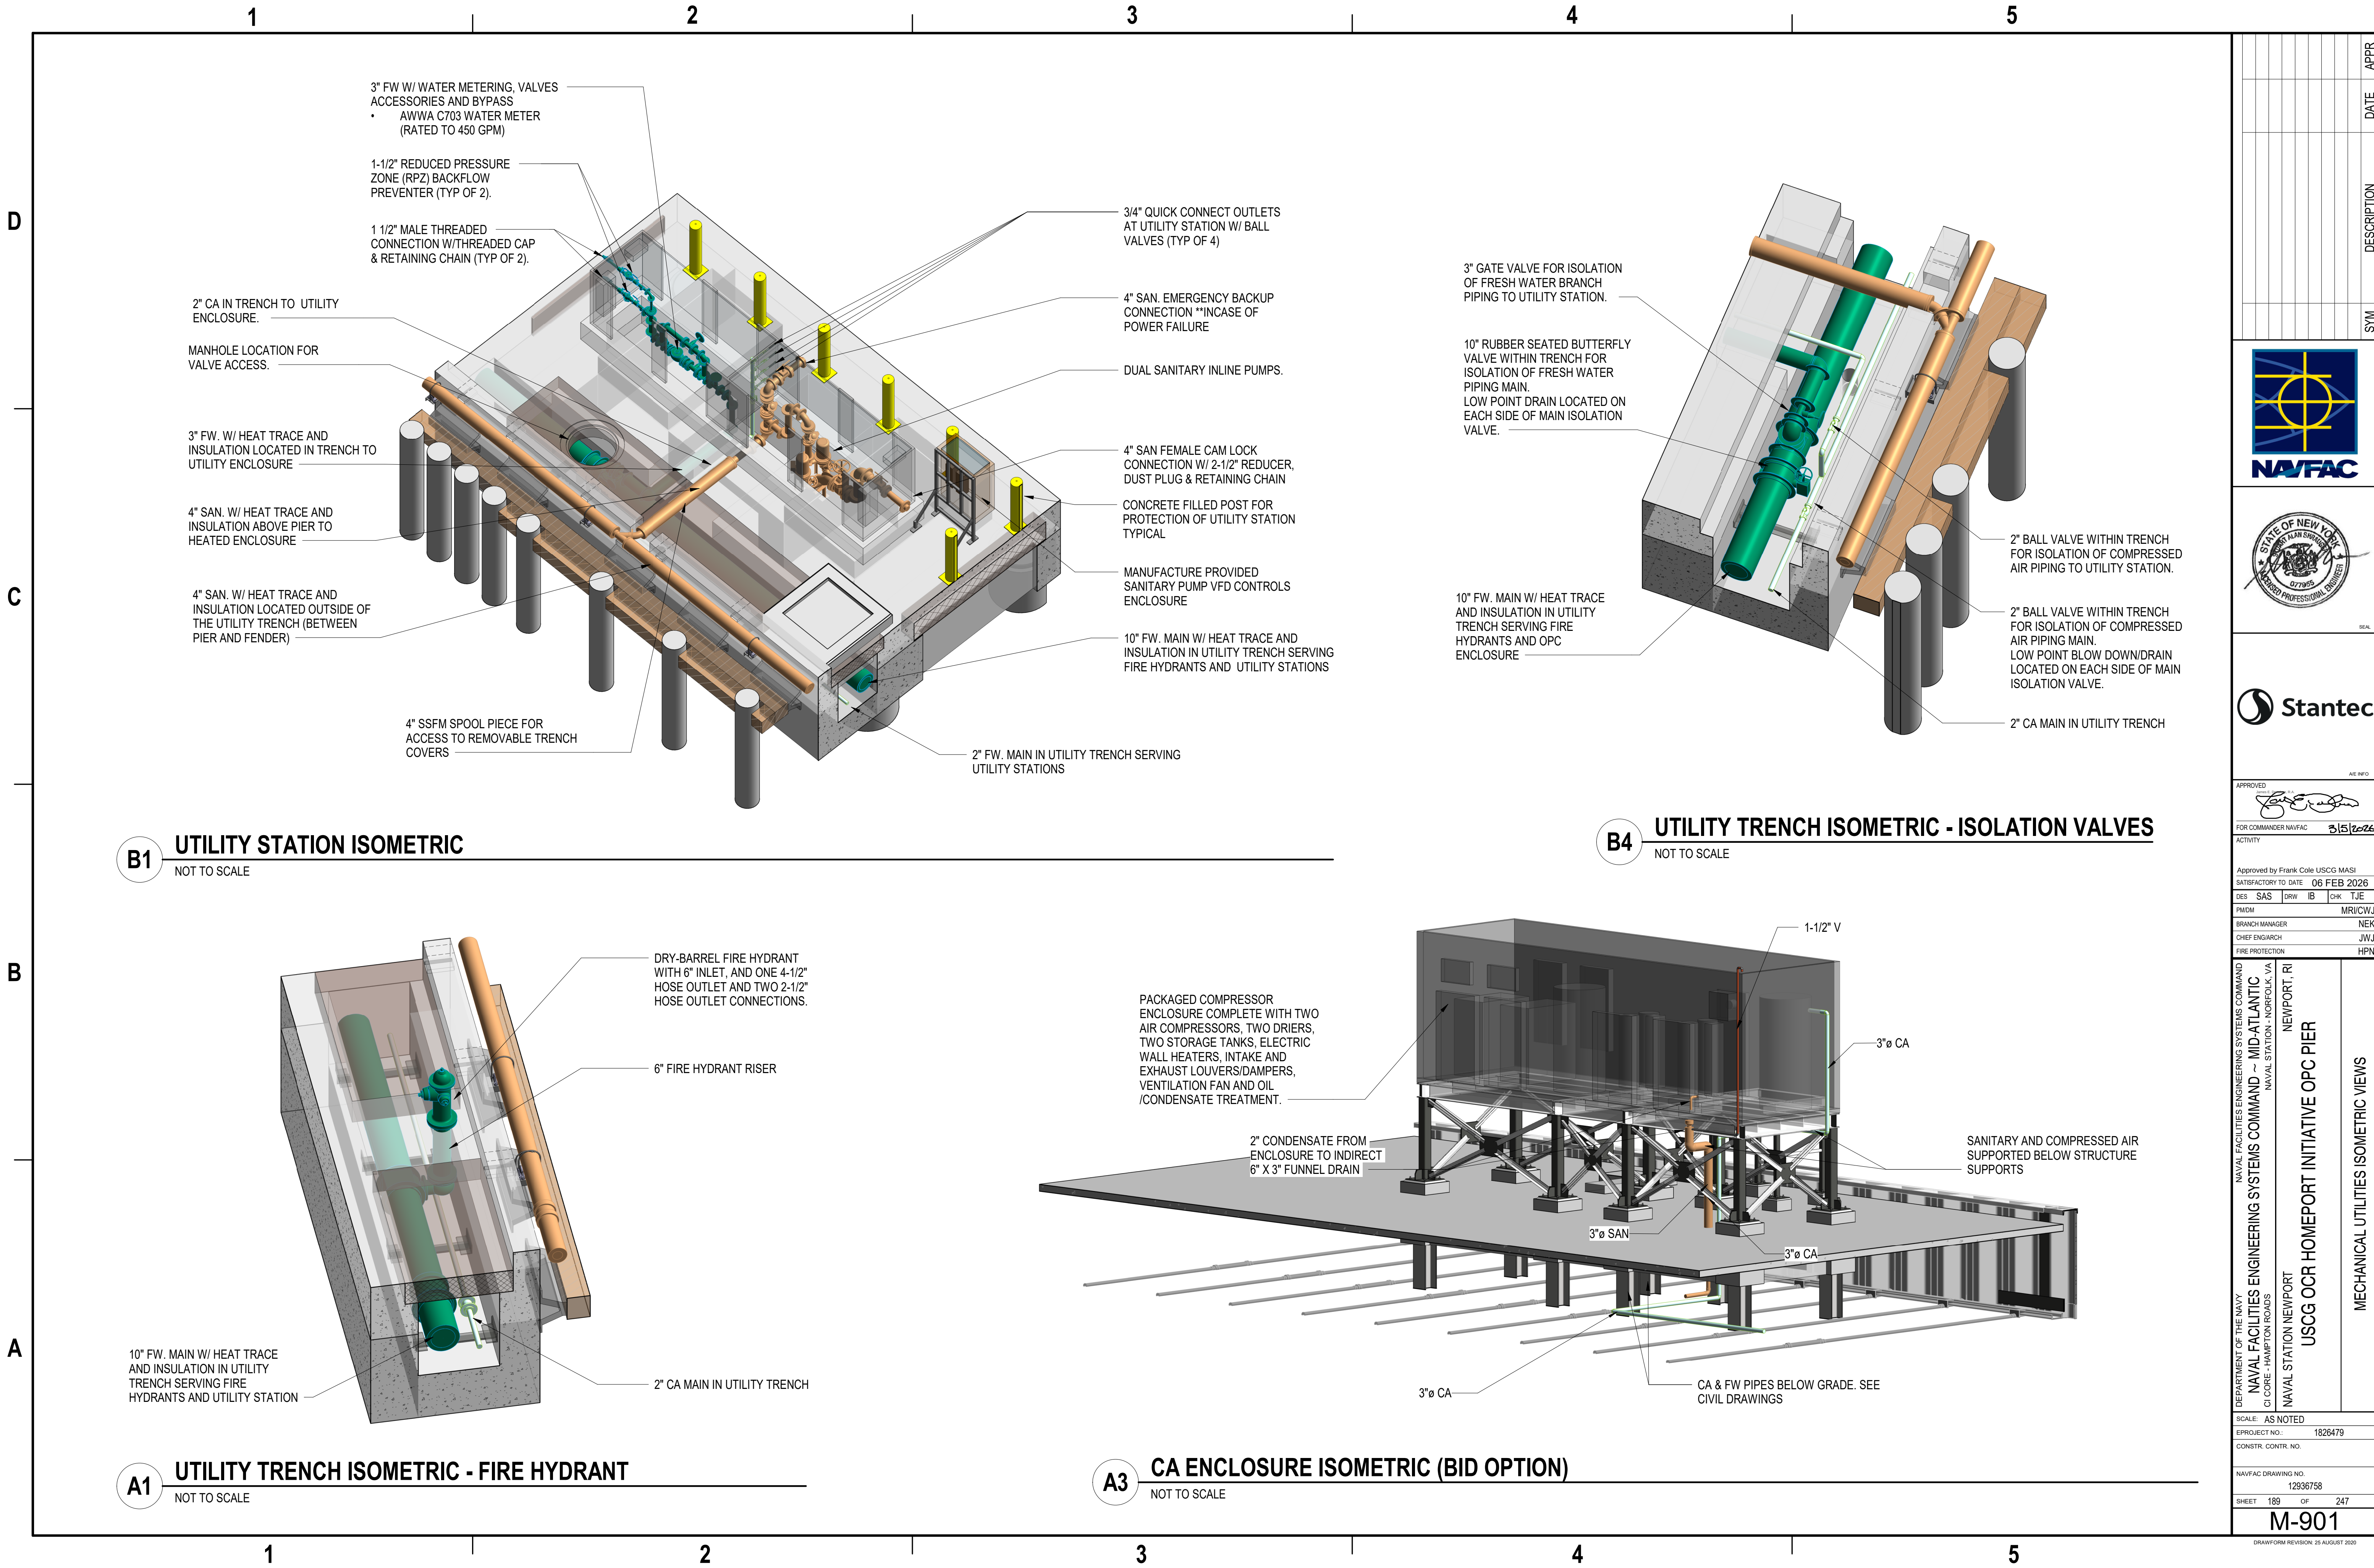

SYN	DESCRIPTION	DATE	APPR



APPROVED: 
FOR COMMANDER NAVFAC 25/5/2026
ACTIVITY

DES	SAS	BRW	IB	CHK	TJE
PMOM	MRU/CWJ	NEK	JWU	HPN	
BRANCH MANAGER					
CHIEF ENGINEER					
FIRE PROTECTION					

DEPARTMENT OF THE NAVY
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND ~ MID-ATLANTIC
CI CORE - HAMPTON ROADS
NAVAL STATION NEWPORT
USCG OCR HOMEPORT INITIATIVE OPC PIER
NEWPORT, RI
MECHANICAL UTILITIES ISOMETRIC VIEWS

SCALE:	AS NOTED
PROJECT NO.:	1826479
CONSTR. CONTR. NO.	
NAVFAC DRAWING NO.	12936758
SHEET	189 OF 247
M-901	

DRAWING REVISION: 25 AUGUST 2020