


C:\Users\griffith\Documents\2136 ARCH_2023_griffith@mbfarchitects.com.rvt
4/8/2026 9:38:57 PM

File
Print

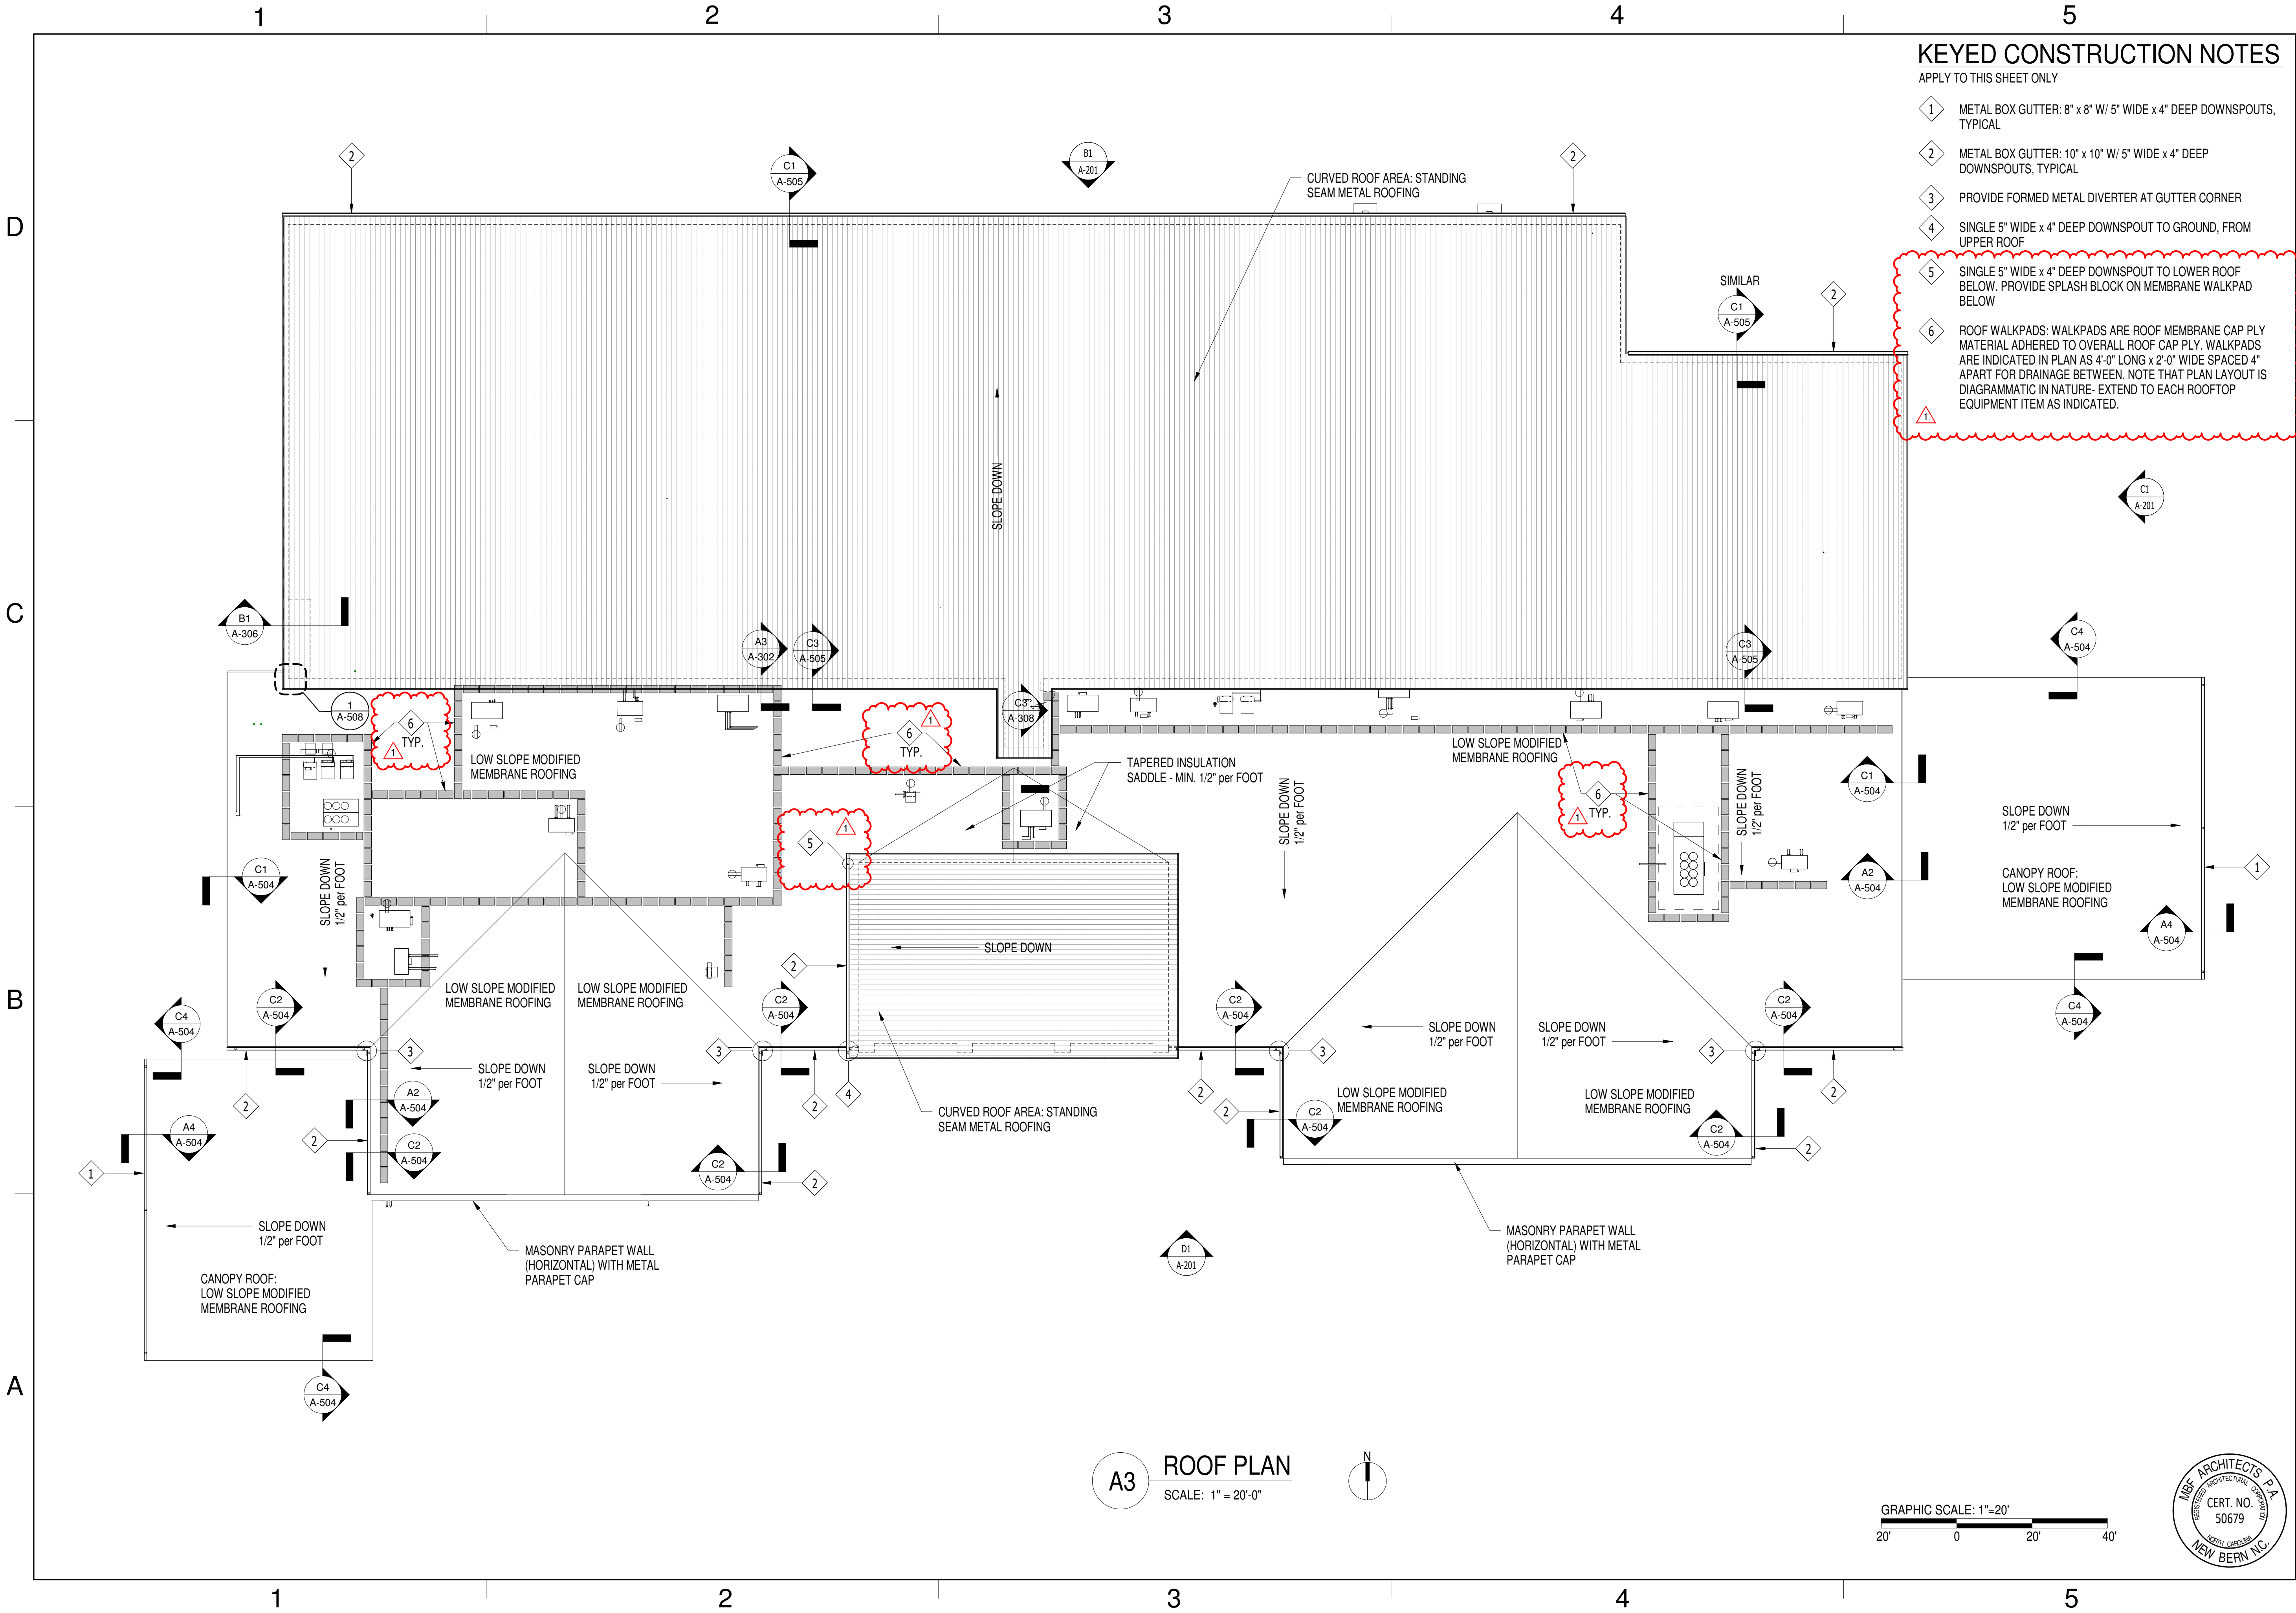

KEYED CONSTRUCTION NOTES

APPLY TO THIS SHEET ONLY

- 1 METAL BOX GUTTER: 8" x 8" W/ 5" WIDE x 4" DEEP DOWNSPOUTS, TYPICAL
- 2 METAL BOX GUTTER: 10" x 10" W/ 5" WIDE x 4" DEEP DOWNSPOUTS, TYPICAL
- 3 PROVIDE FORMED METAL DIVERTER AT GUTTER CORNER
- 4 SINGLE 5" WIDE x 4" DEEP DOWNSPOUT TO GROUND, FROM UPPER ROOF
- 5 SINGLE 5" WIDE x 4" DEEP DOWNSPOUT TO LOWER ROOF BELOW. PROVIDE SPLASH BLOCK ON MEMBRANE WALKPAD BELOW
- 6 ROOF WALKPADS: WALKPADS ARE ROOF MEMBRANE CAP PLY MATERIAL ADHERED TO OVERALL ROOF CAP PLY. WALKPADS ARE INDICATED IN PLAN AS 4'-0" LONG x 2'-0" WIDE SPACED 4' APART FOR DRAINAGE BETWEEN. NOTE THAT PLAN LAYOUT IS DIAGRAMMATIC IN NATURE- EXTEND TO EACH ROOFTOP EQUIPMENT ITEM AS INDICATED.

2026.04.07	DATE	APPR
1	Amendment	SYM
DESCRIPTION		
D		
C		
B		
A		

24 DECEMBER 2025 SEAL

307 C Pullock Street | New Bern, NC 28560
252-637-6373 | mbfarchitects.com
AE RFPD

APPROVED

FOR COMMANDER NAVFAC

ACTIVITY Approved by Erik A. Lewis, Infrastructure Engineering Branch Head, FRCE Cherry Point via Electronic Signature

SATISFACTORY TO 12/24/2025

DES DLG DRW DLG CHK DJE

PM/DM KTB/SOM

BRANCH MANAGER CGM

CHIEF ENG/ARCH JWJ

FIRE PROTECTION HPN

NAVFACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND ~ MIDATLANTIC

DESIGN AND CONSTRUCTION (DD CORE)

NAVAL STATION - NORFOLK, VA

CHERRY POINT, NC

P-995 COMPOSITE REPAIR FACILITY

ROOF PLAN

SCALE: AS INDICATED

PROJECT NO.: 1692230

STA. PROJ. NO.:

NAVFAC DRAWING NO. 12938274

SHEET 126 OF 456

A-116

DRAWFORM REVISION: 25 AUGUST 2020